



macroworks

AVIATION GLINT AND GLARE ASSESSMENT

Proposed Solar PV Energy Development

Cleeves Riverside Quarter, Limerick.

Prepared by Macro Works Ltd

September 2025



1.	AVIATION GLINT AND GLARE ASSESSMENT	3
1.1	Introduction	3
1.2	Methodology.....	7
1.3	Results.....	9
1.4	Overall Conclusion.....	10
	Appendix A: SGHAT Results	A



1. AVIATION GLINT AND GLARE ASSESSMENT

1.1 INTRODUCTION

This Glint and Glare Assessment was carried out by Macro Works Ltd to determine the potential for solar reflectance effects upon aviation receptors in respect of proposed roof-mounted solar PV installations on the roofs of a proposed residential and commercial development at Cleeves Riverside Quarter, Limerick. The proposed panels are generally south facing and will be placed on the roofs several accommodation and commercial buildings, the riverside canopy, and a number of carparking ports. The proposed panels will remain in a fixed position throughout the day and year (i.e. they will not rotate to track the movement of the sun). Figure 1.1 and Figure 1.2 refer.



Figure 1.1 Aerial view indicating the location of the proposed development.

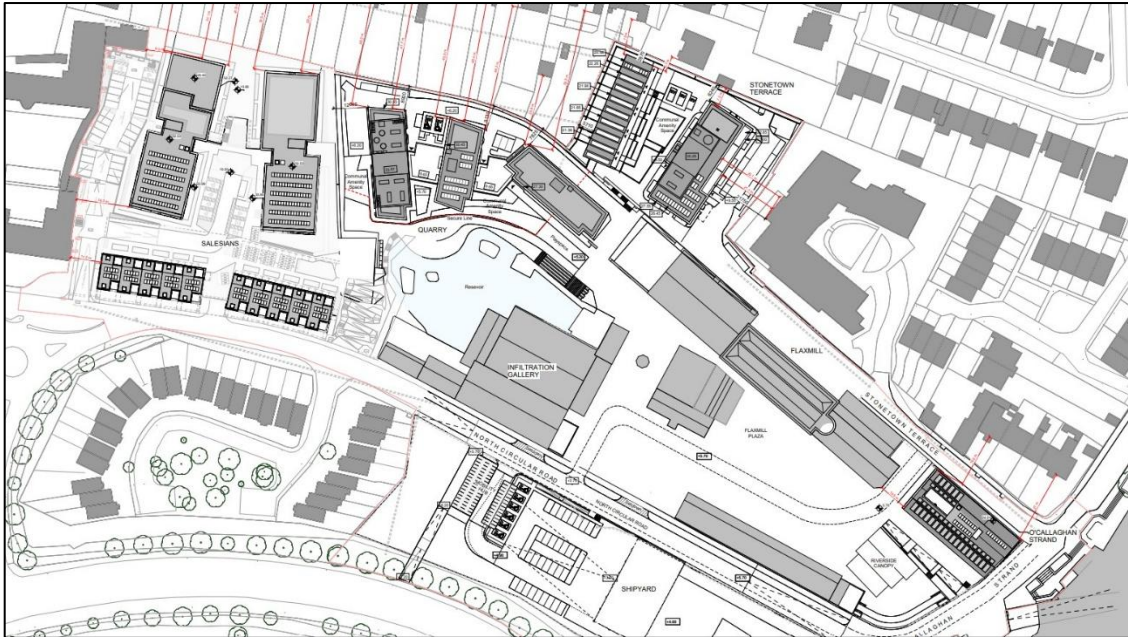


Figure 1.2 Extract from drawing no. CRQMP-FCBS-ZZ-02-DR-AA-0115 'Proposed Site Layout Plan' showing the layout of the proposed buildings and locations of the proposed panels.

1.1.1 Project Description

The proposed development provides for the (A) Demolition of a number of structures to facilitate development and (B) Construction and phased delivery of (i) buildings within the site ranging in height from 3 – 7 stories (with screened plant at roof level) including (a) 234 no. residential units; (b) 270 no. student bedspaces (PBSA) with ancillary resident services at ground floor level; (c) 256sqm of commercial floorspace; and (d) a creche; (ii) extensive public realm works, riverside canopy and heritage interpretative panels (iv) 3 no. dedicated bat houses; (v) Mobility Hub with canopy; and (vi) all ancillary site development works including (a) water services, foul and surface water drainage and associated connections across the site and serving each development zone; (b) attenuation measures; (c) raising the level of North Circular Road; (d) car and bicycle parking; (e) public lighting; (f) telecommunication antennae and (g) all landscaping works. Consent is also sought for use of the PBSA accommodation, outside of student term time, for short-term letting purposes.

1.1.2 Statement of Authority

This technical assessment was undertaken by Peter Connell, GIS and LVIA Consultant (BA, MPhil, MSc) of Macro Works Ltd., a specialist landscape and visual assessment company with over 20 years' experience in the appraisal of visual effects from a variety of energy, infrastructure and commercial developments, including landscape and visual impact assessments, and glint and glare assessments. Peter has previously prepared numerous glint and glare assessments which have been accepted by a number of planning authorities.

1.1.3 **Guidance and Best Practice**

The Irish Aviation Authority (IAA) has not published any specific guidance on solar PV developments. The IAA identifies the need to ensure safety in relation to potential reflectance effects emitting from solar developments and highlights the potential for an ocular assessment to be requested.¹ The European Union Aviation Safety Authority (EASA) requires an assessment of the luminance of proposed PV panels, rather than by ocular irradiance, so as not to dazzle air traffic controllers to the extent of a reduction in visual perception of airport operations.² EASA found that 20,000 cd/m² was the maximum acceptable luminance value for solar PV arrays in the vicinity of an aviation receptor. As the IAA refer to the need for an ocular assessment, this analysis will focus on potential ocular effects and will not assess luminance levels.

The sequence of guidance developed by the United States Federal Aviation Administration (FAA) to address the potential hazards that solar developments may pose to aviation activities, is considered the most comprehensive for the purposes of assessment of solar developments near aerodromes. The initial guidance was prepared in 2010 (entitled 'Technical Guidance for Evaluating Selected Solar Technologies on Airports' (archived)), was subsequently updated in 2013³ (entitled 'Interim Policy, FAA Review of Solar Energy System Projects on Federally Obligated Airports'). The most current version of the guidance (Version 1.1) 'Technical Guidance for Evaluating Selected Solar Technologies on Airports' was released in 2018.⁴

The Solar Glare Hazard Analysis Tool (SGHAT) was developed in conjunction with the FAA in harmony with this guidance and is adopted as the standard for measuring the ocular impact of solar developments. Furthermore, it is commonly regarded as the accepted industry standard by aviation authorities internationally when considering the glint and glare effects upon aviation-related receptors.

By virtue of their efficiency, the intensity of reflected light from modern PV solar panels is deliberately low and currently equates with that of the reflection from still water. Recent studies generally agree, however, that there still exists the potential for hazard or nuisance upon surrounding receptors. Macro Works' glint and glare analysis methods and determination of effects are based on a combination of available studies and established best practice. This methodology has been successfully implemented on numerous previous solar farm projects that met with the approval of various Planning Authorities

Federal Aviation Authority

Within the FAA's interim policy, a 'Review of Solar Energy System Projects on Federally Obligated Airports', it states:

Based on FAA guidance, best practice in Ireland is to meet the following standards:

¹ Irish Aviation Authority. (2025). IAA - National Aviation Safeguarding Framework, Consultation Document, p. 30.

² European Union Aviation Safety Agency. (2025). Certification Specifications and Guidance Material for Aerodrome Design (CS-ADR-DSN). Issue 7. Page 161. https://www.easa.europa.eu/en/document-library/certification-specifications/group/cs-adr-dsn-aerodromes-design?utm_source=chatgpt.com#cs-adr-dsn-aerodromes-design.

³ Interim Policy, FAA Review of Solar Energy System Projects on Federally Obligated Airports, Department of Transportation, Federal Aviation Administration, date: 10/2013

⁴ Technical Guidance for Evaluating Selected Solar Technologies on Airports, Federal Aviation Administration (FAA), date: 04/2018

⁵ Federal Aviation Administration (FAA). (2013). Department of Transportation - Federal Aviation Administration. Interim Policy, FAA Review of Solar Energy System Projects on Federally Obligated Airports. Vol 78 (No 205), 63276-63279. Available at: <https://www.federalregister.gov/documents/2013/10/23/2013-24729/interim-policy-faa-review-of-solar-energy-system-projects-on-federally-obligated-airports>

"No potential for glint or glare in the existing or planned Airport Traffic Control Tower (ATCT) cab, and

No potential for glare or "low potential for after-image" (shown in green in Figure 1[Figure 1.3 refers]) along the final approach path for any existing landing threshold or future landing thresholds (including any planned interim phases of the landing thresholds) as shown on the current FAA-approved Airport Layout Plan (ALP). The final approach path is defined as two (2) miles from fifty (50) feet above the landing threshold using a standard three (3) degree glidepath."

An update of the policy in 2021⁶ replaced this interim policy, with the key amendment of deprioritising runway approaches as critical aviation receptors, citing the following;


"Initially, FAA believed that solar energy systems could introduce a novel glint and glare effect to pilots on final approach. FAA has subsequently concluded that in most cases, the glint and glare from solar energy systems to pilots on final approach is similar to glint and glare pilots routinely experience from water bodies, glass-façade buildings, parking lots, and similar features. However, FAA has continued to receive reports of potential glint and glare from on-airport solar energy systems on personnel working in ATCT cabs. Therefore, FAA has determined the scope of agency policy should be focused on the impact of on-airport solar energy systems to federally-obligated towered airports, specifically the airport's ATCT" (Federal Aviation Administration 05/11/2021).

In summary, glare at an ATCT is not acceptable and while still relevant glare with a "low potential for after-image" is generally acceptable along final approach paths to runways in most instances.

Solar Glare Hazard Analysis Tool

The SGHAT was designed to determine whether a proposed solar energy project would result in the potential for ocular impact as depicted on the Solar Glare Hazard Analysis Plot (Figure 1.3 refers). SGHAT analyses ocular impact over the entire calendar year in one minute intervals from when the sun rises above the horizon until the sun sets below the horizon. One of the principal outputs from the SGHAT report is a glare plot per receptor that indicates the time of day and days per year that glare has the potential to occur. SGHAT plot classifies the intensity of ocular impact as either Green Glare, Yellow Glare or Red Glare. These colour classifications are equivalent to the FAA's definitions regarding the level of ocular impact e.g. 'Green Glare' in the SGHAT is synonymous to the FAA's "low potential for after-image", and so forth. The various correlations are illustrated on the Solar Glare Hazard Analysis Plot.

⁶ Federal Aviation Administration Policy: Review of Solar Energy System Projects on Federally-Obligated Airports; date: 11/2021

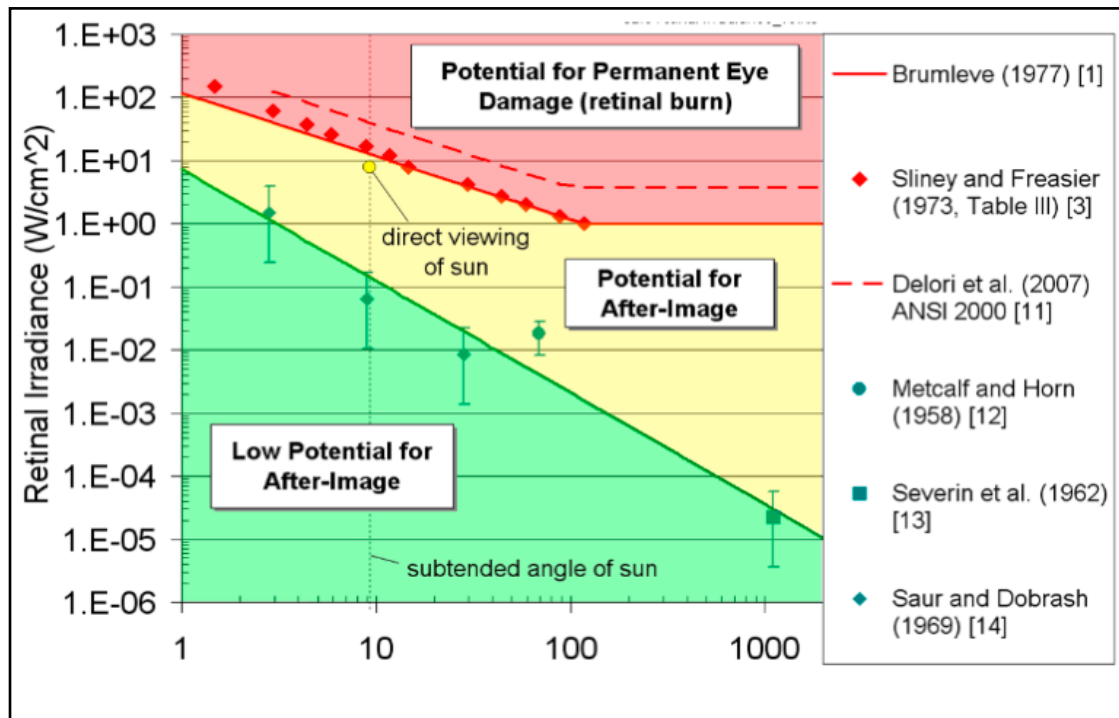

Solar Glare Ocular Hazard Plot: The potential ocular hazard from solar glare is a function of retinal irradiance and the subtended angle (size/distance) of the glare source. It should be noted that the ratio of spectrally weighted solar illuminance to solar irradiance at the earth's surface yields a conversion factor of ~ 100 lumens/W. Plot adapted from Ho et al., 2011.

Chart References: Ho, C.K., C.M. Ghanbari, and R.B. Diver, 2011, Methodology to Assess Potential Glint and Glare Hazards from Concentrating Solar Power Plants: Analytical Models and Experimental Validation, J. Solar Energy Engineering, August 2011, Vol. 133, 031021-1 – 031021-9.

Figure 1.3 - Figure 1 from the FAA Interim Policy, FAA Review of Solar Energy System Projects on Federally Obligated Airports

1.2 METHODOLOGY

The process for dealing with aviation receptors is as follows:

1. The Federal Aviation Administration (FAA) approved Solar Glare Hazard Analysis Tool (SGHAT) is used to determine if any of these aviation receptors has the potential to theoretically experience glint or glare. This tool also calculates the intensity of such reflectance and whether it is acceptable by FAA standards.
2. SGHAT does not account for terrain screening or screening provided by surface elements such as existing vegetation or buildings, therefore the results of the SGHAT may need to be considered, in conjunction with an assessment of existing intervening screening that may be present, to establish if reflectance can actually be experienced at the receptors.
3. Finally, if necessary, additional assessment is undertaken using Macro Works' bespoke model which would take into account any screening provided by any proposed mitigation measures.

1.2.1 **Identification of Relevant Receptors**

The Planning and Development (Solar Safeguarding Zone) Regulations 2022 set out 43 Solar Safeguarding Zones (SSZs). A SSZ is an area around an airport, aerodrome or helipad in which there is a potential for glint or glare from solar panels to impact aviation safety. A portion of the proposed development is situated within the Coonagh SSZ. The proposed development is located outside the University Hospital Limerick SSZ though was included in this assessment out of an abundance of caution due to its relative proximity to the development (c. 3.6km). At a distance of c. 20km away, Shannon Airport is not considered a relevant receptor.

Runways Approaches

This SGHAT analysis was produced to assess the potential for impacts upon aviation receptors, resulting from the proposed solar installation. Coonagh Airfield is located approximately 2.7km west of the proposed development and comprises one runway.

Observation Points

University Hospital Limerick helipad is situated approximately 3.6km south of the proposed development. Thirteen Observation Points (OP), with heights ranging from 1.7m to 300m, were assessed for potential reflectance. These OPs present a range of flight heights from the urban standard for helicopters down to ground level at 25m intervals, representing the approach to land.



Figure 1.4 Aerial view showing the location of the proposed development relative to the identified aviation receptors.

1.3 RESULTS

1.3.1 Runway Approaches

The SGHAT results are contained in Appendix A and show that, of the two runway approaches analysed at Coonagh Airfield, one had potential for Green Glare to occur (Runway 10).

Neither of the runway approaches showed any potential for Yellow Glare as a result of the proposed solar panels. The absence of Yellow Glare is regarded as a 'Pass' in this assessment as there would only be low potential for after-image.

1.3.2 Observation Points (OP 1 - 13)

The SGHAT results are contained in Appendix A and show that none of the 13 OPs analysed had potential for Green or Yellow Glare to occur.

None of the 13 OPs analysed showed any potential for Yellow Glare to occur. The absence of Yellow Glare is regarded as a 'Pass' in this assessment as there would only be low potential for after-image

1.4 OVERALL CONCLUSION

From the analysis and discussions contained herein, it is considered that the proposed PV arrays at the proposed Cleeves Riverside Quarter development, Limerick results in a 'Pass' at the Coonagh and University Hospital Limerick aviation receptors.

APPENDIX A: SGHAT RESULTS

FORGESOLAR GLARE ANALYSIS

Project: **Limerick**

Site configuration: **Cleeves Riverside Quarter**

Analysis conducted by Luis Dominguez (luis@macroworks.ie) at 08:44 on 25 Sep, 2025.

U.S. FAA 2013 Policy Adherence

The following table summarizes the policy adherence of the glare analysis based on the 2013 U.S. Federal Aviation Administration Interim Policy 78 FR 63276. This policy requires the following criteria be met for solar energy systems on airport property:

- No "yellow" glare (potential for after-image) for any flight path from threshold to 2 miles
- No glare of any kind for Air Traffic Control Tower(s) ("ATCT") at cab height.
- Default analysis and observer characteristics (see list below)

ForgeSolar does not represent or speak officially for the FAA and cannot approve or deny projects. Results are informational only.

COMPONENT	STATUS	DESCRIPTION
Analysis parameters	PASS	Analysis time interval and eye characteristics used are acceptable
2-mile flight path(s)	PASS	Flight path receptor(s) do not receive yellow glare
ATCT(s)	N/A	No ATCT receptors designated

Default glare analysis parameters and observer eye characteristics (for reference only):


- Analysis time interval: 1 minute
- Ocular transmission coefficient: 0.5
- Pupil diameter: 0.002 meters
- Eye focal length: 0.017 meters
- Sun subtended angle: 9.3 milliradians

FAA Policy 78 FR 63276 can be read at <https://www.federalregister.gov/d/2013-24729>

SITE CONFIGURATION

Analysis Parameters

DNI: peaks at 1,000.0 W/m²
 Time interval: 1 min
 Ocular transmission
 coefficient: 0.5
 Pupil diameter: 0.002 m
 Eye focal length: 0.017 m
 Sun subtended angle: 9.3
 mrad
 Site Config ID: 160325.14979
 Methodology: V2

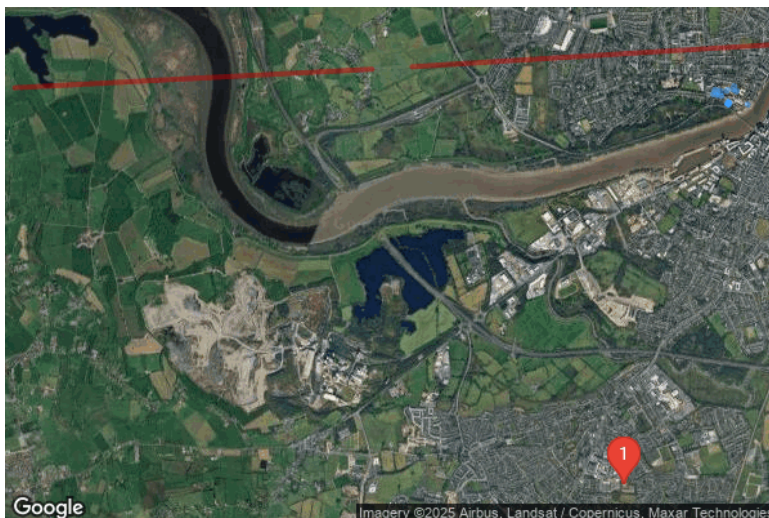

PV Array(s)

Name: PA1
Axis tracking: Fixed (no rotation)
Tilt: 20.0°
Orientation: 194.0°
Rated power: -
Panel material: Smooth glass without AR coating
Reflectivity: Vary with sun
Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.664782	-8.638849	8.49	24.04	32.53
2	52.664620	-8.638910	8.11	24.42	32.53
3	52.664590	-8.638696	8.09	24.44	32.53
4	52.664752	-8.638635	8.31	24.22	32.53
5	52.664782	-8.638849	8.49	24.04	32.53

Name: PA10

Axis tracking: Fixed (no rotation)

Tilt: 75.0°

Orientation: 118.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663778	-8.637004	5.12	6.24	11.36
2	52.663770	-8.636981	5.11	5.18	10.29
3	52.663601	-8.637129	4.55	5.74	10.29
4	52.663609	-8.637154	4.56	6.80	11.36
5	52.663778	-8.637004	5.12	6.24	11.36

Name: PA11

Axis tracking: Fixed (no rotation)

Tilt: 75.0°

Orientation: 298.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663706	-8.636902	4.95	4.95	9.90
2	52.663566	-8.637022	4.50	5.40	9.90
3	52.663561	-8.637004	4.50	6.07	10.57
4	52.663699	-8.636882	4.94	5.63	10.57
5	52.663706	-8.636902	4.95	4.95	9.90

Name: PA12

Axis tracking: Fixed (no rotation)

Tilt: 75.0°

Orientation: 118.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663699	-8.636882	4.94	5.63	10.57
2	52.663561	-8.637004	4.50	6.07	10.57
3	52.663554	-8.636984	4.49	5.41	9.90
4	52.663693	-8.636862	4.93	4.97	9.90
5	52.663699	-8.636882	4.94	5.63	10.57

Name: PA13

Axis tracking: Fixed (no rotation)

Tilt: 40.0°

Orientation: 298.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663711	-8.636919	4.96	4.27	9.23
2	52.663572	-8.637040	4.51	4.72	9.23
3	52.663566	-8.637022	4.50	5.40	9.90
4	52.663706	-8.636902	4.95	4.95	9.90
5	52.663711	-8.636919	4.96	4.27	9.23

Name: PA14

Axis tracking: Fixed (no rotation)

Tilt: 40.0°

Orientation: 118.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663693	-8.636862	4.93	4.97	9.90
2	52.663554	-8.636984	4.49	5.41	9.90
3	52.663549	-8.636968	4.48	4.75	9.23
4	52.663688	-8.636846	4.92	4.31	9.23
5	52.663693	-8.636862	4.93	4.97	9.90

Name: PA15

Axis tracking: Fixed (no rotation)

Tilt: 25.0°

Orientation: 190.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.664399	-8.639085	7.90	12.90	20.80
2	52.664355	-8.638573	8.01	12.79	20.80
3	52.664323	-8.638580	7.96	10.84	18.80
4	52.664366	-8.639093	7.86	10.94	18.80
5	52.664399	-8.639085	7.90	12.90	20.80

Name: PA16

Axis tracking: Fixed (no rotation)

Tilt: 25.0°

Orientation: 193.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.664336	-8.638381	7.99	12.81	20.80
2	52.664265	-8.637877	7.08	13.72	20.80
3	52.664233	-8.637890	6.99	11.81	18.80
4	52.664304	-8.638394	7.93	10.87	18.80
5	52.664336	-8.638381	7.99	12.81	20.80

Name: PA2

Axis tracking: Fixed (no rotation)

Tilt: 20.0°

Orientation: 184.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.664714	-8.638188	8.16	24.37	32.53
2	52.664707	-8.637969	8.02	24.51	32.53
3	52.664541	-8.637983	7.92	24.61	32.53
4	52.664548	-8.638202	8.14	24.39	32.53
5	52.664714	-8.638188	8.16	24.37	32.53

Name: PA3

Axis tracking: Fixed (no rotation)

Tilt: 20.0°

Orientation: 191.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.664781	-8.637164	7.50	21.75	29.25
2	52.664774	-8.637100	7.50	21.75	29.25
3	52.664651	-8.637137	6.74	22.51	29.25
4	52.664654	-8.637169	6.73	22.52	29.25
5	52.664627	-8.637178	6.62	22.63	29.25
6	52.664638	-8.637274	6.70	22.55	29.25
7	52.664708	-8.637252	7.03	22.22	29.25
8	52.664695	-8.637132	6.97	22.28	29.25
9	52.664732	-8.637120	7.19	22.06	29.25
10	52.664738	-8.637177	7.18	22.07	29.25
11	52.664781	-8.637164	7.50	21.75	29.25

Name: PA4

Axis tracking: Fixed (no rotation)

Tilt: 20.0°

Orientation: 214.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.664722	-8.635884	8.42	12.03	20.45
2	52.664623	-8.635991	8.13	12.32	20.45
3	52.664666	-8.636100	8.29	12.16	20.45
4	52.664650	-8.636117	8.30	12.15	20.45
5	52.664580	-8.635940	8.01	12.44	20.45
6	52.664645	-8.635869	8.07	12.38	20.45
7	52.664662	-8.635910	8.13	12.32	20.45
8	52.664711	-8.635856	8.33	12.12	20.45
9	52.664722	-8.635884	8.42	12.03	20.45

Name: PA5

Axis tracking: Fixed (no rotation)

Tilt: 20.0°

Orientation: 220.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663616	-8.634455	2.88	16.07	18.95
2	52.663570	-8.634364	2.18	16.77	18.95
3	52.663540	-8.634406	2.03	16.92	18.95
4	52.663586	-8.634496	2.70	16.25	18.95
5	52.663616	-8.634455	2.88	16.07	18.95

Name: PA6

Axis tracking: Fixed (no rotation)

Tilt: 30.0°

Orientation: 204.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.665086	-8.636284	12.49	10.31	22.80
2	52.665055	-8.636161	12.11	10.69	22.80
3	52.665042	-8.636170	11.94	9.86	21.80
4	52.665073	-8.636291	12.31	9.49	21.80
5	52.665049	-8.636307	11.97	10.83	22.80
6	52.665018	-8.636186	11.61	11.19	22.80
7	52.665006	-8.636195	11.44	10.36	21.80
8	52.665037	-8.636316	11.79	10.01	21.80
9	52.665013	-8.636332	11.44	11.36	22.80
10	52.664982	-8.636211	11.11	11.69	22.80
11	52.664970	-8.636220	10.93	10.87	21.80
12	52.665000	-8.636341	11.26	10.54	21.80
13	52.664977	-8.636358	10.91	11.89	22.80
14	52.664946	-8.636236	10.59	12.21	22.80
15	52.664933	-8.636245	10.43	11.37	21.80
16	52.664964	-8.636366	10.73	11.07	21.80
17	52.664940	-8.636382	10.37	12.43	22.80
18	52.664909	-8.636261	10.14	12.66	22.80
19	52.664897	-8.636270	9.98	11.82	21.80
20	52.664928	-8.636391	10.21	11.59	21.80
21	52.664904	-8.636408	9.91	12.89	22.80
22	52.664873	-8.636286	9.69	13.11	22.80
23	52.664860	-8.636295	9.54	12.26	21.80
24	52.664891	-8.636416	9.75	12.05	21.80
25	52.664867	-8.636432	9.46	13.34	22.80
26	52.664837	-8.636311	9.28	13.52	22.80
27	52.664824	-8.636320	9.17	12.63	21.80
28	52.664855	-8.636441	9.30	12.50	21.80
29	52.664830	-8.636458	9.04	13.76	22.80
30	52.664799	-8.636337	8.94	13.86	22.80
31	52.664786	-8.636346	8.83	12.97	21.80
32	52.664817	-8.636467	8.93	12.87	21.80
33	52.664792	-8.636484	8.70	14.10	22.80
34	52.664761	-8.636363	8.61	14.19	22.80
35	52.664749	-8.636372	8.53	13.27	21.80
36	52.664780	-8.636494	8.58	13.22	21.80
37	52.665086	-8.636284	12.49	10.31	22.80

Name: PA7

Axis tracking: Fixed (no rotation)

Tilt: 40.0°

Orientation: 298.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663795	-8.637058	5.13	4.10	9.23
2	52.663625	-8.637206	4.58	4.65	9.23
3	52.663617	-8.637180	4.57	5.72	10.29
4	52.663785	-8.637029	5.12	5.17	10.29
5	52.663795	-8.637058	5.13	4.10	9.23

Name: PA8

Axis tracking: Fixed (no rotation)

Tilt: 75.0°

Orientation: 298.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663785	-8.637029	5.12	5.17	10.29
2	52.663617	-8.637180	4.57	5.72	10.29
3	52.663609	-8.637154	4.56	6.80	11.36
4	52.663778	-8.637004	5.12	6.24	11.36
5	52.663785	-8.637029	5.12	5.17	10.29

Name: PA9

Axis tracking: Fixed (no rotation)

Tilt: 40.0°

Orientation: 118.0°

Rated power: -

Panel material: Smooth glass without AR coating

Reflectivity: Vary with sun

Slope error: correlate with material



Vertex	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
1	52.663770	-8.636981	5.11	5.18	10.29
2	52.663601	-8.637129	4.55	5.74	10.29
3	52.663592	-8.637102	4.54	4.69	9.23
4	52.663760	-8.636951	5.10	4.13	9.23
5	52.663770	-8.636981	5.11	5.18	10.29

Flight Path Receptor(s)

Name: Coonagh - LFC 10 Runway

Description: None

Threshold height: 15 m

Direction: 87.0°

Glide slope: 3.0°

Pilot view restricted? Yes

Vertical view: 30.0°

Azimuthal view: 50.0°



Point	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
Threshold	52.666417	-8.684562	1.80	15.20	17.00
Two-mile	52.664919	-8.732229	2.80	182.90	185.70

Name: Coonagh - LFC 28 Runway

Description: None

Threshold height: 15 m

Direction: 266.5°

Glide slope: 3.0°

Pilot view restricted? Yes

Vertical view: 30.0°

Azimuthal view: 50.0°



Point	Latitude (°)	Longitude (°)	Ground elevation (m)	Height above ground (m)	Total elevation (m)
Threshold	52.666613	-8.679212	2.00	15.20	17.20
Two-mile	52.668378	-8.631570	10.80	175.10	185.90

Discrete Observation Receptors

Name	ID	Latitude (°)	Longitude (°)	Elevation (m)	Height (m)
OP 1	1	52.632808	-8.650790	25.20	1.70
OP 2	2	52.632808	-8.650790	25.20	25.00
OP 3	3	52.632808	-8.650790	25.20	50.00
OP 4	4	52.632808	-8.650790	25.20	75.00
OP 5	5	52.632808	-8.650790	25.20	100.00
OP 6	6	52.632808	-8.650790	25.20	125.00
OP 7	7	52.632808	-8.650790	25.20	150.00
OP 8	8	52.632808	-8.650790	25.20	175.00
OP 9	9	52.632808	-8.650790	25.20	200.00
OP 10	10	52.632808	-8.650790	25.20	225.00
OP 11	11	52.632808	-8.650790	25.20	250.00
OP 12	12	52.632808	-8.650790	25.20	275.00
OP 13	13	52.632808	-8.650790	25.20	300.00

GLARE ANALYSIS RESULTS

Summary of Glare

PV Array Name	Tilt (°)	Orient (°)	"Green" Glare min	"Yellow" Glare min	Energy kWh
PA1	20.0	194.0	424	0	-
PA10	75.0	118.0	0	0	-
PA11	75.0	298.0	0	0	-
PA12	75.0	118.0	0	0	-
PA13	40.0	298.0	0	0	-
PA14	40.0	118.0	0	0	-
PA15	25.0	190.0	604	0	-
PA16	25.0	193.0	671	0	-
PA2	20.0	184.0	270	0	-
PA3	20.0	191.0	397	0	-
PA4	20.0	214.0	346	0	-
PA5	20.0	220.0	483	0	-
PA6	30.0	204.0	854	0	-
PA7	40.0	298.0	0	0	-
PA8	75.0	298.0	0	0	-
PA9	40.0	118.0	0	0	-

Total annual glare received by each receptor

Receptor	Annual Green Glare (min)	Annual Yellow Glare (min)
Coonagh - LFC 10 Runway	4049	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0




Results for: PA1

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	424	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

424 minutes of green glare

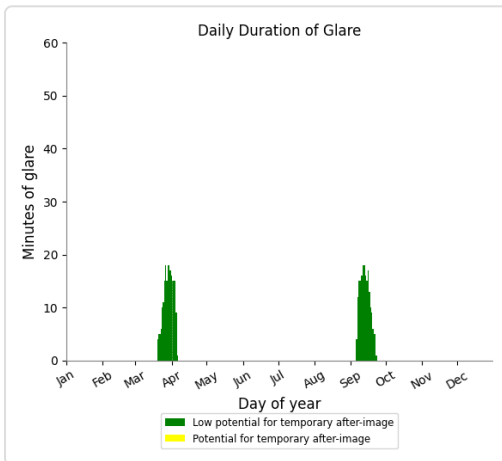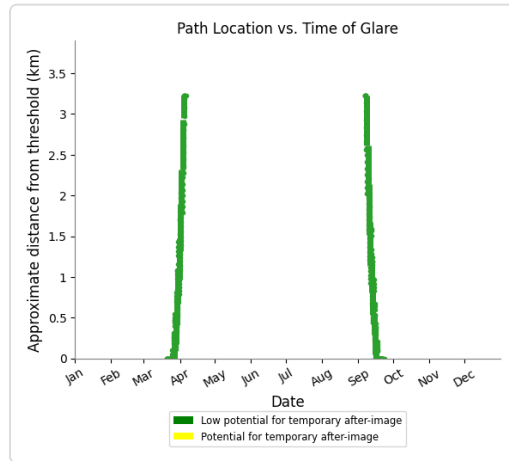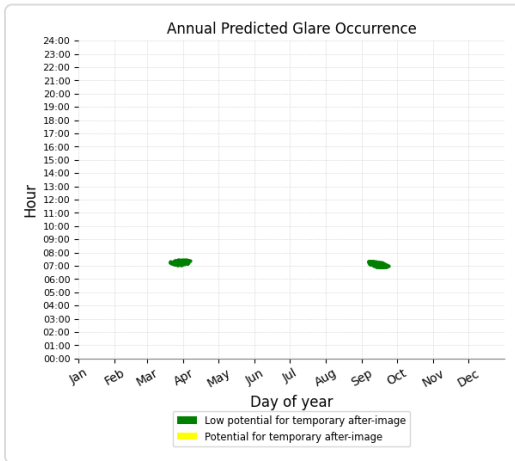

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA10

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA11

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA12

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA13

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA14

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare




Results for: PA15

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	604	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

604 minutes of green glare

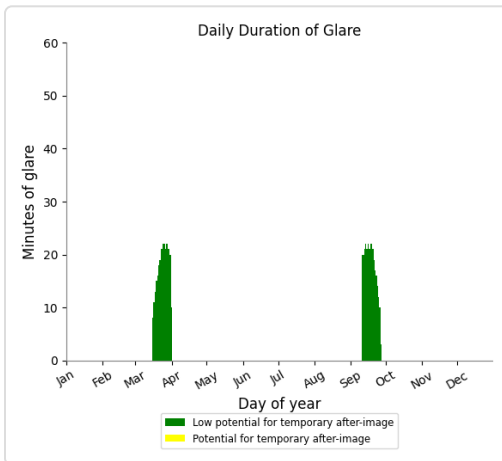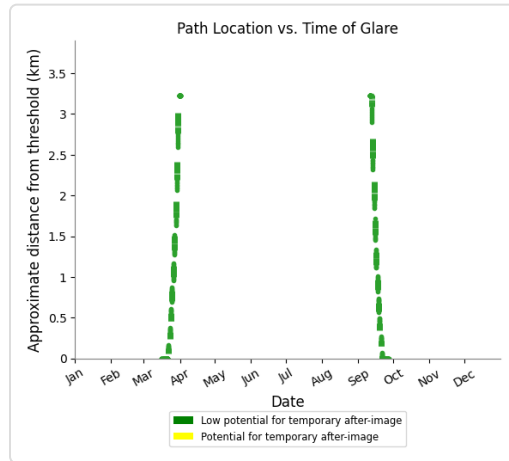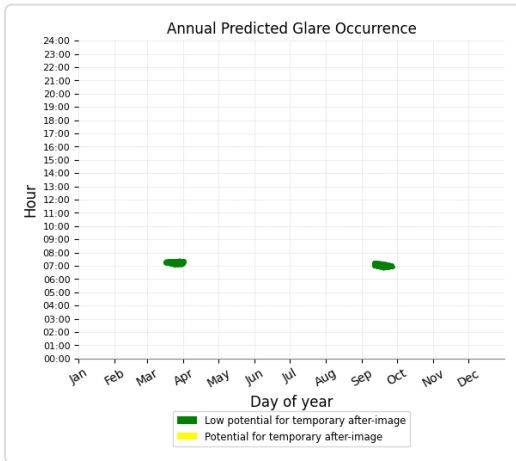

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare




Results for: PA16

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	671	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

671 minutes of green glare

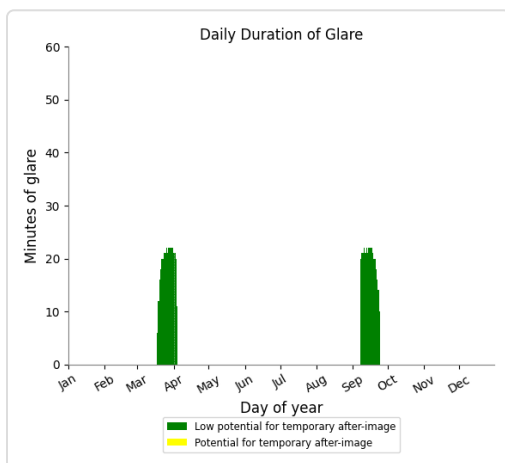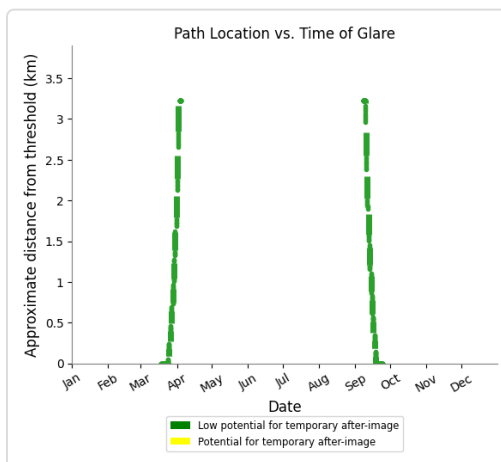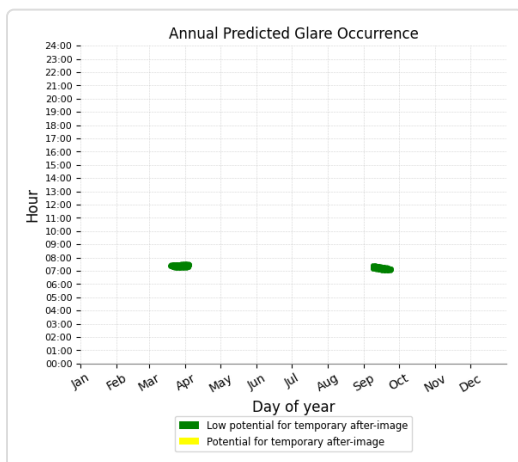

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare




Results for: PA2

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	270	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

270 minutes of green glare

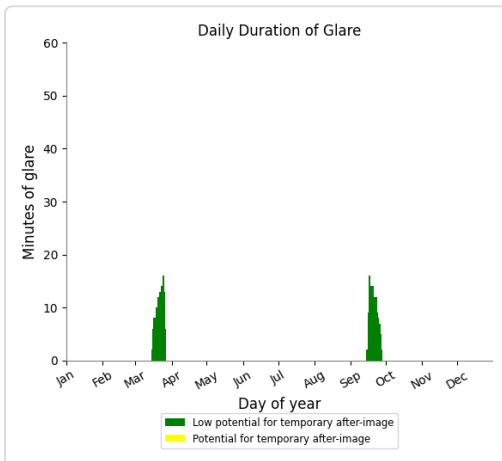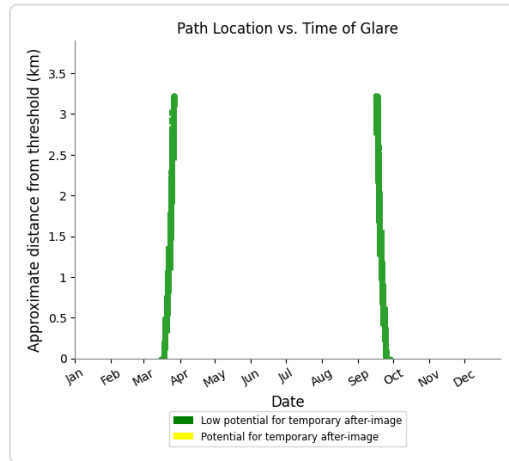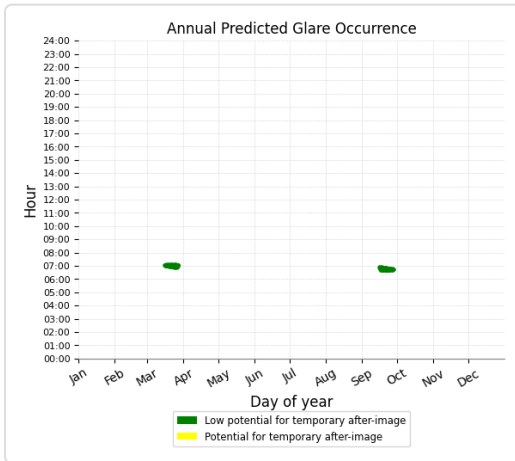

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare




Results for: PA3

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	397	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

397 minutes of green glare

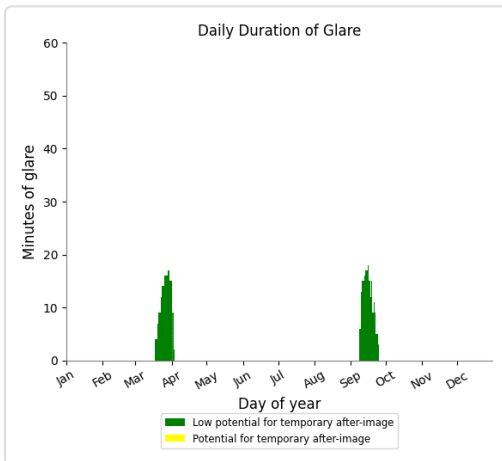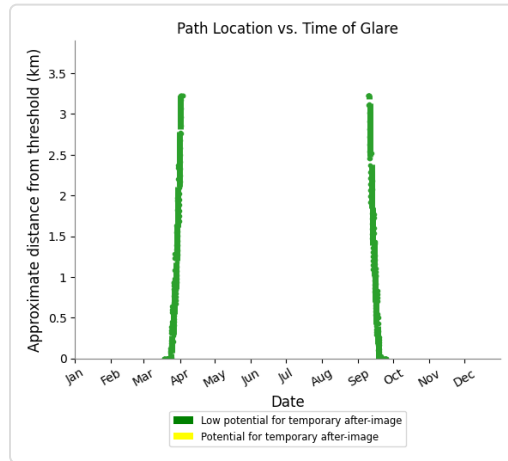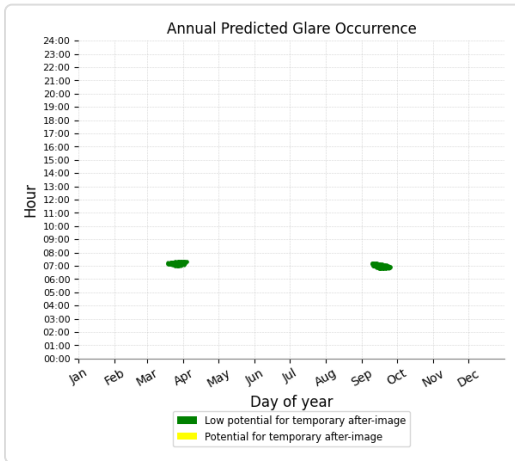

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare




Results for: PA4

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	346	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

346 minutes of green glare

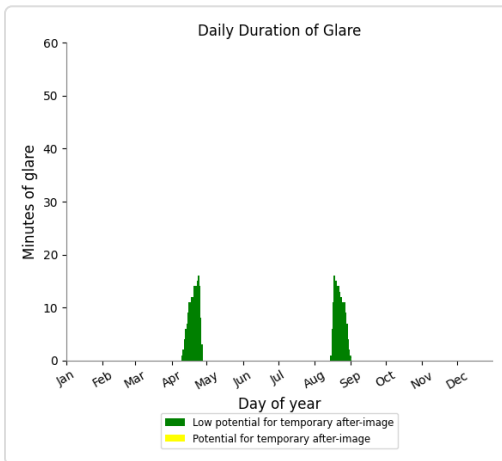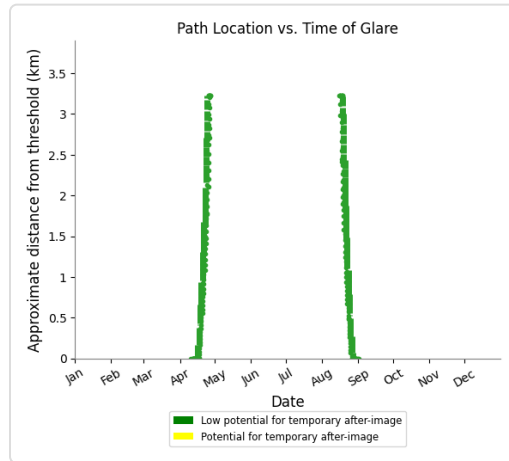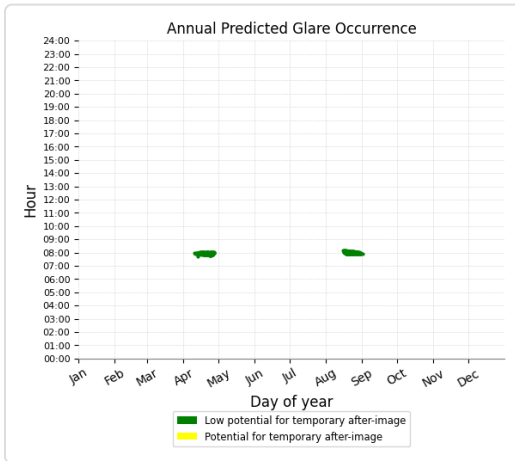

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare




Results for: PA5

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	483	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

483 minutes of green glare

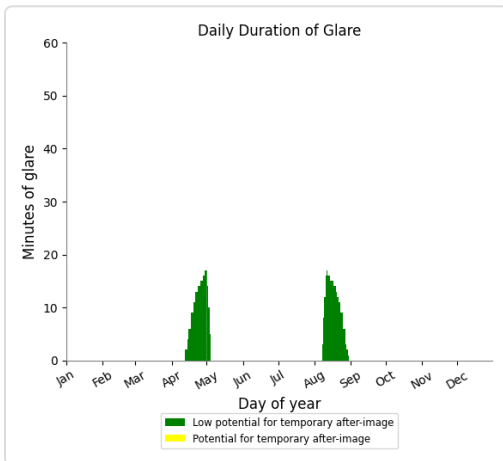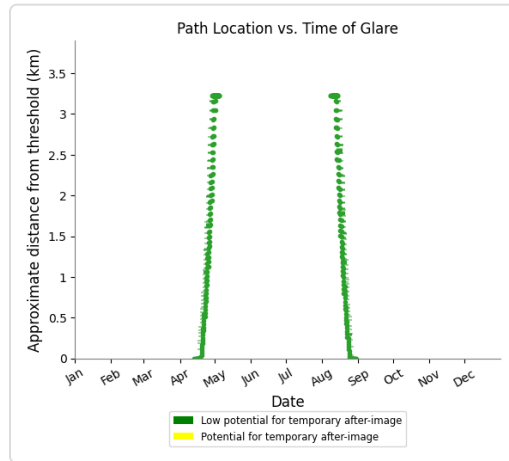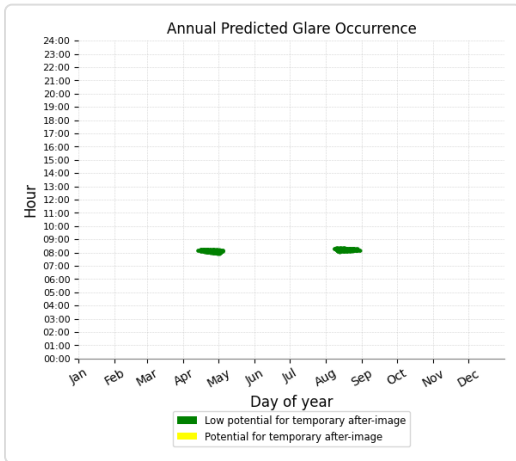

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare




Results for: PA6

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	854	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

854 minutes of green glare

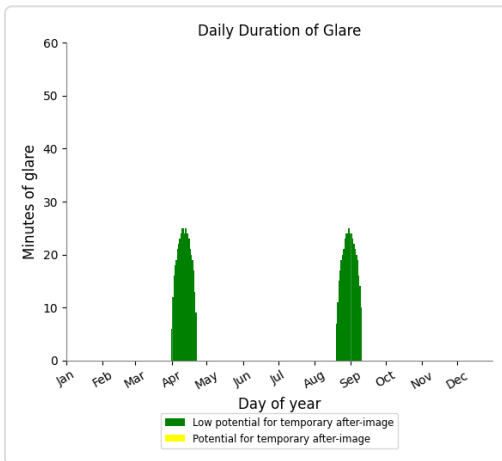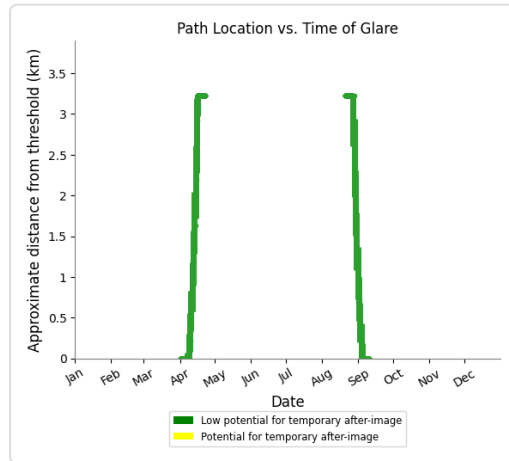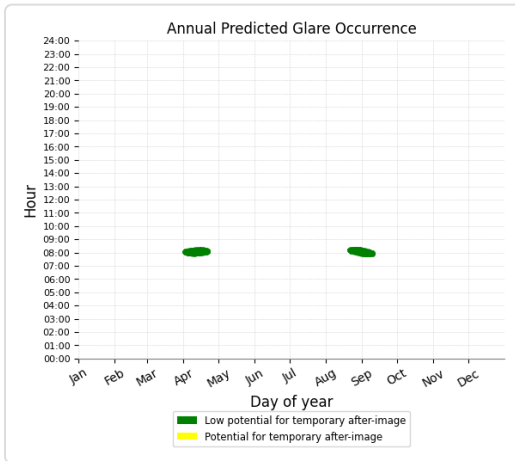

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA7

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA8

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Results for: PA9

Receptor	Green Glare (min)	Yellow Glare (min)
Coonagh - LFC 10 Runway	0	0
Coonagh - LFC 28 Runway	0	0
OP 1	0	0
OP 2	0	0
OP 3	0	0
OP 4	0	0
OP 5	0	0
OP 6	0	0
OP 7	0	0
OP 8	0	0
OP 9	0	0
OP 10	0	0
OP 11	0	0
OP 12	0	0
OP 13	0	0

Flight Path: Coonagh - LFC 10 Runway

0 minutes of yellow glare

0 minutes of green glare

Flight Path: Coonagh - LFC 28 Runway

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 1

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 2

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 3

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 4

0 minutes of yellow glare

0 minutes of green glare

Point Receptor: OP 5

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 6

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 7

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 8

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 9

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 10

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 11

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 12

0 minutes of yellow glare
0 minutes of green glare

Point Receptor: OP 13

0 minutes of yellow glare
0 minutes of green glare

Assumptions

"Green" glare is glare with low potential to cause an after-image (flash blindness) when observed prior to a typical blink response time.

"Yellow" glare is glare with potential to cause an after-image (flash blindness) when observed prior to a typical blink response time.

Times associated with glare are denoted in Standard time. For Daylight Savings, add one hour.

Glare analyses do not account for physical obstructions between reflectors and receptors. This includes buildings, tree cover and geographic obstructions.

Several calculations utilize the PV array centroid, rather than the actual glare spot location, due to V1 algorithm limitations. This may affect results for large PV footprints. Additional analyses of array sub-sections can provide additional information on expected glare.

The subtended source angle (glare spot size) is constrained by the PV array footprint size. Partitioning large arrays into smaller sections will reduce the maximum potential subtended angle, potentially impacting results if actual glare spots are larger than the sub-array size.

Additional analyses of the combined area of adjacent sub-arrays can provide more information on potential glare hazards. (See previous point on related limitations.)

Glare locations displayed on receptor plots are approximate. Actual glare-spot locations may differ.

Glare vector plots are simplified representations of analysis data. Actual glare emanations and results may differ.

The glare hazard determination relies on several approximations including observer eye characteristics, angle of view, and typical blink response time. Actual results and glare occurrence may differ.

Hazard zone boundaries shown in the Glare Hazard plot are an approximation and visual aid based on aggregated research data. Actual ocular impact outcomes encompass a continuous, not discrete, spectrum.

Refer to the Help page at www.forgesolar.com/help/ for assumptions and limitations not listed here.

2016 © Sims Industries d/b/a ForgeSolar, All Rights Reserved.