

12.0 AIR QUALITY AND CLIMATE

12.1 Air Quality

12.1.1 Introduction

This section of the chapter assesses the likely air quality and climate impacts associated with the proposed residential-led mixed-use development at Milltown Park, Sandford Road, Dublin 6. A full description of the development is available in Chapter 3 - Description of Development.

This chapter was completed by Tanmay Gojamgunde. Tanmay is an environmental consultant in the Air Quality & Climate section of AWN Consulting, a Trinity Consultants Company. He holds a MSc in Air Pollution Management and Control from the University of Birmingham and has also completed BTech in Environmental Engineering. As part of the MSc, he worked on 'The Impact of bus-fleet electrification on air quality in Birmingham' utilising advanced dispersion modelling tools and emission inventory toolkit. Prior to joining AWN, Tanmay contributed to several key environmental projects in India, including Delhi's first air quality monitoring program (R ASMAN), air quality and traffic planning assessments with IIT Kanpur, and an Environmental Impact Assessment Report (EIAR) for an industrial district in Kanpur. He also specialises in conducting air dispersion modelling assessments of emissions, emission inventories, R programming and extends to broader aspects of environmental engineering.

This chapter was reviewed by Dr. Jovanna Arndt, a Principal Environmental Consultant in the Air Quality & Climate section of AWN Consulting. She holds a BSc. in Environmental Science and a Ph.D. in Atmospheric Chemistry from University College Cork. She is an Associate Member of both the Institute of Air Quality Management and the Institute of Environmental Sciences. She has been specialising in the area of air quality and climate over 8 years and has prepared air quality and climate assessments for inclusion within EIARs for residential developments such as Twenties Lane (Planning Application Ref: 22713), Cherrywood T13 (Planning Application Ref: DZ23A/0028), Corballis Donabate LRD (Planning Application Ref: LR0017/S3), commercial and industrial developments by Dublin Airport Authority, Zoetis, Ipsen, Merck Millipore, Greener Ideas Limited and Abbvie, as well as renewable energy developments such as Codling Wind Park and the Cúil Na Móna Anaerobic Digestion Facility. She also specialises in assessing air quality impacts using air dispersion modelling of transportation schemes such as BusConnects Dublin, major Highways England Road schemes and major rail infrastructure in the form of High Speed 2 (HS2 in the UK). She has prepared air dispersion modelling assessments of emissions from data centres, energy centres and the chemical industry as part of EPA Industrial Emissions Licences for Microsoft, Greener Ideas Limited, Merck Millipore, Lilly Limerick, Chemifloc, Takeda, Kingspan and Kilshane Energy. She has also provided Air Quality Action Plan (AQAP) and Air Quality Management Area (AQMA) support to several UK councils and assessed the air quality impacts of potential Clean Air Zones in the UK.

12.1.1.1 Aspects Relevant to this Assessment

The key elements of construction of the proposed development with potential for air quality impacts are:

- Potential fugitive dust emissions from general site preparation (demolition works, foundation and basement excavation) and construction activities;
- Potential fugitive dust emissions from trucks associated with construction;
- Engine emissions from construction vehicles and machinery.

The key elements of operation of the proposed development with potential for air quality and climate impacts are:

- A change in traffic flows on road links nearby the proposed development.

12.1.2 Study Methodology

12.1.2.1 Relevant Legislation & Guidance

The principal guidance and best practice documents used to inform the assessment of potential impacts on air quality are summarised below.

- Guidance on the Assessment of Dust from Demolition and Construction v2.2 (Institute of Air Quality Management [IAQM] (hereafter referred to as the IAQM Guidelines) (IAQM, 2024);
- A Guide To The Assessment Of Air Quality Impacts On Designated Nature Conservation Sites (Version 1.1) (IAQM, 2020); and
- PE-ENV-01106: Air Quality Assessment of Specified Infrastructure Projects (Transport Infrastructure Ireland [TII], 2022a).

In addition to specific air quality guidance documents, the following guidelines were considered and consulted in the preparation of this chapter:

- Guidelines on the Information to be Contained in Environmental Impact Assessment Reports (hereafter referred to as the Environmental Protection Agency (EPA) Guidelines) (EPA, 2022);
- Guidelines for Planning Authorities and An Bord Pleanála on carrying out Environmental Impact Assessment (Department of Housing, Planning & Local Government, 2018); and
- Environmental Impact Assessment (EIA) Directive Guidance on the Preparation of the Environmental Impact Assessment Report (European Commission, 2017).

12.1.2.2 Criteria for Rating of Impacts: Ambient Air Quality Standards

To reduce the risk to health from poor air quality, national and European statutory bodies have set limit values in ambient air for a range of air pollutants. These limit values or 'Air Quality Standards' are health or environmental-based levels for which additional factors may be considered. For example, natural background levels, environmental conditions and socio-economic factors may all play a part in the limit value which is set.

Air quality significance criteria are assessed on the basis of compliance with the appropriate standards or limit values. The applicable standards in Ireland are set out in *Directive (EU) 2024/2881 of the European Parliament and of the Council of 23 October 2024 on ambient air quality and cleaner air for Europe (recast)*. This directive supersedes *EU Directive 2008/50/EC of the European Parliament and of the Council of 21 May 2008 on ambient air quality and cleaner air for Europe (CAFE Directive)*. Directive (EU) 2024/2881 sets out air quality standards for pollutants to be reached by 2026 and by 2030 which are more closely aligned with the World Health Organisation (WHO) air quality guidelines.

The ambient air quality limit values for pollutants are set out in Annex I of Directive (EU) 2024/2881. Table 1 of Annex I in Directive (EU) 2024/2881 sets out the updated air quality limit values for pollutants to be achieved by 1 January 2030, which are more closely aligned with the WHO air quality guidelines. Table 2 of Annex I in Directive (EU) 2024/2881 sets out the limit values for air pollutants which are to be achieved by 11 December 2026 and are also applicable up to 2030. The limit values in Table 2 of Annex I are the same as the limits set under Directive 2008/50/EC and the Air Quality Standards Regulations 2022.

The *Ambient Air Quality Standards Regulations 2022 (S.I. 739 of 2022) (the Air Quality Standards Regulations 2022)* further transposed the CAFE Directive and revoked the Air Quality Standards Regulations 2011, as amended. With the adoption of Directive (EU) 2024/2881, Ireland must transpose this directive into national law, i.e. update the Air Quality Standards Regulations, before December 2026.

In relation to the proposed development, the applicable limit values are for nitrogen dioxide (NO₂) and particulate matter (PM₁₀ and PM_{2.5}). Table 12.1 outlines the limit values pre-2030 and post-2030 for the specified pollutants.

Pollutant	Directive (EU) 2024/2881 Annex I Table 2		Directive (EU) 2024/2881 Annex I Table 1	
	Limit Type	Limit Value (to be attained by 2026 and applicable until 2030)	Limit Type	Limit Value (to be attained by 2030)
Nitrogen Dioxide (NO ₂)	Hourly limit for protection of human health - not to be exceeded more than 18 times/year	200 µg/m ³	Hourly limit for protection of human health - not to be exceeded more than 3 times/year	200 µg/m ³
	N/A	N/A	24-hour limit for protection of human health - not to be exceeded more than 18 times/year	50 µg/m ³

	Annual limit for protection of human health	40 µg/m ³	Annual limit for protection of human health	20 µg/m ³
Particulate Matter (as PM ₁₀)	24-hour limit for protection of human health - not to be exceeded more than 35 times/year	50 µg/m ³ PM ₁₀	24-hour limit for protection of human health - not to be exceeded more than 18 times/year	45 µg/m ³ PM ₁₀
	Annual limit for protection of human health	40 µg/m ³ PM ₁₀	Annual limit for protection of human health	20 µg/m ³ PM ₁₀
Particulate Matter (as PM _{2.5})	N/A	N/A	24-hour limit for protection of human health - not to be exceeded more than 18 times/year	25 µg/m ³ PM _{2.5}
	Annual limit for protection of human health	25 µg/m ³ PM _{2.5}	Annual limit for protection of human health	10 µg/m ³ PM _{2.5}

Table 12.1: Ambient Air Quality Limit Values

12.1.2.3 Criteria for Rating of Impacts: WHO Air Quality Guidelines & Clean Air Strategy

In April 2023, the Government of Ireland published the *Clean Air Strategy for Ireland* (Government of Ireland, 2023), which provides a high-level strategic policy framework needed to reduce air pollution. The strategy commits Ireland to achieving the 2021 WHO Air Quality Guidelines Interim Target 3 (IT₃) by 2026 (Table 12.2), the IT₄ targets by 2030 and the final targets by 2040 (Table 12.2). The strategy notes that a significant number of EPA monitoring stations observed air pollution levels in 2021 above the WHO targets; 80% of these stations would fail to meet the final PM_{2.5} target of 5 µg/m³. The strategy also acknowledges that “meeting the WHO targets will be challenging and will require legislative and societal change, especially with regard to both PM_{2.5} and NO₂”.

Annex II of Directive (EU) 2024/2881 gives assessment thresholds which align with the clean air strategy final 2040 WHO targets. Directive (EU) 2024/2881 states that “Member States shall endeavour to achieve and preserve the best ambient air quality and a high level of protection of human health and the environment, with the aim of achieving a zero-pollution objective as referred to in Article 1(1), in line with WHO recommendations, and below the assessment thresholds laid down in Annex II.”

These assessment thresholds relate to monitoring of ambient air quality by Member States, where “exceedances of the assessment thresholds specified in Annex II shall be determined on the basis of concentrations during the previous 5 years where sufficient data are available. An

assessment threshold shall be deemed to have been exceeded if it has been exceeded during at least 3 separate years out of those previous 5 years."

Pollutant	Limit Type	IT ₃ (2026)	IT ₄ (2030)	Final Target (2040)
NO ₂	24-hour limit for protection of human health	-	-	25 µg/m ³
	Annual limit for protection of human health	20 µg/m ³	-	10 µg/m ³
PM (as PM ₁₀)	24-hour limit for protection of human health	75 µg/m ³	50 µg/m ³	45 µg/m ³
	Annual limit for protection of human health	30 µg/m ³	20 µg/m ³	15 µg/m ³
PM (as PM _{2.5})	24-hour limit for protection of human health	37.5 µg/m ³	25 µg/m ³	15 µg/m ³
	Annual limit for protection of human health	15 µg/m ³	10 µg/m ³	5 µg/m ³

Table 12.2: WHO Air Quality Guidelines 2021

The applicable air quality limit values for the purposes of this assessment are those set out in Table 12.1. The pre-2030 limit values in Table 2 of Annex I of Directive (EU) 2024/2881 are applicable for the construction phase and Opening Year 2028 for the proposed development. The limit values stipulated in Table 1 of Annex I of Directive (EU) 2024/2881 are applicable for the Design Year 2043 for the proposed development.

12.1.2.4 Criteria for Rating of Impacts: Dust Deposition Guidelines

The concern from a health perspective is focused on particles of dust that are less than 10 microns (PM₁₀) and less than 2.5 microns (PM_{2.5}). The EU ambient air quality standards outlined in Table 12.1 have set ambient air quality limit values for PM₁₀ and PM_{2.5}.

With regards to larger dust particles that can give rise to nuisance dust, there are no statutory guidelines regarding the maximum dust deposition levels that may be generated during the construction phase of a development in Ireland. Furthermore, no specific criteria have been stipulated for nuisance dust in respect of this development.

With regard to dust deposition, the German TA-Luft standard for dust deposition (non-hazardous dust) (German VDI, 2002) sets a maximum permissible emission level for dust deposition of 350 mg/m²/day averaged over a one-year period at any receptors outside the site boundary. The TA-Luft standard has been applied for the purpose of this assessment based on recommendations from the EPA in Ireland in the document titled Environmental Management Guidelines - Environmental Management in the Extractive Industry (Non-Scheduled Minerals) (EPA, 2006). The document recommends that the TA-Luft limit of 350 mg/m²/day be applied to the site boundary of quarries. This limit value can be implemented with regard to dust

impacts from construction of the proposed development.

12.1.2.5 Criteria for Rating of Impacts: Air Quality & Traffic Significance Criteria

The Transport Infrastructure Ireland (TII) guidance document Air Quality Assessment of Specified Infrastructure Projects – PE-ENV-01106 (TII, 2022b) details a methodology for determining air quality impact significance criteria for road schemes which can be applied to any project that causes a change in traffic. The degree of impact is determined based on the percentage change in pollutant concentrations relative to the Do-Nothing scenario. The TII significance criteria are outlined in Table 4.9 of Air Quality Assessment of Specified Infrastructure Projects – PE-ENV-01106 (TII, 2022b) and reproduced in Table 12.3 below. These criteria have been adopted for the proposed development to predict the impact of NO₂, PM₁₀ and PM_{2.5} emissions as a result of the proposed development.

Long-term average concentration at receptor in assessment year	% Change in concentration relative to Air Quality Limit Value (AQLV)			
	1%	2-5%	6-10%	>10%
75% or less of AQLV	Neutral	Neutral	Slight	Moderate
76 – 94% of AQLV	Neutral	Slight	Moderate	Moderate
95 – 102% of AQLV	Slight	Moderate	Moderate	Substantial
103 – 109% of AQLV	Moderate	Moderate	Substantial	Substantial
110% or more of AQLV	Moderate	Substantial	Substantial	Substantial

Source: Air Quality Assessment of Specified Infrastructure Projects – PE-ENV-01106 (TII, 2022b))

Table 12.3: Air Quality & Traffic Significance Criteria

As per Table 12.3 a neutral effect is one where a change in concentration at a receptor is:

- 5% or less where the Opening Year, without the proposed development, annual mean concentration is 75% or less of the standard; or
- 1% or less where the Opening Year, without the proposed development, annual mean concentration is 94% or less of the standard.

Where an effect does not meet the criteria for neutral, as described above, the effect can either be positive or negative. The TII guidance (TII, 2022) states that “*the evaluation of significance of effects for the operational phase should be undertaken for the Opening Year only as the Design Year is likely to show lower total pollutant concentrations and changes in concentration*” (TII, 2022).

Non-significant effects (i.e. of local importance only) are ‘neutral’ or ‘slight’ changes in concentrations while significant effects can be changes in pollutant concentrations that are either ‘moderate’ or ‘substantial’. However, the TII guidance (TII, 2022) states that these must be considered in the context of the project and ‘moderate’ or ‘substantial’ increases are not necessarily always significant effects.

The impact descriptors in Table 12.3 are used to describe the impact at each modelled receptor location, and the significance of the impacts is then determined, aligning with the terminology in the EPA guidelines (EPA, 2022). Whilst it may be determined that there are 'slight', 'moderate' or 'substantial' impacts at one or more receptors, an overall judgement should be made of whether the proposed development is 'significant' or 'not significant' in terms of air quality. Factors to consider when determining the overall significance of a proposed development are provided in Table 4.10 of the TII guidance (TII, 2022).

12.1.2.6 Construction Phase

Dust Assessment

The Institute of Air Quality Management in the UK (IAQM) guidance document 'Guidance on the Assessment of Dust from Demolition and Construction' (IAQM, 2024) outlines an assessment method for predicting the impact of dust emissions from construction activities based on the scale and nature of the works and the sensitivity of the area to dust impacts. The IAQM methodology has been applied to the construction phase of this development to predict the likely risk of dust impacts in the absence of mitigation measures and to determine the level of site-specific mitigation required. The use of UK guidance is recommended by Transport Infrastructure Ireland in their guidance document Air Quality Assessment of Specified Infrastructure Projects – PE-ENV-01106 (TII, 2022b).

The major dust generating activities are divided into four types within the IAQM guidance (IAQM, 2024) to reflect their different potential impacts. These are:

- Demolition.
- Earthworks.
- Construction.
- Trackout (movement of heavy vehicles).

The magnitude of each of the four categories is divided into 'Large', 'Medium' or 'Small' scale depending on the nature of the activities involved. The criteria for determining the category for the works involved are outlined in Table 12.4, these are based on the IAQM guidance (IAQM, 2024). The magnitude of each activity is combined with the overall sensitivity of the area to determine the risk of dust impacts from site activities. This allows the level of site-specific mitigation to be determined.

Dust Emission Magnitude		
Small	Medium	Large
Demolition		
<ul style="list-style-type: none"> Total building volume <12,000 m³ Construction material with low potential for dust release (e.g. metal cladding or timber) Demolition activities <6 m above ground Demolition during wetter months 	<ul style="list-style-type: none"> Total building volume 12,000 - 75,000 m³ Potentially dusty construction material Demolition activities 6 – 12 m above ground level 	<ul style="list-style-type: none"> Total building volume >75,000 m³ Potentially dusty construction material (e.g. concrete) On-site crushing and screening Demolition activities >12 m above ground level
Earthworks		
<ul style="list-style-type: none"> Total site area <18,000 m² Soil type with large grain size (e.g. sand) <5 heavy earth moving vehicles active at any one time Formation of bunds <3 m in height Earthworks during wetter months 	<ul style="list-style-type: none"> Total site area 18,000 m² - 110,000 m² Moderately dusty soil type (e.g. silt) 5 – 10 heavy earth moving vehicles active at any one time Formation of bunds 3 – 6 m in height 	<ul style="list-style-type: none"> Total site area >110,000 m² Potentially dusty soil type (e.g. clay, which will be prone to suspension when dry due to small particle size) >10 heavy earth moving vehicles active at any one time Formation of bunds >6 m in height
Construction		
<ul style="list-style-type: none"> Total building volume <12,000 m³ Construction material with low potential for dust release (e.g. metal cladding or timber) 	<ul style="list-style-type: none"> Total building volume 12,000 - 75,000 m³ Potentially dusty construction material (e.g. concrete) On-site concrete batching 	<ul style="list-style-type: none"> Total building volume >75,000 m³ On-site concrete batching Sandblasting
Trackout (Truck Movements)		
<ul style="list-style-type: none"> <20 HDV (>3.5 t) outward movements in any one day Surface material with low potential for dust release Unpaved road length <50 m 	<ul style="list-style-type: none"> 20 – 50 HDV (>3.5 t) outward movements in any one day Moderately dusty surface material (e.g. high clay content) Unpaved road length 50 – 100 m 	<ul style="list-style-type: none"> >50 HDV (>3.5 t) outward movements in any one day Potentially dusty surface material (e.g. high clay content) Unpaved road length >100 m

Table 12.4: IAQM Criteria to Determine Dust Emissions Magnitude

Once the dust emission magnitude has been determined the next step, according to the IAQM guidance (IAQM, 2024), is to establish the level of risk by combining the magnitude with the overall sensitivity of the area to dust soiling, human health and ecological effects. The level of risk associated with each activity is determined using the criteria in Table .

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
Demolition			
High	High risk	Medium risk	Medium risk
Medium	High risk	Medium risk	Low risk
Low	Medium risk	Low risk	Negligible
Earthworks			
High	High risk	Medium risk	Low risk
Medium	Medium risk	Medium risk	Low risk
Low	Low risk	Low risk	Negligible
Construction			
High	High risk	Medium risk	Low risk
Medium	Medium risk	Medium risk	Low risk
Low	Low risk	Low risk	Negligible
Trackout			
High	High risk	Medium risk	Low risk
Medium	Medium risk	Medium risk	Low risk
Low	Low risk	Low risk	Negligible

Table 12.5: IAQM Criteria to Determine Risk of Dust Impacts

Traffic Assessment

Construction phase traffic also has the potential to impact air quality. The TII guidance *Air Quality Assessment of Specified Infrastructure Projects – PE-ENV-01106* (TII, 2022b), states that road links meeting one or more of the following criteria can be defined as being 'affected' by a proposed development and should be included in the local air quality assessment. While the guidance is specific to infrastructure projects the approach can be applied to any development that causes a change in traffic.

- Annual average daily traffic (AADT) changes by 1,000 or more;
- Heavy duty vehicle (HDV) AADT changes by 200 or more;
- Daily average speed change by 10 kph or more;
- Peak hour speed change by 20 kph or more; and
- A change in road alignment by 5m or greater.

DBFL Consulting Engineers have prepared a Traffic and Transport Impact Assessment for the

proposed development enclosed separately and have prepared Chapter 15 of this EIAR (Transportation). It has been determined by DBFL that the construction stage traffic will not increase by 1,000 AADT, or 200 HDV AADT and the development will not result in speed changes or changes in road alignment, therefore the traffic does not meet the above scoping criteria. As a result, a detailed air quality assessment of construction stage traffic emissions has been scoped out from any further assessment as there is no potential for significant impacts to air quality.

12.1.2.7 Operational Phase

Traffic Assessment

Operational phase traffic has the potential to impact local air quality as a result of increased vehicle movements associated with the proposed development. The TII scoping criteria detailed in Section 12.1.2.6 were used to determine if any road links are affected by the proposed development and require inclusion in a detailed air dispersion modelling assessment. DBFL Consulting Engineers have prepared a *Traffic and Transport Impact Assessment* for the proposed development enclosed separately and have prepared Chapter 15 of this EIAR (Transportation). It has been determined by DBFL that the proposed development will result in the operational phase traffic increasing by more than 1,000 AADT on a small number of road links. Therefore, in accordance with the TII scoping criteria a detailed air dispersion modelling assessment of operational phase traffic emissions was conducted. Additionally, traffic associated with other cumulative developments in the vicinity of the proposed development was included in the figures supplied to ensure a full cumulative assessment was conducted. Please see the accompanying *Traffic and Transport Assessment* and Chapter 15 of this EIAR for further details.

The impact of traffic emissions on air quality is assessed for both human and ecological receptors within 200 m of impacted roads as per the TII PE-ENV-01106 guidance (TII, 2022b). The following sections describe the methodology for each assessment.

The impact to air quality as a result of changes in traffic is assessed at sensitive human receptors in the vicinity of affected roads. These are discussed in further detail within Section 0 and shown graphically in Figure 12.3.

The TII guidance (2022) states that modelling should be conducted for NO₂, PM₁₀ and PM_{2.5} for the Base, Opening and Design Years for both the Do Minimum (Do Nothing – i.e. assuming the proposed development is not in place) and Do Something (with the proposed development in place) scenarios. Modelling of operational NO₂, PM₁₀ and PM_{2.5} concentrations has been conducted for the Do Nothing and Do Something scenarios using the TII Road Emissions Model (REM) online calculator tool (TII, 2025b).

The following inputs are required for the REM tool: receptor locations, light duty vehicle (LDV) annual average daily traffic movements (AADT), annual average daily heavy-duty vehicles (HDV AADT), annual average traffic speeds, road link lengths, road type, project county location and pollutant background concentrations. The Default fleet mix option was selected along with the Intermediate Case fleet data base selection for cars, the ICE Sales Ban 2035 fleet data base for LGVs and the EU Target for the HGV fleet data base, as per TII Guidance (TII, 2025). The Intermediate Case assumes a linear interpolation between the Business-as-Usual

case – where current trends in vehicle ownership continue and the Climate Action Plan (CAP) case – where adoption of low emission light duty vehicles occurs. The ICE Sales Ban 2035 represents a sales ban on new combustion engine vehicles to be implemented by 2035, and the EU Target for HGV represents interim targets for emissions from sales of new HGVs.

Using this input data the model predicts the road traffic contribution to ambient ground level concentrations at the identified sensitive receptors using generic meteorological data. The TII REM uses county-based Irish fleet composition for different road types, for different European emission standards from pre-Euro to Euro 6/VI with scaling factors to reflect improvements in fuel quality, retrofitting, and technology conversions. The TII REM also includes emission factors for PM₁₀ emissions associated with brake and tyre wear (TII, 2025b). The predicted road contributions are then added to the existing background concentrations to give the predicted ambient concentrations. The ambient concentrations are then compared with the relevant ambient air quality standards to assess the compliance of the proposed development with these ambient air quality standards.

The TII guidance (2022b) also states that impacts to sensitive ecology due to traffic emissions should be considered. Consideration should be given to designated sites within 2km of the proposed development. However, a detailed assessment is only required at a local level, where there is a designated site within 200m of impacted road links. The TII guidance (TII, 2022b) notes that only sites that are sensitive to nitrogen and acid deposition need to be included in the assessment. It is not necessary to include sites for example that have been designated as a geological feature or water course. There are no designated ecological sites within 200m of the site or impacted road links and therefore no assessment was required as there is no potential for significant impacts to the designated sites due to changes in air quality.

Traffic Data Used in Modelling Assessment

Traffic flow information detailed in Table 12.1 was obtained from DBFL Consulting Engineers for the purposes of this assessment. Data for the Base Year 2025 and the Do Nothing and Do Something scenarios for the opening year 2028 and design year 2043 were provided. A conservative growth factor has been applied to the traffic data to allow for cumulative development within the area. Specific cumulative developments were also investigated but it was found that there were no specific permitted developments that would lead to cumulative traffic impacts due to their increased distance from the site (see Traffic Impact Assessment and Chapter 15 for further details).

The modelling assessment has been undertaken for road links including the Sandford Road and Milltown Road as these met the TII scoping criteria and were within 200m of receptors. Background concentrations have been included as per Section 0 of this chapter based on available EPA background monitoring data (EPA, 2025a).

Road Name	Speed (kph)	Base Year	Opening Year		Design Year	
			Do Nothing	Do Something	Do Nothing	Do Something
		LDV AADT (HDV AADT)	LDV AADT (HDV AADT)	LDV AADT (HDV AADT)	LDV AADT (HDV AADT)	LDV AADT (HDV AADT)
R117 Milltown Road (Link 1)	50	13216 (986)	13925 (1173)	14929 (1180)	15012 (1494)	16018 (1500)
Site Access (Link 2)	30	0 (0)	0 (0)	1976 (9)	0 (0)	1976 (9)

Table 12.1: Traffic Data used in Air Modelling Assessment

12.1.3 Existing Receiving Environment

12.1.3.1 Meteorological Data

A key factor in assessing temporal and spatial variations in air quality is the prevailing meteorological conditions. Depending on wind speed and direction, individual receptors may experience very significant variations in pollutant levels under the same source strength (i.e. traffic levels) (WHO, 2006). Wind is of key importance in dispersing air pollutants and for ground level sources, such as traffic emissions, pollutant concentrations are generally inversely related to wind speed. Thus, concentrations of pollutants derived from traffic sources will generally be greatest under very calm conditions and low wind speeds when the movement of air is restricted. In relation to PM_{10} , the situation is more complex due to the range of sources of this pollutant. Smaller particles (less than $PM_{2.5}$) from traffic sources will be dispersed more rapidly at higher wind speeds. However, fugitive emissions of coarse particles ($PM_{2.5}$ - PM_{10}) will actually increase at higher wind speeds. Thus, measured levels of PM_{10} will be a non-linear function of wind speed.

The nearest representative weather station collating detailed weather records is Dublin Airport, which is located approximately 11 km north of the site. Dublin Airport met data has been examined to identify the prevailing wind direction and average wind speeds over a five-year period (see Figure 12.1). For data collated during five representative years (2020 – 2024), the predominant wind direction is westerly to south-westerly, with generally moderate wind speeds (Met Éireann, 2025c).

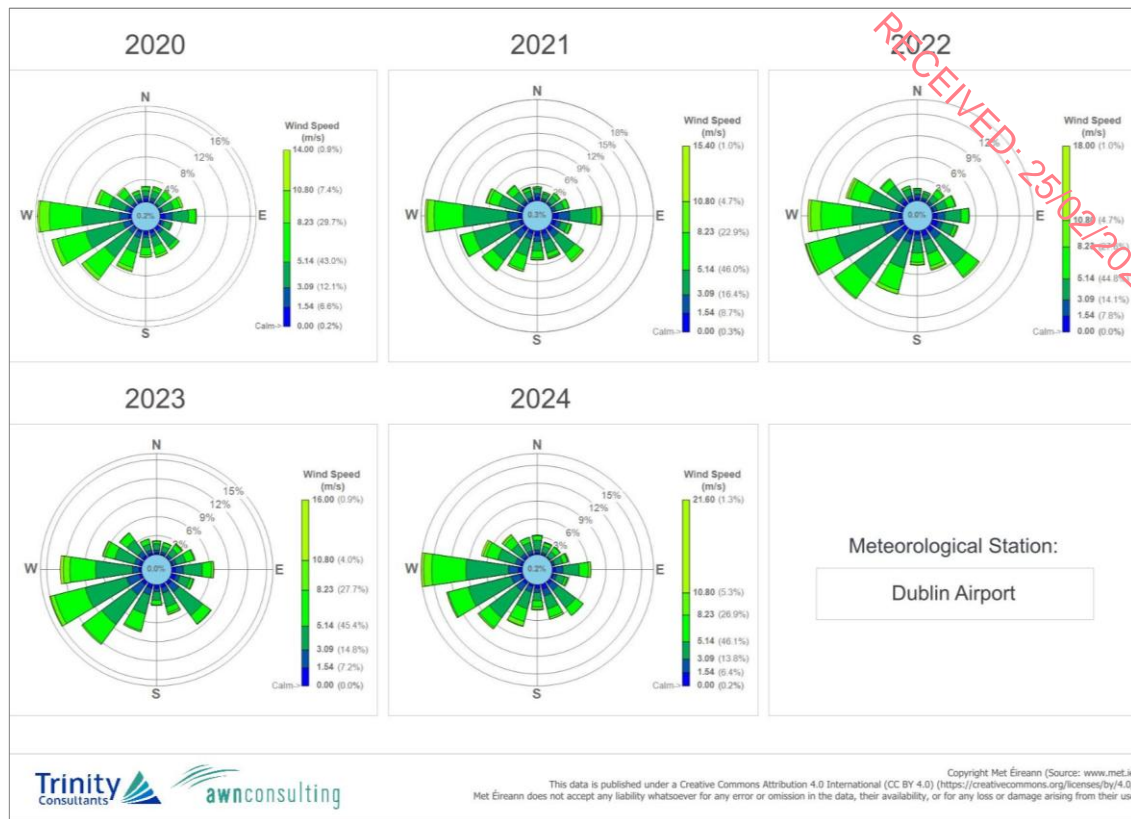


Figure 12.1: Dublin Airport Windroses (2020 – 2024)

12.1.3.2 Baseline Air Quality

Air quality monitoring programs have been undertaken in recent years by the EPA. The most recent annual report on air quality in Ireland is 'Air Quality In Ireland 2024' (EPA, 2025a). The EPA website details the range and scope of monitoring undertaken throughout Ireland and provides both monitoring data and the results of previous air quality assessments.

As part of the implementation of the Air Quality Standards Regulations 2022 (S.I. No. 739 of 2022), as amended, four air quality zones have been defined in Ireland for air quality management and assessment purposes (EPA, 2025a). Dublin is defined as Zone A and Cork as Zone B. Zone C is composed of 23 towns with a population of greater than 15,000. The remainder of the country, which represents rural Ireland but also includes all towns with a population of less than 15,000, is defined as Zone D.

In terms of air monitoring and assessment, the proposed development site is within Zone A (EPA, 2025a). The long-term monitoring data has been used to determine background concentrations for the key pollutants in the region of the proposed development. The background concentration accounts for all non-traffic derived emissions (e.g. natural sources, industry, home heating etc.). The use of publicly available long-term datasets is recommended by TII in their PE-ENV-0016 guidance (2022b). This use of long-term data sets is preferred over on-site baseline air monitoring surveys as it gives a better indication of long-term trends in air quality. The use of long-term monitoring data from the EPA is considered appropriate for determining the background air quality in the area of the proposed development.

Continuous monitoring by the EPA is carried out at a number of monitoring stations within Zone A; these include urban background sites, roadside (traffic) sites and suburban background sites. It is necessary to select monitoring stations that are representative of the site location. Not all monitoring stations are considered suitable for determining background pollutant concentrations and must be reviewed on a case-by-case basis to determine the most appropriate EPA monitoring sites for the current assessment.

The EPA, on their website (EPA, 2025a), state that background sites generally represent overall area-wide exposure more closely than roadside sites. Roadside monitoring sites are heavily influenced by traffic emissions and are not considered representative of area-wide pollutant levels.

The full suite of EPA Zone A monitoring locations were reviewed. A combination of Urban and Suburban background was determined to be the most representative background for the area of the proposed development. Influences from traffic emissions will be captured within the traffic modelling assessment and therefore, suburban background concentrations give the best indication of other, non-traffic derived sources of pollutants.

NO₂

Long-term NO₂ monitoring was carried out at the representative suburban Zone A locations of Ballyfermot, Dun Laoghaire, Swords and Rathmines for the period 2020 – 2024 (Table 12.7) (EPA, 2025a). Long-term average concentrations are significantly below the annual average limit of 40 µg/m³. Average results range from 10 – 16 µg/m³. The overall annual average concentration for this 5-year period is 13 µg/m³. Additionally, there were no exceedances of the hourly limit value of 200 µg/m³. Based on the above information a conservative estimate of the current background NO₂ concentration for the region of the proposed development is 13 µg/m³.

Station	Averaging Period	Year				
		2020	2021	2022	2023	2024
Rathmines	Annual Mean NO ₂ (µg/m ³)	13	14	14	15	13
	1-hr Mean NO ₂ values >200 µg/m ³ (days)	0	0	0	0	0
Dún Laoghaire	Annual Mean NO ₂ (µg/m ³)	13	16	16	13	11
	1-hr Mean NO ₂ values >200 µg/m ³ (days)	0	0	0	0	0
Swords	Annual Mean NO ₂ (µg/m ³)	11	11	12	10	10
	1-hr Mean NO ₂ values >200 µg/m ³ (days)	0	0	0	0	0
Ballyfermot	Annual Mean NO ₂ (µg/m ³)	12	13	13	13	12
	1-hr Mean NO ₂ values >200 µg/m ³ (days)	0	0	0	0	0

Table 12.2: Trends in Zone A Air Quality – Nitrogen Dioxide (NO₂)

PM₁₀

Continuous PM₁₀ monitoring was carried out at two representative Zone B locations from 2020 – 2024; Tallaght, Rathmines, Phoenix Park and Dún Laoghaire. Annual average PM₁₀ concentrations across the sites ranged from 9 – 15 µg/m³ over the 2020 – 2024 period. The overall annual average concentration for this 5-year period is 12 µg/m³. There were at most 4 exceedances of the daily limit of 50 µg/m³ in 2020 (at Rathmines). However, 35 exceedances are permitted per year (EPA, 2025a). Based on the EPA data, a conservative estimate of the current background PM₁₀ concentration in the region of the proposed development is 12

µg/m³.

Station	Averaging Period	Year				
		2020	2021	2022	2023	2024
Tallaght	Annual Mean PM ₁₀ (µg/m ³)	10	10	11	11	10
	24-hr Mean PM ₁₀ values > 50 µg/m ³ (days)	1	0	1	1	0
Rathmines	Annual Mean PM ₁₀ (µg/m ³)	11	12	15	15	13
	24-hr Mean PM ₁₀ values > 50 µg/m ³ (days)	2	0	4	2	2
Phoenix Park	Annual Mean PM ₁₀ (µg/m ³)	10	10	11	9	10
	24-hr Mean PM ₁₀ values > 50 µg/m ³ (days)	0	0	0	0	0
Dún Laoghaire	Annual Mean PM ₁₀ (µg/m ³)	12	11	12	12	12
	24-hr Mean PM ₁₀ values > 50 µg/m ³ (days)	0	0	1	0	1

Table 12.3: Trends in Zone A Air Quality – PM₁₀

PM_{2.5}

Continuous PM₁₀ monitoring was carried out at two representative Zone A locations from 2020–2024; Tallaght, Rathmines, Phoenix Park and Dún Laoghaire. Annual average PM₁₀ concentrations across the sites ranged from 6–9 µg/m³ over the 2020–2024 period (Table 12.g). The overall annual average concentration for this 5-year period is 7 µg/m³. Based on the EPA data, a conservative estimate of the current background PM₁₀ concentration in the region of the proposed development is 8 µg/m³.

Station	Averaging Period	Year				
		2020	2021	2022	2023	2024
Tallaght	Annual Mean PM _{2.5} (µg/m ³)	7	6	6	6	6
Rathmines	Annual Mean PM _{2.5} (µg/m ³)	8	9	8	7	8
Phoenix Park	Annual Mean PM _{2.5} (µg/m ³)	7	6	6	6	7
Dún Laoghaire	Annual Mean PM _{2.5} (µg/m ³)	8	8	8	7	7

Table 12.4: Trends in Zone A Air Quality – PM_{2.5}

Summary

Based on the above information the air quality in the suburban Dublin area is generally good, with concentrations of the key pollutants generally well below the current relevant limit values set out in Table 2 of Annex I of Directive (EU) 2024/2881. The current pollutant concentrations at these monitoring sites are also in compliance with the 2030 limit values set out in Directive (EU) 2024/2881 and the clean air strategy, however, concentrations are approaching the limit values. Further measures will be needed at a national scale to reduce air pollution in future years. The EPA have indicated that road transport emissions are contributing to increased levels of NO₂ with the potential for breaches in the annual NO₂ limit value in future years at locations within urban centres and roadside locations. In addition, burning of solid fuels for home heating is contributing to increased levels of particulate matter (PM₁₀ and PM_{2.5}). The EPA predict that exceedances in the particulate matter limit values are likely in future years if burning of solid fuels for residential heating continues (EPA, 2025a).

12.1.3.3 Sensitivity of the Receiving Environment

Construction Phase

In line with the UK Institute of Air Quality Management (IAQM) guidance document 'Guidance on the Assessment of Dust from Demolition and Construction' (IAQM, 2024) prior to assessing the impact of dust from a proposed development, the sensitivity of the area must first be assessed as outlined below. Both receptor sensitivity and proximity to proposed works areas are taken into consideration. For the purposes of this assessment, high sensitivity receptors are regarded as residential properties where people are likely to spend the majority of their time. Commercial properties and places of work are regarded as medium sensitivity while low sensitivity receptors are places where people are present for short periods or do not expect a high level of amenity. Table 12.10 outlines the criteria for determining the sensitivity of the area to dust soiling and dust-related human health effects as per the IAQM guidance (IAQM, 2024).

Sensitivity of the Area to Dust Soiling Effects on People and Property						
Receptor Sensitivity	Number of Receptors	Distance from Source (m)				
		<20	<50	<100	<250	
High	>100	High	High	Medium	Low	
	10 - 100	High	Medium	Low	Low	
	1 - 10	Medium	Low	Low	Low	
Medium	>1	Medium	Low	Low	Low	
Low	>1	Low	Low	Low	Low	
Sensitivity of the Area to Human Health Impacts						
Receptor Sensitivity	Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from Source (m)			
			<20	<50	<100	<250
High	< 24 µg/m ³	>100	Medium	Low	Low	Low
		10 - 100	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
Medium	< 24 µg/m ³	>10	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
Low	< 24 µg/m ³	>1	Low	Low	Low	Low

Table 12.5: Criteria for Determining the Sensitivity of the Area

In terms of receptor sensitivity to dust soiling, there are a number of highly sensitive residential properties within 100 m of the proposed development boundary (Figure 12.2). There are 10-100 high sensitivity residential properties and 3 medium sensitivity commercial receptors within 20m of the site boundary, there are a further 10-100 high sensitivity receptors and a medium sensitivity receptor within 50m and >100 properties and 2 low sensitivity receptors within 100m of the site boundary. Based on these receptor numbers and using the IAQM criteria in Table 12.10, the sensitivity of the area to dust soiling impacts from the proposed development is high.

In addition to sensitivity to dust soiling, the IAQM guidelines also outline the assessment criteria for determining the sensitivity of the area to human health impacts. The criteria take into consideration the current annual mean PM₁₀ concentration, receptor sensitivity based on type (residential receptors are classified as high sensitivity) and the number of receptors

affected within various distance bands from the construction works. A conservative estimate of the current annual mean PM₁₀ concentration in the vicinity of the proposed development is 12 µg/m³. There are 10-100 high sensitivity residential properties and 3 medium sensitivity commercial receptors within 20m of the proposed development boundary (Figure 12.2). Based on the IAQM criteria outlined in Table 12.5 the worst-case sensitivity of the area to dust-related human health effects is low.

The IAQM guidelines also outline the assessment criteria for determining the sensitivity of the area to dust-related ecological impacts. Dust emissions can coat vegetation leading to a reduction in the photosynthesising ability of the plant, as well as other effects. The guidance states that dust impacts to vegetation can occur up to 50 m from the site, and 50 m from site access roads, up to 250 m for the site entrance. The sensitivity of the area is determined based on the distance to the source, the designation of the site, (European, National or local designation) and the potential dust sensitivity of the ecologically important species present. There are no sensitive ecological receptors that meet these criteria within the study area and there is no potential for impacts to sensitive ecology from construction dust emissions and no further assessment is required.

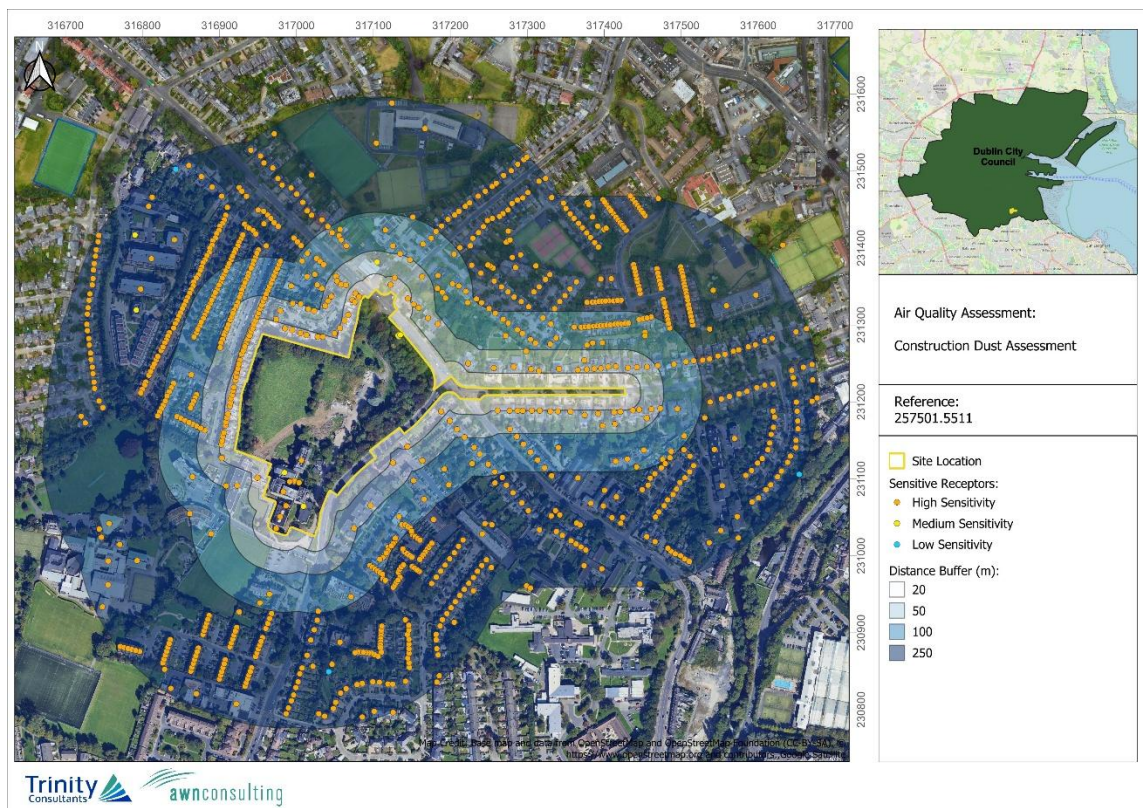


Figure 12.2: Sensitive Receptors within 250m of Site

Operational Phase

The impact to air quality due to changes in traffic is assessed at sensitive receptors in the vicinity of affected roads. The TII guidance (2022b) states that a proportionate number of representative receptors, which are located in areas which will experience the highest concentrations or greatest improvements because of the proposed development, are to be included in the modelling. The TII criteria state that receptors within 200 m of impacted road

links should be assessed; roads which are greater than 200 m from receptors will not impact pollutant concentrations at that receptor (TII, 2022b). The TII guidance (2022b) defines sensitive receptor locations for the purposes of modelling annual mean pollutant concentrations as: residential housing, schools, hospitals, care homes and short term-accommodation such as hotels, i.e. locations where members of the public are likely to be regularly present for 24 hours. A total of 2 no. high sensitivity residential receptors (R1 and R2) were included in the modelling assessment associated with the impacted road links (Link 1 and Link 2) (see Figure 12.3).

Receptors R1 and R2 represent existing residential properties within 200m of impacted road links. The receptors chosen are representative of the affected receptors within 200m of impacted roads and other receptors in these areas will experience similar or lesser air quality related impacts from traffic emissions.

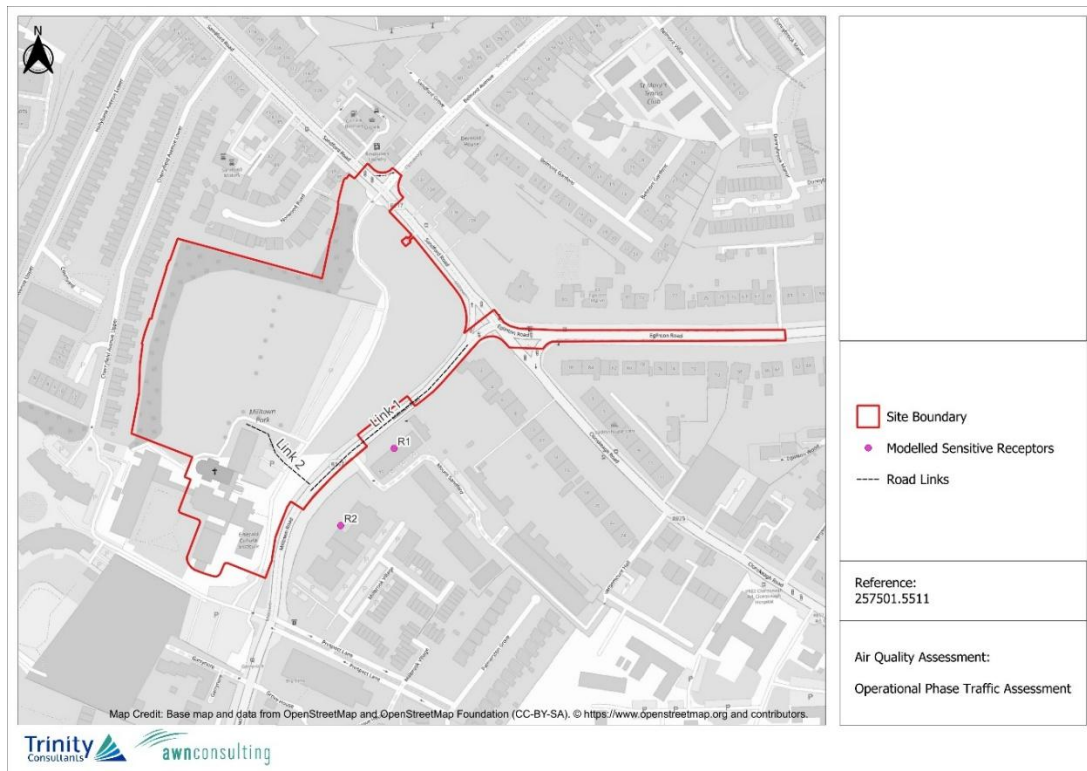


Figure 12.3: Location of Sensitive Receptors used in Operational Phase Air Quality Assessment

12.1.4 Potential Impact of the Proposed Development

12.1.4.1 Construction Phase

Dust Assessment

The greatest potential impact on air quality during the construction phase of the proposed development is from construction dust emissions and the potential for nuisance dust. While construction dust tends to be deposited within 250 m of a construction site, the majority of the deposition occurs within the first 50 m (IAQM, 2024). The extent of any dust generation depends on the nature of the dust (soils, peat, sands, gravels, silts etc.) and the nature of the

construction activity. In addition, the potential for dust dispersion and deposition depends on local meteorological factors such as rainfall, wind speed and wind direction. A review of Dublin Airport meteorological data indicates that the prevailing wind direction is westerly to south-westerly and wind speeds are generally moderate in nature (Section 0). In addition, dust generation is considered negligible on days where rainfall is greater than 0.2 mm. A review of historical 30-year average data for Dublin Airport meteorological station indicates that on average 200 days per year have rainfall over 0.2 mm (Met Éireann, 2025c). Therefore, it can be determined that 54% of the time dust generation will be reduced due to natural meteorological conditions.

Determining the Potential Dust Emission Magnitude

The magnitude of the works under each category can be classified as either small, medium or large depending on the scale of the works involved. The magnitude of each activity has been determined below for the proposed development using the criteria in Table .

- Demolition: The dust emission magnitude for the proposed demolition activities can be classified as medium as worst case as the total building volume to be demolished is building volume 12,000 - 75,000 m³ .
- Earthworks: The dust emission magnitude for the proposed earthwork activities can be classified as medium as the total site area is between 18,000 – 110,000 m².
- Construction: The dust emission magnitude for the proposed construction activities can be classified as large as a worst-case as the total volume of buildings to be constructed will be greater than 75,000 m³.
- Trackout: The dust emission magnitude for the proposed trackout can be classified as medium, as there will be between 20 - 50 outward HGV movements per day during the construction phase of the proposed development.

Determining the Dust Risk Impacts

Once the dust emission magnitude has been determined the next step, according to the IAQM guidance (IAQM, 2024), is to establish the level of risk by combining the magnitude with the overall sensitivity of the area to dust soiling and dust-related human health effects. The level of risk associated with each activity is determined using the criteria in Table . The overall risk of dust impacts from the construction works is shown in Table 12.6 for each category.

There is at most a high risk of dust soiling impacts and a low risk of dust-related human health impacts associated with the proposed works. As a result, best practice dust mitigation measures associated with high-risk works will be implemented to ensure there are no significant impacts at nearby sensitive receptors. In the absence of mitigation, dust impacts are predicted to be **direct, short-term, negative** and **slight**.

Receptor	Receptor Sensitivity	Dust Emission Magnitude	Risk of Dust-Related Impacts
Demolition			
Dust Soiling	High	Medium	Medium Risk
Human Health	Low		Low Risk
Earthworks			
Dust Soiling	High	Medium	Medium Risk
Human Health	Low		Low Risk
Construction			
Dust Soiling	High	Large	High Risk
Human Health	Low		Low Risk
Trackout			
Dust Soiling	High	Medium	Medium Risk
Human Health	Low		Low Risk

Table 12.6: Risk of Dust Impacts used to Define Site-Specific Mitigation

Traffic Assessment

There is also the potential for traffic emissions to impact air quality with respect to human health in the short-term over the construction phase, particularly, due to the increase in HGVs accessing the site. The construction stage traffic has been reviewed, and a detailed air quality assessment has been scoped out as none of the road links impacted by the proposed development satisfy the TII assessment criteria in Section 0.

Therefore, it can be determined that the construction stage traffic will have an *imperceptible, neutral, short-term* and *not significant* impact on air quality.

12.1.4.2 Operational Phase

There is the potential for vehicles accessing the site to result in emissions of NO₂, PM₁₀ and PM_{2.5}.

Traffic Assessment

The potential impact of the proposed development has been assessed by modelling emissions from the traffic generated due to the development. The traffic data has included specific cumulative developments within the area to provide for a worst-case assessment and to assess potential cumulative impacts (see Transport Assessment and Chapter 15 prepared by DBFL Consulting Engineers for further details).

The traffic data includes the Do Nothing (DN) scenario and Do Something (DS) scenario. The impact of NO₂, PM₁₀ and PM_{2.5} emissions for the Opening and Design Years was predicted at the nearest sensitive receptors to the impacted road links. This assessment allows the

significance of the development, with respect to both relative and absolute impacts, to be determined.

The TII guidance PE-ENV-01106 (TII, 2022b) details a methodology for determining air quality impact significance criteria for TII road schemes and infrastructure projects. However, this significant criteria can be applied to any development that causes a change in traffic. The degree of impact is determined based on both the absolute and relative impact of the proposed development. Results are compared against the 'Do Nothing' scenario, which assumes that the proposed development is not in place in future years, to determine the degree of impact.

Traffic related air emissions have the potential to impact air quality which can affect human health. The following details the results of the air dispersion modelling assessment of traffic emissions to determine the impact to human health. The predicted pollutant concentrations have been compared against the ambient air quality limit values set out in Table . The current limit values set out in Table 2 of Annex I of Directive (EU) 2024/2881 are applicable to the Opening Year 2028 and the limit values set out in Table 1 of Annex I of Directive (EU) 2024/2881 are applicable to the Design Year 2043 as the assessment year is post-2030.

NO₂

The results of the NO₂ modelling are shown in Table 12.7. In the Opening Year 2028, predicted annual mean concentrations of NO₂ are in compliance with the annual mean limit value of 40 µg/m³ reaching at most 36% of the limit. In addition, the TII guidance (2022) states that the hourly limit value for NO₂ of 200 µg/m³ is unlikely to be exceeded at roadside locations unless the annual mean is above 60 µg/m³. As predicted NO₂ concentrations are significantly below 60 µg/m³ (Table 12.7), it can be concluded that the short-term NO₂ limit value will be complied with at all receptor locations. Some increases in NO₂ concentrations are predicted at the worst-case receptors assessed in the Opening Year when compared with the Do-Nothing scenario (see Table 12.7). Concentrations are predicted to increase by at most 0.12 µg/m³ at receptor R2. When comparing the change in concentration with the air quality limit value, it results in a maximum change of 0.30% at receptor R2. The other receptor in the area will experience similar or lesser impacts and all increases are considered 'neutral' as per the TII criteria in Table .

In the Design Year 2043, predicted annual mean NO₂ concentrations are in compliance of the limit value of 20 µg/m³ at the worst-case receptors assessed, reaching at most 66% of the limit. The proposed development will result in a 'neutral' increase in NO₂ concentrations according to the TII significance criteria in Table , with concentrations increasing by at most 0.01 µg/m³ as a result of the proposed development (at receptor R1, see (Table 12.7), which is an increase of 0.05% when compared with the applicable annual mean limit value for NO₂. Therefore, the impact of the proposed development on NO₂ concentrations is neutral.

Receptor	Impact Opening Year						Description
	DN	% of AQLV	DS	% of AQLV	DS-DN	% Change of AQLV	
R1	14.4	36%	14.4	36%	0.03	0.07%	Neutral
R2	13.0	33%	13.1	33%	0.12	0.30%	Neutral
Receptor	Impact Design Year						Description
	DN	% of AQLV	DS	% of AQLV	DS-DN	% Change of AQLV	

R1	13.2	66%	13.2	66%	0.01	0.05%	Neutral
R2	13.0	65%	13.0	65%	0.01	0.05%	Neutral

Table 12.7: Predicted Annual Mean NO₂ Concentrations (µg/m³)

PM₁₀

The results of the PM₁₀ modelling can be seen in Table 12.8 for the Opening Year 2028 and Design Year 2043.

In the Opening Year 2028, annual mean PM₁₀ concentrations are in compliance with the annual mean limit value of 40 µg/m³ reaching at most 38% of the limit. In the Design Year 2043 annual mean PM₁₀ concentrations are also in compliance with the annual mean limit value of 20 µg/m³ reaching at most 75% of the limit. In addition, the proposed development will not result in any days of exceedance of the daily PM₁₀ limit value (Table) in both the opening and design years.

The changes in PM₁₀ concentrations as a result of the proposed development can be assessed relative to the 'Do Nothing' (DN) levels. In the Opening Year 2028 annual PM₁₀ concentrations will increase by at most 0.21 µg/m³ at receptor R2, this is a 0.53% increase when compared with the annual mean limit value of 20 µg/m³. This is considered a 'neutral' impact as per the TII criteria in Table . The other receptor in the area will experience similar or lesser impacts and all increases at other modelled receptors are considered 'neutral' as per the TII criteria in Table .

In the Design Year 2043 the proposed development will result in a maximum increase of 0.20 µg/m³ at receptor R2, which is a 1% increase when compared with the annual mean limit of 20 µg/m³. The changes in concentrations in the Design Year are considered 'neutral' based on the TII criteria in Table .

Receptor	Impact Opening Year						Description
	DN	% of AQLV	DS	% of AQLV	DS-DN	% Change of AQLV	
R1	15.0	38%	15.1	38%	0.05	0.13%	Neutral
R2	12.0	30%	12.2	31%	0.21	0.53%	Neutral
Receptor	Impact Design Year						Description
	DN	% of AQLV	DS	% of AQLV	DS-DN	% Change of AQLV	
R1	15.0	75%	15.0	75%	0.04	0.20%	Neutral
R2	12.0	60%	12.2	61%	0.20	1.00%	Neutral

Table 12.8: Predicted Annual Mean PM₁₀ Concentrations (µg/m³)

PM_{2.5}

In relation to changes in PM_{2.5} concentrations as a result of the proposed development, the results of the assessment can be seen in Table 12.9 for the modelled Opening Year 2028 and Design Year 2043.

In the Opening Year 2028, predicted annual mean concentrations of PM_{2.5} are in compliance with the annual mean limit value of 25 µg/m³ reaching at most 38% of the limit. There is predicted to be an increase in PM_{2.5} concentrations at the worst-case receptors assessed in the Opening Year when compared with the Do-Nothing scenario (see Table 12.9). Concentrations

are predicted to increase by at most $0.11 \mu\text{g}/\text{m}^3$ at receptor R2. When comparing the change in concentration with the air quality limit value, it results in a maximum change of 0.44% at receptor R2. This is considered a 'neutral' impact as per the TII criteria in Table . The other receptor in the area will experience similar or lesser impacts and all increases at other modelled receptors are considered 'neutral' as per the TII criteria in Table .

In the Design Year 2043, predicted annual mean $\text{PM}_{2.5}$ concentrations are in compliance with the limit value of $10 \mu\text{g}/\text{m}^3$ at all receptors assessed. Concentrations reach at most 96% of the annual mean limit value. The proposed development will result in a 'neutral' increase in $\text{PM}_{2.5}$ concentrations according to the TII significance criteria Table , with concentrations increasing by at most $0.10 \mu\text{g}/\text{m}^3$ as a result of the proposed development (at receptor R2, see Table 12.9), which is an increase of 1% when compared with the annual mean limit value of $10 \mu\text{g}/\text{m}^3$ for $\text{PM}_{2.5}$.

Receptor	Impact Opening Year						
	DN	% of AQLV	DS	% of AQLV	DS-DN	% Change of AQLV	Description
R1	9.6	38%	9.6	38%	0.03	0.12%	Neutral
R2	8.0	32%	8.1	32%	0.11	0.44%	Neutral
Receptor	Impact Design Year						
	DN	% of AQLV	DS	% of AQLV	DS-DN	% Change of AQLV	Description
R1	9.6	96%	9.6	96%	0.02	0.20%	Neutral
R2	8.0	80%	8.1	81%	0.10	1.00%	Neutral

Table 12.9: Predicted Annual Mean $\text{PM}_{2.5}$ Concentrations ($\mu\text{g}/\text{m}^3$)

Significance of Predicted Changes in NO_2 , PM_{10} and $\text{PM}_{2.5}$ Concentrations

As outlined in Section 12.1.2.5, the TII guidance (2022b) states that the significance of effects should be assessed based on the opening year only. Non-significant effects are 'neutral' or 'slight' changes in concentrations while significant effects can be changes in pollutant concentrations that are either 'moderate' or 'substantial'. However, the TII guidance (2022b) states that these must be considered in the context of the project and 'moderate' or 'substantial' increases are not necessarily always significant effects.

In relation to NO_2 , PM_{10} and $\text{PM}_{2.5}$ the predicted changes in concentrations are 'neutral' at the worst-case receptors assessed. Therefore, according to the TII criteria as outlined in Section 12.1.2.5, the impact is ***not significant***.

In relation to the future inhabitants of the proposed development, predicted pollutant concentrations at the representative receptors (R1 and R2) are in compliance with the relevant limit values indicating that traffic emissions for the existing road network will not significantly impact the local air quality at the proposed development site.

For the purposes of this assessment, it has been assumed that the current estimated background pollutant concentrations are applicable for both the opening and design years, with no decreases in future background concentrations allowed for. There will be some decreases in background concentrations in future years. However, at present there is no guidance-based methodology available for estimating future year background concentrations

and therefore, as a conservative approach, the current estimated background concentrations have been applied to future years.

Due to the large uncertainty in future improvements in fleet composition and emissions, such as projected changes to vehicle registration and electric vehicle uptake, the future year emission rates utilised by the TII REM tool do not account for the full implementation of these measures. Predicted design year concentrations are therefore currently overly conservative as future emissions improvements are not fully taken into account, as well as no improvement in background concentrations being assumed.

As a result, the opening year predicted concentrations are the most appropriate for determining the significance of effects as per Section 12.1.2.5.

It can be concluded that the impact of traffic emissions on air quality and human health during the operational phase is **long-term, direct, localised, negative** and **not significant** in EIA terms.

The measures set out in the *Clean Air Strategy for Ireland* (Government of Ireland 2023) aim to work towards solutions to ensure that air pollution concentrations are reduced in order to comply with the future changes in limit values. Ireland will need to continue to implement and develop measures to ensure continuing improvements in air quality in future years in order to meet the objectives of the Clean Air Strategy for Ireland (Government of Ireland, 2023) and to ensure the ambient air quality limit values set out in Directive (EU) 2024/2881 are achieved. The estimated background concentrations used in the assessment are the largest contribution to predicted pollutant concentrations, rather than pollutant contributions associated with the proposed development. Strategies to improve air quality at a national level in future years will contribute to reducing background concentrations and therefore it is envisioned that air quality will improve in the future.

12.1.4.3 Summary

The following Table summarises the identified likely significant effects during the construction phase of the proposed development before mitigation measures are applied.

Likely Significant Effect	Quality	Significance	Extent	Probability	Duration	Type
Construction Dust Impact	Negative	Not significant - slight	Localised	Likely	Short-term	Direct
Construction Traffic Impacts	Neutral	Not significant -imperceptible	Localised	Likely	Short-term	Direct

Table 12.10: Summary of Construction Phase Likely Significant Effects in the absence of mitigation

The following Table summarises the identified likely significant effects during the operational phase of the proposed development before mitigation measures are applied.

Likely Significant Effect	Quality	Significance	Extent	Probability	Duration	Type
Operational Traffic Impacts	Negative	Not significant	Localised	Likely	Long-term	Direct

Table 12.11: Summary of Operational Phase Likely Significant Effects in the absence of mitigation

12.1.5 Cumulative Impacts

12.1.5.1 Construction Phase

Cumulative construction dust impacts may occur if other developments with potential for significant dust generation within 500 m of the site are under construction simultaneously.

A review of the planned and permitted projects within the last ten years in vicinity of the site was undertaken to identify developments with the potential for cumulative construction phase impacts. There is the potential for the construction phase of the proposed development to coincide with that of the following permitted developments:

- Internal reconfiguration and full renovation of an existing 2 storey science block (c. 830 sq m) and construction of new 3 storey extension at Gonzaga College (DCC Reg. Ref. WEB2190/24);
- Planning permission for the development will consist of the construction of a two-storey archive storage and office building at the adjoining Jesuits' lands along Milltown Road (DCC Reg. Ref. 3116/22);
- Demolition of existing buildings on site and construction of 74 No. Build to Rent Apartment scheme at Nos. 11C & 9/14 Milltown Road (DCC Reg. Ref. 4115/21 / ACP Ref. 313048-22, amended under WEB2775/24);
- Construction of 63 No. Build to Rent units at Dunlem, Rydalmount, Milltown Road (DCC Reg. Ref. 4578/22, ACP Ref. PL29S.315883);
- Student accommodation and residential development including site clearance and demolition of extensions, 439 No. PBSA bedspaces 16 No. residential apartments and the extension and renovation of the 14 No. residential dwellings at the former Paper Mills site and adjoining properties in Clonskeagh Road, Dublin 6 (DCC Reg. Ref. WEBLRD6063/25-3, ACP Ref. LH29S.323142);

If these sites were to commence construction at the same time, the cumulative effects will be temporary and slight. Otherwise, no significant cumulative impacts have been identified.

The dust mitigation measures outlined in Section 10 will be applied during the construction phase which will avoid significant cumulative impacts on air quality. With appropriate mitigation measures in place, the predicted cumulative impacts on air quality associated with the construction phase of the proposed development is **short-term, direct, negative and not**

significant.

12.1.5.2 Operational Phase

Cumulative developments were included in the traffic figures supplied for the operational phase assessment and therefore the cumulative effect is included within the operational stage effect for the proposed development outlined in Section 12.1.4.2. The effect is predicted to be **long-term, direct, localised, negative** and **not significant** with regards to air quality.

12.1.5.3 Do-Nothing Impact

In the Do-Nothing scenario, ambient air quality at the site will remain as per the baseline and will change in accordance with trends within the wider area (including influences from potential new developments in the surrounding area, changes in road traffic, etc). The Do-Nothing scenario is considered **neutral** in terms of air quality.

12.1.6 Avoidance, Remedial and Mitigation Measures

12.1.6.1 Construction Phase

The proposed development has been assessed as having a high risk of dust soiling impacts and a low risk of dust related human health impacts during the construction phase as a result of earthworks, construction and trackout activities (see Section o). Therefore, the following dust mitigation measures shall be implemented during the construction phase of the proposed development. These measures are appropriate for sites with a high risk of dust impacts and aim to ensure that no significant nuisance occurs at nearby sensitive receptors. These measures will be incorporated into the *Construction Environmental Management Plan (CEMP)* prepared for the site. Mitigation measures for high-risk sites as recommended by IAQM construction dust guidance are detailed in **Table 12.12**.

Table 12.12: Site Specific Mitigation Measures

Mitigation Measure	Action
Communications	
Develop and implement a stakeholder communications plan that includes community engagement before work commences on site.	Highly Recommended
Display the name and contact details of person(s) accountable for air quality and dust issues on the site boundary. This may be the environment manager/engineer or the site manager.	Highly Recommended
Display the head or regional office contact information	Highly Recommended

Mitigation Measure	Action
Develop and implement a Dust Management Plan (DMP), which may include measures to control other emissions, approved by the Local Authority. The level of detail will depend on the risk and should include as a minimum the highly recommended measures in the IAQM Guidance. The desirable measures should be included as appropriate for the site. The DMP may include monitoring of dust deposition, dust flux, real-time PM ₁₀ continuous monitoring and/or visual inspections.	Highly Recommended
Site Management	
Record all dust and air quality complaints, identify cause(s), take appropriate measures to reduce emissions in a timely manner, and record the measures taken.	Highly Recommended
Make the complaints log available to the local authority when asked.	Highly Recommended
Record any exceptional incidents that cause dust and/or air emissions, either on- or offsite, and the action taken to resolve the situation in the logbook.	Highly Recommended
Hold regular liaison meetings with other high risk construction sites within 500 m of the site boundary, to ensure plans are co-ordinated and dust and particulate matter emissions are minimised. It is important to understand the interactions of the off-site transport/deliveries which might be using the same strategic road network routes.	Highly Recommended
Monitoring	
Undertake daily on-site and off-site inspection, where receptors (including roads) are nearby, to monitor dust, record inspection results, and make the log available to the local authority when asked. This should include regular dust soiling checks of surfaces such as street furniture, cars and windowsills within 100 m of site boundary, with cleaning to be provided if necessary.	Highly Recommended
Carry out regular site inspections to monitor compliance with the DMP, record inspection results, and make an inspection log available to the local authority when asked	Highly Recommended
Increase the frequency of site inspections by the person accountable for air quality and dust issues on site when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions.	Highly Recommended
Agree dust deposition, dust flux, or real-time PM ₁₀ continuous monitoring locations with the Local Authority. Where possible commence baseline monitoring at least three months before work commences on site or, if it a large site, before work on a phase commences. Further guidance is provided by IAQM on monitoring during demolition, earthworks and construction.	Highly Recommended
Preparing and Maintaining the Site	
Plan site layout so that machinery and dust causing activities are located away from receptors, as far as is possible.	Highly Recommended

Mitigation Measure	Action
Erect solid screens or barriers around dusty activities or the site boundary that are at least as high as any stockpiles on site.	Highly Recommended
Fully enclose site or specific operations where there is a high potential for dust production and the site is active for an extensive period.	Highly Recommended
Avoid site runoff of water or mud.	Highly Recommended
Keep site fencing, barriers and scaffolding clean using wet methods.	Highly Recommended
Remove materials that have a potential to produce dust from site as soon as possible, unless being re-used on site. If they are being re-used on-site cover as described below.	Highly Recommended
Cover, seed or fence stockpiles to prevent wind whipping.	Highly Recommended
Operating vehicle/machinery and sustainable travel	
Ensure all vehicles switch off engines when stationary – no idling vehicles.	Highly Recommended
Avoid the use of diesel- or petrol-powered generators and use mains electricity or battery powered equipment where practicable.	Highly Recommended
Impose and signpost a maximum-speed-limit of 24 kmph on surfaced and 16 kmph on unsurfaced haul roads and work areas (if long haul routes are required these speeds may be increased with suitable additional control measures provided, subject to the approval of the nominated undertaker and with the agreement of the local authority, where appropriate)	Highly Recommended
Produce a Construction Logistics Plan to manage the sustainable delivery of goods and materials.	Highly Recommended
Implement a Travel Plan that supports and encourages sustainable travel (public transport, cycling, walking, and car-sharing)	Highly Recommended
Operations	
Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques such as water sprays or local extraction, e.g. suitable local exhaust ventilation systems.	Highly Recommended
Ensure an adequate water supply on the site for effective dust/particulate matter suppression/mitigation, using non-potable water where possible and appropriate	Highly Recommended
Use enclosed chutes and conveyors and covered skips.	Highly Recommended
Minimise drop heights from conveyors, loading shovels, hoppers and other loading or handling equipment and use fine water sprays on such equipment wherever appropriate.	Highly Recommended
Ensure equipment is readily available on site to clean any dry spillages and clean up spillages as soon as reasonably practicable after the event using wet cleaning methods.	Highly Recommended
Avoid bonfires and burning of waste materials.	Highly Recommended
Measures Specific to Demolition	

Mitigation Measure	Action
Soft strip inside buildings before demolition (retaining walls and windows in the rest of the building where possible to provide a screen against dust.	Highly Recommended
Ensure effective water suppression is used during demolition operations. Handheld sprays are more effective than hoses attached to equipment as the water can be directed to where it is needed. In addition, high volume water suppression systems, manually controlled, can produce fine water droplets that effectively bring the dust particles to the ground.	Highly Recommended
Avoid explosive blasting, using appropriate manual or mechanical alternatives.	Highly Recommended
Bag and remove any biological debris or damp down such material before demolition.	Highly Recommended
Measures Specific to Earthworks	
Re-vegetate earthworks and exposed areas/soil stockpiles to stabilise surfaces as soon as practicable	Desirable
Use Hessian, mulches or trackifiers where it is not possible to re-vegetate or cover with topsoil, as soon as is practicable.	Desirable
Only remove the cover in small areas during work and not all at once.	Desirable
Measures Specific to Construction	
Avoid scabbling (roughening of concrete surfaces) if possible.	Desirable
Ensure sand and other aggregates are stored in bunded areas and are not allowed to dry out, unless this is required for a particular process, in which case ensure that appropriate additional control measures are in place.	Highly Recommended
Ensure bulk cement and other fine powder materials are delivered in enclosed tankers and stored in silos with suitable emission control systems to prevent escape of material and overfilling during delivery.	Desirable
For smaller supplies of fine powder materials, ensure bags are sealed after use and stored appropriately to prevent dust.	Desirable
Measures Specific to Trackout	
Use water-assisted dust sweeper(s) on the access and local roads, to remove, as necessary, any material tracked out of the site. This may require the sweeper being continuously in use.	Highly Recommended
Avoid dry sweeping of large areas.	Highly Recommended
Ensure vehicles entering and leaving sites are covered to prevent escape of materials during transport.	Highly Recommended
Inspect on-site haul routes for integrity and instigate necessary repairs to the surface as soon as reasonably practicable.	Highly Recommended
Record all inspections of haul routes and any subsequent action in a site logbook.	Highly Recommended
Install hard surfaced haul routes, which are regularly damped down with fixed or mobile sprinkler systems, or mobile water bowsers and regularly cleaned.	Highly Recommended

Mitigation Measure	Action
Implement a wheel washing system (with rumble grids to dislodge accumulated dust and mud prior to leaving the site where reasonably practicable).	Highly Recommended
Ensure there is an adequate area of hard surfaced road between the wheel wash facility and the site exit, wherever site size and layout permits.	Highly Recommended
Access gates to be located at least 10 m from receptors where possible.	Highly Recommended

12.1.6.2 Operational Phase

No site-specific mitigation measures are proposed for the operational phase as impacts are predicted to be not significant.

12.1.7 Monitoring Required

12.1.7.1 Construction Phase

The following monitoring measures are proposed to ensure the dust mitigation measures are working satisfactorily:

- Undertake daily on-site and off-site inspections, where receptors (including roads) are nearby, to monitor dust, record inspection results in the site inspection log. This should include regular dust soiling checks of surfaces such as street furniture, cars and windowsills within 100 m of site boundary, with cleaning to be provided if necessary.
- Increase the frequency of site inspections by the person accountable for air quality and dust issues on site when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions.
- Monitoring of construction dust deposition along the site boundary to nearby sensitive receptors during the construction phase of the proposed development is recommended to ensure mitigation measures are working satisfactorily. This can be carried out using the Bergerhoff method in accordance with the requirements of the German Standard VDI 2119. The Bergerhoff Gauge consists of a collecting vessel and a stand with a protecting gauge. The collecting vessel is secured to the stand with the opening of the collecting vessel located approximately 2m above ground level. The TA Luft limit value is 350 mg/m²/day during the monitoring period of 30 days (+/- 2 days). Monitoring shall ensure that the dust mitigation measures are working satisfactorily as construction works progress.

12.1.7.2 Operational Phase

There is no monitoring recommended for the operational phase of the proposed development as impacts to air quality are predicted to be *imperceptible*.

12.1.8 Interactions

12.1.8.1 Air Quality and Population & Human Health

Construction Phase

An adverse air quality impact during the construction phase can cause health and dust nuisance issues. There is a low risk of dust-related human health impacts during the construction phase of the proposed development. Best practice mitigation measures will be implemented during the construction phase to ensure that the impact of the proposed development complies with all ambient air quality legislative limits. Therefore, the predicted impact is **direct, short-term, negative, localised** and **not significant** with respect to Air Quality and Population & Human Health during the construction phase.

Operational Phase

Vehicles accessing the site will emit pollutants which may impact Air Quality and Population & Human Health. However, the increased number of vehicles associated with the proposed development will not cause a significant change in air pollutant emissions in the locality. It has been assessed that emissions will be in compliance with the ambient air quality standards which are set for the protection of human health. Impacts will be **long-term, localised, direct, negative** and **not significant** with respect to Air Quality and Population & Human Health during the operational phase.

12.1.8.2 Air Quality and Climate

Air Quality and Climate have interactions as the emissions from the burning of fossil fuels during the construction and operational phases generate both air quality and climate impacts. There is no impact on climate due to air quality. However, the sources of impacts on Air Quality and Climate are strongly linked.

12.1.8.3 Air Quality and Land & Soils

Construction Phase

Construction phase activities such as land clearing, excavations, stockpiling of materials etc. have the potential for interactions between Air Quality and Land & Soils in the form of dust emissions. With the appropriate mitigation measures to prevent fugitive dust emissions, it is predicted that there will be no significant interactions between Air Quality and Land & Soils during the construction phase.

Operational Phase

There are no potentially significant interactions identified between Air Quality and Land & Soils during the operational phase.

12.1.8.4 Air Quality and Biodiversity

Construction Phase

Dust generation can occur during extended dry weather periods due to construction traffic along haul routes and construction activities such as excavations and infilling works. Dust emissions can coat vegetation leading to a reduction in the photosynthesising ability as well as other effects. There are no designated ecological sites within 250m of the proposed development site area. Significant dust impacts are not predicted beyond this distance. Dust mitigation measures will be implemented on site as set out in Section 12.1.6. With the implementation of these mitigation measures dust emissions will be minimised and impacts will be **direct, short-term, negative, localised** and **not significant** with respect to biodiversity.

Operational Phase

There are no potentially significant interactions identified between Air Quality and Biodiversity during the operational phase.

12.1.8.5 Air Quality and Material Assets – Traffic & Transport

Construction Phase

Interactions between Air Quality and Traffic can be significant. With increased traffic movements and reduced engine efficiency, i.e. due to congestion, the emissions of vehicles increase. The impacts of the proposed development on air quality are assessed by reviewing the change in annual average daily traffic on roads close to the site. In this assessment, the impact of the interactions between Traffic and Air Quality are linked but there is no potential for significant impacts from traffic on air quality. The effects are considered to be **direct, short-term, neutral, localised** and **not significant** during the construction phase.

Operational Phase

The impact of the interactions between Air Quality and Traffic are considered to be **long-term, direct, negative** and **not significant** during the operational phase.

12.1.9 Difficulties Encountered

There were no difficulties encountered when compiling this assessment.

12.2 Climate

12.2.1 Introduction

This section of the chapter assesses the likely climate impacts associated with the proposed residential-led mixed-use development at Milltown Park, Sandford Road, Dublin 6. A full description of the development is available in Chapter 3 - Description of Development.

The climate assessment is divided into two distinct sections – a greenhouse gas assessment (GHGA) and a climate change risk assessment (CCRA).

- Greenhouse Gas Emissions Assessment (GHGA) – Quantifies the GHG emissions from a project over its lifetime. The assessment compares these emissions to relevant carbon budgets, targets and policy to contextualise magnitude.
- Climate Change Risk Assessment (CCRA) – Identifies the impact of a changing climate on a project and receiving environment. The assessment considers a project's vulnerability to climate change and identifies adaptation measures to increase project resilience.

12.2.1.1 Aspects Relevant to this Assessment

During the construction phase engine emissions from site vehicles and machinery have the potential to impact climate through the release of CO₂ and to a lesser extent, other greenhouse gases (GHGs). Embodied carbon of materials used in the construction of the development along with site activities will impact climate. Impacts to climate are assessed against Ireland's obligations under the EU 2030 GHG targets and sectoral emissions ceilings. Engine emissions from vehicles accessing the site have the potential to impact climate during the operational phase of the development through the release of CO₂. Operational phase impacts will be long-term in duration. In addition, the vulnerability of the proposed development in relation to future climate change must be considered during the operational phase.

12.2.2 Study Methodology

12.2.2.1 Relevant Guidance

The principal guidance and best practice documents used to inform the assessment of potential impacts on climate are summarised below. In addition to specific climate guidance documents, the following guidelines were considered and consulted in the preparation of this chapter:

- Guidelines on the Information to be Contained in Environmental Impact Assessment Reports (hereafter referred to as the Environmental Protection Agency (EPA) Guidelines) (EPA, 2022); and
- Environmental Impact Assessment of Projects – Guidance on the preparation of the Environmental Impact Assessment Report (European Commission, 2017).

The assessment has referred to national guidelines where available, in addition to international standards and guidelines relating to the assessment of climate impacts. These are summarised below:

- Transport Infrastructure Ireland (TII) PE-ENV-01104: Climate Guidance for National Roads, Light Rail and Rural Cycleways (Offline & Greenways) – Overarching Technical Document (TII, 2022a);
- Transport Infrastructure Ireland (TII) GE-ENV-01106: TII Carbon Assessment Tool for Road and Light Rail Projects and User Guidance Document (TII, 2025a);

- Institute of Sustainability and Environmental Professionals (ISEP) (formerly known as Institute of Environmental Management & Assessment (IEMA)) Environmental Impact Assessment Guide to: Assessing GHG Emissions and Evaluating their Significance (hereafter referred to as the ISEP 2022 GHG Guidance) (ISEP, 2022);
- ISEP Environmental Impact Assessment Guide to: Climate Change Resilience and Adaptation (hereafter referred to as the ISEP 2020 EIA Guide) (ISEP, 2020a);
- ISEP GHG Management Hierarchy (hereafter referred to as the ISEP 2020 GHG Management Hierarchy) (ISEP, 2020b);
- ISEP Principles Series: Climate Change Mitigation & EIA (ISEP, 2010);
- Carbon Management in Infrastructure and Built Environment - PAS 2080 (BSI, 2023); and
- Technical Guidance on the Climate Proofing of Infrastructure in the Period 2021-2027 (European Commission, 2021a).

12.2.2.2 Relevant Legislation

In 2015, the Climate Action and Low Carbon Development Act 2015 (No. 46 of 2015) (as amended) (Government of Ireland, 2015) was enacted (the 2015 Act). The purpose of the 2015 Act was to enable Ireland *"to pursue, and achieve, the transition to a low carbon, climate resilient and environmentally sustainable economy by the end of the year 2050"* (3(1) of No. 46 of 2015). This is referred to in the 2015 Act as the 'National Transition Objective'. The 2015 Act made provision for a national mitigation plan, and a national adaptation framework. In addition, the 2015 Act provided for the establishment of the Climate Change Advisory Council with the function to advise and make recommendations on the preparation of the national mitigation and adaptation plans and compliance with existing climate obligations.

The first Climate Action Plan (CAP) was published by the Irish Government in June 2019 (Government of Ireland, 2019). The Climate Action Plan 2019 outlined the current status across key sectors including Electricity, Transport, Built Environment, Industry and Agriculture and outlined the various broadscale measures required for each sector to achieve ambitious decarbonisation targets. The 2019 CAP also detailed the required governance arrangements for implementation including carbon-proofing of policies, establishment of carbon budgets, a strengthened Climate Change Advisory Council and greater accountability to the Oireachtas. The Government published the second Climate Action Plan in November 2021 (Government of Ireland, 2021a) and a third update in December 2022 (Government of Ireland, 2022) with an Annex of Action published in March 2023. The current Climate Action Plan is CAP25 and was published in April 2025 (Government of Ireland, 2025).

Following on from Ireland declaring a climate and biodiversity emergency in May 2019, and the European Parliament approving a resolution declaring a climate and environment emergency in Europe in November 2019, the Government approved the publication of the General Scheme in December 2019, followed by the publication of the Climate Action and Low Carbon Development (Amendment) Act 2021 (hereafter referred to as the 2021 Climate Act) in March 2021. The Climate Act was signed into Law on 23rd July 2021, giving statutory

effect to the core objectives stated within the CAP.

The purpose of the 2021 Climate Act (Government of Ireland, 2021) is to provide for the approval of plans “for the purpose of pursuing the transition to a climate resilient, biodiversity rich and climate neutral economy by no later than the end of the year 2050”. The 2021 Climate Act also provides for “carbon budgets and a decarbonisation target range for certain sectors of the economy”. The 2021 Climate Act defines the carbon budget as “the total amount of greenhouse gas emissions that are permitted during the budget period”.

In relation to carbon budgets, the 2015 Act (as amended) states “a carbon budget, consistent with furthering the achievement of the national climate objective, shall be proposed by the Climate Change Advisory Council, finalised by the Minister and approved by the Government for the period of 5 years commencing on the 1 January 2021 and ending on 31 December 2025 and for each subsequent period of 5 years (in this Act referred to as a ‘Budget Period’)”.

The carbon budget is to be produced for 3 sequential budget periods (Table 12.13). The carbon budget can be revised where new obligations are imposed under the law of the European Union or international agreements or where there are significant developments in scientific knowledge in relation to climate change. In relation to the sectoral emissions ceiling, the Minister for the Environment, Climate and Communications (the Minister for the Environment) shall prepare and submit to government the maximum amount of GHG emissions that are permitted in different sectors of the economy during a budget period, and different ceilings may apply to different sectors. The sectorial emission ceilings for 2030 are published in CAP25) (Government of Ireland, 2025) (Table 12.14).

Budget Period	Carbon Budget	Reduction Required
2021-2025	295 Mt CO ₂ e	Reduction in emissions of 4.8% per annum for the first budget period.
2026-2030	200 Mt CO ₂ e	Reduction in emissions of 8.3% per annum for the second budget period.
2031-2035	151 Mt CO ₂ e	Reduction in emissions of 3.5% per annum for the third provisional budget.

Table 12.13: 5-Year Carbon Budgets

Sector	Baseline (MtCO ₂ e)	Carbon Budgets (MtCO ₂ e)		2030 Emissions (MtCO ₂ e)	Indicative Emissions % Reduction in Final Year of 2025 – 2030 Period (Compared to 2018)
	2018	2021-2025	2026-2030		
Electricity	10	40	20	3	75
Transport	12	54	37	6	50

Sector	Baseline (MtCO ₂ e)	Carbon Budgets (MtCO ₂ e)		2030 Emissions (MtCO ₂ e)	Indicative Emissions % Reduction in Final Year of 2025 – 2030 Period (Compared to 2018)
	2018	2021-2025	2026-2030		
Built Environment – Residential	7	29	23	4	40
Built Environment – Commercial	2	7	5	1	45
Industry	7	30	24	4	35
Agriculture	23	106	96	17.25	25
Other (F-gases, waste, petroleum refining)	2	9	8	1	50
Land Use, Land-use Change and Forestry (LULUCF)	5	Reflecting the continued volatility for LULUCF baseline emissions to 2030 and beyond, CAP25 puts in place ambitious activity targets for the sector reflecting an EU-type approach.			
Total	68				
Unallocated Savings	-	-	26	-5.25	-
Legally Binding Carbon Budgets and 2030 Emission Reduction Targets	-	295	200	-	51

Table 12.14: Sectoral Emission Ceilings 2030

12.2.2.3 Relevant Policy

Greenhouse Gas Assessment Policy

In December 2023, CAP24 was published, establishing key actions to deliver a 51% reduction in GHG emissions by 2030 (compared to 2018 levels) and achieve climate neutrality by 2050 (Government of Ireland, 2023). The updated and current CAP25, published in April 2025, builds on the progress of the previous four iterations of the CAP, with CAP23 first publishing carbon budgets and sectoral emission ceilings, and reaffirms Ireland’s climate ambition, with a focus on delivery, implementation and measurable outcomes, particularly ahead of the second carbon budget period (2026–2030). 2025 is the last year in the first 5-year carbon budget period. During the initial 5-year budget period the average annual reduction required was 4.8%, this increases to 8.3% in the second budget period (2026-2030). CAP25 retains the

high-impact sectors where the biggest savings can be achieved, while emphasising public sector leadership and green procurement. These sectors include renewable energy, energy efficiency of buildings, transport, sustainable farming, sustainable business and land-use change.

CAP25 also includes targeted actions to decarbonise industrial heat and support the transition to carbon-neutral manufacturing processes. Public sector leadership is strengthened through a new Buying Greener: Green Public Procurement Strategy and Action Plan (2024–2027), the development of mandatory Climate Action Roadmaps, and enhanced emissions monitoring and reporting across government operations. To support innovation and ensure future economic resilience, IDA Ireland continues to attract and support businesses investing in climate technologies and low-carbon solutions.

CAP25 highlights a significant 17% reduction in electricity emissions in early 2024, with wind power supplying nearly 40% of Ireland's total electricity demand and over 100,000 rooftop microgenerators connected to the grid. Investments are ongoing in grid reinforcement, offshore wind development, and interconnectors with France and the UK to enhance renewable generation capacity. EirGrid, Enterprise Ireland and IDA Ireland have recently signed an MoU to collectively support offshore wind development in Ireland.

CAP25 also reinforces targets first outlined in CAP24 to reduce the embodied carbon of construction materials, with a 10% reduction by 2025 and 30% reduction by 2030 for materials produced and used in Ireland. Cement and high embodied carbon construction materials can be reduced through product substitution, reduced clinker content in cement and uptake of low-carbon construction methods, including those outlined in the Construction Industry Federation 2021 report Modern Methods of Construction (Construction Industry Federation, 2021). There also remains scope for the construction industry to use more timber in construction. In 2022, 24% of new construction in Ireland was built using timber frames to satisfy the demand for housing. Public bodies are now required under the Public Sector Mandate to use best practice project design to reduce embodied carbon; procure concretes with clinker replacements (lower carbon); and require that large construction projects produce a whole life cycle GHG emissions assessment.

Furthermore, CAP25 advances sector-specific measures in green procurement, electrification of transport and heat, and just transition (with the introduction of a Just Transition Commission) to support vulnerable communities. Transport emissions increased by 0.3%. Electric vehicles and the use of biofuels are stated as the best means of transport emission reductions in the medium term.

The Dublin City Climate Action Plan (DCC, 2024) is based on four foundations (A Resilient, Resource Full, Creative and Social City) and sets out the 2030 vision that Dublin City Council have for the city. The four foundations can be described as: a Creative City, a Resource-Full City, a Resilient City and a Social City. These foundations aim to deliver the overall target of a 51% reduction in greenhouse gas emissions in line with our National Climate Objective by 2030 (2018 baseline), while striving for neutrality before 2050 as per Dublin City's participation in the EU Mission for 100 Climate Neutral and Smart Cities (Net Zero Cities). While achieving this, DCC want the city to also ensure it remains climate resilient and that the transition to its 2030 is Just. Action OS7 states that Dublin City Council should promote active travel and public transport.

Action S1 on the Social City foundation is: *"A Connected Active Travel Network: Moving people through the city to meet friends and family, to go to work or school, or to simply explore must be easy and safe. We will bring together 95% of the population of the City within 400 metres of the active travel network; making it easier for people to walk, cycle, wheel or scoot to their destination or for leisure, day or night."*

The proposed development acts as a connection between the north and south of the city facilitating and improving safety for active travel.

In 2024, the Government published its *Long-Term Strategy on Greenhouse Gas Emissions Reductions* (Government of Ireland, 2024a). This strategy provides a long-term plan on how Ireland will transition towards net carbon zero by 2050, achieving the interim targets set out in the CAP.

Climate Change Vulnerability Policy

The second National Adaptation Framework (NAF) (Government of Ireland, 2024b) was published in June 2024 in line the five-year requirement of the 2015 Climate and Low Carbon Development Act. The plan provides a whole of government and society approach to climate adaptation in Ireland to reduce Irelands vulnerability to climate change risks including extreme weather events, flooding, drought, loss of biodiversity, sea level rise and increased temperatures. Similar to the *"Just Transition"* when considering carbon emissions, the NAF aims for *"Just Resilience"* stating that *"a climate resilient Ireland will have a reduced reliance on fossil fuel, it will have widely accessible electrified public transport and will have transitioned towards sustainable agricultural practices such as agroforestry and organic farming"*.

In relation to the built environment the NAF states, in Chapter 3, *"deepening of adaptation considerations in the planning and building standards processes is considered the most appropriate way of increasing the resilience of the built environment"*. Within the NAF it mentions that there is a risk of damage to buildings and structures from severe weather events such as high winds and intense rainfall. New development should accommodate predicted future climate change impacts without requiring major redesign or redevelopment in the future which may be costly and inefficient. This will require facilitating innovative building design, new materials and standards (to accommodate hotter summers while withstanding changes in precipitation patterns and more intense storms for example) according to the NAF (Government of Ireland, 2024b).

The National Climate Change Risk Assessment (NCCRA) was published in May 2024 (EPA, 2024b). The NCCRA was required to be developed under Action 457 from the 2021 CAP (Government of Ireland 2021). Action 457 seeks to *"further develop Ireland's national climate change risk assessment capacity to identify the priority physical risks of climate change to Ireland"*. The NCCRA uses definitions of the risk determinants from the Intergovernmental Panel on Climate Change (IPCC) Risk Framework (IPCC, 2023):

- **Hazard** - the potential occurrence of a natural or human-induced physical event or trend or physical impact that may cause loss of life, injury, or other health impacts, as well as damage and loss to property, infrastructure, livelihoods, service provision, ecosystems, and environmental resources

- **Exposure** - the presence of people, livelihoods, species or ecosystems, environmental functions, services, and resources, infrastructure, or economic, social, or cultural assets in places and settings that could be adversely affected
- **Vulnerability** - the propensity or predisposition to be adversely affected. Vulnerability encompasses a variety of concepts including sensitivity
- **Risk** - the potential for adverse consequences for human or ecological systems.

When considering risk, the NCCRA assesses exposure and vulnerability for two future climate change scenarios or Representative Concentration Pathways (RCPs):

- RCP_{4.5} was selected as it represents a scenario aligned with the global temperature trajectory
- RCP_{8.5} was selected as it represents a high-emissions scenario and achieves the highest level of modelled temperature increases by the end of the century. Consequently, this scenario will result in the highest level of physical risk for Ireland, and the greatest requirement for adaptation.

These scenarios align with a conservative approach to assess risks to Ireland and assumes global emission reduction targets are not met. This aligns with the principle of precaution as stated in the NAF (Government of Ireland, 2024b). In addition to the future climate scenarios, the NCCRA assesses the risk from the future climate during the following timeframes:

- Present (~2030)
- Medium term (~2050)
- Long term (~2100).

12.2.3 Greenhouse Gas Assessment

As per the EU guidance document *Guidance on Integrating Climate Change and Biodiversity into Environmental Impact Assessment* (European Commission, 2013) the climate baseline is first established with reference to EPA data on annual GHG emissions (see Section 14.5.1).

12.2.3.1 Construction Phase

The GHG assessment accounts for various components relating to the project during different life stages to determine the total impact of the development on climate. The reference study period (i.e. the assumed building life expectancy) for the purposes of the assessment is 60 years. Embodied carbon emissions are attributed to four main categories, taken from BS EN 15978.

The categories are:

- **Product Stages (Category A1 to A3)** The carbon emissions generated at this stage arise from extracting the raw materials from the ground, their transport to a point of manufacture and then the primary energy used (and the associated carbon impacts that arise) from transforming the raw materials into construction products.
- **Construction (Category A4 to A5)** These carbon impacts arise from transporting the construction products to site, and their subsequent processing and assembly into the building.
- **Use Stage (Category B1 to B7)** This covers a wide range of sources from the GHG emissions associated with the operation of the building (B1), maintenance (B2), repair (B3), refurbishment (B4) and replacement (B5) of materials, and operational energy use (B6) and water use (B7).
- **End of Life Stages (Category C1 to C4)** The eventual deconstruction and disposal of the existing building at the end of its life takes account of the on-site activities of the demolition contractors. No “credit” is taken for any future carbon benefit associated with the reuse or recycling of a material into new products.

PE-ENV-01104 (TII, 2022a) recommends the calculation of the construction stage embodied carbon using the TII Online Carbon Tool (TII, 2025a) or an appropriate alternative tool. Embodied carbon refers to the sum of the carbon needed to produce a good or service. It incorporates the energy needed in the mining or processing of raw materials, the manufacturing of products and the delivery of these products to site. The purpose of the embodied carbon assessment is to engage the design team in the consideration of embodied carbon at an early stage in the development and mitigate embodied carbon. This engagement aims to ensure carbon savings are made and to assist in aligning the project to Ireland’s CAP goal of Net Carbon Zero by 2050.

The TII Online Carbon Tool (TII, 2025a) has been commissioned by TII to assess GHG emissions associated with road or rail projects in Ireland. The TII Carbon Tool (TII, 2024) uses emission factors from recognised sources including the Civil Engineering Standard Method of Measurement (CESSM) Carbon and Price Book database (CESSM, 2013), which can be applied to a variety of developments, not just road or rail. The tool aligns with PAS 2080.

For the building elements of the proposed development, the OneClick LCA 3D Designer tool was utilised. OneClick LCA is certified to EN 15978, EN 15978, ISO 21931 – 1 & ISO 21929, and data requirements of ISO 14040 & EN 15804, and is LEED, BREEAM and PAS 2080 aligned. It allows users to assess the carbon impact of buildings at various stages of design. The tool includes a detailed product and material list based on Irish materials as well as materials from the UK and Europe. The OneClick LCA 3D Designer option allows for a high-level assessment of the embodied carbon impact of a development at early design stages when specific detailed design information is not known and is suitable for EIAR stage assessments.

Inputs into the tool include gross floor areas for the building types (houses/duplexes/apartments), building frame type, number of above ground floors and building size and shape. The tool then makes necessary default assumptions based on these parameters and a typical build-up with the option to refine the default assumptions where project specific information is available. The tool allows for optioneering and optimization of

the carbon impact, it highlights the key areas within the building with the highest carbon impact and provides options for lower carbon intensive materials.

The TII Carbon Tool was utilised to estimate the GHG emissions associated with the non-building elements of the proposed development including construction activities, land clearance activities and construction wastes.

Reasonable conservative estimates have been used in this assessment where necessary to provide an estimate of the GHGs associated with the proposed development. It should be noted that some of the GHG emissions within the TII carbon tool results will have been accounted for within the building LCA therefore the results are conservative estimates and based on a worst- case scenario.

12.2.3.2 Operational Phase

Traffic Emissions

Emissions from road traffic associated with the proposed development have the potential to emit carbon dioxide (CO₂) which will impact climate.

The TII guidance *Air Quality Assessment of Specified Infrastructure Projects – PE-ENV-01106* (TII, 2022b), states that road links meeting one or more of the following criteria can be defined as being 'affected' by a proposed development and should be included in the local air quality assessment, and also the climate assessment. While the guidance is specific to infrastructure projects the approach can be applied to any development that causes a change in traffic.

- Annual average daily traffic (AADT) changes by 1,000 or more;
- Heavy duty vehicle (HDV) AADT changes by 200 or more;
- Daily average speed change by 10 kph or more;
- Peak hour speed change by 20 kph or more; and
- A change in road alignment by 5 m or greater.

While the guidance is specific to infrastructure projects the approach can be applied to any development that causes a change in traffic.

There are a small number of road links that will experience a change of over 1,000 in the AADT during the operational phase due to the proposed development. As a result, a detailed assessment of traffic related carbon dioxide (CO₂) emissions was conducted.

PE-ENV-01104 (TII, 2022a) states that road traffic related emissions information should be calculated using the TII Road Emissions Model (REM) online calculator tool (TII, 2025b). The TII guidance (TII, 2022b) states that modelling should be conducted for the Base, Opening and Design Years for both the Do Nothing and Do Something scenarios. The output is provided in terms of CO₂e.

The following inputs are required for the REM tool: receptor locations, light duty vehicle (LDV) annual average daily traffic movements (AADT), annual average daily heavy-duty vehicles (HDV AADT), annual average traffic speeds, road link lengths, road type, project county location and pollutant background concentrations. The *Default* fleet mix option was selected along with the *Intermediate Case* fleet data base selection for cars, the *ICE Sales Ban 2035* fleet data base for LGVs and the *EU Target* for the HGV fleet data base, as per TII Guidance (TII, 2025). The Intermediate Case assumes a linear interpolation between the Business-as-Usual case – where current trends in vehicle ownership continue and the Climate Action Plan (CAP) case – where adoption of low emission light duty vehicles occurs. The ICE Sales Ban 2035 represents a sales ban on new combustion engine vehicles to be implemented by 2035, and the EU Target for HGV represents interim targets for emissions from sales of new HGVs.

Traffic flow information was obtained from DBFL Consulting Engineers, the traffic engineers, for the purposes of this assessment. Data was provided for the Base Year 2025, Opening Year 2028 and Design Year 2043 (see accompanying *Traffic and Transport Assessment* for further details). Both the Do Nothing and Do Something scenarios are quantified to determine the degree of change in emissions due to the proposed development. A total of 2 no. scenarios were assessed, these include:

- The Do-Nothing scenario – this scenario assumes the proposed development is not in place in future years but includes traffic associated with cumulative developments in the wider area.
- The Proposed scenario – this is the “Do Something” scenario and includes traffic from the Do-Nothing scenario and traffic associated with the proposed development as well as traffic associated with cumulative developments in the wider area.

Further detail on the modelling scenarios can be found in the accompanying *Traffic and Transport Assessment* prepared by DBFL Consulting Engineers. The traffic data is detailed in Table 12.15. Only road links that met the TII scoping criteria were included in the modelling assessment. Inputs include light duty vehicle (LDV) annual average daily traffic movements (AADT), annual average daily heavy-duty vehicles (HDV AADT), annual average traffic speeds, road link lengths, road type and project county location.

Road Name	Speed (kph)	Base Year		Opening Year		Design Year	
				Do Nothing	Do Something	Do Nothing	Do Something
		LDV AADT (HDV AADT)	LDV AADT (HDV AADT)	LDV AADT (HDV AADT)	LDV AADT (HDV AADT)	LDV AADT (HDV AADT)	LDV AADT (HDV AADT)
R117 Milltown Road (Link 1)	50	13216 (986)	13925 (1173)	14929 (1180)	15012 (1494)	16018 (1500)	
Site Access (Link 2)	30	0 (0)	0 (0)	1976 (9)	0 (0)	1976 (9)	

Table 12.15: Traffic Data used in Operational Phase Climate Assessment

Operational Phase Energy Use

The EU guidance (European Commission, 2013) also states indirect GHG emissions as a result of a development must be considered, which includes emissions associated with energy usage. The quantification of operational energy usage is out of scope of this assessment due to user variability, however information on the proposed energy strategy for the development was obtained from the Climate Action Energy Statement Report prepared by OESC Consulting. Several measures in relation to sustainable energy usage have been incorporated into the overall design of the development which will have the benefit of reducing the impact to climate where possible during operation.

Significance Criteria for GHGA

The Transport Infrastructure Ireland (TII) guidance document entitled PE-ENV-01104 Climate Guidance for National Roads, Light Rail and Rural Cycleways (Offline & Greenways) – Overarching Technical Document (TII, 2022a) outlines a recommended approach for determining the significance of both the construction and operational phases of a development.

The significance of GHG effects set out in PE-ENV-01104 (TII, 2022a) is based on ISEP guidance (ISEP, 2022) which is consistent with the terminology contained within Figure 3.4 of the EPA document *Guidelines on the information to be contained in Environmental Impact Assessment Reports* (EPA, 2022).

The 2022 ISEP Guidance (ISEP, 2022) sets out the following principles for significance:

- When evaluating significance, all new GHG emissions contribute to a negative environmental impact; however, some projects will replace existing development or baseline activity that has a higher GHG profile. Therefore, the significance of a project's emissions should be based on its net impact over its lifetime, which may be positive, negative or negligible;
- Where GHG emissions cannot be avoided, the goal of the EIA process should be to reduce the project's residual emissions at all stages; and
- Where GHG emissions remain significant, but cannot be further reduced, approaches to compensate the project's remaining emissions should be considered.

The criteria for determining the significance of effects are a two-stage process that involves defining the magnitude of the impacts and the sensitivity of the receptors (i.e. Ireland's National GHG targets). In relation to climate, there is no project specific assessment criteria, but the project will be assessed against the recommended TII significance determination. This takes account of any embedded or committed mitigation measures that form part of the design which should be considered.

TII (TII 2022a) states that professional judgement must be considered when contextualising and assessing the significance of a project's GHG impact. TII reference the ISEP guidance (ISEP, 2022) which states that the crux of assessing significance is "*not whether a project emits GHG emissions, nor even the magnitude of GHG emissions alone, but whether it contributes to*

reducing GHG emissions relative to a comparable baseline consistent with a trajectory towards net zero by 2050”.

Significance is determined using the criteria outlined in Table 12.16 (derived from Table 6.7 of PE-ENV-01104 (TII 2022a)) along with consideration of the following two factors:

- The extent to which the trajectory of GHG emissions from the project aligns with Ireland’s GHG trajectory to net zero by 2050; and
- The level of mitigation taking place.

Effects	Significance Level	Description
Significant Adverse	Major Adverse	The project’s GHG impacts are not mitigated. The project has not complied with do-minimum standards set through regulation, nor provided reductions required by local or national policies; and No meaningful absolute contribution to Ireland’s trajectory towards net zero.
	Moderate Adverse	The project’s GHG impacts are partially mitigated. The project has partially complied with do-minimum standards set through regulation, and have not fully complied with local or national policies; and Falls short of full contribution to Ireland’s trajectory towards net zero.
Not Significant	Minor Adverse	The project’s GHG impacts are mitigated through ‘good practice’ measures. The project has complied with existing and emerging policy requirements; and Fully in line to achieve Ireland’s trajectory towards net zero.
	Negligible	The project’s GHG impacts are mitigated beyond design standards. The project has gone well beyond existing and emerging policy requirements; and Well ‘ahead of the curve’ for Ireland’s trajectory towards net zero.
Beneficial	Beneficial	The project’s net GHG impacts are below zero and it causes a reduction in atmosphere GHG concentration. The project has gone well beyond existing and emerging policy requirements; and Well ‘ahead of the curve’ for Ireland’s trajectory towards net zero, provides a positive climate impact.

Table 12.16: Significance Criteria for GHGA

Ireland's carbon budgets can also be used to contextualise the magnitude of GHG emissions from the proposed development (TII, 2022a). The approach is based on comparing the net proposed development GHG emissions to the relevant carbon budgets (Government of Ireland, 2023a). With the publication of the Climate Action Act in 2021 and the Climate Action Plan 2025, sectoral carbon budgets have been published for comparison with the net GHG emissions from the proposed development over its lifespan. The aim of the carbon budgets is to ensure we are on a trajectory to meet the National Climate Objective of Net Zero by 2050.

12.2.4 Climate Change Risk Assessment

The assessment involves determining the vulnerability of the proposed development to climate change. This involves an analysis of the sensitivity and exposure of the development to climate hazards which together provide a measure of vulnerability.

PE-ENV-01104 (TII, 2022a) states that the CCRA is guided by the principles set out in the overarching best practice guidance documents:

- Technical Guidance on the Climate Proofing of Infrastructure in the Period 2021-2027 (European Commission, 2021a); and
- The Institute of Environmental Management and Assessment, Environmental Impact Assessment Guide to: Climate Change Resilience and Adaptation (2nd Edition) (ISEP, 2020).

The baseline environment information provided in Section 0, future climate change modelling and input from other experts working on the proposed development (i.e. hydrologists) should be used to assess the likelihood of a climate risk.

First an initial screening CCRA based on the operational phase is carried out, according to the TII guidance PE-ENV-01104. This is carried out by determining the sensitivity of proposed development assets (i.e. receptors) and their exposure to climate change hazards.

The proposed development asset categories must be assigned a level of sensitivity to climate hazards. PE-ENV-01104 (TII, 2022a) provides the list of asset categories and climate hazards to be considered. The asset categories will vary for development type and need to be determined on a development-by-development basis.

- **Asset Categories:** Pavements; drainage; structures; utilities; landscaping; signs, light posts, buildings, and fences.
- **Climate Hazards:** Flooding (coastal, pluvial, fluvial); extreme heat; extreme cold; wildfire; drought; extreme wind; lightning and hail; landslides; fog.

The sensitivity is based on a High, Medium or Low rating with a score of 1 to 3 assigned as per the criteria below.

- **High Sensitivity:** The climate hazard will or is likely to have a major impact on the asset category. This is a sensitivity score of 3.

- **Medium Sensitivity:** It is possible or likely the climate hazard will have a moderate impact on the asset category. This is a sensitivity score of 2.
- **Low Sensitivity:** It is possible the climate hazard will have a low or negligible impact on the asset category. This is a sensitivity score of 1.

Once the sensitivities have been identified the exposure analysis is undertaken. The exposure analysis involves determining the level of exposure of each climate hazard at the project location irrespective of the project type. For example, flooding could be a risk if the project location is next to a river in a floodplain. Exposure is assigned a level of High, Medium or Low as per the below criteria.

- **High Exposure:** It is almost certain or likely this climate hazard will occur at the project location, i.e. might arise once to several times per year. This is an exposure score of 3.
- **Medium Exposure:** It is possible this climate hazard will occur at the project location, i.e. might arise a number of times in a decade. This is an exposure score of 2.
- **Low Exposure:** It is unlikely or rare this climate hazard will occur at the project location, i.e. might arise a number of times in a generation or in a lifetime. This is an exposure score of 1.

Once the sensitivity and exposure are categorised, a vulnerability analysis is conducted by multiplying the sensitivity and exposure to calculate the vulnerability.

Significance Criteria for CCRA

The CCRA involves an initial screening assessment to determine the vulnerability of the proposed development to various climate hazards. The vulnerability is determined by combining the sensitivity and the exposure of the proposed development to various climate hazards.

$$\text{Vulnerability} = \text{Sensitivity} \times \text{Exposure}$$

The vulnerability assessment takes any proposed mitigation into account. Table 12.17 details the vulnerability matrix; vulnerabilities are scored on a high, medium and low scale.

TII guidance (TII, 2022a) and the EU technical guidance (European Commission, 2021a) note that if all vulnerabilities are ranked as low in a justified manner, no detailed climate risk assessment may be needed. Therefore, the impact from climate change on the proposed development is not significant.

However, where residual medium or high vulnerabilities exist the assessment may need to be progressed to a detailed climate change risk assessment and further mitigation implemented to reduce risks. An assessment of construction phase CCRA impacts is only required according to the TII guidance (TII, 2022a) if a detailed CCRA is required.

		Exposure		
		High (3)	Medium (2)	Low (1)
Sensitivity	High (3)	9 - High	6 – High	3 - Medium
	Medium (2)	6 - High	4 - Medium	2 - Low
	Low (1)	3 - Medium	2 – Low	1 - Low

Table 12.17: Vulnerability Matrix

The screening CCRA, detailed in Section 0, did not identify any residual medium or high risks to the proposed development as a result of climate change. Therefore, a detailed CCRA for the construction and operational phase were scoped out.

While a CCRA for the construction phase was not required, best practice mitigation against climate hazards is still recommended in Section 12.2.9.

12.2.5 Existing Receiving Environment

PE-ENV-01104 (TII, 2022a) states that a baseline climate scenario should identify, consistent with the study area for the project, GHG emissions without the project for both the current and future baseline.

Ireland declared a climate and biodiversity emergency in May 2019 and in November 2019 there was European Parliament approval of a resolution declaring a climate and environment emergency in Europe. This, in addition to Ireland's current failure to meet its EU binding targets under Regulation 2018/842 (European Union, 2018) results in changes in GHG emissions either beneficial or adverse being of more significance than previously considered prior to these declarations.

Climate impacts are assessed at a national level and in relation to national targets and sectoral emission ceilings. The study area for climate is the Republic of Ireland and the baseline is determined in relation to this study area.

12.2.5.1 Current GHG Baseline

Data published in July 2025 (EPA, 2025c), indicates that Ireland exceeded, without the use of flexibilities, its 2024 annual limit set under EU's Effort Sharing Decision (ESD) (EU 2018/842) by 1.03 MtCO₂e. However, the 2024 emissions represent the second consecutive year in which Ireland's emission were below (-4.2%) 1990 levels. ETS (Emissions Trading Scheme) emissions decreased (-7.4%) and ESR (Effort Sharing Regulation) emissions decreased (-0.5%). Ireland's target is an emission reduction of 626 kt of CO₂e by 2030 on an average baseline of 2016 to 2018.

The EPA estimate that 2024 total national GHG emissions, excluding LULUCF, have decreased by 2.0% on 2023 levels to 53.75 Mt CO₂e, with a 0.7 Mt CO₂e (-8.9%) reduction in electricity industries alone. This was driven by a 39.6% share of energy from renewables in 2024 and the complete phase-out of peat for electricity generation. Manufacturing combustion and industrial processes decreased by 4.6% to 6.0 Mt CO₂e in 2024 due to declines in fossil fuel usage. The sector with the highest emissions in 2024 was agriculture at 38% of the total, followed by transport at 21.7%. For 2024, total national emissions (including

LULUCF) were 57.64 Mt CO₂e (EPA, 2025c) (Table 12.18).

The current estimates of National greenhouse gas emissions (including LULUCF) in 2024 are 12.0% below 2018, well off the National Climate ambition of a 51% reduction by 2030. The data indicate that from 2021- 2024 Ireland has used 82.5% of the 295 Mt CO₂e Carbon Budget for the five-year period 2021-2025. This leaves 17.5% of the budget available for 2025, requiring a substantial 10.3% annual emissions reduction for 2025 to stay within budget.

Sector ^{Note 1}	2021	2022	2023	2024	Total Budget (Mt CO ₂ e) (2021-2025)	% Budget 2021-2025 Used	Annual Change 2023 – 2024
Electricity	9.89	9.69	7.57	6.95	40	85.25%	-8.19%
Transport	11.09	11.76	11.80	11.65	54	85.74%	-1.27%
Buildings (Residential)	6.87	5.75	5.35	5.61	29	81.31%	4.86%
Buildings (Commercial and Public)	1.44	1.45	1.39	1.49	7	82.43%	7.19%
Industry	7.09	6.62	6.31	6.01	30	86.77%	-4.75%
Agriculture	21.94	21.78	20.72	20.41	106	80.05%	-1.50%
Other ^{Note 2}	1.86	1.93	1.81	1.63	9	80.33%	-9.94%
LULUCF	4.63	3.98	3.89	3.89	–	–	0
Total including LULUCF	64.82	62.99	58.83	57.64	295	82.81%	-2.04%

Note 1 Reproduced from latest emissions data on the EPA website (EPA, 2025c).

Note 2 Other includes Petroleum refining, F-Gases and Waste (emissions from solid waste disposal on land, solid waste treatment (composting and anaerobic digestion), wastewater treatment, waste incineration and open burning of waste).

Table 12.18: Trends in Total National GHG Emissions 2021 – 2024

12.2.5.2 Future GHG Baseline

The future baseline with respect to the GHGA can be considered in relation to the future climate targets which the assessment results will be compared against. In line with TII (TII, 2022a) and ISEP Guidance (ISEP, 2022) the future baseline is a trajectory towards net zero by 2050, "whether it [the project] contributes to reducing GHG emissions relative to a comparable baseline consistent with a trajectory towards net zero by 2050".

The future baseline will be determined by Ireland meeting its targets set out in the CAP25, and future CAPs, alongside binding 2030 EU targets. The European Union (EU) enacted 'Regulation (EU) 2018/842 on binding annual GHG emission reductions by Member States from 2021 to 2030 contributing to climate action to meet commitments under the Paris Agreement and amending Regulation (EU) No. 525/2013' (hereafter referred to as the Regulation) (European Union, 2018) to meet the commitments under the Paris Agreement. The

Regulation aims to deliver, collectively by the EU in the most cost-effective manner possible, reductions in GHG emissions from the Emission Trading Scheme (ETS) and non-ETS sectors amounting to 43% and 30%, respectively, by 2030 compared to 2005. The Regulation was amended in April 2023 and Ireland must now limit its ETS and non-ETS greenhouse gas emissions by at least 42% by 2030. The ETS is an EU-wide scheme which regulates the GHG emissions of larger industrial emitters including electricity generation, cement manufacturing and heavy industry. The non-ETS sector includes all domestic GHG emitters which do not fall under the ETS scheme and includes GHG emissions from transport, residential and commercial buildings and agriculture.

In May 2025, the EPA released the report *Ireland's Greenhouse Gas Emissions Projections 2024-2055* (EPA, 2025b), which includes total projected emissions and a breakdown of projected emissions per sector under the 'With Existing Measures' and 'With Additional Measures' scenarios. The EPA projections indicate that currently implemented measures (With Existing Measures) will achieve a reduction of 10% on 2005 levels by 2030, significantly short of the 42% reduction target. If measures in the higher ambition (With Additional Measures) scenario are implemented, EPA projections show that Ireland can achieve a reduction of 22% by 2030, still short of the 42% reduction target.

12.2.5.3 Current CCRA Baseline

The region of the proposed development has a temperate, oceanic climate, resulting in mild winters and cool summers. The Met Éireann weather station at Dublin Airport is the nearest, representative, weather and climate monitoring station to the proposed development with meteorological data recorded for the 30-year period from 1991 to 2020. The historical regional weather data for Dublin Airport meteorological station is representative of the current climate in the region of the proposed development. The data for the 30-year period from 1991 to 2020 indicates that the wettest months at Dublin Airport meteorological station were November and December, and the driest month on average was June (Met Éireann, 2025a). July was the warmest month with a mean temperature of 15.4 Celsius. January was the coldest month with a mean temperature of 5.2 Celsius.

Met Éireann's 2023 Climate Statement (Met Éireann, 2024a) states 2023's average shaded air temperature in Ireland is provisionally 11.20°C, which is 1.65°C above the 1961-1990 long-term average. Before this, 2022 was the warmest year on record; however, 2023 was 0.38°C warmer (see Figure). 2023 also had above average rainfall, this included the warmest June on record and the wettest March and July on record. Record high sea surface temperatures (SST) were recorded since April 2023 which included a severe marine heatwave to the west of Ireland during the June 2023. This marine heatwave contributed to the record rainfall in July.

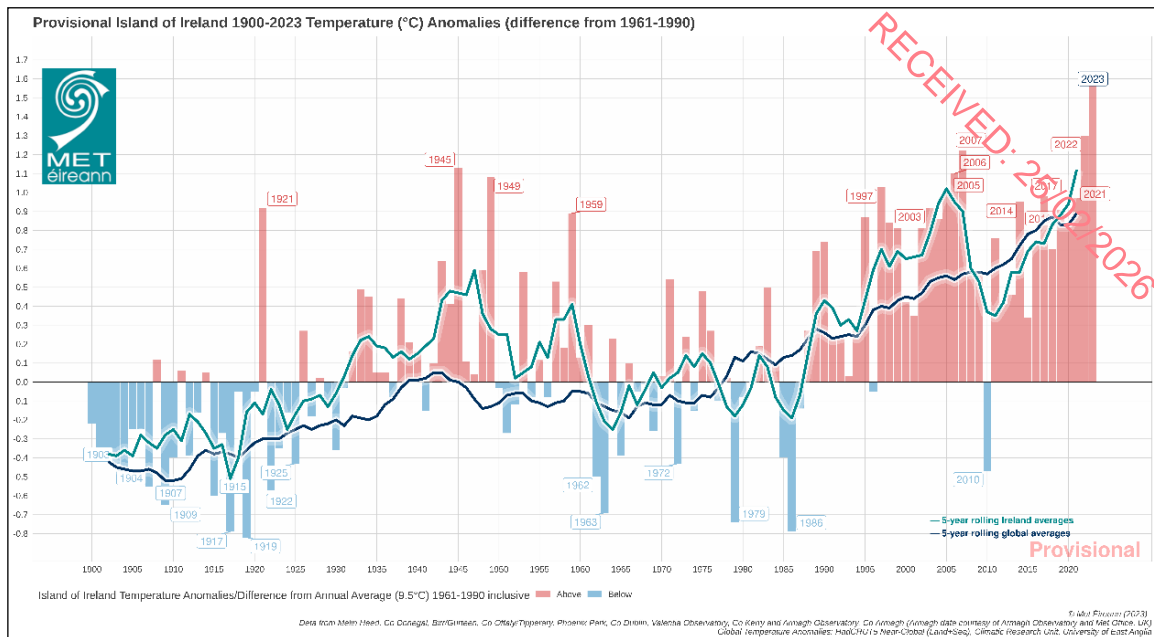


Figure 12.4: 1900-2023 Temperature (°C) Temperature Anomalies (differences from 1961-1990)

Met Éireann's 2024 *Climate Statement* (Met Éireann 2025b) states 2024's average shaded air temperature in Ireland is provisionally 10.72°C, which is 1.17°C above the 1961-1990 long-term average or 0.55°C above the most recent 1991-2020 long-term average. This is the 4th warmest year on record with 2023 breaking previous records. Seven of the top ten warmest years have occurred since 2005. Record high sea surface temperatures (SST) were recorded in 2022, and in 2024 continued at or near record high levels. 2024 was overall drier than average, however there were many instances of heavy or intense rainfall which led to flooding events. This trend is predicted to continue with climate change with an increase in both dry periods and heavy rainfall events. Considering the extraordinary data, Met Éireann states that the latest Irish climate change projections indicate further warming in the future, including warmer winters. The record temperatures mean the likelihood of extreme weather events occurring has increased. This will result in longer dry periods and heavy rainfall events. Storm surges and coastal flooding due to sea level rise. Compound events, where coastal surges and extreme rainfall events occur simultaneously will also increase. Met Éireann has high confidence in maximum rainfall rates increasing but not in how the frequency or intensity of storms will change with climate change.

12.2.5.4 Future CCRA Baseline

Impacts as a result of climate change will evolve with a changing future baseline, changes have the potential to include increases in global temperatures and increases in the number of rainfall days per year. Therefore, it is expected that the baseline climate will evolve over time and consideration is needed with respect to this within the design of the proposed development.


Ireland has seen increases in the annual rainfall in the north and west of the country, with small increases or decreases in the south and east including in the region where the proposed development will be located (EPA, 2021b). The EPA have compiled a list of potential adverse

impacts as a result of climate change including the following which may be of relevance to the proposed development (EPA, 2021b):

- More intense storms and rainfall events;
- Increased likelihood and magnitude of river and coastal flooding;
- Water shortages in summer in the east;
- Adverse impacts on water quality; and
- Changes in distribution of plant and animal species.

TII's Guidance document PE-ENV-01104 (TII 2022a) states that for future climate change a moderate to high Representative Concentration Pathways (RCP) should be adopted. RCP4.5 is considered moderate, while RCP8.5 is considered high. Representative Concentration Pathways (RCPs) describe different 21st century pathways of GHG emissions depending on the level of climate mitigation action undertaken.

National Framework for Climate Services (NFCS) was founded in June 2022 to streamline the provision of climate services in Ireland and will be led by Met Éireann. The aim of the NFCS is to enable the co-production, delivery and use of accurate, actionable and accessible climate information and tools to support climate resilience planning and decision making. In addition to the NFCS, further work has been ongoing into climate projects in Ireland through research under the TRANSLATE project. TRANSLATE (Met Éireann, 2023) has been led by climate researchers from University of Galway – Irish Centre for High End Computing (ICHEC), and University College Cork – SFI Research Centre for Energy, Climate and Marine (MaREI), supported by Met Éireann climatologists. TRANSLATE's outputs are produced using a selection of internationally reviewed and accepted models from both CORDEX and CMIP5. Representative Concentration Pathways (RCPs) provide a broad range of possible futures based on assumptions of human activity. The modelled scenarios include for "least" (RCP2.6), "more" (RCP4.5) or "most" (RCP8.5) climate change, see Figure below.

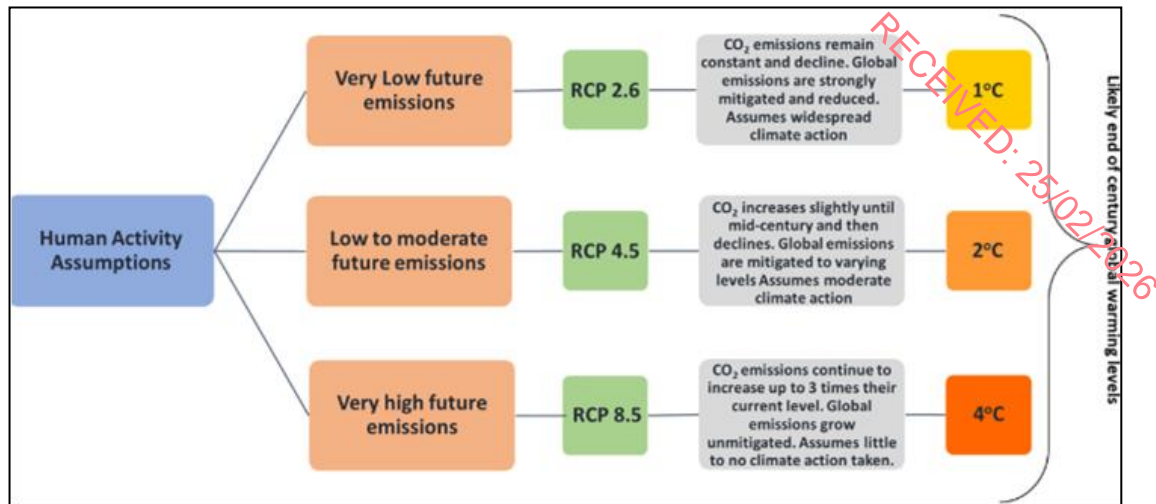


Source: TRANSLATE project Storymap (Met Éireann 2023)

Figure 12.5: Representative Concentration Pathways associated emission levels

TRANSLATE (Met Éireann, 2023) provides the first standardised and bias-corrected national climate projections for Ireland to aid climate risk decision making across multiple sectors (for example, transport, energy, water), by providing information on how Ireland's climate could change as global temperatures increase to 1.5°C, 2°C, 2.5°C, 3°C or 4°C. Projections broadly agree with previous projections for Ireland. Ireland's climate is dominated by the Atlantic Meridional Overturning Circulation (AMOC), a large system of ocean currents – including the Gulf Stream – characterised by a northward flow of warm water and a southward flow of cold water. Due to the AMOC, Ireland does not suffer from the extremes of temperature experienced by other countries at a similar latitude. Recent studies have projected that the AMOC could decline by 30 – 40 % by 2100, resulting in cooler North Atlantic Sea surface temperatures (SSTs) (Met Éireann, 2023b).

Met Éireann projects that Ireland will nevertheless continue to warm, although the AMOC cooling influence may lead to reduced warming compared with continental Europe. AMOC weakening is also expected to lead to additional sea level rise around Ireland. With climate change Ireland's temperature and rainfall will undergo more and more significant changes e.g. on average summer temperature could increase by more than 2°C, summer rainfall could decrease by 9% while winter rainfall could increase by 24% (see Figure 12.6). Future projects also include a 10-fold increase in the frequency of summer nights (values > 15°C) by the end of the century, a decrease in the frequency of cold winter nights and an increase in the number of heatwaves. A heatwave in Ireland is defined as a period of 5 consecutive days where the daily maximum temperature is greater than 25°C.

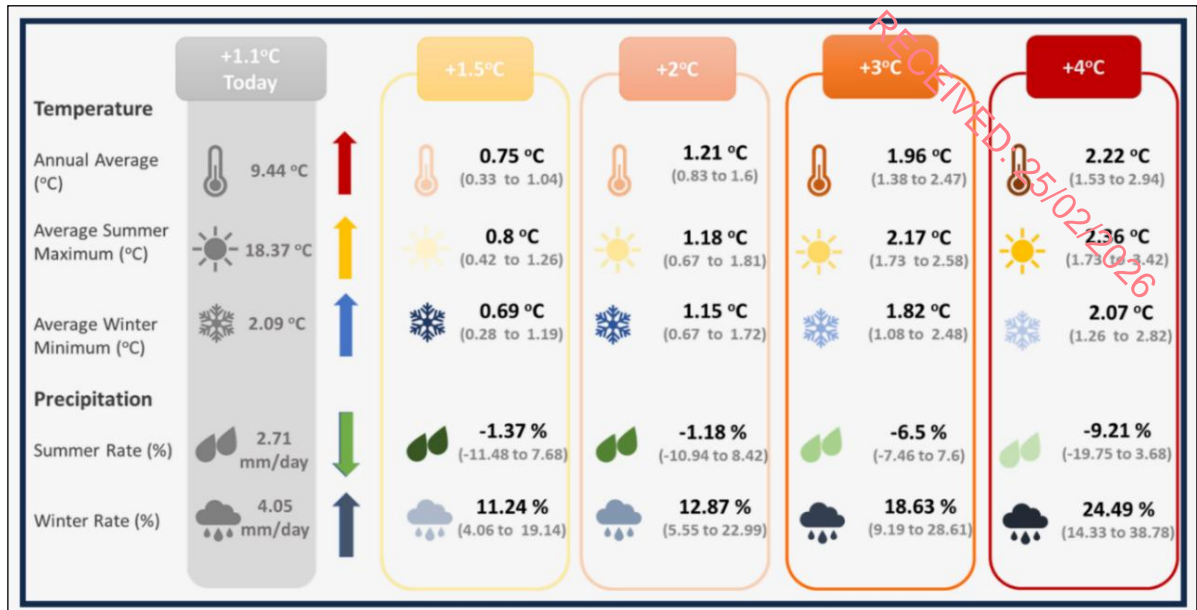

Source: TRANSLATE project Storymap (Met Éireann, 2023)

Figure 12.6: Change of climate variables for Ireland for different Global warming thresholds

The TRANSLATE research report (Met Éireann, 2023) finds that night-time temperatures will warm more than day-time temperatures, with temperatures increases across all seasons but the highest in the summer (with an increase of 0.5°C to 3.5°C). Autumn is projected to have the highest increase in average minimum temperatures (with an increase of 1.1°C to 4.4°C). The variance is dependent on the scenario that is being reviewed. While these temperatures are projected across all of Ireland, they increase most in the east of the country compared to the west. With respect to rainfall, increases of 4% to 38% are projected, however this will not be spread across the year as during summer months there are projected decreases in rainfall beyond the 2°C warming scenario.

In January 2024 the EPA published *Ireland's Climate Change Assessment Synthesis Report* (EPA, 2024c) which contained four volumes:

- Volume 1: Climate Science: Ireland in a Changing World
- Volume 2: Achieving Climate Neutrality by 2050
- Volume 3: Being Prepared for Ireland's Future Climate
- Volume 4: Realising the Benefits of Transition and Transformation

This report reinforces the existing and future risks arising from climate change. Volume 1 (EPA, 2024c) states that under Early action, the temperature increase averaged across the island of Ireland relative to the recent past (1976 to 2005) would reach 0.91°C (0.44 to 1.10°C) by mid-century before falling back to 0.80°C (0.34 to 1.07°C) at the end of the century. Whereas under Late action, by the end of the century it is projected that the temperature increases could be 2.77°C (2.02 to 3.49°C). Heat extremes will become more frequent and more severe and cold extremes will become less frequent and less severe with further

warming.

Precipitation was 7% higher over the period 1991 to 2020 than over the 1961 to 1990 period. The average future predicted increase in precipitation is <10% in annual mean accumulated. By 2100 projected additional rises in sea level range from 0.32 to 0.6m under early action to 0.63 to 1.01m under late action scenarios, with greater storm surges potentially affecting critical infrastructure along the coastline. Projections of changes in storminess are highly uncertain and translate into large uncertainties in future frequency and intensity of extreme waves.

Volume 3 of the report (EPA, 2024c) discusses how water supplies will face growing pressures resulting in increased water demand and how options need to be developed, including potential new sources. The report states the key role of critical infrastructure for delivering public services, economic development and a sustainable environment. These are exposed to a range of climate extremes. Failures in critical infrastructure can cascade across other sectors and present a multi-sector risk due to climate change.

The report references the EPA's *Critical Infrastructure Vulnerability to Climate Change* report (EPA, 2021a) as the most substantial research project in Ireland to date on climate change and critical infrastructure which assesses the future performance of Ireland's critical infrastructure when climate is considered. The Critical Infrastructure Vulnerability to Climate Change report states with respect to water availability and quality, that flood risk and heatwaves have a medium vulnerability index and the underground supply network has a high vulnerability to snowstorms and cold spells. However, while the vulnerability is high, the exposure is likely to reduce due to future climate change resulting in less cold weather events. The risk assessment highlights the co-dependence of the water sector to the energy sector, and how vulnerability in the energy sector may have cascading impacts.

Volume 4 of the report (EPA, 2024c) calls for system change, including a transformation of urban settings. Stating that meaningful urban transformation can create a better living environment while simultaneously reducing emissions.

The projections were echoed by the *Updated High-resolution Climate Projections for Ireland Research Report: 471* (EPA, 2024d) which was in broad agreement with previous research. The future autumn and winter months are projected to be up to 10% wetter, while summer is projected to be up to 8% drier.

12.2.6 Potential Impact of the Proposed Development

12.2.6.1 Greenhouse Gas Assessment

Demolition Phase

There are some demolition works proposed as part of the proposed development. A total of 4,847.5 m² of existing structures buildings are proposed to be demolished. The predicted demolition waste figures and waste routes have been informed by Chapter 14 – Material Assets (Waste) of this EIAR.

The primary concern from a climate perspective in relation to demolition works is the

embodied carbon impact. Depending on the final end-use of the demolition wastes, the associated embodied carbon has the potential to impact climate. Where possible demolished materials should be re-used on site or sent to a suitably licenced waste facility for re-use on other sites. Brickwork, concrete, steel and glazing are materials which have the potential for very high embodied carbon but also have the potential for recovery or recycling.

The estimated GHG impact of the demolition wastes has been calculated using the TII Carbon Tool (2025a). These are presented in Table 12.24. The predicted GHG emissions have been compared against the Waste and Transport sector 2030 budgets. As can be seen in Table 12.24, the predicted GHG emissions from the demolition wastes will be a small fraction of the total carbon budgets.

GHG Assessment Category	tCO ₂ e	Target / Sectoral Budget (tCO ₂ e)	% of Relevant Target / Budget	
Demolition Waste	41	2030 Sectoral Budget (Waste Sector)	1,000,000	0.00007%
Demolition Waste Transport	11	2030 Sectoral Budget (Transport Sector)	6,000,000	0.000003%

Table 12.24: Trends in Total National GHG Emissions 2021 – 2024

Operational carbon of an inefficient building can be greater than embodied carbon over time. The new structure will be designed to Nearly Zero Energy Building (NZEB) standards in accordance with the 2022 Part L requirements.

Mitigation measures for the demolition phase, specifically in relation to management of demolition wastes will aid in reducing the embodied carbon impact of the demolition phase of the proposed development (Section 12.2.9).

Construction Phase

The most significant proportion of GHG emissions tend to occur during the construction phase due to embodied carbon in construction materials and emissions from construction activities. Therefore, the assessment has been included in the construction phase assessment for the purposes of the EIAR. The assessment is broken down into the following stages as per Section 0:

- Product stage (A₁ – A₃);
- Transportation to site (A₄);
- Site operations (construction activities) (A₅); and
- Material replacement & refurbishment (B₄ – B₅).

The construction phase GHG emissions comprise stages A₁ – A₅ which includes the construction materials, the transport of the materials to site and the construction activities or site operations. Ongoing material refurbishment and replacement throughout the lifetime of the development is included within category B₄ – B₅, these are default values based on the

typical maintenance requirements for the chosen material types over the assumed 60-year lifetime.

The carbon assessment highlights the areas where the highest embodied carbon emissions occur, specifically as a result of building materials based on a typical build-up for the building type (house; duplex; apartment, etc.).

The GHG emissions from the development as a total cannot be compared against one specific sector 2030 carbon budget. The emissions are broken down into different assessment categories, and these must be compared separately to the relevant sectoral emissions budgets, which are detailed in Table 12. The relevant sectoral emissions for the proposed development comparison include the Industry sector, Transport sector, and Waste sector. The predicted emissions for the proposed development are annualised over the assumed 60-year lifespan and then compared to the relevant sector 2030 carbon budgets. Annualising the full carbon emissions over the lifetime of the development allows for appropriate comparison with annual GHG targets.

The results of the GHGA are shown in Table 12. This includes both the outputs from the OneClick LCA tool and the TII Carbon Tool. Construction materials make up the majority of GHG emissions for the proposed development, accounting for approximately 56.21% of the total construction phase GHG emissions. Material replacement makes up the second highest contribution at 19.5% of the total. Material transport, waste and construction activities make up the remainder of the construction GHG emissions. The A5 and B4-B5 categories include carbon savings associated with waste material recycling or re-use.

It has been calculated that the total construction phase embodied carbon (including maintenance and replacement of materials over the development lifetime) for the proposed development will be 40,495 tonnes CO₂e (see Table 12.).

Stage	GHG Assessment Category	Predicted GHG Emissions (tCO ₂ e)	Predicted GHG Emissions as % of Project Total	Relevant Sector for Carbon Budget Comparison
A1-A3	Materials	22,762.64	56.21%	Industry
A4	Material Transport	473.90	1.17%	Transport
A5	Excavations	83.15	0.21%	Industry
	Construction site material waste	1,282.94	3.17%	Waste
	Construction site material waste transport	9.95	0.02%	Transport
	Construction site waste	108.08	0.27%	Waste
B4 - B5	Maintenance Material	7,894.96	19.50%	Industry

Stage	GHG Assessment Category	Predicted GHG Emissions (tCO ₂ e)	Predicted GHG Emissions as % of Project Total	Relevant Sector for Carbon Budget Comparison
	Maintenance Material Transport	7,488.85	18.49%	Transport
	Maintenance Material Waste	389.59	0.96%	Waste
Total		40,4945		

Table 12.25: GHG Assessment Results

Figure 12.7 shows the GHG emissions for the proposed development per life-cycle stage based on the output from the OneClick LCA 3D Designer tool and the TII Carbon Tool combined.

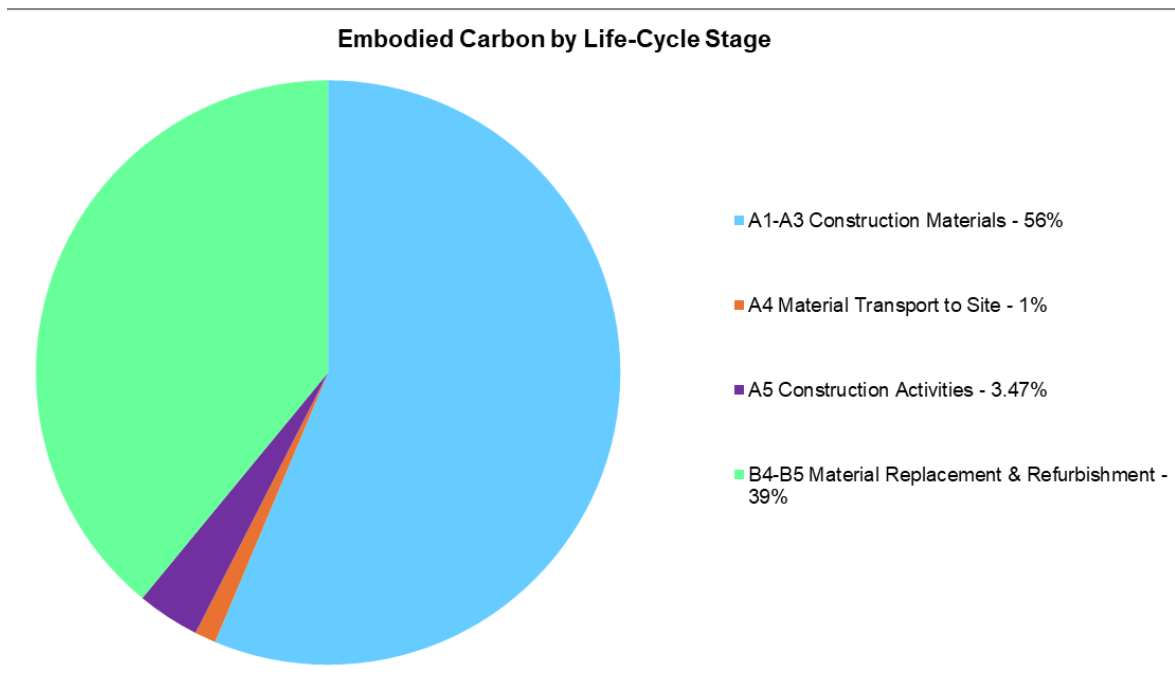


Figure 12.7: Embodied Carbon by Life-Cycle Stage

The total predicted GHG emissions (as shown in Table 12.) can be averaged over the full lifespan of the proposed development to give the predicted annual emissions to allow for direct comparison with national annual emissions and targets.

In Table , GHG emissions have been compared against the carbon budget for the industry, transport, and waste sectors in 2030 (Government of Ireland, 2025), against Ireland’s total GHG emissions in 2024, and against Ireland’s EU 2030 target of a 42% reduction in non-ETS sector emissions based on 2005 levels (27.7 Mt CO₂e) (set out in Regulation EU 2018/842).

The estimated total GHG emissions, when annualised over the 60-year proposed

development lifespan, are equivalent to 0.001% of Ireland's total GHG emissions in 2024 and 0.002% of Ireland's non-ETS 2030 emissions target. The estimated GHG emissions associated with transport-related activities are 0.002% of the 2030 Transport budget, construction waste GHG emissions are 0.002% of the Waste budget, industry-related activities are 0.013% of the 2030 Industry budget.

Target/Sectoral Budget (tCO ₂ e)		Annualised Development GHG Emissions		% of Relevant Target/Budget
Ireland's 2024 Total GHG Emissions (existing baseline)	57,640,000	675	Total GHG Emissions	0.001%
Non-ETS 2030 Target	27,722,000	675	Total GHG Emissions	0.002%
2030 Sectoral Budget (Industry Sector)	4,000,000	511	Total Industry Emissions	0.013%
2030 Sectoral Budget (Transport Sector)	6,000,000	133	Total Transport Emissions	0.002%
2030 Sectoral Budget (Waste Sector)	1,000,000	30	Total Waste Emissions	0.003%

Table 12.26: Estimated GHG Emissions Relative to Sectoral Budgets and GHG Baseline

Operational Phase

Operational Energy Usage

The proposed development has been designed to reduce the impact to climate where possible. Several measures have been incorporated into the design to ensure the operational phase emissions are minimised. The primary elements with respect to reducing climate impacts and optimising energy usage are summarised in Section 12.2.9.3 and are based on information provided in the accompanying *Climate Action and Energy Statement* prepared in relation to the proposed development.

Operational Traffic Emissions

There is the potential for increased traffic volumes to impact climate during the operational phase. To provide for a worst-case assessment and to assess potential cumulative impacts, the traffic data has included specific cumulative developments within the area (see *Transportation Assessment* prepared by DBFL for further details).

The predicted concentrations of CO₂e for the future years of 2028 and 2043 are detailed in Table 12.27. These are significantly less than Ireland's national 2027 and 2030 targets set out under EU legislation (targets beyond 2030 are not available) and the 2030 sectoral emissions ceilings. It is predicted that in 2028 the proposed development will increase CO₂ emissions by 15 tonnes CO₂e. This equates to 0.00004% of the 2027 national emission ceiling or 0.0002% of the 2030 Transport sector emissions ceiling (see Table 12.7).

Similarly low increases in CO₂ emissions are predicted to occur in 2043 with emissions increasing by 9 tonnes CO₂e. This equates to 0.00003% of the 2030 national emission ceiling or 0.00015% of the 2030 Transport sector emissions ceiling (Table 12.).

In addition, bicycle parking and electric vehicle parking and charging infrastructure will be provided as part of the parking requirements at the proposed development which will promote the use of more sustainable methods of transport.

Year	Scenario	CO ₂ e (tonnes/annum)
2028	Do Nothing	128
	Do Something	143
2043	Do Nothing	81
	Do Something	90
Increment Change in 2028		15
National Emission Ceiling 2027 (Tonnes) ^{Note 1}		37,869,352
Impact in 2028 (as % of national emissions ceiling)		0.00004%
Transport Sector 2030 Emission Ceiling		6,000,000
Impact in 2028 (as % of transport sector emissions ceiling)		0.0002%
Increment Change in 2043		9
National Emission Ceiling 2030 (Tonnes) ^{Note 1}		27,722,000
Impact in 2043 (as % of national emissions ceiling)		0.00003%
Impact in 2043 (as % of transport sector emissions ceiling)		0.00015%

^{Note 1} Target under Commission Implementing Decision (EU) 2020/2126 of 16 December 2020 on setting out the annual emission allocations of the Member States for the period from 2021 to 2030 pursuant to Regulation (EU) 2018/842 of the European Parliament and of the Council.

Table 12.27: Traffic Emissions GHG Impact Assessment

GHGA Significance of Effects

The TII guidance states that the following two factors should be considered when determining significance:

- The extent to which the trajectory of GHG emissions from the project aligns with Ireland's GHG trajectory to net zero by 2050; and
- The level of mitigation taking place.

The level of mitigation described in Section 12.2.11 has been considered when determining the significance of the proposed development's GHG emissions. According to the TII significance criteria described in Section 0 and Table 12.16, the significance of the GHG emissions during the construction and operational phase is minor adverse. The proposed development aligns with the following GHG significance criteria as per Table 12.16:

- The project's GHG impacts are mitigated through 'good practice' measures.
- The project has complied with existing and emerging policy requirements; and
- Fully in line to achieve Ireland's trajectory towards net zero.

In accordance with the EPA guidelines (EPA, 2022), the above significance equates to a significance of effect of GHG emissions during the construction and operational phase, which is **direct, long-term, negative** and **slight**, which is overall **not significant**.

12.2.6.2 Climate Change Risk Assessment

Construction Phase

A detailed CCRA of the construction phase has been scoped out, as discussed in Section 12.2.4 and Section 12.2.8.2, which states that there are no residual medium or high-risk vulnerabilities to climate change hazards. Therefore, a detailed CCRA is not required (TII, 2022a). However, consideration has been given to the proposed development's vulnerability to the following climate change hazards with best practice mitigation measures proposed in Section 12.2.11:

- Flood Risk due to increased precipitation, and intense periods of rainfall. This includes fluvial and pluvial flooding;
- Increased temperatures potentially causing drought, wildfires and prolonged periods of hot weather;
- Reduced temperatures resulting in ice or snow; and
- Major Storm Damage including wind damage.

Operational Phase

The sensitivity and exposure of the development to various climate hazards must first be determined to then determine the vulnerability of the proposed development to climate change. Flooding (coastal, pluvial, fluvial), extreme heat, extreme cold, wildfire, drought, extreme wind, lightning, hail, landslides and fog have been considered as climate hazards in the context of the proposed development.

The sensitivity of the proposed development to the climate hazards is assessed irrespective of the project location. Table 12.28 details the sensitivity of the proposed development on a scale of high (3), medium (2) and low (1).

Once the sensitivity has been established the exposure of the proposed development to each of the climate hazards is determined, this is the likelihood of the climate hazard occurring at the project location and is also scored on a scale of high (3), medium (2) and low (1).

The product of the sensitivity and exposure is then used to determine the overall vulnerability of the proposed development to each of the climate hazards as per Table 12.17.

The results of the vulnerability assessment are detailed in Table 12.28.

Climate Hazard	Sensitivity	Exposure	Vulnerability
Flooding (Coastal, Pluvial, Fluvial)	1 (Low)	2 (Medium)	2 (Low)
Extreme Heat	1 (Low)	2 (Medium)	2 (Low)
Extreme Cold	1 (Low)	2 (Medium)	2 (Low)
Wildfire	1 (Low)	1 (Low)	1 (Low)
Drought	1 (Low)	1 (Low)	1 (Low)
Extreme Wind	1 (Low)	1 (Low)	1 (Low)
Lightning & Hail	1 (Low)	1 (Low)	1 (Low)
Landslides	1 (Low)	1 (Low)	1 (Low)
Fog	1 (Low)	1 (Low)	1 (Low)

Table 12.28: Climate Change Vulnerability Assessment

The sensitivity and exposure of the area was determined with reference to a number of online tools and with input from the various discipline specialists on the project team. It was concluded that the proposed development does not have any significant vulnerabilities to the identified climate hazards as described in the below sections. All vulnerabilities are classified as low.

Flooding

A *Site-Specific Flood Risk Assessment (SSFRA)* was undertaken by DBFL Consulting Engineers and is submitted separately as part of this planning application. This document was reviewed to inform the climate change vulnerability assessment and assess the potential for flooding at the proposed development site.

The proposed development is located in Flood Zone C. The SSFRA notes that for storms greater than the 1% AEP pluvial event, the development's drainage network design will be exceeded and areas with low ground levels may begin to flood. However, the proposed development includes a new surface water network which will manage the surface water onsite and therefore mitigate the risk of pluvial flooding onsite. The new infrastructure is designed to accommodate rainfall runoff/ flows up to 1% AEP event. In addition, the surface water network has been designed to include an additional allowance of 20% in rainfall intensities due to climate change which is sufficient for the medium risk future climate change scenario. Proposed surface water drains have been designed in accordance with the Greater Dublin Strategic Drainage Study (GSDSDS) and DCC's Sustainable Drainage Design and Evaluation Guide.

It can be concluded that overall, the proposed development has low vulnerability to flood risk.

Extreme Wind, Fog, Lightning & Hail

In relation to extreme winds, the building shall be designed to the appropriate standards to account for the relevant wind loadings events for RCP4.5 and RCP8.5. If required as part of the building design, lightning protection shall be provided for. Hail and fog are not predicted to significantly affect the building due to its design.

It can be concluded that overall, the proposed development has low vulnerability to extreme wind, fog, lightning and hail.

Wildfires

In relation to wildfires, the *Think Hazard!* tool developed by the Global Facility for Disaster Reduction and Recovery (GFDRR, 2025), indicates that the wildfire hazard is classified as low for the Dublin area. This means that there is between a 4% to 10% chance of experiencing weather that could support a hazardous wildfire that may pose some risk to life and property loss in any given year. Future climate modelling indicates that there could be an increase in the weather conditions which are favourable to fire conditions. These include increases in temperature and prolonged dry periods. However, due to the project location in a built-up, sub-urban area the risk of wildfire is significantly lessened, and it can be concluded that the proposed development is of low vulnerability to wildfires.

Landslides

The Geological Society of Ireland (GSI) landslide susceptibility mapping database (GSI, 2025) was reviewed to inform the risk from landslides at the proposed development. There have not been any historical landslide events in the vicinity of the proposed development, and the area is of low susceptibility to future landslides. Therefore, the vulnerability of the proposed development to landslides is classed as low.

Extreme Temperatures (Heat & Cold) & Drought

Extreme temperatures, both extreme heat and extreme cold, have the potential to impact the building materials and some related infrastructure and potentially landscape planting. However, the building materials selected at the detailed design and will be done with consideration of the likely future temperature ranges Ireland will experience under RCP4.5 and RCP8.5 up to 2100. Therefore, extreme temperatures are not considered a significant risk.

Throughout detailed design phase, the architects will be using guidance documents to inform with design detail decisions including the EU Commission *Technical Guidance on Adapting Buildings to Climate Change* (European Commission (2021a)), LETI emergency design guide (LETI, 2020), and the latest available IPCC report. In addition, should updated EuroCodes be published prior to completion of detailed design, which will include consideration for climate impacts, these design standards will be considered.

Summary

Overall, the proposed development has at most low vulnerabilities to the identified climate hazards. Therefore, no detailed risk assessment is required.

CCRA Significance of Effects

With design mitigation in place, there are no significant risks to the proposed development as a result of climate change. In accordance with the EPA Guidelines (EPA, 2022), the significance of effect of the impacts to the proposed development as a result of climate change are **direct, long-term, negative** and **imperceptible**, which is overall **not significant** in EIA terms.

12.2.7 Summary

The following table summarises the identified likely significant effects on climate due to the proposed development before mitigation measures are applied.

Likely Significant Effect in accordance with EPA Terminology	Quality	Significance	Extent	Probability	Duration	Type
GHG emissions from construction materials & activities and operational energy usage	Negative	Significant (moderate adverse as per Table 12.16)	National	Likely	Long-term	Direct
Climate change and related vulnerability of the proposed development	Negative	Not significant - slight	Local	Likely	Long-term	Direct

Table 12.29: Summary of Likely Significant Effects in the absence of mitigation

12.2.8 Cumulative Impacts

With respect to the requirement for a cumulative assessment the ISEP (ISEP, 2022) and TII (TII, 2022a) guidance on which the assessment is based states that *"the identified receptor for the GHG Assessment is the global climate and impacts on the receptor from a project are not geographically constrained, the normal approach for cumulative assessment in EIA is not considered applicable. By presenting the GHG impact of a project in the context of its alignment to Ireland's trajectory of net zero and any sectoral carbon budgets, this assessment will demonstrate the potential for the project to affect Ireland's ability to meet its national carbon reduction target. This assessment approach is considered to be inherently cumulative"*.

The traffic data used for the operational phase assessment included cumulative traffic from existing and permitted developments in the surrounding area. Therefore, this impact assessment is cumulative.

As per the above, the cumulative impact of the proposed development in relation to GHG emissions is considered **direct, long-term, negative** and **slight**, which is overall **not significant** in EIA terms.

12.8.1 The 'Do Nothing' Scenario

In the Do-Nothing scenario, the site will remain as per the baseline and will change in accordance with trends within the wider area (including influences from potential new developments in the surrounding area, changes in road traffic, etc).

As the site is zoned for development, it is likely that in the absence of the proposed development a development of a similar nature would occur. Therefore, the predicted climate impacts within this report are likely to occur even in the absence of the proposed development.

12.2.9 Avoidance, Remedial and Mitigation Measures

12.2.9.1 Incorporated Design Mitigation

A number of measures have been incorporated into the design of the development to mitigate against the impacts of future climate change. For example, adequate attenuation and drainage have been incorporated into the design of the development to avoid potential flooding impacts as a result of increased rainfall events in future years. These measures have been considered when assessing the vulnerability of the proposed development to climate change (Section 14.7.2.2).

In relation to operational energy usage information from the Climate Action and Energy Statement prepared by OCSC Consulting for the proposed development has been used to inform this assessment. The proposed development will be Nearly Zero Energy Building (NZEB) compliant in line with the Technical Guidance Part L (2022) of the Building Regulations requirements for the residential elements and Technical Guidance Part L (2022), Buildings other than Dwellings for the creche. As per the Climate Action and Energy Statement number of incorporated design mitigation measures that have been incorporated into the design of the development to reduce the impact on climate wherever possible. Such measures included in the proposed development to reduce the impact to climate from energy usage are:

- The development will be in compliance with the requirements of the Near Zero Energy Building (NZEB) Standards.
- A renewable energy rating (RER) of 20% will be achieved to comply with Part L (2021) of the NZEB regulations.
- A Building Energy Rating (BER) of A2/A3 is being targeted.
- Improved building thermal transmittance (U-Values), air permeability and thermal bridging (see Section 8.1.1 of the Climate Action, Energy and Sustainability Report for detail).
- Use of solar PV panels.
- Use of air source heat pumps (Minimum COP of 2.5).

These identified measures will aid in reducing the impact to climate during the operational phase of the proposed development in line with the goals of the Climate Action Plan.

12.2.9.2 Construction Phase Mitigation

Embodied carbon of materials and construction activities will be the primary source of climate impacts during the construction phase. The following measures to reduce the embodied carbon of the construction works are:

- Appointing a suitably competent contractor who will undertake waste audits detailing resource recovery best practice and identify materials can be reused/recycled.
- Prevention of on-site or delivery vehicles from leaving engines idling, even over short periods.
- Ensure all plant and machinery are well maintained and inspected regularly.
- Minimising waste of materials due to poor timing or over ordering on site will aid to minimise the embodied carbon footprint of the site.
- Sourcing materials locally where possible to reduce transport related CO₂ emissions.
- Material choices and quantities will be reviewed during detailed design, to identify and implement any lower embodied carbon options, where feasible. For example, a 30% minimum clinker replacement in cement may be utilised in line with the requirements for public bodies.

In terms of impact on the proposed development due to climate change, during construction the Contractor will be required to mitigate against the effects of extreme rainfall/flooding through site risk assessments and method statements. The Contractor will also be required to mitigate against the effects of extreme wind/storms, temperature extremes through site risk assessments and method statements. All materials used during construction will be accompanied by certified datasheets which will set out the limiting operating temperatures. Temperatures can affect the performance of some materials, and this will require consideration during construction. During construction, the Contractor will be required to mitigate against the effects of fog, lightning and hail through site risk assessments and method statements.

Throughout detailed design and construction phase, guidance documents to inform with design detail decisions shall be reviewed e.g. the EU Commission *Technical Guidance on Adapting Buildings to Climate Change* (European Commission (2021a), LETI emergency design guide (LETI, 2020), and the latest IPCC report.

12.2.9.3 Operational Phase Mitigation

The proposed development has been designed to reduce the impact on climate as a result of energy usage during operation. These measures are outlined in 12.2.9 above as incorporated design mitigation. No further operational phase mitigation is proposed.

12.2.10 Monitoring

Monitoring and reporting of the embodied carbon in the construction phase will be

conducted. The aim of monitoring will be to seek further ways to minimise climate impacts. Monitoring will include contractual obligations, in line with the most recent Climate Action Plan and sectoral targets, for the successful tenderer to ensure that the proposed development stays in line with updated aims. Commitments to monitor GHG emissions during the construction phase will also be secured through the final Construction Environmental Management Plan (CEMP).

Monitoring will include embodied carbon of construction materials, water usage, power and fuel usage, and waste generation (including reuse and recycling rates). Where monitoring shows that the proposed development is not meeting its targets, further mitigation will be put in place.

Monitoring should also include reviewing potential for extreme weather events which may cause damage during construction. Contractors' Environmental Management System (EMS) will include measures to address risks during such events i.e. flooding.

12.2.11 Interactions

Climate has the potential to interact with a number of other environmental attributes.

12.2.11.1 Land, Soils, Geology and Hydrology

The impact of flood risk has been assessed, and the surface water drainage network will be designed to cater for increased rainfall in future years as a result of climate change.

The effect of the interactions between climate and land, soils, geology and hydrology are *direct, short-term, negative* and *imperceptible* during the construction phase and *direct, long-term, negative* and *imperceptible* during the operational phase, which is overall *not significant* in EIA terms.

12.2.11.2 Air Quality

Air quality and climate have interactions due to the emissions from the burning of fossil fuels during the construction and operational phases generating both air quality and climate impacts. Air quality modelling outputs are utilised within the Climate Chapter.

There is no impact on climate due to air quality. However, the sources of impacts on air quality and climate are strongly linked.

12.2.11.3 Traffic and Transportation

During the construction and operational phase, there is the potential for interactions between climate and traffic. Vehicles accessing the site will result in emissions of CO₂, a greenhouse gas. The effects of the proposed development on climate are assessed by reviewing the change in annual average daily traffic on roads close to the site.

In this assessment, the effects of the interactions between traffic and climate are considered to be *direct, short-term, negative* and *not significant* during the construction phase and *direct, long-term, negative* and *not significant* during the operational phase, which is overall *not significant* in EIA terms.

12.2.11.4 Waste

Waste management measures will be put in place to minimise the amount of waste entering landfill, which has higher associated embodied carbon emissions than other waste management such as recycling.

The effect of the interactions between waste and climate are considered to be *direct, short-term, negative* and *not significant* during the construction phase and *direct, long-term, negative* and *not significant* during the operational phase, which is overall *not significant* in EIA terms.

12.2.12 Difficulties Encountered

There were no difficulties encountered in compiling this assessment.

12.3 References

BRE (2003) Controlling Particles, Vapours & Noise Pollution from Construction Sites
 British Standards Institution (BSI) (2023). Publicly Available Specification (PAS) 2080:2023 on Carbon Management in Infrastructure
 Civil Engineering Standard Method of Measurement (CESSM) (2013) Carbon and Price Book database.
 Construction Industry Federation (2021) Modern Methods of Construction
 Dublin City Council (DCC) (2024) Dublin City Climate Action Plan 2024-2029
 Environmental Protection Agency (2006) Environmental Management Guidelines - Environmental Management in the Extractive Industry (Non-Scheduled Minerals)
 Environmental Protection Agency (2020a) State of the Irish Environment Report (Chapter 2: Climate Change)
 Environmental Protection Agency (2020b) Research 339: High-resolution Climate Projections for Ireland – A Multi-model Ensemble Approach'
 Environmental Protection Agency (2022) Guidelines on the Information to be Contained in Environmental Impact Assessment Reports
 Environmental Protection Agency (2024b) National Climate Change Risk Assessment (NCCRA)
 Environmental Protection Agency (2024c) Ireland's Climate Change Assessment Synthesis Report
 Environmental Protection Agency (2024d) Updated High-resolution Climate Projections for Ireland Research Report: 471
 Environmental Protection Agency (2025a) Air Quality in Ireland 2024 (& previous annual reports 2020-2023)
 Environmental Protection Agency (2025b) Ireland's Greenhouse Gas Emissions Projections 2024-2055
 Environmental Protection Agency (2025c) Ireland's Provisional Greenhouse Gas Emissions 1990-2024
 Environmental Protection Agency (EPA) (2021a) Critical Infrastructure Vulnerability to Climate Change Report No. 369
 European Commission (2013) Guidance on Integrating Climate Change and Biodiversity into Environmental Impact Assessment
 European Commission (2014) 2030 Climate and Energy Policy Framework
 European Commission (2017) Environmental Impact Assessment of Projects: Guidance on the preparation of the Environmental Impact Assessment Report

European Commission (2021a) Technical guidance on the Climate Proofing of Infrastructure in the Period 2021-2027

European Commission (2021b) 2030 EU Climate Target Plan

European Commission (2021b) Forging a climate-resilient Europe - the new EU Strategy on Adaptation to Climate Change.

European Union (2018) Regulation 2018/842 on binding annual greenhouse gas emission reductions by Member States from 2021 to 2030 contributing to climate action to meet commitments under the Paris Agreement and amending Regulation (EU) No. 525/2013

German VDI (2002) Technical Guidelines on Air Quality Control – TA Luft

Government of Ireland (2023) Clean Air Strategy for Ireland

Global Facility for Disaster Reduction and Recovery (GFDRR) (2025) Think Hazard!

Government of Ireland (2015) Climate Action and Low Carbon Development Act

Government of Ireland (2019) Climate Action Plan 2019

Government of Ireland (2020) Climate Action Plan 2021

Government of Ireland (2021) Climate Action and Low Carbon Development (Amendment) Act 2021 (the 2021 Climate Act) (No. 32 of 2021)

Government of Ireland (2022) Climate Action Plan 2022

Government of Ireland (2023) Climate Action Plan (CAP) 2024

Government of Ireland (2024a) Long-term Strategy on Greenhouse Gas Emissions Reductions (draft)

Government of Ireland (2024b) National Adaptation Framework (NAF)

Government of Ireland (2025) Climate Action Plan (CAP) 2025

Institute of Sustainability and Environmental Professionals (ISEP) (formerly known as Institute of Environmental Management & Assessment (IEMA)) (2020a) Environmental Impact Assessment Guide to: Climate Change Resilience and Adaptation

Institute of Sustainability and Environmental Professionals (ISEP) (formerly known as Institute of Environmental Management & Assessment (IEMA)) (2020b) GHG Management Hierarchy

Institute of Sustainability and Environmental Professionals (ISEP) (formerly known as Institute of Environmental Management & Assessment (IEMA)) (2022) Environmental Impact Assessment Guide to: Assessing GHG Emissions and Evaluating their Significance

Institute of Air Quality Management (IAQM) (2020) A Guide To The Assessment Of Air Quality Impacts On Designated Nature Conservation Sites (Version 1.1)

Institute of Air Quality Management (IAQM) (2024) Guidance on the Assessment of Dust from Demolition and Construction (Version 2.2)

Intergovernmental Panel on Climate Change (IPCC) (2023). AR6 Synthesis Report: Climate Change 2023 of the Sixth Assessment Report (AR6)

KPMG (2024) Ireland's Climate Action Plan 2023

LETI (2020) Climate Emergency Design Guide

Met Éireann (2023) TRANSLATE: One Climate Resource for Ireland. [Online] Available at: <https://www.met.ie/science/translate>

Met Éireann (2025a). Ireland's 30-year Climate Averages. Available from: <https://www.met.ie/climate/30-year-averages>

Met Éireann (2025b) Met Éireann's 2024 Climate Statement Available at: <https://www.met.ie/annual-climate-statement-for-2024>

Met Éireann (2025c) Met Éireann website: <https://www.met.ie/>

The Geological Society of Ireland (GSI) (2025) Landslide Susceptibility Mapping Database

Transport Infrastructure Ireland (2022a) PE-ENV-01104: Climate Guidance for National Roads, Light Rail and Rural Cycleways (Offline & Greenways) – Overarching Technical Document

Transport Infrastructure Ireland (2022b) PE-ENV-01106: Air Quality Assessment of Specified

Infrastructure Projects

Transport Infrastructure Ireland (2025a) GE-ENV-01106: TII Carbon Assessment Tool for Road and Light Rail Projects and User Guidance Document

Transport Infrastructure Ireland (2025b) TII Road Emissions Model (REM): Model Development Report – GE-ENV-01107

World Health Organisation (2021) Air Quality Guidelines (and previous Air Quality Guideline Reports 1999 & 2000 & 2006)

RECEIVED: 25/02/2026