



APPENDIX 11-2

CARBON CALCULATIONS

Core input data
ENTER INPUT DATA HERE! VALUES SHOULD ONLY BE CHANGED ON THIS SHEET. **DO NOT USE EXAMPLE VALUES AS DEFAULTS!** ENTER YOUR OWN VALUES THAT ARE SPECIFIC TO YOUR PARTICULAR SITE.
Note: The input parameters include some variables that can be specified by default values, but others that must be site specific. Variables that can be taken from defaults are marked with purple tags on left hand side.

Click here to move to Payback Time
Click here to return to Instructions

Input data		Expected values		Possible range of values		Record source of data
Enter expected value here		Enter minimum value here		Enter maximum value here		Record source of data
Windfarm characteristics						
Dimensions	17	17	17	17	17	Record source of data
No. of turbines	35	35	35	35	35	
Lifetime of windfarm (years)	6	5.9	5.9	6.1	6.1	
Power rating of turbines (turbine capacity) (MW)	0.35	0.35	0.35	0.35	0.35	
Capacity factor	5	5	5	5	5	
Backup	10	10	10	10	10	Record source of data
Extra capacity required for backup (%)	0.35	0.35	0.35	0.35	0.35	
Additional emissions due to reduced thermal efficiency of the reserve generation (%)	5	5	5	5	5	
Carbon dioxide emissions from turbine life (e.g. manufacture, construction, decommissioning)	10	10	10	10	10	
	Calculate wrt installed cap ▼	Calculate wrt installed cap ▼	Calculate wrt installed cap ▼	Calculate wrt installed cap ▼	Calculate wrt installed cap ▼	
Characteristics of peatland before windfarm development						
Type of peatland	Acid b ▼	Acid b ▼	Acid b ▼	Acid b ▼	Acid b ▼	Record source of data
Average annual air temperature at site (°C)	9.3	4.6	15	15	15	
Average depth of peat at site (m)	1.14	1.14	1.14	1.14	1.14	
C Content of dry peat (% by weight)	53.23	19.57	64.28	64.28	64.28	
Average extent of drainage around drainage features at site (m)	15.00	15.00	15.00	15.00	15.00	
Average water table depth at site (m)	0.50	0.10	1.00	1.00	1.00	
DV soil bulk density (g cm ⁻³)	0.13	0.01	0.29	0.29	0.29	
Characteristics of bog plants						
Time required for regeneration of bog plants after restoration (years)	10	5	15	15	15	Record source of data
Carbon accumulation due to C fixation by bog plants in undrained peats (tC ha ⁻¹ yr ⁻¹)	0.25	0.2	0.3	0.3	0.3	
Enter simple data ▼						
29.3						
3.50						
Foresty Plantation Characteristics						
Method used to calculate CO ₂ loss from forest felling	1.046	1.046	1.046	1.046	1.046	Record source of data
Area of forestry plantation to be felled (ha)	0.20705	0.20705	0.20705	0.20705	0.20705	
Conifer:ratel of carbon sequestration in timber (tC ha ⁻¹ yr ⁻¹)	0.437	0.437	0.437	0.437	0.437	
Enter simple data ▼						
29.3						
Contractual emission factors						
To update contractual emission factors from the web	1.046	1.046	1.046	1.046	1.046	Record source of data
Coal-fired plant emission factor (t CO ₂ MWh ⁻¹)	0.20705	0.20705	0.20705	0.20705	0.20705	
Grid-mix emission factor (t CO ₂ MWh ⁻¹)	0.437	0.437	0.437	0.437	0.437	
Fossil fuel-mix emission factor (t CO ₂ MWh ⁻¹)	3	3	3	3	3	
Number of borrow pits	157	157	157	157	157	
Average length of pits (m)	43	43	43	43	43	Record source of data
Average width of pits (m)	1.14	1.14	1.14	1.14	1.14	
Average depth of peat removed from pit (m)	1.14	1.14	1.14	1.14	1.14	
Enter simple data ▼						
29.3						
Foundations and hard-standing area associated with each turbine						
Method used to calculate CO ₂ loss from foundations and hard-standing	1.046	1.046	1.046	1.046	1.046	Record source of data
Average length of turbine foundations (m)	0.20705	0.20705	0.20705	0.20705	0.20705	
Average width of turbine foundations (m)	0.437	0.437	0.437	0.437	0.437	
Average length of hard-standing (m)	3	3	3	3	3	
Average width of hard-standing (m)	157	157	157	157	157	
Average depth of peat removed from hard-standing (m)	43	43	43	43	43	Record source of data
Average depth of peat removed from hard-standing (m)	1.14	1.14	1.14	1.14	1.14	
Enter simple data ▼						
29.3						
3.50						
Access tracks						
Total length of access track (m)	17600	17600	17600	17600	17600	Record source of data
Existing track length (m)	4300	4300	4300	4300	4300	
Length of access track that is floating road (m)	1630	1630	1630	1630	1630	
Floating road width (m)	5	5	5	5	5	
Length of floating road that is drained (m)	11670	11670	11670	11670	11670	
Average depth of drains associated with floating roads (m)	5	5	5	5	5	Record source of data
Length of access track that is excavated road (m)	1.14	1.14	1.14	1.14	1.14	
Excavated road width (m)	1.14	1.14	1.14	1.14	1.14	
Length of access track that is rock filled road (m)	1.14	1.14	1.14	1.14	1.14	
Rock filled road width (m)	1.14	1.14	1.14	1.14	1.14	
Length of rock filled road that is drained (m)	1.14	1.14	1.14	1.14	1.14	Record source of data
Average depth of drains associated with rock filled roads (m)	1.14	1.14	1.14	1.14	1.14	
Enter simple data ▼						
29.3						
3.50						
Cable trenches						
Length of any cable trench on peat that does not follow access tracks and is lined with a permeable medium (e.g. sand) (m)	1.20	1.20	1.20	1.20	1.20	Record source of data
Average depth of peat cut for cable trenches (m)	1.20	1.20	1.20	1.20	1.20	
Enter simple data ▼						
29.3						
3.50						
Additional peat excavated already accounted for above						
Volume of additional peat excavated (m ³)	22500	22500	22500	22500	22500	Record source of data
Area of additional peat excavated (m ²)	32100.0	32100.0	32100.0	32100.0	32100.0	
Enter simple data ▼						
22500						
32100.0						
Peat Landscape Hazard						
WebLink: Peat Landscape Hazard and Risk Assessments: Best Practice Guide for Proposed Electricity Generation Developments	22500	22500	22500	22500	22500	Record source of data
Area of additional peat excavated (m ²)	32100.0	32100.0	32100.0	32100.0	32100.0	
Enter simple data ▼						
22500						
32100.0						
Improvement of C sequestration at site by blocking drains, restoration of degraded habitat etc						
Improvement of degraded habitat	25	25	25	25	25	Record source of data
Area of degraded bog to be improved (ha)	25	25	25	25	25	
Water table depth in degraded bog before improvement (m)	25	25	25	25	25	
Time required for hydrology and habitat of bog to return to its previous state on improvement (years)	25	25	25	25	25	
Period of time when effectiveness of the improvement in degraded bog can be guaranteed (years)	25	25	25	25	25	
Improvement of felled plantation land	25	25	25	25	25	Record source of data
Area of felled plantation to be improved (ha)	25	25	25	25	25	
Water table depth in felled area before improvement (m)	25	25	25	25	25	
Time required for hydrology and habitat of felled plantation to return to its previous state on improvement (years)	25	25	25	25	25	
Period of time when effectiveness of the improvement in felled plantation can be guaranteed (years)	25	25	25	25	25	
Restoration of peat removed from borrow pits	25	25	25	25	25	Record source of data
Area of borrow pits to be restored (ha)	25	25	25	25	25	
Depth of water table in borrow pit before restoration with respect to the restored surface (m)	25	25	25	25	25	
Depth of water table in borrow pit after restoration with respect to the restored surface (m)	25	25	25	25	25	
Time required for hydrology and habitat of borrow pit to return to its previous state on restoration (years)	25	25	25	25	25	
Period of time when effectiveness of the restoration of peat removed from borrow pits can be guaranteed (years)	25	25	25	25	25	Record source of data
Early removal of drains from foundations and handstanding before restoration (m)	25	25	25	25	25	
Water table depth around foundations and handstanding before restoration (m)	25	25	25	25	25	
Water table depth around foundations and handstanding after restoration (m)	25	25	25	25	25	
Time to completion of backfilling, removal of any surface drains, and full restoration of the hydrology (years)	25	25	25	25	25	
Restoration of site after decommissioning						
Will the hydrology of the site be restored on decommissioning?	No	No	No	No	No	Record source of data
Will you attempt to block any gullies that have formed due to the windfarm?	No	No	No	No	No	
Will you attempt to block all artificial ditches and facilitate rewetting?	No	No	No	No	No	
Will the habitat of the site be restored on decommissioning?	No	No	No	No	No	
Will you control grazing on degraded areas?	No	No	No	No	No	
Choice of methodology for calculating emission factors						
Site specific (required for planning applications)						

Core input data
ENTER INPUT DATA HERE! VALUES SHOULD ONLY BE CHANGED ON THIS SHEET. **DO NOT USE EXAMPLE VALUES AS DEFAULTS!** ENTER YOUR OWN VALUES THAT ARE SPECIFIC TO YOUR PARTICULAR SITE.
Note: The input parameters include some variables that can be specified by default values, but others that must be site specific. Variables that can be taken from defaults are marked with purple tags on left hand side.

Click here to move to Payback Time
Click here to return to Instructions

Results

PAYBACK TIME AND CO₂ EMISSIONS

Note: The carbon payback time of the windfarm is calculated by comparing the loss of C from the site due to windfarm development with the carbon-savings achieved by the windfarm while displacing electricity generated from coal-fired capacity or grid-mix.

[Click here to return to Input data](#)

[Click here](#)



[Click here to return to Instructions](#)

[Click here](#)

	Exp.	Min.	Max.
1. Windfarm CO₂ emission saving over...			
...coal-fired electricity generation (tCO ₂ yr ⁻¹)	3271	3217	3326
...grid-mix of electricity generation (tCO ₂ yr ⁻¹)	648	637	658
...fossil fuel - mix of electricity generation (tCO ₂ yr ⁻¹)	1367	1344	1389
Energy output from windfarm over lifetime (MWh)	109456	107632	111280
Total CO₂ losses due to wind farm (t CO₂ eq.)			
2. Losses due to turbine life (eg. manufacture, construction, decommissioning)	87355	85767	88944
3. Losses due to backup	68332	67193	69471
4. Losses due to reduced carbon fixing potential	2781	1978	3708
5. Losses from soil organic matter	35316	-15325	170549
6. Losses due to DOC & POC leaching	0	0	0
7. Losses due to felling forestry	12974	13162	13350
Total losses of carbon dioxide	206758	152775	346022
8. Total CO₂ gains due to improvement of site (t CO₂ eq.)			
8a. Change in emissions due to improvement of degraded bogs	0	0	0
8b. Change in emissions due to improvement of felled forestry	0	0	0
8c. Change in emissions due to restoration of peat from borrow pits	0	0	0
8d. Change in emissions due to removal of drainage from foundations & hardstanding	0	0	0
Total change in emissions due to improvements	0	0	0

RESULTS

	Exp.	Min.	Max.
Net emissions of carbon dioxide (t CO₂ eq.)			
	206758	152775	346022
Carbon Payback Time			
...coal-fired electricity generation (years)	63.2	45.9	107.6
...grid-mix of electricity generation (years)	319.3	232.1	543.4
...fossil fuel - mix of electricity generation (years)	151.3	110.0	257.5
Ratio of soil carbon loss to gain by restoration (TARGET ratio (Natural Resources Wales) < 1.0)	No gains!	No gains!	No gains!
Ratio of CO ₂ eq. emissions to power generation (g / kWh) (TARGET ratio by 2030 (electricity generation) < 50 g / kWh)	1889	1373	3215

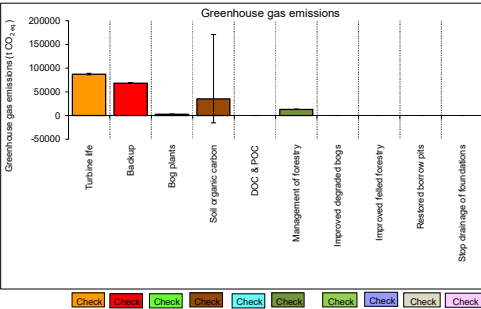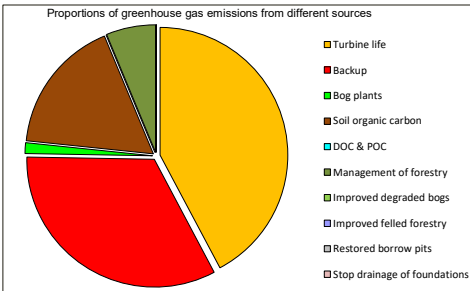

Results

PAYBACK TIME AND CO₂ EMISSIONS

Note: The carbon payback time of the windfarm is calculated by comparing the loss of C from the site due to windfarm development with the carbon-savings achieved by the windfarm while displacing electricity generated from coal-fired capacity or grid-mix.

[Click here to return to Input data](#)

[Click here](#)

[Click here to return to Instructions](#)

[Click here](#)

Data used in barchart of carbon payback time using fossil-fuel mix as counterfactual

Greenhouse gas emissions

	Exp.	Min.	Max.
Turbine life	87355	1588	1588
Backup	68332	1139	1139
Bog plants	2781	803	927
Soil organic carbon	35316	50641	135233
DOC & POC	0	0	0
Management of forestry	12974	0	376
Improved degraded bogs	0	0	0
Improved felled forestry	0	0	0
Restored borrow pits	0	0	0
Stop drainage of foundations	0	0	0

Data used in barchart of carbon payback time using fossil-fuel mix as counterfactual

Greenhouse gas emissions

	Exp.	Min.	Max.	Exp.	Min.	Max.
Turbine life	87355	1588	1588	767	14	14
Backup	68332	1139	1139	600	10	10
Bog plants	2781	803	927	24	7	8
Soil organic carbon	35316	50641	135233	310	452	1168
DOC & POC	0	0	0	0	0	0
Management of forestry	12974	-188	376	114	-2	3
Improved degraded bogs	0	0	0	0	0	0
Improved felled forestry	0	0	0	0	0	0
Restored borrow pits	0	0	0	0	0	0
Stop drainage of foundations	0	0	0	0	0	0
	206758			1815		

Windfarm CO₂ emission saving

Note: The total emission savings are given by estimating the total possible electrical output of the windfarm multiplied by the emission factor for the counterfactual case (coal-fire generation and electricity from grid)

[Click here to move to Payback Time](#) [Click here](#)

[illegible]

Calculation of capacity factor	1	Direct input of capacity factor		
		Exp	Min	Max
Entered capacity factor (%)		0.35	0.35	0.35

Parameters	Slope (a)			Intercept (b)		
<i>Partial power curves for different turbines</i>	Exp	Min	Max	Exp	Min	Max
User-defined	0.0	0.0	0.0	0.0	0.0	0.0
Vestas 2.0 MW Optispeed C2	1392.5	1392.5	1392.5	-4291.9	-4291.9	-4291.9

[illegible]

Total				Forestry Area 1			Forestry Area 2			Forestry Area 3			Forestry Area 4			Forestry Area 5		
Calculation of annual energy output from wind farm																		
Direct input of capacity factor																		
Capacity factor(%)				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Annual energy output from windfarm (MW yr⁻¹)				3127	3075	3179	0	0	0	0	0	0	0	0	0	0	0	0

RESULTS	Total			Area 1			Area 2			Area 3			Area 4			Area 5		
Windfarm CO ₂ emission saving over...																		
...coal-fired electricity generation (tCO ₂ yr ⁻¹)	3271	3216.66	3325.7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
...grid-mix of electricity generation (tCO ₂ yr ⁻¹)	648	636.72	658.303	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
...fossil fuel - mix of electricity generation (tCO ₂ yr ⁻¹)	1367	1343.86	1389.42	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Click here to move to Payback Time [Click here](#)

Windfarm CO₂ emission saving
(note: the total emission savings are given by estimating the total possible electrical output of the windfarm multiplied by the emission factor for the counterfactual case (coal-fire generation and electricity from grid))

Emissions due to turbine life

Note: The carbon payback time of the windfarm due to turbine life (eg. manufacture, construction, decommissioning) is calculated by comparing the emissions due to turbine life with carbon-savings achieved by the windfarm while displacing electricity generated from coal-fired capacity or grid-mix.

Method used to estimate CO₂ emissions from turbine life (eg. manufacture, construction, decommissioning)?

Calculate wrt installed capacity

	Exp	Min	Max
Direct input of emissions due to turbine life (t CO ₂ windfarm ⁻¹)	0	0	0
Calculation of emissions due to turbine life from energy output			
CO ₂ emissions due to turbine life (tCO ₂ turbine ⁻¹)	5139	5045	5232
No. of turbines	17	17	17
Total calculated CO ₂ emission of the wind farm due to turbine life (t CO ₂ windfarm ⁻¹)	87355	85767	88944

	Exp	Min	Max	Construction Area 1			Construction Area 2			Construction Area 3			Construction Area 4			Construction Area 5		
	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max
Calculation of emissions due to cement used in construction																		
Volume of cement used (m ³)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CO ₂ emission rate (t CO ₂ m ⁻³ cement)	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316	0.316
Total CO ₂ emissions due to cement used	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

RESULTS**Losses due to turbine life (eg.**

87355 85767 88944

Additional CO₂ payback time of windfarm due to turbine life (eg. manufacture, construction, decommissioning)

...coal-fired electricity generation (months)	320	320	321
...grid-mix of electricity generation (months)	1619	1616	1621
...fossil fuel - mix of electricity generation (months)	767	766	768

Click here to move to Payback Time [Click here](#)

Emissions due to turbine life

Note: The carbon payback time of the windfarm due to turbine life (eg. manufacture, construction, decommissioning) is calculated by comparing the emissions due to turbine life with carbon-savings achieved by the windfarm while displacing electricity generated from coal-fired capacity or grid-mix.

http://www.concretecentre.com/PDF/SCF_Table%207%20Embodied%20CO2_April%202013.pdf

**Embodied carbon dioxide (CO₂e) of concretes used in buildings**

CONCRETE APPLICATION	Concrete designation	CO ₂ e (kgCO ₂ e/m ³) ¹			CO ₂ e (kgCO ₂ e/tonne) ¹		
		CEM I concrete	30% fly ash concrete	50% ggbs concrete	CEM I concrete	30% fly ash concrete	50% ggbs concrete
Blinding, mass fill, strip footings, mass foundations, trench foundations ²	GEN1	177	128	101	77	55	44
Reinforced Foundations ²	RC25/30**	316	263	197	133	111	83
Ground floors ²	RC20/35 *	316	261	186	134	110	79
Structural: in situ floors, superstructure, walls, basements ²	RC32/40 **	369	313	231	154	131	96
High strength concrete ²	RC40/50 **	432	351	269	178	146	111
		CO ₂ e (kgCO ₂ e/m ³)			CO ₂ e (kgCO ₂ e/tonne)		
Unreinforced Precast flooring ³		-			165		
Reinforced precast flooring ³		-			171		
Average Generic Concrete Block ⁴		-			84		

* Includes 30kg/m³ steel reinforcement

** Includes 100kg/m³ steel reinforcement

Emissions due to backup power generation

Note: CO₂ loss due to back up is calculated from the extra capacity required for backup of the windfarm given in the input data.

	Expected	Minimum	Maximum
Reserve capacity required for backup			
No. of turbines	17	17	17
Power rating of turbines (turbine capacity) (MW)	6	5.9	6.1
Power of wind farm (MW h ⁻¹)	102	100.3	103.7
Rated capacity (MW yr ⁻¹)	893520	878628	908412
Extra capacity required for backup (%)	5	5	5
Additional emissions due to reduced thermal efficiency of the reserve generation (%)	10	10	10
Reserve capacity (MWh yr ⁻¹)	4468	4393	4542

Carbon dioxide emissions due to backup power generation			
Coal-fired plant emission factor (t CO ₂ MWh ⁻¹)	1.046	1.046	1.046
Grid-mix emission factor (t CO ₂ MWh ⁻¹)	0.20705	0.20705	0.20705
Fossil fuel- mix emission factor (t CO ₂ MWh ⁻¹)	0.437	0.437	0.437
Lifetime of windfarm (years)	35	35	35
Annual emissions due to backup from...			
...coal-fired electricity generation (tCO ₂ yr ⁻¹)	4673	4595	4751
...grid-mix of electricity generation (tCO ₂ yr ⁻¹)	925	910	940
...fossil fuel - mix of electricity generation (tCO ₂ yr ⁻¹)	1952	1920	1985

RESULTS			
Total emissions due to backup from...			
...coal-fired electricity generation (tCO ₂)	163559	160833	166285
...grid-mix of electricity generation (tCO ₂)	32376	31836	32915
...fossil fuel - mix of electricity generation (tCO₂)	68332	67193	69471
Additional CO₂ payback time of windfarm due to backup			
...coal-fired electricity generation (months)	600	600	600
...grid-mix of electricity generation (months)	600	600	600
...fossil fuel - mix of electricity generation (months)	600	600	600

Click here to move to Payback Time [Click here](#)

Click here to return to Instructions [Click here](#)

Emissions due to backup power generation

Note: CO₂ loss due to back up is calculated from the extra capacity required for backup of the windfarm given in the input data.

Note: Wind generated electricity is inherently variable, providing unique challenges to the electricity generating industry for provision of a supply to meet consumer demand (Netz, 2004). Backup power is required to accompany wind generation to stabilise the supply to the consumer. This backup power will usually be obtained from a fossil fuel source. At a high level of wind power penetration in the overall generating mix, and with current grid management techniques, the capacity for fossil fuel backup may become strained because it is being used to balance the fluctuating consumer demand with a variable and highly unpredictable output from wind turbines (White, 2007). The Carbon Trust (Carbon Trust/DTI, 2004) concluded that increasing levels of intermittent generation do not present major technical issues at the percentages of renewables expected by 2010 and 2020, but the UK renewables target at the time of that report was only 20%. When national reliance on wind power is low (less than ~20%), the additional fossil fuel generated power requirement can be considered to be insignificant and may be obtained from within the spare generating capacity of other power sectors (Dale et al, 2004). However, as the national supply from wind power increases above 20%, without improvements in grid management techniques, emissions due to backup power generation may become more significant. The extra capacity needed for backup power generation is currently estimated to be 5% of the rated capacity of the wind plant if wind power contributes more than 20% to the national grid (Dale et al 2004). Moving towards the SG target of 50% electricity generation from renewable sources, more short-term capacity may be required in terms of pumped-storage hydro-generated power, or a better mix of offshore and onshore wind generating capacity. Grid management techniques are anticipated to reduce this extra capacity, with improved demand side management, smart meters, grid reinforcement and other developments. However, given current grid management techniques, it is suggested that 5% extra capacity should be assumed for backup power generation if wind power contributes more than 20% to the national grid. At lower contributions, the extra capacity required for backup should be assumed to be zero. These assumptions should be revisited as technology improves.

Assumption: Backup assumed to be by fossil-fuel-mix of electricity generation. Note that hydroelectricity may also be used for backup, so this assumption may make the value for backup generation too high. These assumptions should be revisited as technology develops.

Emissions due to loss of bog plants
Note: Annual C fixation by the site is calculated by multiplying area of the windfarm by the annual C accumulation due to bog plant fixation

	Expected	Minimum	Maximum
Area where carbon accumulation by bog plants is lost			
Total area of land lost due to windfarm construction (m ²)	186003	186003	186003
Total area affected by drainage due to windfarm construction (m ²)	488134	488134	488134
Total area where fixation by plants is lost (m ²)	674137	674137	674137
Total loss of carbon accumulation			
Carbon accumulation in undrained peats (tC ha ⁻¹ yr ⁻¹)	0.25	0.2	0.3
Lifetime of windfarm (years)	35	35	35
Time required for regeneration of bog plants after restoration (years)	10	5	15
Carbon accumulation up to time of restoration (tCO ₂ eq. ha ⁻¹)	41	29	55

Assumptions:
1. Bog plants are 100% lost from the area where peat is removed for construction.
2. Bog plants are 100% lost from the area where peat is drained.
3. The recovery of carbon accumulation by plants on restoration of land is as given in inputs.

RESULTS			
Total loss of carbon accumulation by bog plants			
Total area where fixation by plants is lost (ha)	67	67	67
Carbon accumulation over lifetime of windfarm (tCO ₂ eq. ha ⁻¹)	41	29	55
Total loss of carbon fixation by plants at the site (t CO₂)	2781	1978	3708
Additional CO₂ payback time of windfarm due to loss of CO₂ fixing potential			
...coal-fired electricity generation (months)	10	7	13
...grid-mix of electricity generation (months)	52	37	68
...fossil fuel - mix of electricity generation (months)	24	18	32

Click here to move to Payback Time [Click here](#)

Emissions due to loss of bog plants
Note: Annual C fixation by the site is calculated by multiplying area of the windfarm by the annual C accumulation due to bog plant fixation

Emissions due to loss of soil organic carbon

Note: Loss of C stored in peatland is estimated from % site lost by peat removal (sheet 5a), CO₂ loss from removed peat (sheet 5b), % site affected by drainage (sheet 5c), and the CO₂ loss from drained peat (sheet 5d).

		Expected result	Minimum result	Maximum result
Check	CO₂ loss due to windfarm construction			
	CO ₂ loss from removed peat (t CO ₂ equiv)	32530	-15325	115583
Check	CO ₂ loss from drained peat (t CO ₂ equiv)	2786	0	54967
RESULTS				
Total CO₂ loss from peat (removed + drained) (t CO₂ equiv)		35316	-15325	170549
Additional CO₂ payback time of windfarm due to loss of soil CO₂				
...coal-fired electricity generation (months)		130	-57	615
...grid-mix of electricity generation (months)		654	-289	3109
...fossil fuel - mix of electricity generation (months)		310	-137	1473

Click here to move to Payback Time

[Click here](#)

Emissions due to loss of soil organic carbon

Note: Loss of C stored in peatland is estimated from % site lost by peat removal (sheet 5a), CO₂ loss from removed peat (sheet 5b), % site affected by drainage (sheet 5c), and the CO₂ loss from drained peat (sheet 5d).

Volume of Peat Removed

Note: % site lost by peat removal is estimated from peat removed in borrow pits, turbine foundations, hard-standing and access tracks.
If peat is removed for any other reason, this must be added in as additional peat excavated in the core input sheet.

Peat removed from borrow pits	Exp	Total Min	Max
Number of borrow pits	3	3	3
Average length of pits (m)	157	157	157
Average width of pits (m)	43	43	43
Average depth of peat removed from pit (m)	1.14	1.14	1.14
Area of land lost in borrow pits (m ²)	20253	20253	20253
Volume of peat removed from borrow pits (m ³)	23088.4	23088.4	23088.4

Peat removed from turbine foundations	Exp	Total Min	Max	Construction Area 1			Construction Area 2			Construction Area 3			Construction Area 4			Construction Area 5		
	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max
Method used to calculate CO ₂ loss from foundations	Rectangular with vertical walls																	
Calculation method code	1																	
No. of turbines	17	17	17	17	17	17	0	0	0	0	0	0	0	0	0	0	0	0
Diameter at surface (m)				25	25	25	0	0	0	0	0	0	0	0	0	0	0	0
				25	25	25	0	0	0	0	0	0	0	0	0	0	0	0
Diameter at bottom (m)				25	25	25	0	0	0	0	0	0	0	0	0	0	0	0
				25	25	25	0	0	0	0	0	0	0	0	0	0	0	0
Depth of foundations (m)				1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
"Area" of land lost in hard-standing (m ²)	10625	10625	10625	10625	10625	10625	0	0	0	0	0	0	0	0	0	0	0	0
Volume of peat removed from foundation area (m ³)	12112.5	12112.5	12112.5	12112.5	12112.5	12112.5	0	0	0	0	0	0	0	0	0	0	0	0

Peat removed from hard-standing	Exp	Total Min	Max															
	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max	Exp	Min	Max
Method used to calculate CO ₂ loss from foundations	Rectangular with vertical walls																	
Calculation method code	1																	
No. of turbines	17	17	17	17	17	17	0	0	0	0	0	0	0	0	0	0	0	0
Diameter at surface (m)				95	95	95	0	0	0	0	0	0	0	0	0	0	0	0
				35	35	35	0	0	0	0	0	0	0	0	0	0	0	0
Diameter at bottom (m)				95	95	95	0	0	0	0	0	0	0	0	0	0	0	0
				35	35	35	0	0	0	0	0	0	0	0	0	0	0	0
Depth of hardstanding (m)				1	1.14	1.14	0	0	0	0	0	0	0	0	0	0	0	0
Area of land lost in hard-standing (m ²)	56525	56525	56525	56525	56525	56525	0	0	0	0	0	0	0	0	0	0	0	0
Volume of peat removed from hardstanding area (m ³)	64438.5	64438.5	64438.5	64438.5	64438.5	64438.5	0	0	0	0	0	0	0	0	0	0	0	0

Peat removed from access tracks	Exp	Total Min	Max
Floating roads			
Length of access track that is floating road (m)	1630	1630	1630

Floating road width (m)	5	5	5
Floating road depth (m)	0	0	0
Area of land lost in floating roads (m ²)	8150	8150	8150
Volume of peat removed for floating roads	0	0	0
<u>Excavated roads</u>			
Length of access track that is excavated road (m)	11670	11670	11670
Excavated road width (m)	5	5	5
Average depth of peat excavated for road (m)	1.14	1.14	1.14
Area of land lost in excavated roads (m ²)	58350	58350	58350
Volume of peat removed for excavated roads	66519	66519	66519
<u>Rock-filled roads</u>			
Length of access track that is rock filled road (m)	0	0	0
Rock filled road width (m)	0	0	0
Rock filled road depth (m)	0	0	0
Area of land lost in excavated roads (m ²)	0	0	0
Volume of peat removed for rock-filled roads	0	0	0
Total area of land lost in access tracks (m ²)	66500	66500	66500
Total volume of peat removed due to access tracks (m ³)	66519	66519	66519

<u>Additional peat excavated -</u> (not already accounted for above)			
Volume of additional peat excavated (m ³)	22500	0	22500
Area of additional peat excavated (m ²)	32100	32100	32100

RESULTS		Total	
	Exp	Min	Max
Total volume of peat removed (m ³) due to windfarm construction	188658	166158	188658
Total area of land lost due to windfarm construction (m ²)	186003	186003	186003

Click here to move to 5b. CO2 loss from removed peat

[Click here](#)

Click here to move to Payback Time

[Click here](#)

Volume of Peat Removed

Note: % site lost by peat removal is estimated from peat removed in borrow pits, turbine foundations, hard-standing and access tracks.
If peat is removed for any other reason, this must be added in to the volume of peat removed, area of land lost and % site lost at the bottom of this worksheet.

CO₂ loss from removed peats

Note: If peat is treated in such a way that it is permanently restored, so that less than 100% of the C is lost to the atmosphere, a lower percentage can be entered in cell C10

	Expected	Minimum	Maximum
CO₂ loss from removed peat			
C Content of dry peat (% by weight)	53.23	19.57	64.28
Dry soil bulk density (g cm ⁻³)	0.13	0.01	0.29
% C contained in removed peat that is lost as CO ₂	100	100	100
Total volume of peat removed (m ³) due to windfarm construction	188658	166158	188658
CO ₂ loss from removed peat (t CO ₂)	48609	859	130296

Assumption: If peat is not restored, 100% of the carbon contained in the removed peat is lost as CO₂

Check

CO₂ loss from undrained peat left in situ			
Total area of land lost due to windfarm construction (ha)	19	19	19
CO ₂ loss from undrained peat left in situ (t CO ₂ ha ⁻¹)	864	870	791
CO ₂ loss from undrained peat left in situ (t CO ₂)	16079	16183	14713

CO₂ loss attributable to peat removal only			
CO ₂ loss from removed peat (t CO ₂)	48609	859	130296
CO ₂ loss from undrained peat left in situ (t CO ₂)	16079	16183	14713
RESULTS			
CO₂ loss attributable to peat removal only (t CO₂)	32530	-15325	115583

Click here to move to 5. Loss of soil CO₂

Click here

Click here to move to Payback Time

Click here

CO₂ loss from removed peats

Note: If peat is treated in such a way that it is permanently restored, so that less than 100% of the C is lost to the atmosphere, a lower percentage can be entered in cell C10

Volume of peat drained

Note: Extent of site affected by drainage is calculated assuming an average extent of drainage around each drainage feature as given in the input data.

Extent of drainage around each metre of drainage ditch	Total		
	Exp	Min	Max
Average extent of drainage around drainage features at site (m)	15	15	15

Peat affected by drainage around borrow pits	Total		
	Exp	Min	Max
Number of borrow pits	3	3	3
Average length of pits (m)	157	157	157
Average width of pits (m)	43	43	43
Average depth of peat removed from pit (m)	1.1	1.1	1.1
Area affected by drainage per borrow pit (m ²)	6900	6900	6900
Total area affected by drainage around borrowpits (m ²)	20700	20700	20700
Total volume affected by drainage around borrowpits (m ³)	11799	11799	11799

[illegible]

Peat affected by drainage of access tracks	Exp	Total Min	Max
<u>Floating roads</u>			
Length of floating road that is drained (m)	0	0	0
Floating road width (m)	5.0	5.0	5.0
Average depth of drains associated with floating roads (m)	0.00	0.00	0.00
Area affected by drainage of floating roads (m ²)	0	0	0
Volume affected by drainage of floating roads (m ³)	0	0	0
<u>Excavated Road</u>			
Length of access track that is excavated road (m)	11670	11670	11670
Excavated road width (m)	5	5	5
Average depth of peat excavated for road (m)	1.1	1.1	1.1
Area affected by drainage of excavated roads (m ²)	350100	350100	350100
Volume affected by drainage of excavated roads (m ³)	199557	199557	199557
<u>Rock-filled roads</u>			
Length of rock filled road that is drained (m)	0	0	0
Rock filled road width (m)	0	0	0
Average depth of drains associated with rock filled roads (m)	0.0	0.0	0.0
Area affected by drainage of rock-filled roads (m ²)	0	0	0
Volume affected by drainage of rock-filled roads (m ²)	0	0	0
Total area affected by drainage of access track (m ²)	350100	350100	350100
Total volume affected by drainage of access track (m ³)	199557	199557	199557

Peat affected by drainage of cable trenches	Exp	Total Min	Max
Length of any cable trench on peat that does not follow access tracks and is lined with a permeable medium (eg. sand) (m)	0	0	0
Average depth of peat cut for cable trenches (m)	1.2	1.2	1.2
Total area affected by drainage of cable trenches (m ²)	0	0	0
Total volume affected by drainage of cable trenches (m ³)	0.00	0.00	0.00

Drainage around additional peat excavated	Exp	Total Min	Max
Volume of additional peat excavated (m ³)	22500.0	0.0	22500.0
Area of additional peat excavated (m ²)	32100.0	32100.0	32100.0
Average depth of excavated peat (m)	1	0	1
Radius of area excavated (m)	101	101	101
Radius of excavated and drained area (m)	116	116	116
Total area affected by drainage (m ²)	10234	10234	10234
Total volume affected by drainage (m ³)	7173.15	0.00	7173.15

Assumption: Area excavated is assumed to be a circle

RESULTS	Exp	Total Min	Max
Total area affected by drainage due to windfarm (m ²)	488134	488134	488134
Total volume affected by drainage due to windfarm (m ³)	279576	272403	279576

Click here to move to 5d. CO2 loss from drained peat

Click here

Click here to move to Payback Time

Click here

Volume of peat drained

Note: Extent of site affected by drainage is calculated assuming an average extent of drainage around each drainage feature as given in the input data.

CO₂ loss due to drainage

Note: Note, CO₂ losses are calculated using two approaches: IPCC default methodology and more site specific equations derived for this project. The IPCC methodology is included because it is the established approach, although it contains no site detail. The new equations have been derived directly from experimental data for acid bogs and fens (see Nayak et al, 2008 - Final report).

Click here to move to 5. Loss of soil CO₂ [Click here](#)

Click here to move to Payback Time [Click here](#)

	Expected	Minimum	Maximum
Drained Land			
Total area affected by drainage due to wind farm construction (ha)	49	49	49
Will the hydrology of the site be restored on decommissioning?	No	No	No
Will the habitat of the site be restored on decommissioning?	No	No	No

Calculations of C Loss from Drained Land if Site is NOT Restored after Decommissioning

Check	Total volume affected by drainage due to wind farm (m ³)	279576	272403	279576
	C Content of dry peat (% by weight)	53	20	64
	Dry soil bulk density (g cm ⁻³)	0.13	0.01	0.29
	Total GHG emissions from Drained Land (t CO₂ equiv.)	72035	1407	193088
	Total GHG Emissions from Undrained Land (t CO₂ equiv.)	69248	1407	138121

Assumption: Losses of GHG from drained and undrained land have the same proportion throughout the emission period.

Calculations of C loss from Drained Land if Site IS Restored after Decommissioning**1. Losses if Land is Drained**

	Flooded period (days year ⁻¹)	0	0	0
	Lifetime of windfarm (years)	35	35	35
	Time required for regeneration of bog plants after restoration (years)	10	5	15
	Methane Emissions from Drained Land			
Check	Rate of methane emission in drained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	-0.003	-0.020	0.017
	Conversion factor: CH ₄ -C to CO ₂ equivalents	30.67	30.67	30.67
	CH ₄ emissions from drained land (t CO ₂ equiv.)	-231	-1224	1249
	Carbon Dioxide Emissions from Drained Land			
Check	Rate of carbon dioxide emission in drained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	20.09	22.38	21.60
	CO ₂ emissions from drained land (t CO ₂)	44126	43694	52729
	Total GHG emissions from Drained Land (t CO₂ equiv.)	43895	42470	53978

Assumption: The drained soil is not flooded at any time of the year.

Note: Conversion = (23 x 16/12) = 30.67 CO₂ equiv. (CH₄-C)⁻¹

2. Losses if Land is Undrained

	Flooded period (days year ⁻¹)	178	178	178
	Lifetime of windfarm (years)	35	35	35
	Time required for regeneration of bog plants after restoration (years)	10	5	15
	Methane Emissions from Undrained Land			
Check	Rate of methane emission in undrained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	0.00	-0.02	0.16
	Conversion factor: CH ₄ -C to CO ₂ equivalents	30.67	30.67	30.67
	CH ₄ emissions from undrained land (t CO ₂ equiv.)	-210	-1224	6547
	Carbon Dioxide Emissions from Undrained Land			
Check	Rate of carbon dioxide emission in undrained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	18.48	22.38	4.24
	CO ₂ emissions from undrained land (t CO ₂)	42407	43694	32065
	Total GHG Emissions from Undrained Land (t CO₂ equiv.)	42197	42470	38612

Note: Conversion = (23 x 16/12) = 30.67 CO₂ equiv. (CH₄-C)⁻¹

3. CO₂ Losses due to Drainage

	Total GHG emissions from drained land (t CO ₂ equiv.)	72035	1407	193088
	Total GHG emissions from undrained land (t CO ₂ equiv.)	69248	1407	138121
	RESULTS			
	Total GHG emissions due to drainage (t CO₂ equiv.)	2786	0	54967

Click here to move to 5. Loss of soil CO₂ [Click here](#)

Click here to move to Payback Time [Click here](#)

CO₂ loss due to drainage

Note: Note, CO₂ losses are calculated using two approaches: IPCC default methodology and more site specific equations derived for this project. The IPCC methodology is included because it is the established approach, although it contains no site detail. The new equations have been derived directly from experimental data for acid bogs and fens (see Nayak et al, 2008 - Final report).

Emission rates from soils

Note: Note, CO₂ losses are calculated using two approaches: IPCC default methodology and more site specific equations derived for this project. The IPCC methodology is included because it is the established approach, although it contains no site detail. The new equations have been thoroughly tested against experimental data (see Nayak et al, 2008 - Final report).

Click here to move to 5d. [Click here](#)
Click here to move to Payback Time [Click here](#)

Selected Methodology = Site specific (required for planning applications)
Type of peatland = Acid Bog

Calculations following IPCC default methodology**Emission characteristics of acid bogs (IPCC, 1997)**

	Expected	Minimum	Maximum
Flooded period (days year ⁻¹)	178	178	178
Annual rate of methane emission (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.04015	0.04015	0.04015
Annual rate of carbon dioxide emission (t CO ₂ ha ⁻¹ yr ⁻¹)	35.2	35.2	35.2

Emission characteristics of fens (IPCC, 1997)

Flooded period (days year ⁻¹)	169	169	169
Annual rate of methane emission (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.219	0.219	0.219
Annual rate of carbon dioxide emission (t CO ₂ ha ⁻¹ yr ⁻¹)	35.2	35.2	35.2

Selected emission characteristics (IPCC, 1997)

Flooded period (days year ⁻¹)	178	178	178
Annual rate of methane emission (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.04015	0.04015	0.04015
Annual rate of carbon dioxide emission (t CO ₂ ha ⁻¹ yr ⁻¹)	35.2	35.2	35.2

Calculations following ECOSSE based methodology**Drained Land**

Total area affected by drainage due to wind farm construction (ha)	49	49	49
Total volume affected by drainage due to wind farm construction (m ³)	279576	272403	279576

Soil Characteristics that Determine Emission Rates

Average annual air temperature at the site (°C)	9.3	4.6	15
Average water table depth at site (m)	0.50	1.00	0.10
Average water table depth of drained land (m)	0.57	1.00	0.57

Annual Emission Rates following site specific methodology

Acid bogs			
Rate of carbon dioxide emission in drained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	20.09	22.38	21.60
Rate of carbon dioxide emission in undrained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	18.48	22.38	4.24
Rate of methane emission in drained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	-0.003	-0.020	0.017
Rate of methane emission in undrained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	0.00	-0.02	0.16
Fens			
Rate of carbon dioxide emission in drained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	58.96	61.89	62.16
Rate of carbon dioxide emission in undrained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	55.18	61.89	10.58
Rate of methane emission in drained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	-0.002	-0.007	0.002
Rate of methane emission in undrained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	0.00	-0.01	0.21

Selected emission characteristics following site specific methodology

Rate of carbon dioxide emission in drained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	20.09	22.38	21.60
Rate of carbon dioxide emission in undrained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	18.48	22.38	4.24
Rate of methane emission in drained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	-0.003	-0.020	0.017
Rate of methane emission in undrained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	0.00	-0.02	0.16

RESULTS**Selected Emission Rates**

Rate of carbon dioxide emission in drained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	20.09	22.38	21.60
Rate of carbon dioxide emission in undrained soil (t CO ₂ ha ⁻¹ yr ⁻¹)	18.48	22.38	4.24
Rate of methane emission in drained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	-0.003	-0.020	0.017
Rate of methane emission in undrained soil ((t CH ₄ -C) ha ⁻¹ yr ⁻¹)	0.00	-0.02	0.16

Click here to move to 5d. CO₂ loss from drained peat [Click here](#)
Click here to move to Payback Time [Click here](#)

Emission rates from soils


Note: Note, CO₂ losses are calculated using two approaches: IPCC default methodology and more site specific equations derived for this project. The IPCC methodology is included because it is the established approach, although it contains no site detail. The new equations have been thoroughly tested against experimental data (see Nayak et al, 2008 - Final report).

Assumption: The period of flooding is taken to be 178 days yr⁻¹ for acid bogs and 169 days yr⁻¹ based on the monthly mean temperature and the lengths of inundation (IPCC, 1997, Revised 1996 IPCC guidelines for national greenhouse gas inventories, Vol 3, table 5-13)


Assumption: The CH₄ emission rate provided for acid bogs is 11 (1-38) mg CH₄-C m⁻² day⁻¹ x 365 days; and for fens is 60 (21-162) mg CH₄-C m⁻² day⁻¹ x 365 days (Aelmann & Crutzen, 1989, J. Atmos. Chem. 8, 307-358)

Assumption: CO₂ emissions on drainage of organic soils for upland crops (e.g., grain, vegetables) are 3.667x9.6 (7.9-11.3) t CO₂ ha⁻¹ yr⁻¹ in temperate climates (Amentano and Menges, 1986, J. Ecol. 74, 755-774).


Note: Carbon dioxide emissions from acid bogs. Equation derived by regression analysis against 60 measurements (Nayak et al, 2009). The equation derived was $R_{CO_2} = (3.667/1000) \times ((6700 \times \exp(-0.26 \times \exp(-0.0515 \times ((W \times 100) - 50)))) + ((72.54 \times T) - 800))$ where R_{CO_2} is the annual rate of CO₂ emissions (t CO₂ (ha)⁻¹ yr⁻¹), T = average annual air temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.53$, $P > 0.05$). Evaluation against 29 independent experiments shows a significant association ($r^2 = 0.21$; $P > 0.05$) and an average error of 3023 t CO₂ ha⁻¹ yr⁻¹ which is non-significant ($P < 0.05$) (Smith et al, 1997).




measurements (Nayak et al, 2009). The equation derived was $R_{CH_4} = (1/1000) \times (500 \times \exp(-0.1234 \times (W \times 100))) + ((3.529 \times T) - 36.67))$ where R_{CH_4} is the annual rate of CH₄ emissions (t CH₄-C (ha)⁻¹ yr⁻¹), T = average annual air temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.54$, $P > 0.05$). Evaluation against 7 independent experiments shows a significant association ($r^2 = 0.81$; $P > 0.05$) and an average error of 27 t CH₄-C ha⁻¹ yr⁻¹ (significance not defined due to lack of replicates - Smith et al, 1997).



Note: Carbon dioxide emissions from fens. Equation derived by regression analysis against 44 measurements (Nayak et al, 2009). The equation derived was $R_{CO_2} = (3.667/1000) \times (16244 \times \exp(-0.175 \times \exp(-0.073 \times ((W \times 100) - 50)))) + (153.23 \times T)$ where R_{CO_2} is the annual rate of CO₂ emissions (t CO₂ (ha)⁻¹ yr⁻¹), T = average annual air temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.42$, $P > 0.05$). Evaluation against 18 independent experiments shows a significant association ($r^2 = 0.56$; $P > 0.05$) and an average error of 2108 t CO₂ ha⁻¹ yr⁻¹ (significance not defined due to lack of replicates - Smith et al, 1997).



Note: Methane emissions from fens. Equation derived by regression analysis against experimental data from 36 measurements (Nayak et al, 2009). The equation derived was $R_{CH_4} = (1/1000) \times (-10 + 563.62 \times \exp(-0.097 \times (W \times 100))) + (0.862 \times T)$ where R_{CH_4} is the annual rate of CH₄ emissions (t CH₄-C (ha)⁻¹ yr⁻¹), T = average annual air temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.41$, $P > 0.05$). Evaluation against 7 independent experiments shows a significant association ($r^2 = 0.69$; $P > 0.05$) and an average error of 154 t CH₄-C ha⁻¹ yr⁻¹ (significance not defined due to lack of replicate - Smith et al, 1997).



Emissions due to loss of DOC and POC

Note: Note, CO₂ losses from DOC and POC are calculated using a simple approach derived from generic estimates of the percentage of the total CO₂ loss that is due to DOC or POC leaching

No POC losses for bare soil included yet. If extensive areas of bare soil is present at site need modified calculation (Birnie et al, 1991)

	Expected	Minimum	Maximum
Total C loss			
Gross CO ₂ loss from restored drained land (t CO ₂)	0	0	0
Gross CH ₄ loss from restored drained land (t CO ₂ equiv.)	0	0	0
Gross CO ₂ loss from improved land (t CO ₂)			
Degraded Bog	0	0	0
Felled Forestry	0	0	0
Borrow Pits	0	0	0
Foundations & Hardstanding	0	0	0
Gross CH ₄ loss from improved land (t CO ₂ equiv.)			
Degraded Bog	0	0	0
Felled Forestry	0	0	0
Borrow Pits	0	0	0
Foundations & Hardstanding	0	0	0
Conversion factor: CH ₄ -C to CO ₂ equivalents	30.6667	30.6667	30.6667
% total soil C losses, lost as DOC	26	7	40
% DOC loss emitted as CO ₂ over the long term	100	100	100
% total soil C losses, lost as POC	8	4	10
% POC loss emitted as CO ₂ over the long term	100	100	100
Total gaseous loss of C (t C)	0	0	0
Total C loss as DOC (t C)	0	0	0
Total C loss as POC (t C)	0	0	0

Note: Only restored drained land included because if land is not

Assumption: DOC loss ranges between 7 - 40% of the total gaseous loss if calculated from the reported (minimum and maximum) values in Worrall 2009 and is **26%** of the total gaseous loss if calculated from the mean of reported maximum and minimum value in Worrall 2009. These DOC values are flux based on soil water concentration (i.e. 12.5 - 85.9 MgC/KM²/yr) and not on flux at catchment outlet (i.e. 10.3 - 21.8 MgC/KM²/yr)

Worrall, F. et al., 2009. The multi-annual carbon budget of a peat-covered catchment. *Science of The*

Assumption: In the long term, 100% of leached DOC is assumed to be lost as CO₂

Assumption: POC loss ranges between 4-10% of the total gaseous loss if calculated from the reported values and is **8%** of the total gaseous loss if calculated from the mean of reported maximum and minimum value in Worrall 2009. POC range is (7 - 22.4 MgC/KM²/yr) (Worrall et al, 2009).

Assumption: In the long term, 100% of leached POC is assumed to be lost as CO₂

RESULTS			
Total CO₂ loss due to DOC leaching (t CO₂)	0	0	0
Total CO₂ loss due to POC leaching (t CO₂)	0	0	0
Total CO₂ loss due to DOC & POC leaching (t CO₂)	0	0	0
Additional CO₂ payback time of windfarm due to DOC & POC			
...coal-fired electricity generation (months)	0	0	0
...grid-mix of electricity generation (months)	0	0	0
...fossil fuel - mix of electricity generation (months)	0	0	0

Click here to move to Payback Time

[Click here](#)

Emissions due to loss of DOC and POC

Note: Note, CO₂ losses from DOC and POC are calculated using a simple approach derived from generic estimates of the percentage of the total CO₂ loss that is due to DOC or POC leaching

No POC losses for bare soil included yet. If extensive areas of bare soil is present at site need modified calculation (Birnie et al, 1991)

Emissions due to forest felling - calculation using simple management data

Note: Emissions due to forestry felling are calculated from the reduced carbon sequestered per crop rotation. If the forestry was due to be removed before the planned development, this C loss is not attributable to the wind farm and so the area of forestry to be felled should be entered as zero.

	Expected	Minimum	Maximum
Emissions due to forestry felling			
Area of forestry plantation to be felled (ha)	29.3	29.3	29.3
Carbon sequestered (tC ha ⁻¹ yr ⁻¹)	3.45	3.5	3.55
Lifetime of windfarm (years)	35	35	35
Carbon sequestered over the lifetime of the windfarm (t C ha ⁻¹)	120.75	122.5	124.25
RESULTS			
Total carbon loss due to felling of forestry (t CO₂)	12974	13162	13350
Additional CO₂ payback time of windfarm due to management of forestry			
...coal-fired electricity generation (months)	48	49	48
...grid-mix of electricity generation (months)	240	248	243
...fossil fuel - mix of electricity generation (months)	114	118	115

Click here to move to Payback Time

[Click here](#)

Emissions due to forest felling - calculation using simple management data

Note: Emissions due to forestry felling are calculated from the reduced carbon sequestered per crop rotation. If the forestry was due to be removed before the planned development, this C loss is not attributable to the wind farm and so the area of forestry to be felled should be entered as zero.

Gains due to site improvement



Note: Note, CO₂ losses are calculated using two approaches: IPCC default methodology and more site specific equations derived for this project. The IPCC methodology is included because it is the established approach, although it contains no site detail. The new equations have been thoroughly tested against experimental data (see Nayak et al, 2008 - Final report).

Selected Methodology = Site specific (required for planning applications)
Type of peatland = Acid Bog


Reduction in GHG emissions due to improvement of site	Expected result				Minimum result				Maximum result			
Improvement of...	Degraded Bog	Felled Forestry	Borrow Pits	Foundations & Hardstanding	Degraded Bog	Felled Forestry	Borrow Pits	Foundations & Hardstanding	Degraded Bog	Felled Forestry	Borrow Pits	Foundations & Hardstanding
1. Description of site												
Period of time when effectiveness of the improvement can be guaranteed (years)	25	25	25	35	25	25	25	35	25	25	25	35
Area to be improved (ha)	0	0	0	0	0	0	0	0	0	0	0	0
Average air temperature at site (°C)	9.3	9.3	9.3	9.3	4.6	4.6	4.6	4.6	15	15	15	15
Depth of peat drained (m)	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14	1.14
Depth of peat above water table before improvement (m)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Depth of peat above water table after improvement (m)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2. Losses with improvement												
Flooded period (days year ⁻¹)	178	178	178	178	178	178	178	178	178	178	178	178
Time required for hydrology and habitat to return to its previous state on restoration (years)	0	0	0	15	0	0	0	10	0	0	0	5
Improved period (years)	25	25	25	20	25	25	25	25	25	25	25	30
Methane emissions from improved land												
Site specific methane emission from improved soil on acid bogs (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.496	0.496	0.496	0.496	0.480	0.480	0.480	0.480	0.516	0.516	0.516	0.516
Site specific methane emission from improved soil on fens (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.560	0.560	0.560	0.560	0.557	0.557	0.557	0.557	0.564	0.564	0.564	0.564
IPCC annual rate of methane emission on acid bogs (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040	0.040
IPCC annual rate of methane emission on fens (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219	0.219
Selected annual rate of methane emission (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.496	0.496	0.496	0.496	0.480	0.480	0.480	0.480	0.516	0.516	0.516	0.516
CH ₄ emissions from improved land (t CO ₂ equiv.)	0	0	0	0	0	0	0	0	0	0	0	0
Carbon dioxide emissions from improved land												
Site specific CO ₂ emission from improved soil on acid bogs (t CO ₂ ha ⁻¹ yr ⁻¹)	0.34	0.34	0.34	0.34	-0.91	-0.91	-0.91	-0.91	1.86	1.86	1.86	1.86
Site specific CO ₂ emissions from improved soil on fens (t CO ₂ ha ⁻¹ yr ⁻¹)	5.28	5.28	5.28	5.28	2.64	2.64	2.64	2.64	8.49	8.49	8.49	8.49
IPCC annual rate of carbon dioxide emission on acid bogs (t CO ₂ ha ⁻¹ yr ⁻¹)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
IPCC annual rate of carbon dioxide emission on fens (t CO ₂ ha ⁻¹ yr ⁻¹)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Selected annual rate of carbon dioxide emission (t CO ₂ ha ⁻¹ yr ⁻¹)	0.34	0.34	0.34	0.34	-0.91	-0.91	-0.91	-0.91	1.86	1.86	1.86	1.86
CO ₂ emissions from improved land (t CO ₂)	0	0	0	0	0	0	0	0	0	0	0	0
Total GHG emissions from improved land (t CO ₂ equiv.)	0	0	0	0	0	0	0	0	0	0	0	0
3. Losses without improvement												
Flooded period (days year ⁻¹)	0	0	0	0	0	0	0	0	0	0	0	0
Time required for hydrology and habitat to return to its previous state on restoration (years)	0	0	0	15	0	0	0	10	0	0	0	5
Improved period (years)	25	25	25	20	25	25	25	25	25	25	25	30
Methane emissions from unimproved land												
Site specific methane emission from unimproved soil on acid bogs (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.496	0.496	0.496	0.496	0.480	0.480	0.480	0.480	0.516	0.516	0.516	0.516
Site specific methane emission from unimproved soil on fens (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.560	0.560	0.560	0.560	0.557	0.557	0.557	0.557	0.564	0.564	0.564	0.564
IPCC annual rate of methane emission on acid bogs (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
IPCC annual rate of methane emission on fens (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Selected annual rate of methane emission (t CH ₄ -C ha ⁻¹ yr ⁻¹)	0.496	0.496	0.496	0.496	0.480	0.480	0.480	0.480	0.516	0.516	0.516	0.516
CH ₄ emissions from unimproved land (t CO ₂ equiv.)	0	0	0	0	0	0	0	0	0	0	0	0
Carbon dioxide emissions from unimproved land												
Site specific CO ₂ emission from unimproved soil on acid bogs (t CO ₂ ha ⁻¹ yr ⁻¹)	0.34	0.34	0.34	0.34	-0.91	-0.91	-0.91	-0.91	1.86	1.86	1.86	1.86
Site specific CO ₂ emissions from unimproved soil on fens (t CO ₂ ha ⁻¹ yr ⁻¹)	5.28	5.28	5.28	5.28	2.64	2.64	2.64	2.64	8.49	8.49	8.49	8.49
IPCC annual rate of carbon dioxide emission on acid bogs (t CO ₂ ha ⁻¹ yr ⁻¹)	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20
IPCC annual rate of carbon dioxide emission on fens (t CO ₂ ha ⁻¹ yr ⁻¹)	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20	35.20
Selected annual rate of carbon dioxide emission (t CO ₂ ha ⁻¹ yr ⁻¹)	0.34	0.34	0.34	0.34	-0.91	-0.91	-0.91	-0.91	1.86	1.86	1.86	1.86
CO ₂ emissions from unimproved land (t CO ₂)	0	0	0	0	0	0	0	0	0	0	0	0
Total GHG emissions from unimproved land (t CO ₂ equiv.)	0	0	0	0	0	0	0	0	0	0	0	0
RESULTS												
4. Reduction in GHG emissions due to improvement of site												
Total GHG emissions from improved land (t CO ₂ equiv.)	0	0	0	0	0	0	0	0	0	0	0	0
Total GHG emissions from unimproved land (t CO ₂ equiv.)	0	0	0	0	0	0	0	0	0	0	0	0
Reduction in GHG emissions due to improvement (t CO ₂ equiv.)	0	0	0	0	0	0	0	0	0	0	0	0
Additional CO ₂ payback time of windfarm due to site improvement												
...coal-fired electricity generation (months)	0	0	0	0	0	0	0	0	0	0	0	0
...grid-mix of electricity generation (months)	0	0	0	0	0	0	0	0	0	0	0	0
...fossil fuel - mix of electricity generation (months)	0	0	0	0	0	0	0	0	0	0	0	0

Note: Methane emissions from acid bogs. Equation derived by regression analysis against 57 measurements (Nayak et al, 2009). The equation derived was $R_{CH_4} = (1/1000) \times (500 \times \exp(-0.1234 \times (W \times 100))) + ((3.529 \times T) - 36.67))$ where R_{CH_4} is the annual rate of CH₄ emissions (t CH₄-C (ha)⁻¹ yr⁻¹), T = average annual air temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.54$, $P > 0.05$). Evaluation against 7 independent experiments shows a significant association ($r^2 = 0.81$, $P > 0.05$) and an average error of 27 t CH₄-C ha⁻¹ yr⁻¹ (significance not defined due to lack of replicates - Smith et al, 1997).


Note: Methane emissions from fens. Equation derived by regression analysis against experimental data from 35 measurements (Nayak et al, 2009). The equation derived was $R_{CH_4} = (1/1000) \times (-10 + 563.62 \times \exp(-0.097 \times (W \times 100)) + (0.662 \times T))$ where R_{CH_4} is the annual rate of CH₄ emissions (t CH₄-C (ha)⁻¹ yr⁻¹), T = average annual air temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.41$, $P > 0.05$). Evaluation against 7 independent experiments shows a significant association ($r^2 = 0.69$, $P > 0.05$) and an average error of 164 t CH₄-C ha⁻¹ yr⁻¹ (significance not defined due to lack of replicate-Smith et al, 1997).



$R_{CO_2} = (3.667/1000) \times ((6700 \times \exp(-0.26 \times \exp(-0.0515 \times ((W \times 100) - 50)))) + ((72.54 \times T) - 800))$ where R_{CO_2} is the annual rate of CO₂ emissions (t CO₂ (ha)⁻¹ yr⁻¹), T = average annual peat temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.53$, $P > 0.05$). Evaluation against 29 independent experiments shows a significant association ($r^2 = 0.21$, $P > 0.05$) and an average error of 3023 t CO₂ ha⁻¹ yr⁻¹ which is non-significant ($P > 0.05$) (Smith et al, 1997).



Note: Carbon dioxide emissions from fens. Equation derived by regression analysis against 44 measurements (Nayak et al, 2009). The equation derived was $R_{CO_2} = (3.667/1000) \times (16244 \times \exp(-0.175 \times \exp(-0.073 \times ((W \times 100) - 50)))) + (153.23 \times T))$ where R_{CO_2} is the annual rate of CO₂ emissions (t CO₂ (ha)⁻¹ yr⁻¹), T = average annual peat temperature (°C) and W is the water table depth (m). The equation shows a significant correlation with measurements ($r^2 = 0.42$, $P > 0.05$). Evaluation against 18 independent experiments shows a significant association ($r^2 = 0.56$, $P > 0.05$) and an average error of 2108 t CO₂ ha⁻¹ yr⁻¹ (significance not defined due to lack of replicates-Smith et al, 1997).



Note: Methane emissions from acid bogs. As above

Note: Methane emissions from fens. As above

Note: CO₂ emissions from acid bogs. As above

Note: CO₂ emissions from fens. As above

Click here to move to Payback Time [Click here](#)

Gains due to site improvement

Note: Note, CO₂ losses are calculated using two approaches: IPCC default methodology and more site specific equations derived for this project. The IPCC methodology is included because it is the established approach, although it contains no site detail. The new equations have been thoroughly tested against experimental data (see Nayak et al, 2008 - Final report).

TII CARBON TOOL

Ch 15: Material Assets, Table 15-7					Distance Assumptions	TII Embodied Carbon Tool Inputs (https://web.tii.ie/index.html)						TII Transport Inputs (https://web.tii.ie/index.html)		
Material	Total no. Truck Loads	Truck Types	TII Embodied Carbon	TII Traffic	Distance (km)	Category	Sub-Category	Material	Quantity	Unit	Embodied tCO ₂ e	Transport Type	Distance (km)	Transport TCO ₂ e
Concrete	963	Concrete mixers	✓	✓	17.4	Series 1700 Structural Concrete	Concrete - Construction General	Construction - Standard Mix (Average)	18,489,600	kg	1911.09	HGV- Rigid - Average	16756.2	20.5118
Delivery of plant	35	Large artic		✓	96.85							HGV- All - Average	3389.75	3.6762
Fencing & gates	3	Large artic		✓	17.4							HGV- All - Average	52.2	0.0566
Compound setup	36	Large artic		✓	17.4							HGV- All - Average	626.4	0.6793
Steel	24	Large artic	✓	✓	96.85	Other	Structural Steelwork	Anchorage and holding down bolt assemblies	480	tonnes	860.69	HGV- All - Average	2324.4	2.5208
Rock and stone	14450	Truck	✓	✓	17.4	Series 2400 - Brickwork, Blockwork and Stonework	Brickwork and Blockwork	General Stone	289,000.00	tonnes	22831	HGV- Rigid - Average	251430	258.3594
Ducting and cabling (internal)	264	Large artic		✓	17.4							HGV- All - Average	4593.6	4.9818
Tree felling	17	Large artic		✓	96.85							HGV- All - Average	1646.45	1.7856
Crane (to lift steel)	1	Large artic		✓	96.85							HGV- All - Average	96.85	0.105
Substation	100	Large artic		✓	17.4							HGV- All - Average	1740	1.887
BESS	100	Large artic	✓	✓	17.4							HGV- All - Average	1740	1.887
Cranes for turbines	12	Large artic		✓	17.4							HGV- All - Average	208.8	0.2264
Refuelling for plant	186	Large artic		✓	17.4							HGV- All - Average	3236.4	3.5099
Site maintenance	135	Large artic		✓	17.4							HGV- All - Average	2349	2.5475
Miscellaneous	90	Large artic		✓	17.4							HGV- All - Average	1566	1.6983
Total											25,602.78			304.43

List of Assumptions

Embodied Carbon Assumptions		
Item	Description	Assumption
Volume of Concrete Mixer	Calculation completed based on the average concrete mixer holding 8m3 of concrete	8
Volume of Average Artic Truck	Calculation completed based on the average artic truck having a carrying capacity of 20 tonnes	20
Ducting and cabling (internal)	Embodied carbon of electrical equipment not included as an option in TII Carbon Tool	-
Grid connection cable laying	Embodied carbon of electrical equipment not included as an option in TII Carbon Tool	-
Tree Felling	Embodied carbon of tree felling is included in the Macauley Institute Carbon Calculator for Wind Farms on Peatland	-
Turbine Lifecycle	Embodied carbon of the overall turbine lifecycle is included in the Macauley Institute Carbon Calculator for Wind Farms on Peatland	-
Concrete	Concrete will be required for various elements of the Proposed Project Approximately 7,704m3 of material is assumed to be required based on 963 concrete mixers being required, assumed 8m3 carrying capacity, and assumed density of 2400kg/m3 The TII Carbon tools requires units in kg for this material type, therefore the following calculation was completed: -7,704m3 * 2400kg/m3 = 20,412,000kg	18,489,600.00
Steel	Steel will be required for various elements of the Proposed Project. Approximately 480 tonnes of steel is assumed to be required based on 24 trucks being required and an assumed carrying capacity of 20 tonnes	480.00
Rock and Stone	Rock and Stone will be required for various elements of the Proposed Project. Approximately 289,000 tonnes of rock/stone is assumed to be required based on 14,450 trucks being required and an assumed carrying capacity of 20 tonnes	289,000.00

Please note that the assumptions for the embodied carbon and traffic assumptions are made based on best estimates of material sources and have considered the removal of the existing 23 no. turbines. In reality the location of material sources will be dependent on what is available at the time of construction. The implications of distance variations on the estimation for carbon calculations is of a very low magnitude within the context of the overall carbon calculations and considered appropriate for the purposes of assessment in the EIAR.

Traffic Assumptions		
Item	Description	Assumption
Import (P) Distance	For modelling purposes, the average distance from Shannon Foynes Port and the Port of Galway for transport of all other materials for the site	96.85
Quarry (Q) Distance	As outlined in Section 4.5.3 of Chapter 4 of the EIAR 3 no. quarries have been identified within 20km for the purposes of delivering material to the Proposed Project site. An average distance of the construction haul routes has been used for modelling purposes.	17.4
Truck Emissions Factor	Calculated from an HGV - Rigid - Average emission factor as provided in the TII Carbon Tool. Source: 2024 DEZNZ emission factors - 'Delivery vehicles' tab, All Rigid HGVs and used Average laden weight. 2024 DEZNZ emission factors - 'WTT - delivery vehicles & freight' tab, all Rigid HGVs and used Average laden weight.	1.02756
Large Artic Emission Factor	Calculated from an HGV - All - Average emission factor as provided in the TII Carbon Tool. Source: 2024 DEZNZ emission factors - 'Delivery vehicles' tab, All HGVs and used Average laden weight. 2024 DEZNZ emission factors - 'WTT - delivery vehicles & freight' tab, all HGVs and used Average laden weight.	1.0845

Truck Emissions Factor	Calculated from an HGV - Articulated - Average emission factor as provided in the TII Carbon Tool	1.30212
------------------------	---	---------

Please note that the assumptions for the embodied carbon and traffic assumptions are made based on best estimates of material sources and have considered the removal of the existing 23 no. turbines. In reality the location of material sources will be dependent on what is available at the time of construction. The implications of distance variations on the estimation for carbon calculations is of a very low magnitude within the context of the overall carbon calculations and considered appropriate for the purposes of assessment in the EIAR.

Carbon Fixing Vegetation Assumptions		
Item	Description	Assumption
Calculation of Carbon Storage Potential in Enhancement Measures	The carbon storage capacity of restored habitats will vary over time as vegetation matures and land use and the baseline environment change. Therefore, while it can be assumed that native woodland replanting and enhancement of wet heath habitat on the Site will result in an increased capacity of carbon storage due to the carbon storage potential that exists within these habitats , to ensure the assessment below is identified under a theoretical precautionary scenario the quantification of these potential carbon savings (via an increase in carbon storage potential) associated with these measures has not been included in the carbon savings assessment. Please note, the carbon sequestration potential associated with the replanting of native woodland will be able to be determined in the future via the Teagasc Forest Carbon Tool ; currently this is not able to be completed due to Teagasc carrying out further analysis and validation on current data and the sequestration potential not being available in the public domain.	Not considered in assessment or quantified
Calculation of Carbon Loss from removal of carbon fixing vegetation	Carbon losses associated with the removal of other carbon-fixing vegetation will result in additional carbon losses. These have not been quantified as the lack of consistent national-level field data and methodologies limits the ability to make accurate projections on carbon sequestration potential for other carbon fixing habitat types, i.e., hedgerow, grassland, etc., and therefore carbon loss associated with removal. While it can be assumed that loss of carbon fixing vegetation will occur as part of the Proposed Project due to the removal of these habitat types, the exact carbon loss is not quantifiable.	Not considered in assessment or quantified