

**Residential Development at Cherry Orchard Point Phase 3, Dublin 10.
Document 2 of 2 - Appendices**

Applicant: Dublin City Council

Date: 9th September 2026

Prepared by

Ann Canning B. Arch Sc., MSc. Energy Retrofit Technologies, MRIA

Appendix A -BS EN17037:2021+A1 Minimum room specific Daylight Provision in accordance with UK National Annex Table NA.1.



Figure 28: Block A - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Block A - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
A1-01.1	LKD	25.6	211	200	1211	100.0%	Y	Y
A1-01.2	Bed	9.5	80	100	687	100.0%	Y	Y
A1-01.3	Bed	11.4	90	100	633	100.0%	Y	Y
A1-02.1	LKD	20.9	190	200	585	100.0%	Y	Y
A1-02.2	Bed	9.8	80	100	612	100.0%	Y	Y
A1-03.1	LKD	20.9	190	200	573	100.0%	Y	Y
A1-03.2	Bed	9.8	80	100	601	100.0%	Y	Y
A2-01.1	LKD	25.6	211	200	1441	100.0%	Y	Y
A2-01.2	Bed	9.5	80	100	649	100.0%	Y	Y
A2-01.3	Bed	11.4	90	100	648	100.0%	Y	Y
A2-02.1	LKD	20.9	190	200	603	100.0%	Y	Y
A2-02.2	Bed	9.8	80	100	626	100.0%	Y	Y
A2-03.1	LKD	20.9	190	200	595	100.0%	Y	Y
A2-03.2	Bed	9.8	80	100	621	100.0%	Y	Y
A2-04.1	LKD	19.8	172	200	591	100.0%	Y	Y
A2-04.2	Bed	9.7	80	100	664	100.0%	Y	Y
A2-05.1	LKD	22.1	204	200	552	99.5%	Y	Y
A2-05.2	Bed	12.5	104	100	524	100.0%	Y	Y
A3-01.1	LKD	25.6	211	200	1265	100.0%	Y	Y
A3-01.2	Bed	9.5	80	100	723	100.0%	Y	Y
A3-01.3	Bed	11.4	90	100	680	100.0%	Y	Y
A3-02.1	LKD	20.9	190	200	631	100.0%	Y	Y
A3-02.2	Bed	9.8	80	100	650	100.0%	Y	Y
A3-03.1	LKD	20.9	190	200	627	100.0%	Y	Y
A3-03.2	Bed	9.8	80	100	658	100.0%	Y	Y
A3-04.1	LKD	19.8	172	200	630	100.0%	Y	Y
A3-04.2	Bed	9.7	80	100	694	100.0%	Y	Y
A3-05.1	LKD	22.1	204	200	588	99.5%	Y	Y
A3-05.2	Bed	12.5	104	100	556	100.0%	Y	Y
A3-06.1	LKD	22.1	204	200	849	100.0%	Y	Y
A3-06.2	Bed	12.5	104	100	1113	100.0%	Y	Y
A3-07.1	LKD	19.8	172	200	1018	100.0%	Y	Y
A3-07.2	Bed	9.7	80	100	1396	100.0%	Y	Y
A3-08.1	LKD	20.9	190	200	1026	100.0%	Y	Y
A3-08.2	Bed	9.8	80	100	1251	100.0%	Y	Y
A3-09.1	Studio	29.4	248	200	1404	100.0%	Y	Y
A3-10.1	LKD	20.9	190	200	1117	100.0%	Y	Y
A3-10.2	Bed	9.8	80	100	1363	100.0%	Y	Y
A3-11.1	LKD	25.6	211	200	1908	100.0%	Y	Y
A3-11.2	Bed	9.5	80	100	1442	100.0%	Y	Y
A3-11.3	Bed	11.4	90	100	1343	100.0%	Y	Y
A4-01.1	LKD	25.6	211	200	1496	100.0%	Y	Y
A4-01.2	Bed	9.5	80	100	678	100.0%	Y	Y
A4-01.3	Bed	11.4	90	100	680	100.0%	Y	Y
A4-02.1	LKD	20.9	190	200	644	100.0%	Y	Y
A4-02.2	Bed	9.8	80	100	658	100.0%	Y	Y
A4-03.1	LKD	20.9	190	200	635	100.0%	Y	Y
A4-03.2	Bed	9.8	80	100	662	100.0%	Y	Y
A4-04.1	LKD	19.8	172	200	847	100.0%	Y	Y
A4-04.2	Bed	9.7	80	100	743	100.0%	Y	Y
A4-05.1	LKD	22.1	204	200	793	100.0%	Y	Y

Block A - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
A4-05.2	Bed	12.5	104	100	596	100.0%	Y	Y
A4-06.1	LKD	22.1	204	200	1416	100.0%	Y	Y
A4-06.2	Bed	12.5	104	100	1190	100.0%	Y	Y
A4-07.1	LKD	19.8	172	200	1619	100.0%	Y	Y
A4-07.2	Bed	9.7	80	100	1511	100.0%	Y	Y
A4-08.1	LKD	20.9	190	200	1065	100.0%	Y	Y
A4-08.2	Bed	9.8	80	100	1276	100.0%	Y	Y
A4-09.1	Studio	29.4	248	200	1430	100.0%	Y	Y
A4-10.1	LKD	20.9	190	200	1144	100.0%	Y	Y
A4-10.2	Bed	9.8	80	100	1393	100.0%	Y	Y
A4-11.1	LKD	25.6	211	200	2123	100.0%	Y	Y
A4-11.2	Bed	9.5	80	100	1571	100.0%	Y	Y
A4-11.3	Bed	11.4	90	100	1362	100.0%	Y	Y
A5-01.1	LKD	25.6	211	200	1299	100.0%	Y	Y
A5-01.2	Bed	9.5	80	100	739	100.0%	Y	Y
A5-01.3	Bed	11.4	90	100	696	100.0%	Y	Y
A5-02.1	LKD	20.9	190	200	658	100.0%	Y	Y
A5-02.2	Bed	9.8	80	100	669	100.0%	Y	Y
A5-03.1	LKD	20.9	190	200	657	100.0%	Y	Y
A5-03.2	Bed	9.8	80	100	681	100.0%	Y	Y
A5-04.1	LKD	20.9	190	200	1100	100.0%	Y	Y
A5-04.2	Bed	9.8	80	100	1304	100.0%	Y	Y
A5-05.1	Studio	29.4	248	200	1462	100.0%	Y	Y
A5-06.1	LKD	20.9	190	200	1164	100.0%	Y	Y
A5-06.2	Bed	9.8	80	100	1408	100.0%	Y	Y
A5-07.1	LKD	25.6	211	200	1957	100.0%	Y	Y
A5-07.2	Bed	9.5	80	100	1463	100.0%	Y	Y
A5-07.3	Bed	11.4	90	100	1358	100.0%	Y	Y
A6-01.1	LKD	25.6	211	200	1720	100.0%	Y	Y
A6-01.2	Bed	9.5	80	100	750	100.0%	Y	Y
A6-01.3	Bed	11.4	90	100	701	100.0%	Y	Y
A6-02.1	LKD	20.9	190	200	858	100.0%	Y	Y
A6-02.2	Bed	9.8	80	100	735	100.0%	Y	Y
A6-03.1	LKD	20.9	190	200	860	100.0%	Y	Y
A6-03.2	Bed	9.8	80	100	741	100.0%	Y	Y
A6-04.1	LKD	20.9	190	200	1677	100.0%	Y	Y
A6-04.2	Bed	9.8	80	100	1488	100.0%	Y	Y
A6-05.1	Studio	29.4	248	200	1665	100.0%	Y	Y
A6-06.1	LKD	20.9	190	200	1691	100.0%	Y	Y
A6-06.2	Bed	9.8	80	100	1505	100.0%	Y	Y
A6-07.1	LKD	25.6	211	200	2467	100.0%	Y	Y
A6-07.2	Bed	9.5	80	100	1595	100.0%	Y	Y
A6-07.3	Bed	11.4	90	100	1375	100.0%	Y	Y


Table 17: Minimum daylight provision compliance for habitable rooms to BS EN17037:2018+A1:2021



Level 5




Level 6

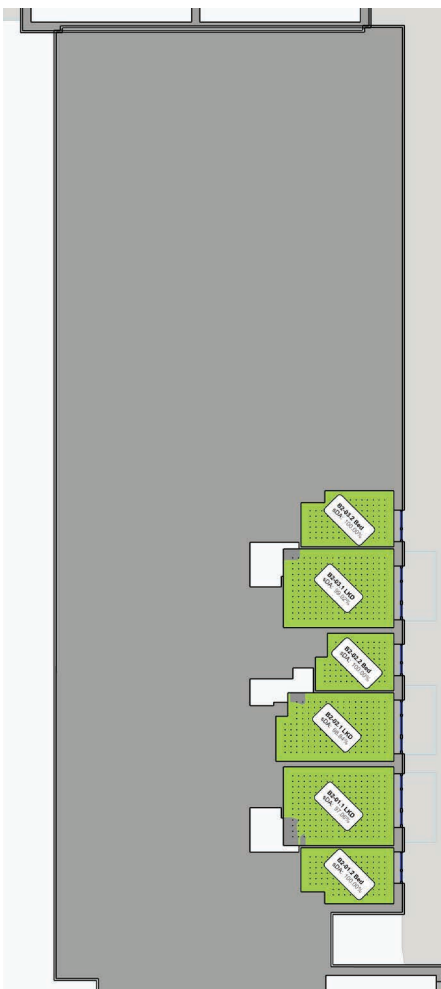

Level 2



Level 3

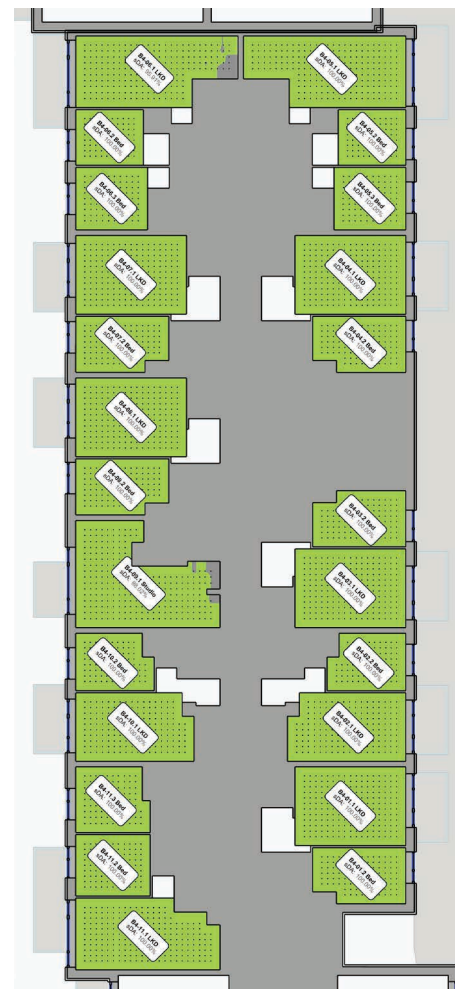

Level 4

Figure 29: Block B - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Block B - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded , Minimum 50% of Grid	Meets Criteria
B2-01.1	LKD	22.1	204	200	529	97.1%	Y
B2-01.2	Bed	12.5	104	100	540	100.0%	Y
B2-02.1	LKD	19.8	172	200	566	98.8%	Y
B2-02.2	Bed	10.7	88	100	651	100.0%	Y
B2-03.1	LKD	22.1	204	200	594	99.0%	Y
B2-03.2	Bed	12.5	104	100	580	100.0%	Y
B3-01.1	LKD	22.1	204	200	578	99.0%	Y
B3-01.2	Bed	12.5	104	100	572	100.0%	Y
B3-02.1	LKD	19.8	172	200	618	100.0%	Y
B3-02.2	Bed	10.7	88	100	695	100.0%	Y
B3-03.1	LKD	22.1	204	200	632	99.5%	Y
B3-03.2	Bed	12.5	104	100	613	100.0%	Y
B3-04.1	LKD	22.1	204	200	655	100.0%	Y
B3-04.2	Bed	12.5	104	100	638	100.0%	Y
B3-05.1	LKD	26.1	220	200	706	98.2%	Y
B3-05.2	Bed	9.5	80	100	807	100.0%	Y
B3-05.3	Bed	11.4	90	100	733	100.0%	Y
B3-06.1	Bed	9.5	80	100	1023	100.0%	Y
B3-06.1	LKD	26.1	220	200	608	81.4%	Y
B3-06.2	Bed	11.4	90	100	904	100.0%	Y
B3-07.1	LKD	22.1	204	200	647	98.5%	Y
B3-07.2	Bed	12.5	104	100	836	100.0%	Y
B3-08.1	LKD	22.1	204	200	706	99.0%	Y
B3-08.2	Bed	12.5	104	100	912	100.0%	Y
B3-09.1	Studio	29.8	252	200	867	91.7%	Y
B3-10.1	LKD	19.8	172	200	901	100.0%	Y
B3-10.2	Bed	10.7	88	100	1133	100.0%	Y
B3-11.1	LKD	24.2	226	200	1158	100.0%	Y
B3-11.2	Bed	11.6	99	100	740	100.0%	Y
B3-11.3	Bed	11.7	93	100	1210	100.0%	Y
B4-01.1	LKD	22.1	204	200	610	100.0%	Y
B4-01.2	Bed	12.5	104	100	597	100.0%	Y
B4-02.1	LKD	19.8	172	200	648	100.0%	Y
B4-02.2	Bed	10.7	88	100	719	100.0%	Y
B4-03.1	LKD	22.1	204	200	657	100.0%	Y
B4-03.2	Bed	12.5	104	100	633	100.0%	Y
B4-04.1	LKD	22.1	204	200	846	100.0%	Y
B4-04.2	Bed	12.5	104	100	665	100.0%	Y
B4-05.1	LKD	26.1	220	200	941	100.0%	Y
B4-05.2	Bed	9.5	80	100	846	100.0%	Y
B4-05.3	Bed	11.4	90	100	763	100.0%	Y
B4-06.1	LKD	26.1	220	200	1168	95.9%	Y
B4-06.2	Bed	9.5	80	100	1136	100.0%	Y
B4-06.3	Bed	11.4	90	100	1017	100.0%	Y
B4-07.1	LKD	22.1	204	200	1171	100.0%	Y
B4-07.2	Bed	12.5	104	100	922	100.0%	Y
B4-08.1	LKD	22.1	204	200	783	100.0%	Y
B4-08.2	Bed	12.5	104	100	983	100.0%	Y
B4-09.1	Studio	29.8	252	200	957	98.0%	Y
B4-10.1	LKD	19.8	172	200	977	100.0%	Y
B4-10.2	Bed	10.7	88	100	1232	100.0%	Y

Block B - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
B4-11.1	LKD	24.2	226	200	1230	100.0%	Y	Y
B4-11.2	Bed	11.6	99	100	803	100.0%	Y	Y
B4-11.3	Bed	11.7	93	100	1272	100.0%	Y	Y
B5-01.1	LKD	22.1	204	200	643	100.0%	Y	Y
B5-01.2	Bed	12.5	104	100	623	100.0%	Y	Y
B5-02.1	LKD	19.8	172	200	677	100.0%	Y	Y
B5-02.2	Bed	10.7	88	100	744	100.0%	Y	Y
B5-03.1	LKD	22.1	204	200	685	100.0%	Y	Y
B5-03.2	Bed	12.5	104	100	652	100.0%	Y	Y
B5-04.1	LKD	22.1	204	200	1078	100.0%	Y	Y
B5-04.2	Bed	12.5	104	100	1043	100.0%	Y	Y
B5-05.1	Studio	29.8	252	200	1029	100.0%	Y	Y
B5-06.1	LKD	19.8	172	200	1053	100.0%	Y	Y
B5-06.2	Bed	10.7	88	100	1284	100.0%	Y	Y
B5-07.1	LKD	24.2	226	200	1931	100.0%	Y	Y
B5-07.2	Bed	11.6	99	100	860	100.0%	Y	Y
B5-07.3	Bed	11.7	93	100	1325	100.0%	Y	Y
B6-01.1	LKD	22.1	204	200	854	100.0%	Y	Y
B6-01.2	Bed	12.5	104	100	645	100.0%	Y	Y
B6-02.1	LKD	19.8	172	200	916	100.0%	Y	Y
B6-02.2	Bed	10.7	88	100	812	100.0%	Y	Y
B6-03.1	LKD	22.1	204	200	873	100.0%	Y	Y
B6-03.2	Bed	12.5	104	100	707	100.0%	Y	Y
B6-04.1	LKD	22.1	204	200	1635	100.0%	Y	Y
B6-04.2	Bed	12.5	104	100	1111	100.0%	Y	Y
B6-05.1	Studio	29.8	252	200	1550	100.0%	Y	Y
B6-06.1	LKD	19.8	172	200	1636	100.0%	Y	Y
B6-06.2	Bed	10.7	88	100	1469	100.0%	Y	Y
B6-07.1	LKD	24.2	226	200	2523	100.0%	Y	Y
B6-07.2	Bed	11.6	99	100	1450	100.0%	Y	Y
B6-07.3	Bed	11.7	93	100	1409	100.0%	Y	Y


Table 18: Minimum daylight provision compliance for habitable rooms to BS EN17037:2018+A1:2021



Level 1



Level 2

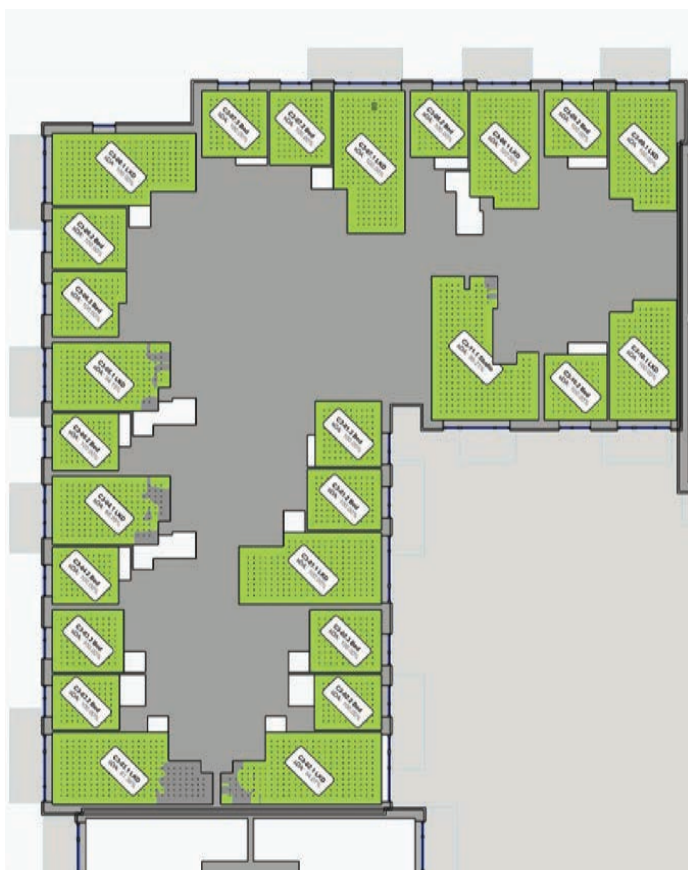

Level 3



Level 4

Figure 30: Block C - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1




Level 5



Level 6



Level 7

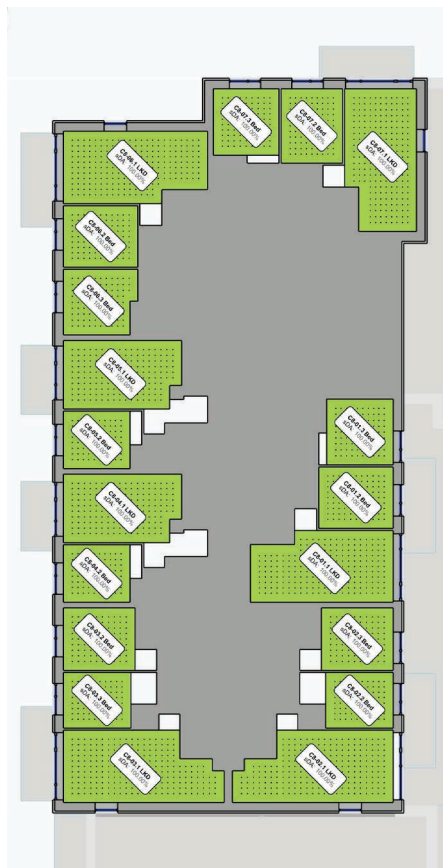

Level 8



Level 9

Figure 31: Block C - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Block C - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
C1-08.1	LKD	19.8	172	200	523	100.0%	Y	Y
C1-08.2	Bed	9.7	80	100	545	100.0%	Y	Y
C1-09.1	LKD	19.7	182	200	548	100.0%	Y	Y
C1-09.2	Bed	10.5	81	100	556	100.0%	Y	Y
C1-10.1	LKD	19.7	182	200	733	100.0%	Y	Y
C1-10.2	Bed	10.5	81	100	1076	100.0%	Y	Y
C1-11.1	Studio	29.8	252	200	754	92.9%	Y	Y
C2-08.1	LKD	19.8	172	200	539	100.0%	Y	Y
C2-08.2	Bed	9.7	80	100	579	100.0%	Y	Y
C2-09.1	LKD	19.7	182	200	566	100.0%	Y	Y
C2-09.2	Bed	10.5	81	100	605	100.0%	Y	Y
C2-10.1	LKD	19.7	182	200	703	100.0%	Y	Y
C2-10.2	Bed	10.5	81	100	1154	100.0%	Y	Y
C2-11.1	Studio	29.8	252	200	740	96.0%	Y	Y
C3-01.1	LKD	24.4	221	200	813	100.0%	Y	Y
C3-01.2	Bed	11.6	99	100	405	100.0%	Y	Y
C3-01.3	Bed	11.1	90	100	395	100.0%	Y	Y
C3-02.1	LKD	25.9	236	200	623	94.1%	Y	Y
C3-02.2	Bed	9.5	80	100	538	100.0%	Y	Y
C3-02.3	Bed	11.4	90	100	636	100.0%	Y	Y
C3-03.1	LKD	25.9	236	200	603	81.4%	Y	Y
C3-03.2	Bed	9.5	80	100	527	100.0%	Y	Y
C3-03.3	Bed	11.4	90	100	646	100.0%	Y	Y
C3-04.1	LKD	19.8	172	200	492	89.0%	Y	Y
C3-04.2	Bed	9.7	80	100	695	100.0%	Y	Y
C3-05.1	LKD	19.8	172	200	513	94.2%	Y	Y
C3-05.2	Bed	9.7	80	100	606	100.0%	Y	Y
C3-06.1	LKD	24.8	230	200	877	100.0%	Y	Y
C3-06.2	Bed	11.6	99	100	578	100.0%	Y	Y
C3-06.3	Bed	11.7	93	100	651	100.0%	Y	Y
C3-07.1	LKD	24.4	221	200	616	100.0%	Y	Y
C3-07.2	Bed	11.6	99	100	591	100.0%	Y	Y
C3-07.3	Bed	11.1	90	100	637	100.0%	Y	Y
C3-08.1	LKD	19.8	172	200	762	100.0%	Y	Y
C3-08.2	Bed	9.7	80	100	649	100.0%	Y	Y
C3-09.1	LKD	19.7	182	200	797	100.0%	Y	Y
C3-09.2	Bed	10.5	81	100	661	100.0%	Y	Y
C3-10.1	LKD	19.7	182	200	1166	100.0%	Y	Y
C3-10.2	Bed	10.5	81	100	1241	100.0%	Y	Y
C3-11.1	Studio	29.8	252	200	1074	99.2%	Y	Y
C4-01.1	LKD	24.4	221	200	861	100.0%	Y	Y
C4-01.2	Bed	11.6	99	100	455	100.0%	Y	Y
C4-01.3	Bed	11.1	90	100	506	100.0%	Y	Y
C4-02.1	LKD	25.9	236	200	650	98.7%	Y	Y
C4-02.2	Bed	9.5	80	100	561	100.0%	Y	Y
C4-02.2	Bed	11.4	90	100	658	100.0%	Y	Y
C4-03.1	LKD	25.9	236	200	648	85.2%	Y	Y
C4-03.2	Bed	11.4	90	100	720	100.0%	Y	Y
C4-03.3	Bed	9.5	80	100	593	100.0%	Y	Y
C4-04.1	LKD	19.8	172	200	532	96.5%	Y	Y
C4-04.2	Bed	9.7	80	100	767	100.0%	Y	Y
C4-05.1	LKD	19.8	172	200	545	96.5%	Y	Y

Block C - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1


Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
C4-05.2	Bed	9.7	80	100	685	100.0%	Y	
C4-06.1	LKD	24.8	230	200	909	100.0%	Y	
C4-06.2	Bed	11.6	99	100	623	100.0%	Y	
C4-06.3	Bed	11.7	93	100	702	100.0%	Y	
C4-07.1	LKD	24.4	221	200	877	100.0%	Y	
C4-07.2	Bed	11.6	99	100	606	100.0%	Y	
C4-07.3	Bed	11.1	90	100	654	100.0%	Y	
C5-01.1	LKD	24.4	221	200	919	100.0%	Y	
C5-01.2	Bed	11.6	99	100	501	100.0%	Y	
C5-01.3	Bed	11.1	90	100	586	100.0%	Y	
C5-02.1	LKD	25.9	236	200	1227	100.0%	Y	
C5-02.2	Bed	9.5	80	100	595	100.0%	Y	
C5-02.3	Bed	11.4	90	100	687	100.0%	Y	
C5-03.1	LKD	25.9	236	200	1097	98.3%	Y	
C5-03.2	Bed	11.4	90	100	778	100.0%	Y	
C5-03.3	Bed	9.5	80	100	657	100.0%	Y	
C5-04.1	LKD	19.8	172	200	574	99.4%	Y	
C5-04.2	Bed	9.7	80	100	839	100.0%	Y	
C5-05.1	LKD	19.8	172	200	575	100.0%	Y	
C5-05.2	Bed	9.7	80	100	749	100.0%	Y	
C5-06.1	LKD	24.8	230	200	943	100.0%	Y	
C5-06.2	Bed	11.6	99	100	666	100.0%	Y	
C5-06.3	Bed	11.7	93	100	736	100.0%	Y	
C5-07.1	LKD	24.4	221	200	909	100.0%	Y	
C5-07.2	Bed	11.6	99	100	618	100.0%	Y	
C5-07.3	Bed	11.1	90	100	673	100.0%	Y	
C6-01.1	LKD	24.4	221	200	946	100.0%	Y	
C6-01.2	Bed	11.6	99	100	534	100.0%	Y	
C6-01.3	Bed	11.1	90	100	622	100.0%	Y	
C6-02.1	LKD	25.9	236	200	1386	100.0%	Y	
C6-02.2	Bed	9.5	80	100	610	100.0%	Y	
C6-02.3	Bed	11.4	90	100	695	100.0%	Y	
C6-03.1	LKD	25.9	236	200	1286	100.0%	Y	
C6-03.2	Bed	9.5	80	100	737	100.0%	Y	
C6-03.3	Bed	11.4	90	100	842	100.0%	Y	
C6-04.1	LKD	19.8	172	200	609	99.4%	Y	
C6-04.2	Bed	9.7	80	100	912	100.0%	Y	
C6-05.1	LKD	19.8	172	200	609	100.0%	Y	
C6-05.2	Bed	9.7	80	100	822	100.0%	Y	
C6-06.1	LKD	24.8	230	200	974	100.0%	Y	
C6-06.2	Bed	11.6	99	100	713	100.0%	Y	
C6-06.3	Bed	11.7	93	100	794	100.0%	Y	
C6-07.1	LKD	24.4	221	200	933	100.0%	Y	
C6-07.2	Bed	11.6	99	100	626	100.0%	Y	
C6-07.3	Bed	11.1	90	100	678	100.0%	Y	
C7-01.1	LKD	24.4	221	200	974	100.0%	Y	
C7-01.2	Bed	11.6	99	100	554	100.0%	Y	
C7-01.3	Bed	11.1	90	100	639	100.0%	Y	
C7-02.1	LKD	25.9	236	200	1409	100.0%	Y	
C7-02.2	Bed	9.5	80	100	618	100.0%	Y	
C7-02.3	Bed	11.4	90	100	712	100.0%	Y	
C7-03.1	LKD	25.9	236	200	1340	100.0%	Y	

Block C - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
C7-03.2	Bed	9.5	80	100	812	100.0%	Y	Y
C7-03.3	Bed	11.4	90	100	918	100.0%	Y	Y
C7-04.1	LKD	19.8	172	200	654	99.4%	Y	Y
C7-04.2	Bed	9.7	80	100	1008	100.0%	Y	Y
C7-05.1	LKD	19.8	172	200	646	100.0%	Y	Y
C7-05.2	Bed	9.7	80	100	901	100.0%	Y	Y
C7-06.1	LKD	24.8	230	200	1002	100.0%	Y	Y
C7-06.2	Bed	11.6	99	100	761	100.0%	Y	Y
C7-06.3	Bed	11.7	93	100	849	100.0%	Y	Y
C7-07.1	LKD	24.4	221	200	946	100.0%	Y	Y
C7-07.2	Bed	11.6	99	100	636	100.0%	Y	Y
C7-07.3	Bed	11.1	90	100	688	100.0%	Y	Y
C8-01.1	LKD	24.4	221	200	982	100.0%	Y	Y
C8-01.2	Bed	11.6	99	100	568	100.0%	Y	Y
C8-01.3	Bed	11.1	90	100	653	100.0%	Y	Y
C8-02.1	LKD	25.9	236	200	1417	100.0%	Y	Y
C8-02.2	Bed	9.5	80	100	628	100.0%	Y	Y
C8-02.3	Bed	11.4	90	100	718	100.0%	Y	Y
C8-03.1	LKD	25.9	236	200	1382	100.0%	Y	Y
C8-03.2	Bed	11.4	90	100	997	100.0%	Y	Y
C8-03.3	Bed	9.5	80	100	888	100.0%	Y	Y
C8-04.1	LKD	19.8	172	200	684	100.0%	Y	Y
C8-04.2	Bed	9.7	80	100	1077	100.0%	Y	Y
C8-05.1	LKD	19.8	172	200	679	100.0%	Y	Y
C8-05.2	Bed	9.7	80	100	987	100.0%	Y	Y
C8-06.1	LKD	24.8	230	200	1036	100.0%	Y	Y
C8-06.2	Bed	11.6	99	100	813	100.0%	Y	Y
C8-06.3	Bed	11.7	93	100	926	100.0%	Y	Y
C8-07.1	LKD	24.4	221	200	949	100.0%	Y	Y
C8-07.2	Bed	11.6	99	100	640	100.0%	Y	Y
C8-07.3	Bed	11.1	90	100	683	100.0%	Y	Y
C9-01.1	LKD	24.4	221	200	1054	100.0%	Y	Y
C9-01.2	Bed	11.6	99	100	782	100.0%	Y	Y
C9-01.3	Bed	11.1	90	100	750	100.0%	Y	Y
C9-02.1	LKD	25.9	236	200	1490	100.0%	Y	Y
C9-02.2	Bed	9.5	80	100	840	100.0%	Y	Y
C9-02.3	Bed	11.4	90	100	772	100.0%	Y	Y
C9-03.1	LKD	25.9	236	200	1932	100.0%	Y	Y
C9-03.2	Bed	9.5	80	100	1266	100.0%	Y	Y
C9-03.3	Bed	11.4	90	100	1079	100.0%	Y	Y
C9-04.1	LKD	19.8	172	200	1250	100.0%	Y	Y
C9-04.2	Bed	9.7	80	100	1192	100.0%	Y	Y
C9-05.1	LKD	19.8	172	200	1228	100.0%	Y	Y
C9-05.2	Bed	9.7	80	100	1137	100.0%	Y	Y
C9-06.1	LKD	24.8	230	200	1623	100.0%	Y	Y
C9-06.2	Bed	11.6	99	100	1044	100.0%	Y	Y
C9-06.3	Bed	11.7	93	100	1006	100.0%	Y	Y
C9-07.1	LKD	24.4	221	200	1191	100.0%	Y	Y
C9-07.2	Bed	11.6	99	100	682	100.0%	Y	Y
C9-07.3	Bed	11.1	90	100	688	100.0%	Y	Y

Table 19: Minimum daylight provision compliance for habitable rooms to BS EN17037:2018+A1:2021

Level 0

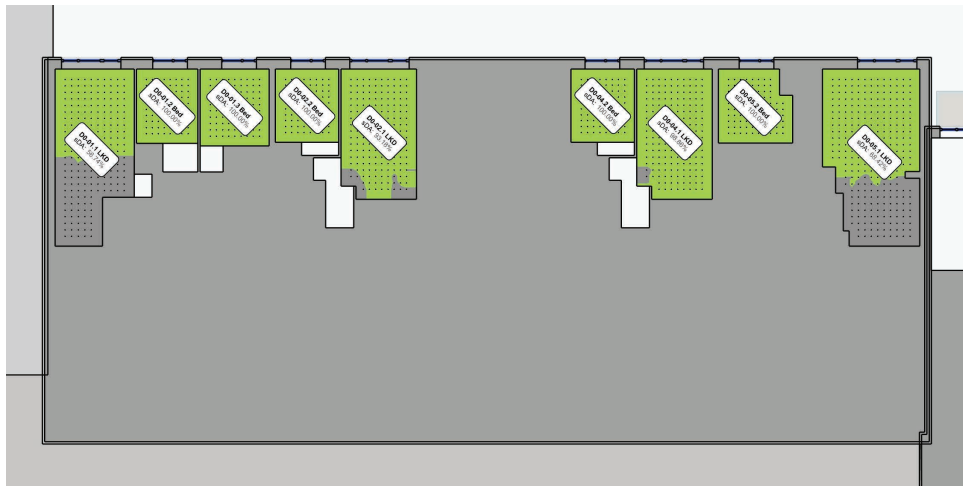

Level 1



Level 3



Level 4

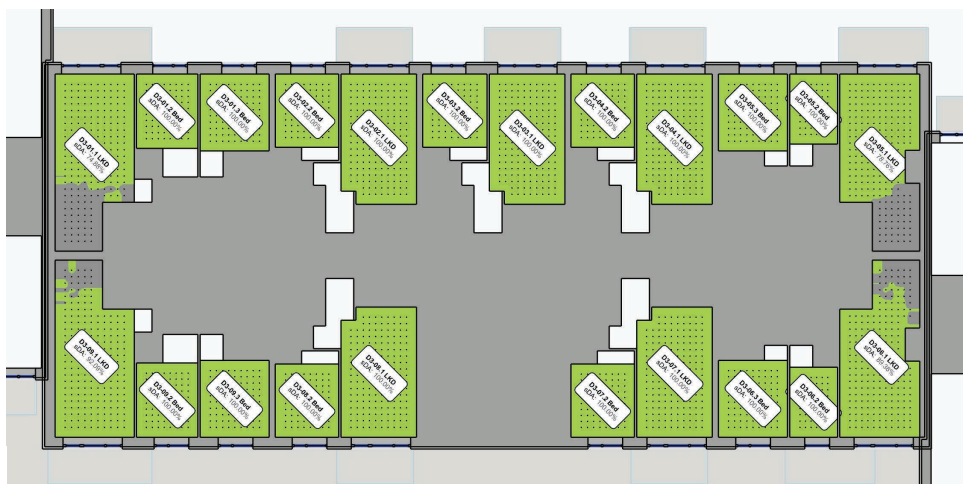


Figure 32: Block D - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Level 5



Level 6

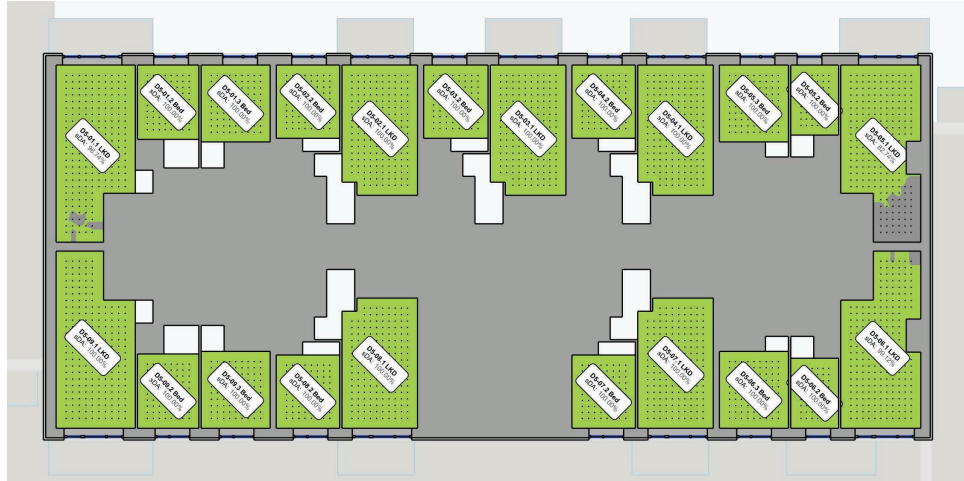


Figure 33: Block D - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Block D - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
D0-01.1	LKD	26.0	215	200	437	85.6%		Y
D0-01.2	Bed	9.5	80	100	661	100.0%		Y
D0-01.3	Bed	11.1	90	100	650	100.0%		Y
D0-02.1	LKD	20.1	176	200	662	100.0%		Y
D0-02.2	Bed	9.7	80	100	710	100.0%		Y
D0-03.1	LKD	20.1	176	200	665	100.0%		Y
D0-03.2	Bed	9.7	80	100	696	100.0%		Y
D0-04.1	LKD	32.5	285	200	531	85.6%		Y
D0-04.2	Bed	10.7	92	100	669	100.0%		Y
D0-04.3	Bed	11.9	96	100	917	100.0%		Y
D0-04.4	Bed	9.4	77	100	520	100.0%		Y
D0-04.5	Bed	11.3	92	100	625	100.0%		Y
D1-01.1	LKD	26.0	215	200	365	81.4%		Y
D1-01.2	Bed	9.5	80	100	637	100.0%		Y
D1-01.3	Bed	11.1	90	100	655	100.0%		Y
D1-02.1	LKD	20.1	176	200	598	100.0%		Y
D1-02.2	Bed	9.7	80	100	712	100.0%		Y
D1-03.1	LKD	20.1	176	200	595	100.0%		Y
D1-03.2	Bed	9.8	80	100	672	100.0%		Y
D1-04.1	LKD	20.1	176	200	597	100.0%		Y
D1-04.2	Bed	9.7	80	100	683	100.0%		Y


Block D - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded , Minimum 50% of Grid	Meets Criteria
D1-05.1	LKD	25.2	226	200	950	82.7%	Y
D1-05.2	Bed	7.0	54	100	923	100.0%	Y
D1-05.3	Bed	11.1	90	100	1415	100.0%	Y
D1-06.1	LKD	20.1	176	200	1091	100.0%	Y
D1-06.2	Bed	9.7	80	100	1555	100.0%	Y
D1-07.1	LKD	20.1	176	200	1044	100.0%	Y
D1-07.2	Bed	9.7	80	100	1493	100.0%	Y
D1-08.1	LKD	26.0	215	200	725	87.0%	Y
D1-08.2	Bed	9.5	80	100	1377	100.0%	Y
D1-08.3	Bed	11.1	90	100	1388	100.0%	Y
D2-01.1	LKD	26.0	215	200	370	79.5%	Y
D2-01.2	Bed	9.5	80	100	645	100.0%	Y
D2-01.3	Bed	11.1	90	100	668	100.0%	Y
D2-02.1	LKD	20.1	176	200	612	100.0%	Y
D2-02.2	Bed	9.7	80	100	731	100.0%	Y
D2-03.1	LKD	20.1	176	200	608	100.0%	Y
D2-03.2	Bed	9.8	80	100	689	100.0%	Y
D2-04.1	LKD	20.1	176	200	613	100.0%	Y
D2-04.2	Bed	9.7	80	100	703	100.0%	Y
D2-05.1	LKD	25.2	226	200	507	80.1%	Y
D2-05.2	Bed	7.0	54	100	708	100.0%	Y
D2-05.3	Bed	11.1	90	100	670	100.0%	Y
D2-06.1	LKD	25.2	226	200	1027	85.0%	Y
D2-06.2	Bed	7.0	54	100	1006	100.0%	Y
D2-06.3	Bed	11.1	90	100	1510	100.0%	Y
D2-07.1	LKD	20.1	176	200	1177	100.0%	Y
D2-07.2	Bed	9.7	80	100	1641	100.0%	Y
D2-08.1	LKD	20.1	176	200	1126	100.0%	Y
D2-08.2	Bed	9.7	80	100	1593	100.0%	Y
D2-09.1	LKD	26.0	215	200	791	89.3%	Y
D2-09.2	Bed	9.5	80	100	1468	100.0%	Y
D2-09.3	Bed	11.1	90	100	1470	100.0%	Y
D3-01.1	LKD	26.0	215	200	371	80.5%	Y
D3-01.2	Bed	9.5	80	100	650	100.0%	Y
D3-01.3	Bed	11.1	90	100	669	100.0%	Y
D3-02.1	LKD	20.1	176	200	615	100.0%	Y
D3-02.2	Bed	9.7	80	100	730	100.0%	Y
D3-03.1	LKD	20.1	176	200	610	100.0%	Y
D3-03.2	Bed	9.8	80	100	688	100.0%	Y
D3-04.1	LKD	20.1	176	200	611	100.0%	Y
D3-04.2	Bed	9.7	80	100	705	100.0%	Y
D3-05.1	LKD	25.2	226	200	511	80.1%	Y
D3-05.2	Bed	7.0	54	100	710	100.0%	Y
D3-05.3	Bed	11.1	90	100	667	100.0%	Y
D3-06.1	LKD	25.2	226	200	1067	91.2%	Y
D3-06.2	Bed	7.0	54	100	1035	100.0%	Y
D3-06.3	Bed	11.1	90	100	1555	100.0%	Y
D3-07.1	LKD	20.1	176	200	1212	100.0%	Y
D3-07.2	Bed	9.7	80	100	1686	100.0%	Y
D3-08.1	LKD	20.1	176	200	1174	100.0%	Y
D3-08.2	Bed	9.7	80	100	1640	100.0%	Y

Block D - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded , Minimum 50% of Grid	Meets Criteria
D3-09.1	LKD	26.0	215	200	829	92.6%	Y
D3-09.2	Bed	9.5	80	100	1514	100.0%	Y
D3-09.3	Bed	11.1	90	100	1511	100.0%	Y
D4-01.1	LKD	26.0	215	200	483	83.7%	Y
D4-01.2	Bed	9.5	80	100	662	100.0%	Y
D4-01.3	Bed	11.1	90	100	672	100.0%	Y
D4-02.1	LKD	20.1	176	200	620	100.0%	Y
D4-02.2	Bed	9.7	80	100	732	100.0%	Y
D4-03.1	LKD	20.1	176	200	616	100.0%	Y
D4-03.2	Bed	9.8	80	100	691	100.0%	Y
D4-04.1	LKD	20.1	176	200	620	100.0%	Y
D4-04.2	Bed	9.7	80	100	713	100.0%	Y
D4-05.1	LKD	25.2	226	200	674	83.2%	Y
D4-05.2	Bed	7.0	54	100	710	100.0%	Y
D4-05.3	Bed	11.1	90	100	676	100.0%	Y
D4-06.1	LKD	25.2	226	200	1217	96.9%	Y
D4-06.2	Bed	7.0	54	100	1054	100.0%	Y
D4-06.3	Bed	11.1	90	100	1586	100.0%	Y
D4-07.1	LKD	20.1	176	200	1243	100.0%	Y
D4-07.2	Bed	9.7	80	100	1707	100.0%	Y
D4-08.1	LKD	20.1	176	200	1211	100.0%	Y
D4-08.2	Bed	9.7	80	100	1675	100.0%	Y
D4-09.1	LKD	26.0	215	200	871	98.1%	Y
D4-09.2	Bed	9.5	80	100	1553	100.0%	Y
D4-09.3	Bed	11.1	90	100	1558	100.0%	Y
D5-01.1	LKD	26.0	215	200	666	94.9%	Y
D5-01.2	Bed	9.5	80	100	735	100.0%	Y
D5-01.3	Bed	11.1	90	100	678	100.0%	Y
D5-02.1	LKD	20.1	176	200	806	100.0%	Y
D5-02.2	Bed	9.7	80	100	750	100.0%	Y
D5-03.1	LKD	20.1	176	200	812	100.0%	Y
D5-03.2	Bed	9.8	80	100	735	100.0%	Y
D5-04.1	LKD	20.1	176	200	813	100.0%	Y
D5-04.2	Bed	9.7	80	100	745	100.0%	Y
D5-05.1	LKD	25.2	226	200	660	82.3%	Y
D5-05.2	Bed	7.0	54	100	725	100.0%	Y
D5-05.3	Bed	11.1	90	100	691	100.0%	Y
D5-06.1	LKD	25.2	226	200	1452	99.6%	Y
D5-06.2	Bed	7.0	54	100	1745	100.0%	Y
D5-06.3	Bed	11.1	90	100	1630	100.0%	Y
D5-07.1	LKD	20.1	176	200	1765	100.0%	Y
D5-07.2	Bed	9.7	80	100	1769	100.0%	Y
D5-08.1	LKD	20.1	176	200	1736	100.0%	Y
D5-08.2	Bed	9.7	80	100	1731	100.0%	Y
D5-09.1	LKD	26.0	215	200	1344	100.0%	Y
D5-09.2	Bed	9.5	80	100	1679	100.0%	Y
D5-09.3	Bed	11.1	90	100	1578	100.0%	Y

Table 20: Minimum daylight provision compliance for habitable rooms to BS EN17037:2018+A1:2021

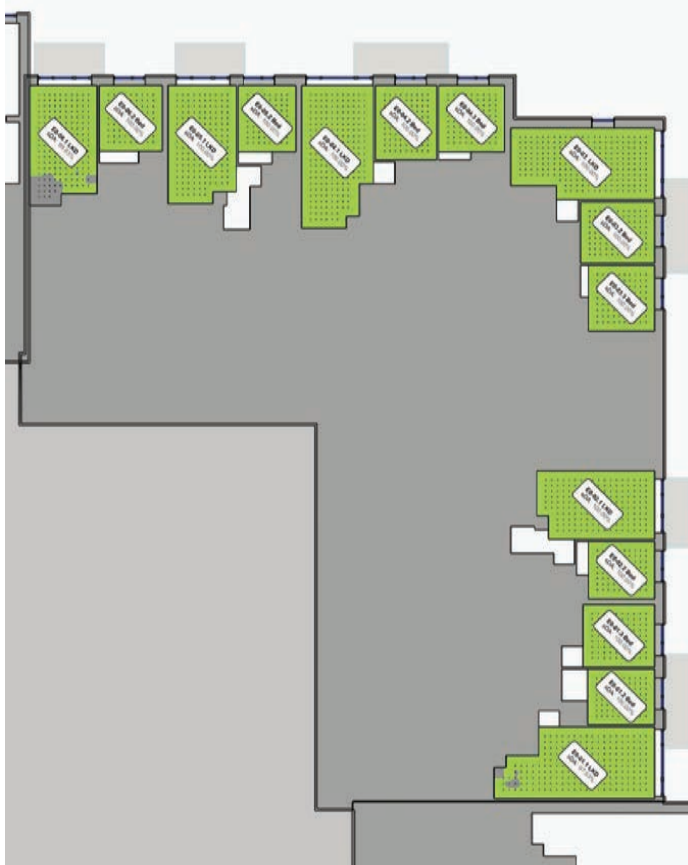


Level 0



Level 1



Level 3

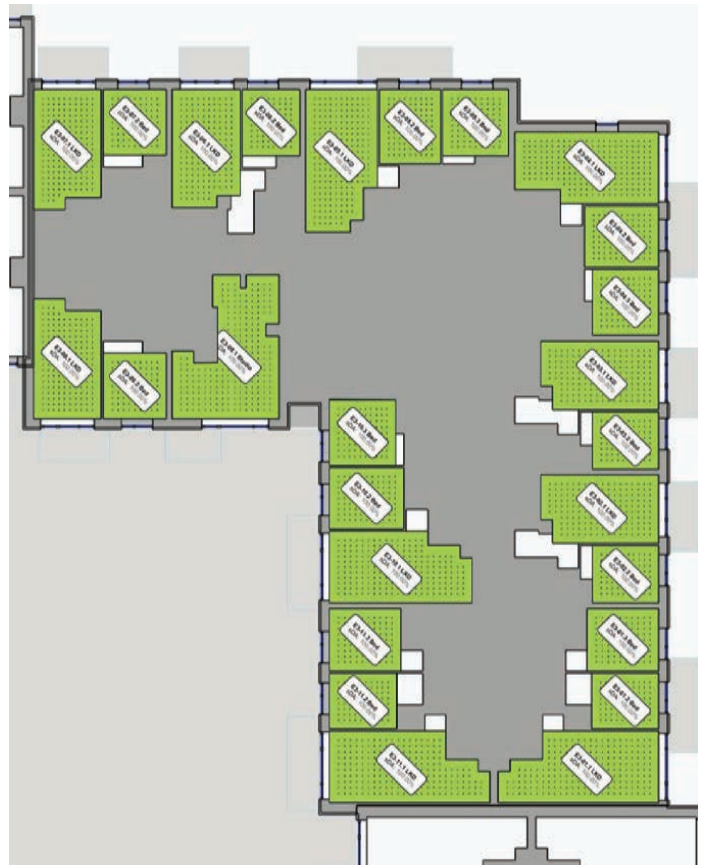

Level 4

Figure 34: Block E - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

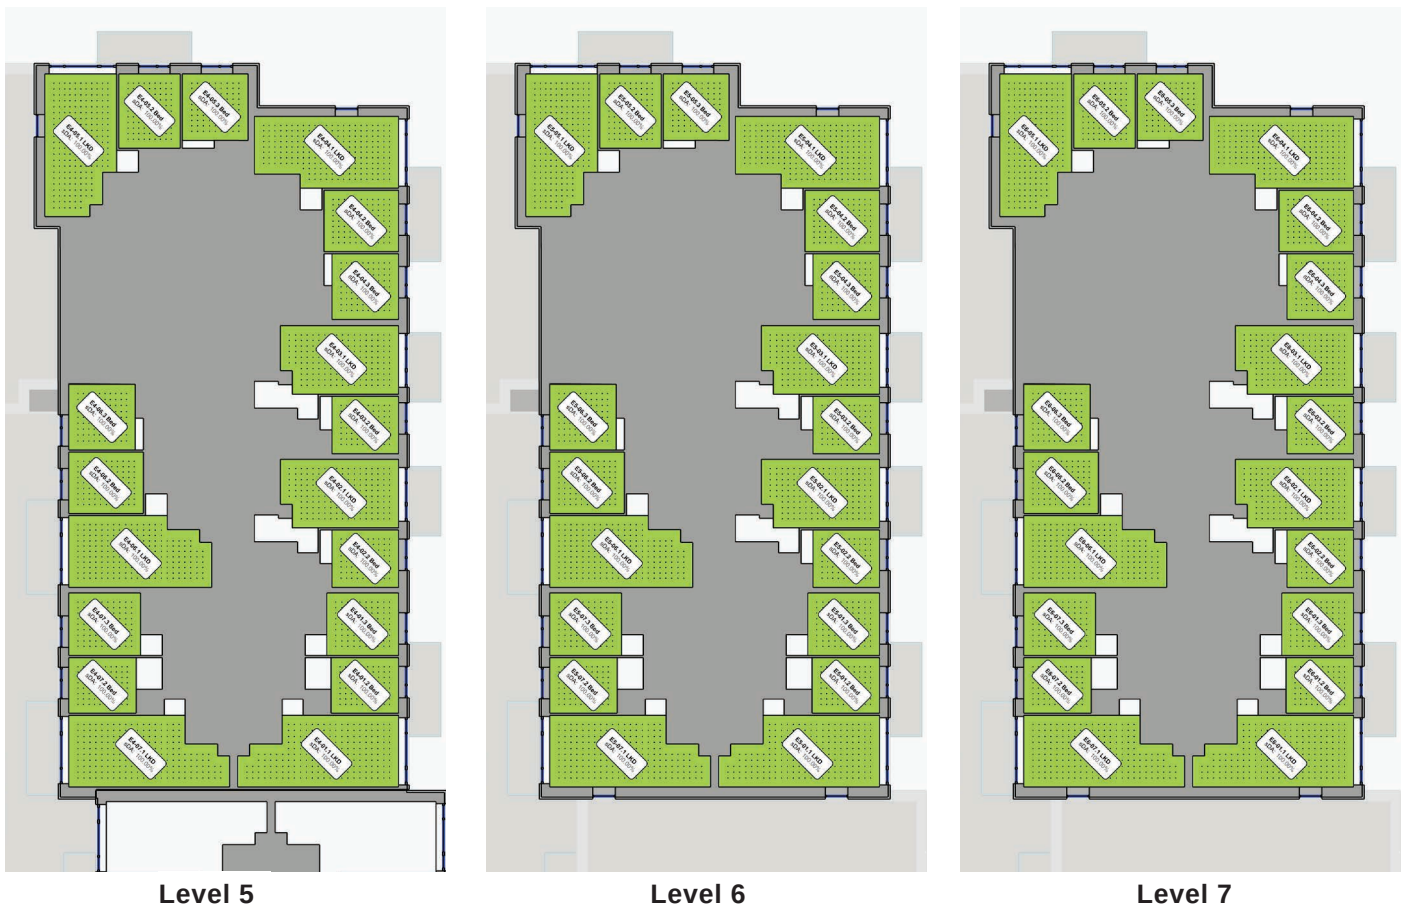


Figure 35: Block E - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Block E - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1								
Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
E0-01.1	LKD	25.6	211	200	594	97.6%	Y	Y
E0-01.2	Bed	9.5	80	100	515	100.0%	Y	Y
E0-01.3	Bed	11.4	90	100	558	100.0%	Y	Y
E0-02.1	LKD	19.8	172	200	618	100.0%	Y	Y
E0-02.2	Bed	9.7	80	100	652	100.0%	Y	Y
E0-03.1	LKD	24.6	230	200	912	100.0%	Y	Y
E0-03.2	Bed	11.6	99	100	501	100.0%	Y	Y
E0-03.3	Bed	11.1	90	100	596	100.0%	Y	Y
E0-04.1	LKD	24.0	217	200	668	100.0%	Y	Y
E0-04.2	Bed	11.6	99	100	426	100.0%	Y	Y
E0-04.3	Bed	11.1	90	100	538	100.0%	Y	Y
E0-05.1	LKD	19.8	172	200	528	100.0%	Y	Y
E0-05.2	Bed	9.7	80	100	528	100.0%	Y	Y
E0-06.1	LKD	19.4	177	200	375	89.8%	Y	Y
E0-06.2	Bed	10.5	81	100	526	100.0%	Y	Y
E1-01.1	LKD	25.6	211	200	612	99.5%	Y	Y
E1-01.2	Bed	9.5	80	100	466	100.0%	Y	Y
E1-01.3	Bed	11.4	90	100	558	100.0%	Y	Y
E1-02.1	LKD	19.8	172	200	582	100.0%	Y	Y
E1-02.2	Bed	9.7	80	100	663	100.0%	Y	Y
E1-03.1	LKD	19.8	172	200	582	100.0%	Y	Y
E1-03.2	Bed	9.7	80	100	633	100.0%	Y	Y
E1-04.1	LKD	24.6	230	200	936	100.0%	Y	Y

Block E - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded , Minimum 50% of Grid	Meets Criteria
E1-04.2	Bed	11.6	99	100	457	100.0%	Y
E1-04.3	Bed	11.1	90	100	610	100.0%	Y
E1-05.1	LKD	24.0	217	200	708	100.0%	Y
E1-05.2	Bed	11.6	99	100	402	100.0%	Y
E1-05.3	Bed	11.1	90	100	563	100.0%	Y
E1-06.1	LKD	19.8	172	200	513	99.4%	Y
E1-06.2	Bed	9.7	80	100	543	100.0%	Y
E1-07.1	LKD	19.4	177	200	360	91.5%	Y
E1-07.2	Bed	10.5	81	100	553	100.0%	Y
E1-08.1	LKD	19.4	177	200	1112	100.0%	Y
E1-08.2	Bed	10.5	81	100	1301	100.0%	Y
E1-09.1	Studio	29.4	242	200	1099	98.3%	Y
E1-10.1	LKD	24.0	217	200	1008	100.0%	Y
E1-10.2	Bed	11.6	99	100	978	100.0%	Y
E1-10.3	Bed	11.1	90	100	870	100.0%	Y
E1-11.1	LKD	25.6	211	200	1038	100.0%	Y
E1-11.2	Bed	9.5	80	100	1327	100.0%	Y
E1-11.3	Bed	11.4	90	100	1261	100.0%	Y
E2-01.1	LKD	25.6	211	200	635	100.0%	Y
E2-01.2	Bed	9.5	80	100	483	100.0%	Y
E2-01.3	Bed	11.4	90	100	580	100.0%	Y
E2-02.1	LKD	19.8	172	200	607	100.0%	Y
E2-02.2	Bed	9.7	80	100	692	100.0%	Y
E2-03.1	LKD	19.8	172	200	606	100.0%	Y
E2-03.2	Bed	9.7	80	100	650	100.0%	Y
E2-04.1	LKD	24.6	230	200	976	100.0%	Y
E2-04.2	Bed	11.6	99	100	470	100.0%	Y
E2-04.3	Bed	11.1	90	100	637	100.0%	Y
E2-05.1	LKD	24.0	217	200	762	100.0%	Y
E2-05.2	Bed	11.6	99	100	433	100.0%	Y
E2-05.3	Bed	11.1	90	100	599	100.0%	Y
E2-06.1	LKD	19.8	172	200	555	100.0%	Y
E2-06.2	Bed	9.7	80	100	581	100.0%	Y
E2-07.1	LKD	19.4	177	200	385	97.2%	Y
E2-07.2	Bed	10.5	81	100	583	100.0%	Y
E2-08.1	LKD	19.4	177	200	1151	100.0%	Y
E2-08.2	Bed	10.5	81	100	1399	100.0%	Y
E2-09.1	Studio	29.4	242	200	1176	99.6%	Y
E2-10.1	LKD	24.0	217	200	1029	100.0%	Y
E2-10.2	Bed	11.6	99	100	1071	100.0%	Y
E2-10.3	Bed	11.1	90	100	1006	100.0%	Y
E2-11.1	LKD	25.6	211	200	1073	100.0%	Y
E2-11.2	Bed	9.5	80	100	1411	100.0%	Y
E2-11.3	Bed	11.4	90	100	1365	100.0%	Y
E3-01.1	LKD	25.6	211	200	647	100.0%	Y
E3-01.2	Bed	9.5	80	100	496	100.0%	Y
E3-01.3	Bed	11.4	90	100	588	100.0%	Y
E3-02.1	LKD	19.8	172	200	617	100.0%	Y
E3-02.2	Bed	9.7	80	100	699	100.0%	Y
E3-03.1	LKD	19.8	172	200	615	100.0%	Y
E3-03.2	Bed	9.7	80	100	669	100.0%	Y


Block E - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
E3-04.1	LKD	24.6	230	200	988	100.0%	Y	
E3-04.2	Bed	11.6	99	100	482	100.0%	Y	
E3-04.3	Bed	11.1	90	100	644	100.0%	Y	
E3-05.1	LKD	24.0	217	200	785	100.0%	Y	
E3-05.2	Bed	11.6	99	100	449	100.0%	Y	
E3-05.3	Bed	11.1	90	100	609	100.0%	Y	
E3-06.1	LKD	19.8	172	200	763	100.0%	Y	
E3-06.2	Bed	9.7	80	100	694	100.0%	Y	
E3-07.1	LKD	19.4	177	200	550	100.0%	Y	
E3-07.2	Bed	10.5	81	100	637	100.0%	Y	
E3-08.1	LKD	19.4	177	200	1674	100.0%	Y	
E3-08.2	Bed	10.5	81	100	1502	100.0%	Y	
E3-09.1	Studio	29.4	242	200	1423	100.0%	Y	
E3-10.1	LKD	24.0	217	200	1112	100.0%	Y	
E3-10.2	Bed	11.6	99	100	1169	100.0%	Y	
E3-10.3	Bed	11.1	90	100	1097	100.0%	Y	
E3-11.1	LKD	25.6	211	200	1115	100.0%	Y	
E3-11.2	Bed	9.5	80	100	1460	100.0%	Y	
E3-11.3	Bed	11.4	90	100	1406	100.0%	Y	
E4-01.1	LKD	25.6	211	200	659	100.0%	Y	
E4-01.2	Bed	9.5	80	100	501	100.0%	Y	
E4-01.3	Bed	11.4	90	100	587	100.0%	Y	
E4-02.1	LKD	19.8	172	200	627	100.0%	Y	
E4-02.2	Bed	9.7	80	100	701	100.0%	Y	
E4-03.1	LKD	19.8	172	200	619	100.0%	Y	
E4-03.2	Bed	9.7	80	100	673	100.0%	Y	
E4-04.1	LKD	24.6	230	200	996	100.0%	Y	
E4-04.2	Bed	11.6	99	100	482	100.0%	Y	
E4-04.3	Bed	11.1	90	100	654	100.0%	Y	
E4-05.1	LKD	24.0	217	200	1274	100.0%	Y	
E4-05.2	Bed	11.6	99	100	461	100.0%	Y	
E4-05.3	Bed	11.1	90	100	626	100.0%	Y	
E4-06.1	LKD	24.0	217	200	1173	100.0%	Y	
E4-06.2	Bed	11.6	99	100	1255	100.0%	Y	
E4-06.3	Bed	11.1	90	100	1319	100.0%	Y	
E4-07.1	LKD	25.6	211	200	1156	100.0%	Y	
E4-07.2	Bed	9.5	80	100	1477	100.0%	Y	
E4-07.3	Bed	11.4	90	100	1445	100.0%	Y	
E5-01.1	LKD	25.6	211	200	1323	100.0%	Y	
E5-01.2	Bed	9.5	80	100	520	100.0%	Y	
E5-01.3	Bed	11.4	90	100	597	100.0%	Y	
E5-02.1	LKD	19.8	172	200	638	100.0%	Y	
E5-02.2	Bed	9.7	80	100	712	100.0%	Y	
E5-03.1	LKD	19.8	172	200	631	100.0%	Y	
E5-03.2	Bed	9.7	80	100	684	100.0%	Y	
E5-04.1	LKD	24.6	230	200	1009	100.0%	Y	
E5-04.2	Bed	11.6	99	100	490	100.0%	Y	
E5-04.3	Bed	11.1	90	100	656	100.0%	Y	
E5-05.1	LKD	24.0	217	200	1348	100.0%	Y	
E5-05.2	Bed	11.6	99	100	469	100.0%	Y	
E5-05.3	Bed	11.1	90	100	631	100.0%	Y	


Block E - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
E5-06.1	LKD	24.0	217	200	1228	100.0%	Y	Y
E5-06.2	Bed	11.6	99	100	1298	100.0%	Y	Y
E5-06.3	Bed	11.1	90	100	1414	100.0%	Y	Y
E5-07.1	LKD	25.6	211	200	1712	100.0%	Y	Y
E5-07.2	Bed	9.5	80	100	1523	100.0%	Y	Y
E5-07.3	Bed	11.4	90	100	1461	100.0%	Y	Y
E6-01.1	LKD	25.6	211	200	1420	100.0%	Y	Y
E6-01.2	Bed	9.5	80	100	766	100.0%	Y	Y
E6-01.3	Bed	11.4	90	100	694	100.0%	Y	Y
E6-02.1	LKD	19.8	172	200	843	100.0%	Y	Y
E6-02.2	Bed	9.7	80	100	754	100.0%	Y	Y
E6-03.1	LKD	19.8	172	200	841	100.0%	Y	Y
E6-03.2	Bed	9.7	80	100	732	100.0%	Y	Y
E6-04.1	LKD	24.6	230	200	1119	100.0%	Y	Y
E6-04.2	Bed	11.6	99	100	707	100.0%	Y	Y
E6-04.3	Bed	11.1	90	100	698	100.0%	Y	Y
E6-05.1	LKD	24.0	217	200	1421	100.0%	Y	Y
E6-05.2	Bed	11.6	99	100	683	100.0%	Y	Y
E6-05.3	Bed	11.1	90	100	688	100.0%	Y	Y
E6-06.1	LKD	24.0	217	200	1878	100.0%	Y	Y
E6-06.2	Bed	11.6	99	100	1497	100.0%	Y	Y
E6-06.3	Bed	11.1	90	100	1453	100.0%	Y	Y
E6-07.1	LKD	25.6	211	200	2327	100.0%	Y	Y
E6-07.2	Bed	9.5	80	100	1673	100.0%	Y	Y
E6-07.3	Bed	11.4	90	100	1492	100.0%	Y	Y


Table 21: Minimum daylight provision compliance for habitable rooms to BS EN17037:2018+A1:2021

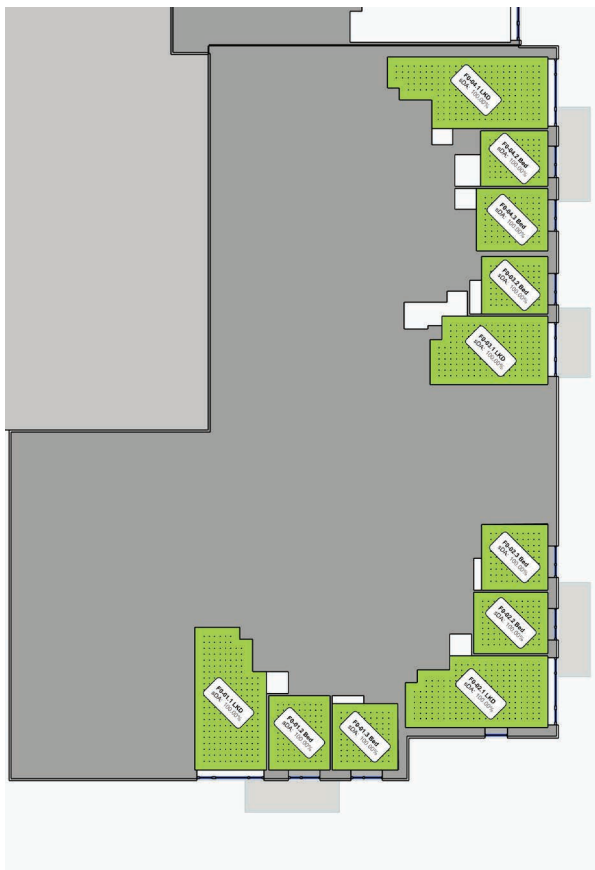

Level 0

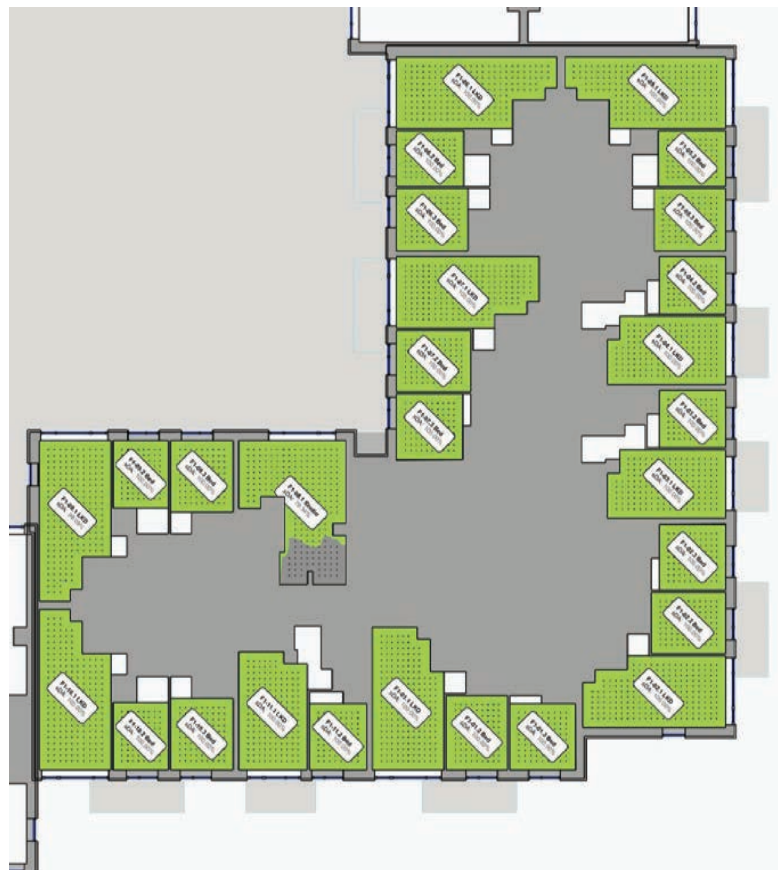

Level 1

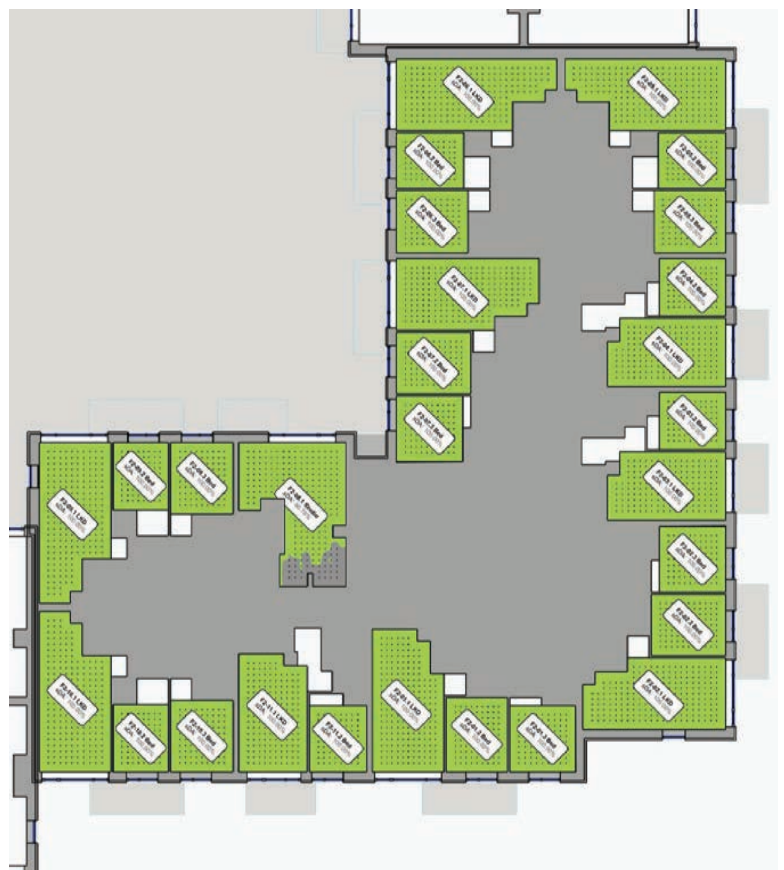

Level 3

Figure 36: Block F - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1



Figure 37: Block F - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Block F - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1							
Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded , Minimum 50% of Grid	Meets Criteria
F0-01.1	LKD	24.0	217	200	1561	100.0%	Y
F0-01.2	Bed	11.6	99	100	976	100.0%	Y
F0-01.3	Bed	11.1	90	100	1377	100.0%	Y
F0-02.1	LKD	24.0	217	200	1307	100.0%	Y
F0-02.2	Bed	11.6	99	100	508	100.0%	Y
F0-02.3	Bed	11.1	90	100	593	100.0%	Y
F0-03.1	LKD	19.8	172	200	627	100.0%	Y
F0-03.2	Bed	9.7	80	100	637	100.0%	Y
F0-04.1	LKD	25.6	211	200	697	100.0%	Y
F0-04.2	Bed	9.5	80	100	538	100.0%	Y
F0-04.3	Bed	11.4	90	100	572	100.0%	Y
F1-01.1	LKD	24.0	217	200	1583	100.0%	Y
F1-01.2	Bed	11.6	99	100	857	100.0%	Y
F1-01.3	Bed	11.1	90	100	1421	100.0%	Y
F1-02.1	LKD	24.0	217	200	1338	100.0%	Y
F1-02.2	Bed	11.6	99	100	463	100.0%	Y
F1-02.3	Bed	11.1	90	100	606	100.0%	Y
F1-03.1	LKD	19.8	172	200	597	100.0%	Y
F1-03.2	Bed	9.7	80	100	639	100.0%	Y
F1-04.1	LKD	19.8	172	200	592	100.0%	Y
F1-04.2	Bed	9.7	80	100	641	100.0%	Y
F1-05.1	LKD	25.6	211	200	710	100.0%	Y
F1-05.2	Bed	9.5	80	100	491	100.0%	Y
F1-05.3	Bed	11.4	90	100	584	100.0%	Y

Block F - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded , Minimum 50% of Grid	Meets Criteria
F1-06.1	LKD	25.6	211	200	1231	100.0%	Y
F1-06.2	Bed	9.5	80	100	791	100.0%	Y
F1-06.3	Bed	11.4	90	100	1062	100.0%	Y
F1-07.1	LKD	24.0	217	200	862	100.0%	Y
F1-07.2	Bed	11.6	99	100	825	100.0%	Y
F1-07.3	Bed	11.1	90	100	719	100.0%	Y
F1-08.1	Studio	29.4	242	200	559	79.3%	Y
F1-09.1	LKD	25.6	211	200	1000	99.1%	Y
F1-09.2	Bed	9.5	80	100	481	100.0%	Y
F1-09.3	Bed	11.4	90	100	512	100.0%	Y
F1-10.1	LKD	25.6	211	200	1078	100.0%	Y
F1-10.2	Bed	9.5	80	100	909	100.0%	Y
F1-10.3	Bed	11.4	90	100	1240	100.0%	Y
F1-11.1	LKD	19.8	172	200	1118	100.0%	Y
F1-11.2	Bed	9.7	80	100	1346	100.0%	Y
F2-01.1	LKD	24.0	217	200	1655	100.0%	Y
F2-01.2	Bed	11.6	99	100	914	100.0%	Y
F2-01.3	Bed	11.1	90	100	1475	100.0%	Y
F2-02.1	LKD	24.0	217	200	1396	100.0%	Y
F2-02.2	Bed	11.6	99	100	484	100.0%	Y
F2-02.3	Bed	11.1	90	100	626	100.0%	Y
F2-03.1	LKD	19.8	172	200	623	100.0%	Y
F2-03.2	Bed	9.7	80	100	668	100.0%	Y
F2-04.1	LKD	19.8	172	200	621	100.0%	Y
F2-04.2	Bed	9.7	80	100	672	100.0%	Y
F2-05.1	LKD	25.6	211	200	740	100.0%	Y
F2-05.2	Bed	9.5	80	100	514	100.0%	Y
F2-05.3	Bed	11.4	90	100	607	100.0%	Y
F2-06.1	LKD	25.6	211	200	1330	100.0%	Y
F2-06.2	Bed	9.5	80	100	882	100.0%	Y
F2-06.3	Bed	11.4	90	100	1157	100.0%	Y
F2-07.1	LKD	24.0	217	200	1010	100.0%	Y
F2-07.2	Bed	11.6	99	100	1020	100.0%	Y
F2-07.3	Bed	11.1	90	100	860	100.0%	Y
F2-08.1	Studio	29.4	242	200	737	86.8%	Y
F2-09.1	LKD	25.6	211	200	1172	100.0%	Y
F2-09.2	Bed	9.5	80	100	735	100.0%	Y
F2-09.3	Bed	11.4	90	100	648	100.0%	Y
F2-10.1	LKD	25.6	211	200	1326	100.0%	Y
F2-10.2	Bed	9.5	80	100	1652	100.0%	Y
F2-10.3	Bed	11.4	90	100	1478	100.0%	Y
F2-11.1	LKD	19.8	172	200	1719	100.0%	Y
F2-11.2	Bed	9.7	80	100	1601	100.0%	Y
F3-01.1	LKD	24.0	217	200	2242	100.0%	Y
F3-01.2	Bed	11.6	99	100	915	100.0%	Y
F3-01.3	Bed	11.2	100	100	1480	100.0%	Y
F3-02.1	LKD	24.0	217	200	1401	100.0%	Y
F3-02.2	Bed	11.6	99	100	490	100.0%	Y
F3-02.3	Bed	11.1	90	100	635	100.0%	Y
F3-03.1	LKD	19.8	172	200	638	100.0%	Y
F3-03.2	Bed	9.7	80	100	685	100.0%	Y

Block F - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
F3-04.1	LKD	19.8	172	200	639	100.0%	Y	Y
F3-04.2	Bed	9.7	80	100	683	100.0%	Y	Y
F3-05.1	LKD	25.6	211	200	750	100.0%	Y	Y
F3-05.2	Bed	9.5	80	100	521	100.0%	Y	Y
F3-05.3	Bed	11.4	90	100	624	100.0%	Y	Y
F3-06.1	LKD	25.6	211	200	1386	100.0%	Y	Y
F3-06.2	Bed	11.4	90	100	1214	100.0%	Y	Y
F3-06.3	Bed	9.5	80	100	932	100.0%	Y	Y
F3-07.1	LKD	24.0	217	200	1158	100.0%	Y	Y
F3-07.2	Bed	11.6	99	100	1209	100.0%	Y	Y
F3-07.3	Bed	11.1	90	100	1279	100.0%	Y	Y
F4-01.1	LKD	24.0	217	200	2415	100.0%	Y	Y
F4-01.2	Bed	11.6	99	100	1544	100.0%	Y	Y
F4-01.3	Bed	11.2	100	100	1557	100.0%	Y	Y
F4-02.1	LKD	24.0	217	200	1463	100.0%	Y	Y
F4-02.2	Bed	11.6	99	100	713	100.0%	Y	Y
F4-02.3	Bed	11.1	90	100	708	100.0%	Y	Y
F4-03.1	LKD	19.8	172	200	832	100.0%	Y	Y
F4-03.2	Bed	9.7	80	100	765	100.0%	Y	Y
F4-04.1	LKD	19.8	172	200	836	100.0%	Y	Y
F4-04.2	Bed	9.7	80	100	765	100.0%	Y	Y
F4-05.1	LKD	25.6	211	200	859	100.0%	Y	Y
F4-05.2	Bed	9.5	80	100	768	100.0%	Y	Y
F4-05.3	Bed	11.4	90	100	673	100.0%	Y	Y
F4-06.1	LKD	25.6	211	200	1663	100.0%	Y	Y
F4-06.2	Bed	11.4	90	100	1416	100.0%	Y	Y
F4-06.3	Bed	9.5	80	100	1654	100.0%	Y	Y
F4-07.1	LKD	24.0	217	200	1835	100.0%	Y	Y
F4-07.2	Bed	11.6	99	100	1444	100.0%	Y	Y
F4-07.3	Bed	11.1	90	100	1399	100.0%	Y	Y

Table 22: Minimum daylight provision compliance for habitable rooms to BS EN17037:2018+A1:2021

Level 0



Level 1



Level 3



Level 4



Figure 38: Block G - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Block G - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded , Minimum 50% of Grid	Meets Criteria
G0-01.1	LKD	40.8	390	200	528	74.4%	Y
G0-01.2	Bed	8.3	70	100	1179	100.0%	Y
G0-01.3	Bed	10.8	90	100	1300	100.0%	Y
G0-02.1	LKD	21.7	187	200	1353	100.0%	Y
G0-02.2	Bed	12.5	104	100	786	100.0%	Y
G0-03.1	LKD	32.2	291	200	1420	100.0%	Y
G0-03.2	Bed	11.0	92	100	1378	100.0%	Y
G0-03.3	Bed	11.6	92	100	1327	100.0%	Y
G0-03.4	Bed	9.4	77	100	722	100.0%	Y
G0-03.5	Bed	11.9	96	100	1566	100.0%	Y
G1-01.1	LKD	26.4	246	200	952	99.2%	Y
G1-01.2	Bed	14.2	115	100	421	100.0%	Y
G1-01.3	Bed	7.2	60	100	1270	100.0%	Y
G1-01.4	Bed	12.5	110	100	1243	100.0%	Y
G1-02.1	LKD	27.8	249	200	1358	100.0%	Y
G1-02.2	Bed	9.7	81	100	930	100.0%	Y
G1-02.3	Bed	5.7	42	100	996	100.0%	Y
G1-02.4	Bed	11.2	88	100	1386	100.0%	Y
G1-03.1	LKD	25.6	230	200	592	82.6%	Y
G1-03.2	Bed	7.0	54	100	482	100.0%	Y
G1-03.3	Bed	11.4	90	100	590	100.0%	Y
G1-04.1	LKD	19.8	172	200	591	100.0%	Y
G1-04.2	Bed	9.7	80	100	683	100.0%	Y
G1-05.1	LKD	26.4	246	200	468	92.7%	Y
G1-05.2	Bed	14.2	115	100	417	100.0%	Y
G1-05.3	Bed	7.2	60	100	556	100.0%	Y
G1-05.4	Bed	12.5	110	100	557	100.0%	Y
G2-01.1	LKD	26.4	246	200	1012	99.2%	Y
G2-01.2	Bed	14.2	115	100	499	100.0%	Y
G2-01.3	Bed	7.2	60	100	1284	100.0%	Y
G2-01.4	Bed	12.5	110	100	1282	100.0%	Y
G2-02.1	LKD	27.8	249	200	1408	100.0%	Y
G2-02.2	Bed	9.7	81	100	950	100.0%	Y
G2-02.3	Bed	5.7	42	100	1026	100.0%	Y
G2-02.4	Bed	11.2	88	100	1409	100.0%	Y
G2-03.1	LKD	24.8	222	200	1645	100.0%	Y
G2-03.2	Bed	7.0	54	100	1035	100.0%	Y
G2-03.3	Bed	11.4	90	100	1436	100.0%	Y
G2-04.1	LKD	25.6	230	200	677	83.9%	Y
G2-04.2	Bed	7.0	54	100	519	100.0%	Y
G2-04.3	Bed	11.4	90	100	649	100.0%	Y
G2-05.1	LKD	19.8	172	200	625	100.0%	Y
G2-05.2	Bed	9.7	80	100	739	100.0%	Y
G2-06.1	LKD	26.4	246	200	491	92.7%	Y
G2-06.2	Bed	14.2	115	100	488	100.0%	Y
G2-06.3	Bed	7.2	60	100	609	100.0%	Y
G2-06.4	Bed	12.5	110	100	611	100.0%	Y
G3-01.1	LKD	26.4	246	200	1567	100.0%	Y
G3-01.2	Bed	14.2	115	100	621	100.0%	Y
G3-01.3	Bed	7.2	60	100	1400	100.0%	Y
G3-01.4	Bed	12.5	110	100	1291	100.0%	Y

Block G - Minimum Illuminance Levels to BS EN17037:2018+A1:2021 - Table NA.1

Space ID	Use	Area m2	Sensor Count	Target Lux	Mean Lux	% of grid target exceeded	Minimum 50% of Grid	Meets Criteria
G3-02.1	LKD	27.8	249	200	1620	100.0%		Y
G3-02.2	Bed	9.7	81	100	1684	100.0%		Y
G3-02.3	Bed	5.7	42	100	1815	100.0%		Y
G3-02.4	Bed	11.2	88	100	1430	100.0%		Y
G3-03.1	LKD	24.8	222	200	2021	100.0%		Y
G3-03.2	Bed	7.0	54	100	1693	100.0%		Y
G3-03.3	Bed	11.4	90	100	1470	100.0%		Y
G3-04.1	LKD	25.6	230	200	879	89.1%		Y
G3-04.2	Bed	7.0	54	100	751	100.0%		Y
G3-04.3	Bed	11.4	90	100	711	100.0%		Y
G3-05.1	LKD	19.8	172	200	840	100.0%		Y
G3-05.2	Bed	9.7	80	100	787	100.0%		Y
G3-06.1	LKD	26.4	246	200	660	98.0%		Y
G3-06.2	Bed	14.2	115	100	601	100.0%		Y
G3-06.3	Bed	7.2	60	100	676	100.0%		Y
G3-06.4	Bed	12.5	110	100	645	100.0%		Y

Table 23: Minimum daylight provision compliance for habitable rooms to BS EN17037:2018+A1:2021

Appendix B - Supplementary Information - IS/ BS EN17037:2018 Table A.1

Daylight Provision Room Results

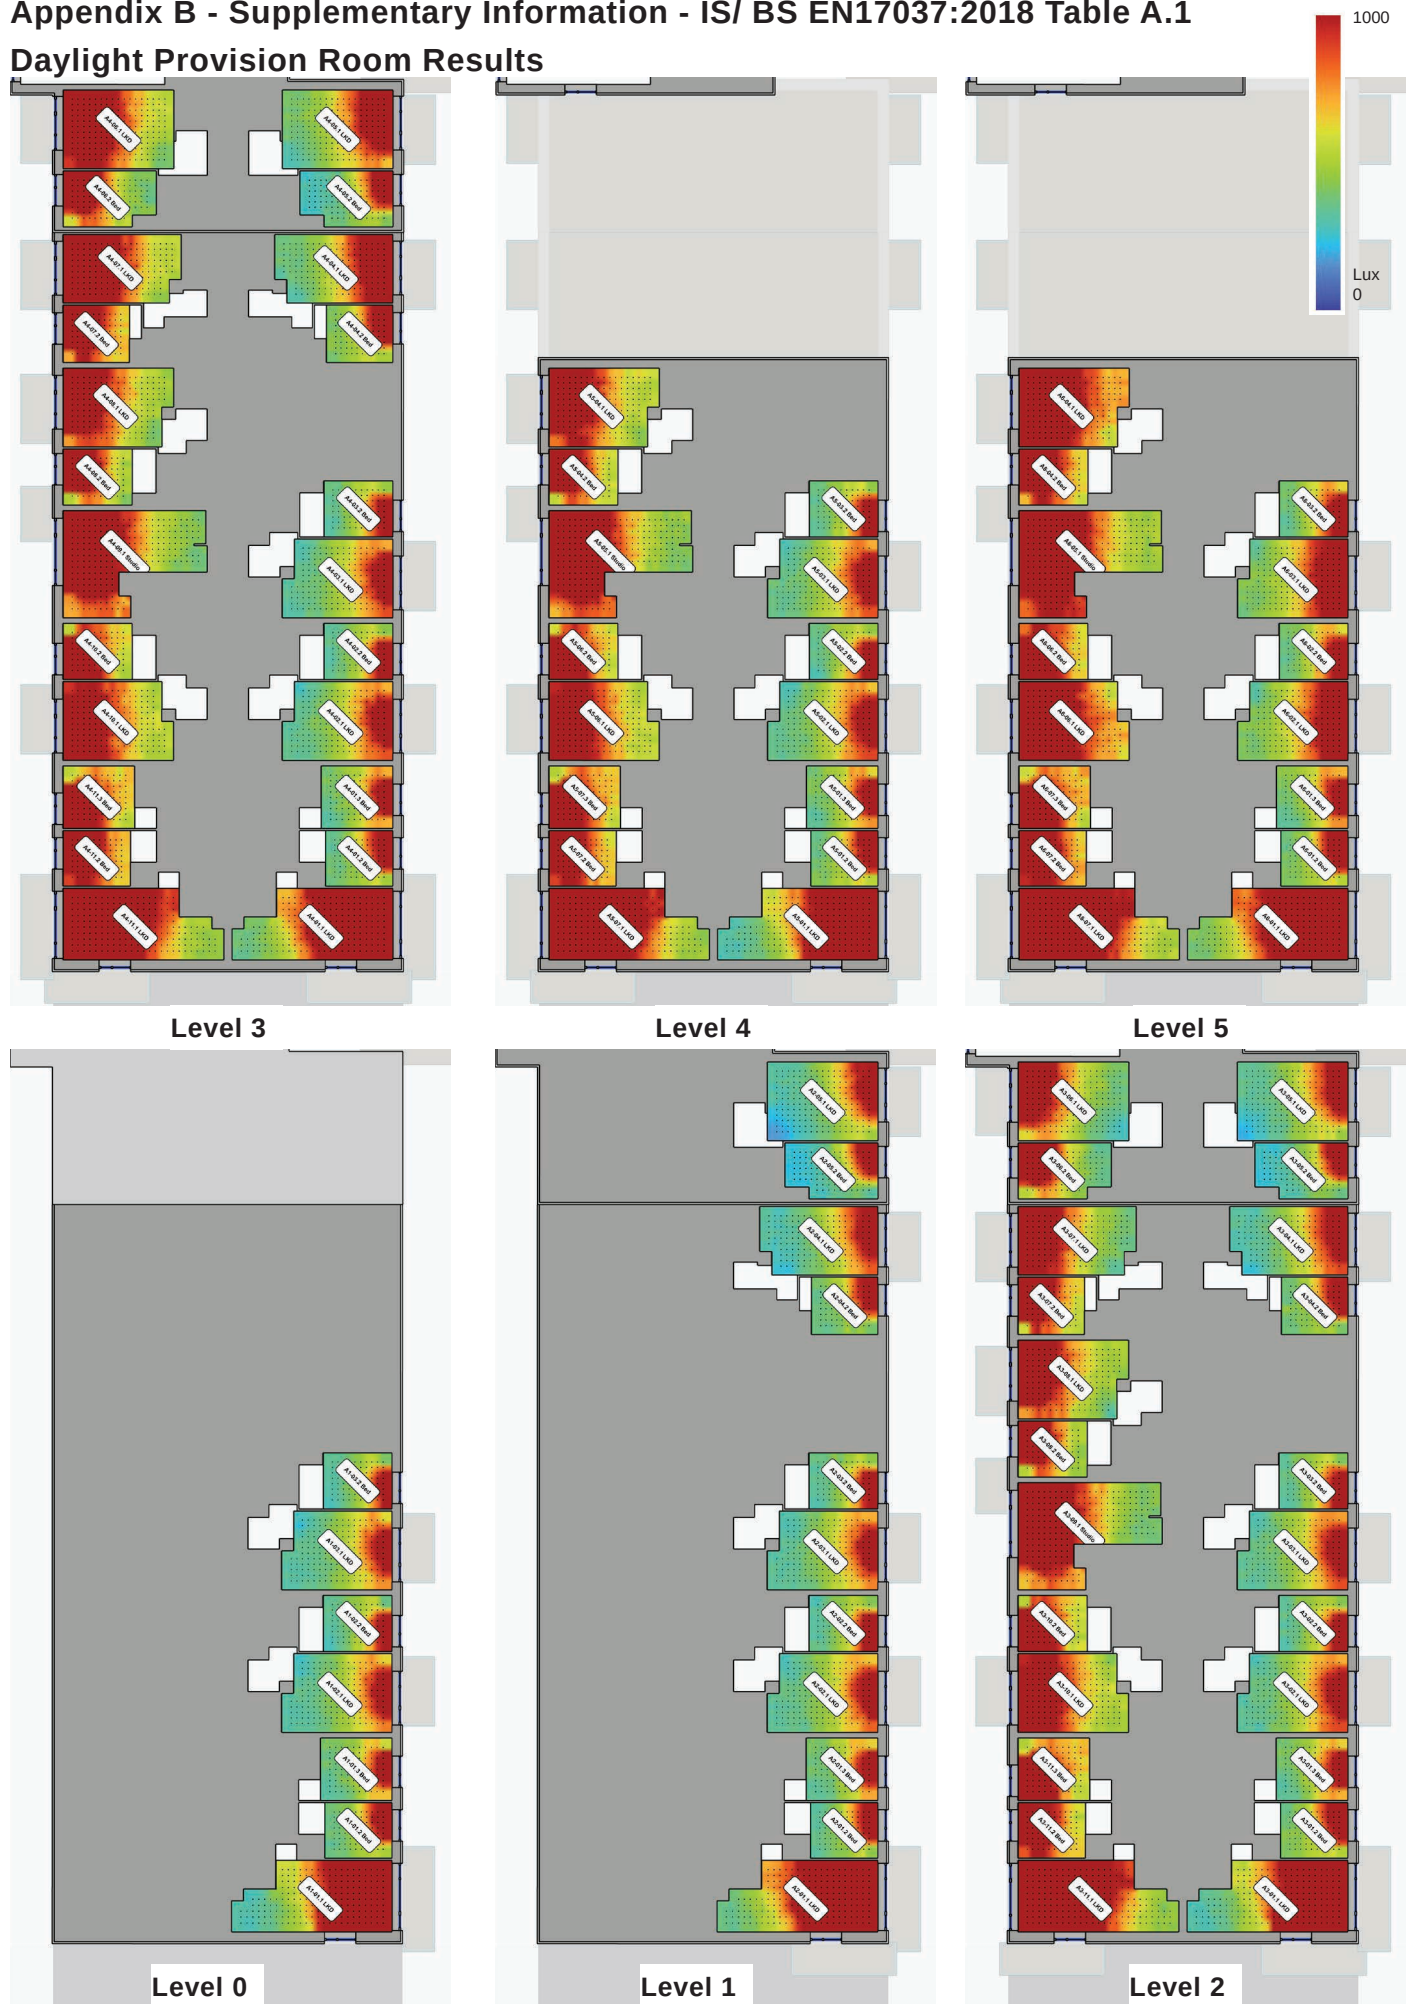


Figure 39: Block A - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

Block A - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
A1-01.1	LKD	25.6	211	High	78.7%	67.4%	55.3%	Minimum	78.8%	49.3%	17.9%
A1-01.2	Bed	9.5	80	Minimum	68.2%	49.2%	26.5%	Medium	82.0%	53.9%	25.4%
A1-01.3	Bed	11.4	90	Minimum	65.7%	46.5%	22.3%	Medium	81.3%	51.3%	22.1%
A1-02.1	LKD	20.9	190	Minimum	63.0%	42.6%	19.1%	Minimum	79.0%	46.7%	16.6%
A1-02.2	Bed	9.8	80	Minimum	64.4%	43.9%	20.3%	Minimum	80.3%	47.8%	16.9%
A1-03.1	LKD	20.9	190	Minimum	61.7%	40.7%	17.6%	Minimum	78.8%	45.5%	16.0%
A1-03.2	Bed	9.8	80	Minimum	63.8%	43.1%	20.1%	Minimum	79.6%	46.7%	16.2%
A2-01.1	LKD	25.6	211	High	80.1%	69.9%	59.3%	Medium	80.0%	54.2%	31.0%
A2-01.2	Bed	9.5	80	Minimum	67.9%	49.6%	25.8%	Medium	81.0%	50.9%	21.6%
A2-01.3	Bed	11.4	90	Minimum	65.4%	46.5%	23.0%	Medium	81.4%	51.9%	23.4%
A2-02.1	LKD	20.9	190	Minimum	64.4%	45.4%	21.1%	Minimum	79.5%	48.3%	18.9%
A2-02.2	Bed	9.8	80	Minimum	65.5%	45.9%	21.5%	Minimum	80.5%	48.6%	18.7%
A2-03.1	LKD	20.9	190	Minimum	63.6%	43.9%	20.3%	Minimum	78.9%	47.1%	16.6%
A2-03.2	Bed	9.8	80	Minimum	65.5%	45.8%	22.8%	Minimum	80.8%	48.4%	19.2%
A2-04.1	LKD	19.8	172	Minimum	62.0%	42.3%	20.7%	Minimum	77.0%	40.5%	10.7%
A2-04.2	Bed	9.7	80	Minimum	65.3%	46.4%	23.3%	Medium	81.3%	51.7%	25.1%
A2-05.1	LKD	22.1	204	Minimum	58.3%	38.6%	16.4%	Minimum	72.9%	32.4%	5.6%
A2-05.2	Bed	12.5	104	Minimum	54.2%	31.2%	8.5%	Minimum	73.9%	32.6%	3.8%
A3-01.1	LKD	25.6	211	High	79.2%	68.2%	57.1%	Medium	79.0%	50.5%	19.3%
A3-01.2	Bed	9.5	80	Medium	70.4%	53.4%	31.5%	Medium	83.1%	57.4%	33.1%
A3-01.3	Bed	11.4	90	Minimum	66.8%	48.7%	26.6%	Medium	81.3%	52.7%	24.8%
A3-02.1	LKD	20.9	190	Minimum	65.8%	47.9%	24.1%	Minimum	79.9%	49.7%	20.8%
A3-02.2	Bed	9.8	80	Minimum	65.9%	46.9%	23.5%	Minimum	80.6%	49.4%	18.4%
A3-03.1	LKD	20.9	190	Minimum	65.2%	46.8%	23.5%	Minimum	79.9%	49.5%	20.3%
A3-03.2	Bed	9.8	80	Minimum	66.1%	47.1%	23.7%	Minimum	80.9%	50.0%	20.8%
A3-04.1	LKD	19.8	172	Minimum	65.1%	46.8%	24.4%	Minimum	78.3%	44.6%	13.7%
A3-04.2	Bed	9.7	80	Minimum	67.4%	48.8%	26.0%	Medium	81.9%	53.8%	27.4%
A3-05.1	LKD	22.1	204	Minimum	62.5%	43.3%	21.0%	Minimum	76.6%	40.5%	10.3%
A3-05.2	Bed	12.5	104	Minimum	58.7%	37.3%	13.3%	Minimum	75.8%	36.1%	5.6%
A3-06.1	LKD	22.1	204	Minimum	60.8%	46.3%	30.5%	Minimum	73.2%	42.8%	21.5%
A3-06.2	Bed	12.5	104	Minimum	62.6%	48.1%	32.0%	Minimum	74.7%	45.0%	22.8%
A3-07.1	LKD	19.8	172	Medium	65.2%	51.4%	37.3%	Minimum	76.1%	48.6%	27.5%
A3-07.2	Bed	9.7	80	Medium	69.1%	56.1%	42.8%	Medium	81.6%	58.2%	40.8%
A3-08.1	LKD	20.9	190	Medium	65.9%	52.8%	38.8%	Medium	78.9%	52.3%	34.9%
A3-08.2	Bed	9.8	80	Medium	67.6%	54.4%	39.5%	Medium	79.2%	53.0%	32.9%
A3-09.1	Studio	29.4	248	Medium	71.1%	58.9%	45.8%	Minimum	77.1%	49.6%	29.3%
A3-10.1	LKD	20.9	190	Medium	69.0%	56.4%	43.2%	Medium	80.5%	55.8%	38.2%
A3-10.2	Bed	9.8	80	Medium	70.1%	56.7%	43.2%	Medium	81.2%	56.8%	38.4%
A3-11.1	LKD	25.6	211	High	81.5%	73.4%	64.4%	Medium	80.9%	58.2%	45.0%
A3-11.2	Bed	9.5	80	Medium	72.3%	59.3%	45.9%	Medium	82.5%	59.9%	42.7%
A3-11.3	Bed	11.4	90	Medium	67.9%	54.6%	40.8%	Medium	81.8%	58.2%	40.6%
A4-01.1	LKD	25.6	211	High	80.5%	71.0%	60.4%	Medium	80.2%	54.8%	33.0%
A4-01.2	Bed	9.5	80	Medium	69.8%	52.2%	31.0%	Medium	82.0%	54.3%	26.6%
A4-01.3	Bed	11.4	90	Minimum	67.3%	49.0%	27.0%	Medium	81.8%	53.6%	26.1%
A4-02.1	LKD	20.9	190	Minimum	66.1%	48.6%	25.4%	Medium	80.2%	50.3%	20.9%
A4-02.2	Bed	9.8	80	Minimum	65.7%	47.2%	23.9%	Minimum	80.5%	49.7%	20.1%
A4-03.1	LKD	20.9	190	Minimum	66.2%	48.4%	25.7%	Minimum	79.9%	49.7%	20.1%
A4-03.2	Bed	9.8	80	Minimum	67.6%	49.0%	26.4%	Minimum	80.5%	49.9%	20.3%
A4-04.1	LKD	19.8	172	Medium	71.8%	55.5%	37.7%	Medium	81.8%	53.2%	25.8%
A4-04.2	Bed	9.7	80	Medium	70.2%	53.2%	32.7%	Medium	83.6%	58.4%	36.1%

Block A - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
A4-05.1	LKD	22.1	204	Medium	71.0%	54.3%	36.1%	Medium	81.2%	51.6%	25.1%
A4-05.2	Bed	12.5	104	Minimum	62.1%	41.8%	17.5%	Minimum	77.5%	42.4%	8.8%
A4-06.1	LKD	22.1	204	Medium	69.4%	56.4%	44.6%	Medium	78.7%	52.7%	36.3%
A4-06.2	Bed	12.5	104	Medium	64.9%	50.8%	35.0%	Minimum	76.4%	48.2%	26.0%
A4-07.1	LKD	19.8	172	Medium	73.9%	61.7%	49.0%	Medium	80.9%	57.2%	40.3%
A4-07.2	Bed	9.7	80	Medium	72.1%	59.2%	46.1%	Medium	82.9%	61.8%	45.0%
A4-08.1	LKD	20.9	190	Medium	67.9%	55.2%	41.6%	Medium	80.0%	54.9%	37.1%
A4-08.2	Bed	9.8	80	Medium	68.2%	55.1%	41.1%	Medium	79.9%	54.6%	34.0%
A4-09.1	Studio	29.4	248	Medium	72.3%	60.3%	47.3%	Medium	78.0%	51.1%	30.8%
A4-10.1	LKD	20.9	190	Medium	69.4%	57.1%	43.7%	Medium	81.0%	57.6%	40.9%
A4-10.2	Bed	9.8	80	Medium	71.5%	57.8%	43.9%	Medium	81.6%	57.7%	39.1%
A4-11.1	LKD	25.6	211	High	80.8%	71.9%	63.1%	Medium	80.8%	57.6%	41.1%
A4-11.2	Bed	9.5	80	Medium	73.8%	61.1%	49.1%	Medium	83.0%	62.5%	45.2%
A4-11.3	Bed	11.4	90	Medium	68.1%	55.4%	41.6%	Medium	82.1%	59.1%	41.9%
A5-01.1	LKD	25.6	211	High	79.3%	68.6%	57.4%	Medium	79.6%	52.3%	23.0%
A5-01.2	Bed	9.5	80	Medium	70.8%	53.9%	34.8%	Medium	82.6%	56.0%	30.2%
A5-01.3	Bed	11.4	90	Medium	69.0%	51.2%	29.6%	Medium	81.6%	53.0%	26.0%
A5-02.1	LKD	20.9	190	Minimum	67.1%	49.8%	27.9%	Medium	80.3%	50.8%	22.0%
A5-02.2	Bed	9.8	80	Minimum	67.5%	49.3%	27.5%	Medium	81.1%	51.4%	22.1%
A5-03.1	LKD	20.9	190	Minimum	66.3%	48.9%	26.5%	Medium	80.3%	50.6%	21.3%
A5-03.2	Bed	9.8	80	Minimum	67.3%	49.0%	27.3%	Medium	81.8%	53.5%	25.1%
A5-04.1	LKD	20.9	190	Medium	69.3%	56.8%	43.4%	Medium	80.9%	57.2%	39.4%
A5-04.2	Bed	9.8	80	Medium	69.3%	56.1%	42.3%	Medium	81.6%	58.3%	40.6%
A5-05.1	Studio	29.4	248	Medium	73.9%	61.6%	49.5%	Medium	78.5%	51.9%	31.9%
A5-06.1	LKD	20.9	190	Medium	70.0%	57.5%	44.8%	Medium	81.6%	58.8%	42.3%
A5-06.2	Bed	9.8	80	Medium	70.9%	57.5%	44.0%	Medium	82.1%	59.2%	41.1%
A5-07.1	LKD	25.6	211	High	81.9%	74.7%	65.3%	Medium	81.5%	60.1%	46.1%
A5-07.2	Bed	9.5	80	Medium	74.0%	60.8%	47.9%	Medium	83.1%	62.7%	45.7%
A5-07.3	Bed	11.4	90	Medium	69.1%	56.2%	42.4%	Medium	82.4%	59.8%	43.4%
A6-01.1	LKD	25.6	211	High	82.2%	74.5%	64.2%	Medium	82.0%	57.6%	37.9%
A6-01.2	Bed	9.5	80	Medium	70.5%	53.8%	34.2%	Medium	83.0%	57.0%	33.4%
A6-01.3	Bed	11.4	90	Medium	68.7%	51.0%	30.5%	Medium	81.8%	53.8%	28.0%
A6-02.1	LKD	20.9	190	Medium	72.5%	57.2%	39.9%	Medium	83.0%	57.1%	33.2%
A6-02.2	Bed	9.8	80	Medium	69.7%	52.7%	32.2%	Medium	82.0%	54.3%	26.8%
A6-03.1	LKD	20.9	190	Medium	72.5%	56.8%	40.2%	Medium	83.2%	57.5%	33.8%
A6-03.2	Bed	9.8	80	Medium	70.0%	53.2%	33.1%	Medium	82.0%	54.2%	27.0%
A6-04.1	LKD	20.9	190	High	75.8%	64.1%	52.9%	Medium	83.4%	64.4%	49.1%
A6-04.2	Bed	9.8	80	Medium	73.2%	59.9%	47.4%	Medium	82.8%	62.0%	45.1%
A6-05.1	Studio	29.4	248	High	76.0%	64.3%	53.6%	Medium	80.5%	55.7%	37.4%
A6-06.1	LKD	20.9	190	High	76.2%	64.7%	53.4%	Medium	83.3%	64.3%	48.6%
A6-06.2	Bed	9.8	80	Medium	73.7%	60.5%	48.3%	Medium	82.5%	60.8%	44.0%
A6-07.1	LKD	25.6	211	High	82.4%	75.6%	66.3%	Medium	81.9%	60.8%	46.4%
A6-07.2	Bed	9.5	80	High	75.5%	63.1%	51.8%	Medium	83.3%	64.0%	48.6%
A6-07.3	Bed	11.4	90	Medium	69.8%	56.9%	43.8%	Medium	82.4%	60.6%	43.8%

Table 24: Daylight provision individual values for all habitable rooms to IS EN 17037:2018+A1:2021

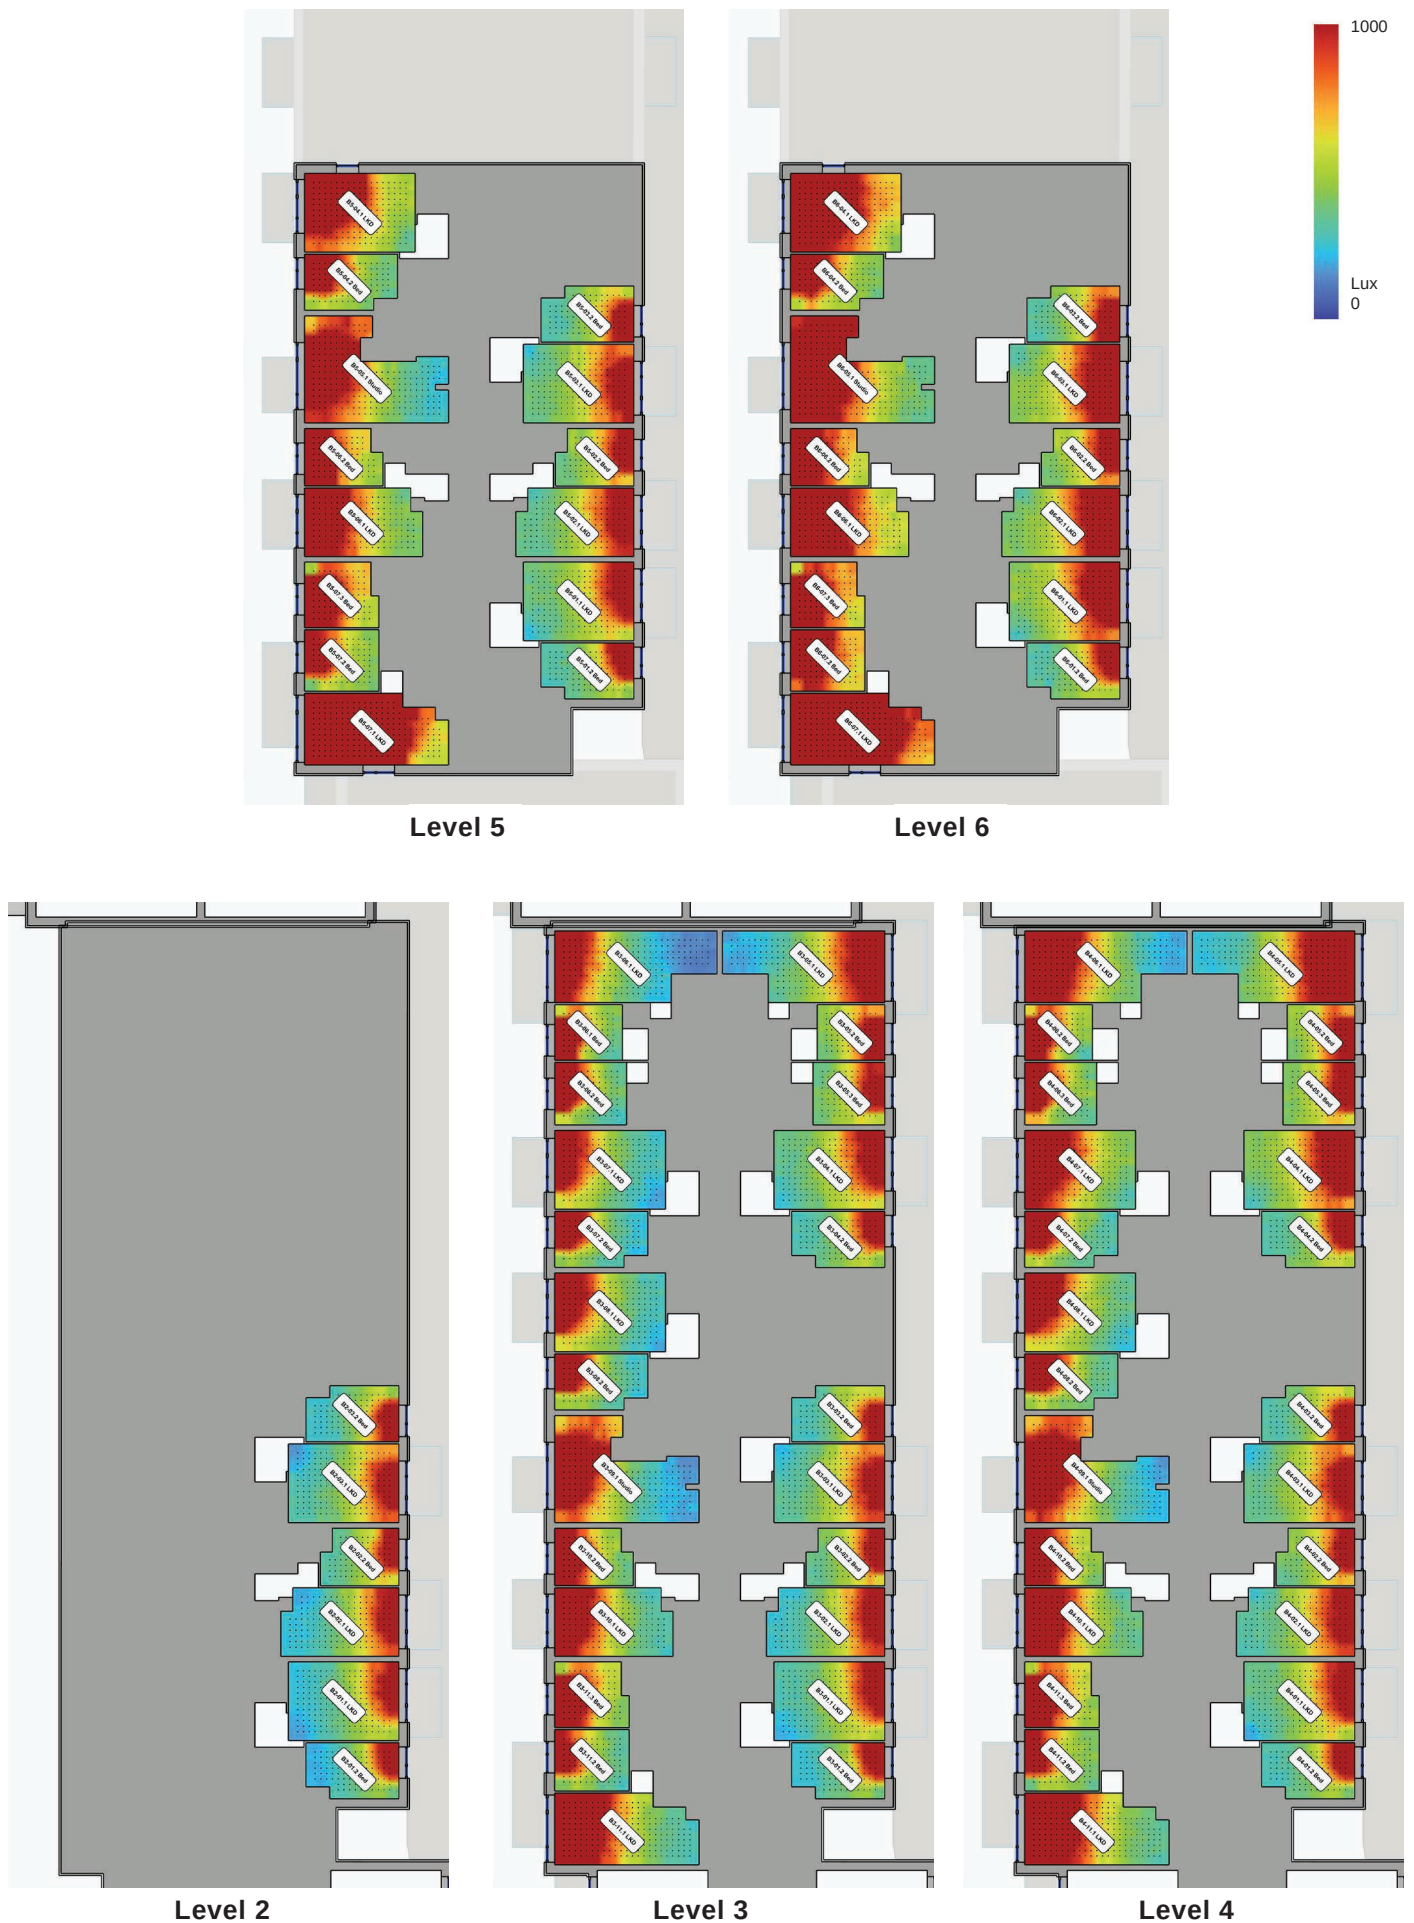


Figure 40: Block B - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

Block B - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
B2-01.1	LKD	22.1	204	Minimum	55.7%	35.1%	16.4%	Minimum	69.8%	28.2%	4.5%
B2-01.2	Bed	12.5	104	Minimum	55.5%	34.7%	13.2%	Minimum	67.1%	24.3%	2.5%
B2-02.1	LKD	19.8	172	Minimum	57.4%	38.4%	18.6%	Minimum	70.5%	29.2%	4.3%
B2-02.2	Bed	10.7	88	Minimum	65.5%	46.8%	27.8%	Minimum	78.6%	45.5%	20.9%
B2-03.1	LKD	22.1	204	Minimum	59.8%	40.0%	20.5%	Minimum	74.4%	36.7%	8.7%
B2-03.2	Bed	12.5	104	Minimum	60.0%	40.0%	18.9%	Minimum	75.6%	36.2%	6.2%
B3-01.1	LKD	22.1	204	Minimum	60.8%	41.4%	20.3%	Minimum	76.0%	38.4%	8.1%
B3-01.2	Bed	12.5	104	Minimum	57.7%	36.9%	13.4%	Minimum	74.5%	34.9%	3.6%
B3-02.1	LKD	19.8	172	Minimum	62.6%	44.1%	23.5%	Minimum	75.2%	37.5%	5.8%
B3-02.2	Bed	10.7	88	Medium	69.4%	52.0%	33.2%	Medium	81.1%	51.9%	26.6%
B3-03.1	LKD	22.1	204	Minimum	63.4%	45.3%	25.6%	Minimum	77.4%	42.3%	13.4%
B3-03.2	Bed	12.5	104	Minimum	62.7%	43.8%	22.4%	Minimum	77.0%	41.1%	9.5%
B3-04.1	LKD	22.1	204	Minimum	64.7%	46.9%	27.1%	Minimum	77.6%	44.8%	17.5%
B3-04.2	Bed	12.5	104	Minimum	62.6%	43.7%	23.1%	Minimum	77.4%	42.5%	12.7%
B3-05.1	LKD	26.1	220	Minimum	64.3%	46.6%	28.1%	Minimum	66.7%	22.9%	1.8%
B3-05.2	Bed	9.5	80	Medium	70.8%	54.0%	37.1%	Medium	82.4%	56.0%	33.8%
B3-05.3	Bed	11.4	90	Medium	69.0%	51.5%	32.9%	Medium	81.3%	52.9%	29.1%
B3-06.1	LKD	26.1	220	Minimum	50.4%	32.0%	11.1%	Minimum	51.2%	5.3%	1.1%
B3-06.1	Bed	9.5	80	Minimum	62.4%	46.5%	30.9%	Minimum	74.2%	42.1%	21.2%
B3-06.2	Bed	11.4	90	Minimum	60.4%	44.4%	25.4%	Minimum	72.8%	40.4%	15.3%
B3-07.1	LKD	22.1	204	Minimum	56.0%	37.7%	17.1%	Minimum	66.4%	31.0%	6.5%
B3-07.2	Bed	12.5	104	Minimum	54.4%	35.3%	16.8%	Minimum	65.1%	26.8%	7.4%
B3-08.1	LKD	22.1	204	Minimum	57.5%	40.1%	21.4%	Minimum	68.3%	34.6%	8.7%
B3-08.2	Bed	12.5	104	Minimum	56.3%	38.3%	21.1%	Minimum	67.4%	32.0%	9.4%
B3-09.1	Studio	29.8	252	Minimum	63.7%	49.4%	34.7%	Minimum	61.3%	16.8%	4.3%
B3-10.1	LKD	19.8	172	Minimum	62.1%	47.1%	31.1%	Minimum	72.1%	40.7%	16.5%
B3-10.2	Bed	10.7	88	Medium	65.9%	51.5%	35.6%	Minimum	76.7%	47.9%	25.1%
B3-11.1	LKD	24.2	226	Medium	65.7%	52.3%	38.5%	Minimum	72.8%	42.2%	17.0%
B3-11.2	Bed	11.6	99	Minimum	58.0%	40.9%	20.1%	Minimum	74.1%	42.8%	15.2%
B3-11.3	Bed	11.7	93	Medium	65.5%	51.4%	35.6%	Medium	78.4%	51.3%	31.1%
B4-01.1	LKD	22.1	204	Minimum	64.0%	45.6%	23.9%	Minimum	77.9%	45.4%	14.3%
B4-01.2	Bed	12.5	104	Minimum	60.6%	40.7%	17.4%	Minimum	77.5%	42.6%	9.7%
B4-02.1	LKD	19.8	172	Minimum	65.4%	47.7%	27.4%	Minimum	78.4%	46.1%	15.7%
B4-02.2	Bed	10.7	88	Medium	70.4%	53.4%	35.2%	Medium	82.1%	55.0%	31.9%
B4-03.1	LKD	22.1	204	Minimum	64.8%	47.1%	26.5%	Minimum	78.7%	46.3%	16.7%
B4-03.2	Bed	12.5	104	Minimum	64.2%	45.4%	24.6%	Minimum	78.5%	45.8%	13.6%
B4-04.1	LKD	22.1	204	Medium	71.8%	55.4%	39.0%	Medium	81.8%	53.5%	29.0%
B4-04.2	Bed	12.5	104	Minimum	65.4%	47.1%	26.7%	Minimum	78.7%	46.7%	17.1%
B4-05.1	LKD	26.1	220	Medium	71.3%	54.9%	38.5%	Minimum	73.9%	36.5%	4.3%
B4-05.2	Bed	9.5	80	Medium	72.8%	56.6%	40.4%	Medium	83.5%	58.3%	37.5%
B4-05.3	Bed	11.4	90	Medium	70.5%	53.6%	36.1%	Medium	82.7%	56.4%	33.7%
B4-06.1	LKD	26.1	220	Minimum	62.6%	48.0%	34.4%	Minimum	61.7%	23.1%	6.2%
B4-06.2	Bed	9.5	80	Medium	65.1%	51.1%	35.1%	Minimum	76.1%	47.5%	24.4%
B4-06.3	Bed	11.4	90	Minimum	62.9%	48.2%	30.9%	Minimum	75.9%	46.3%	22.8%
B4-07.1	LKD	22.1	204	Medium	65.6%	52.2%	36.6%	Minimum	76.3%	47.7%	26.4%
B4-07.2	Bed	12.5	104	Minimum	58.4%	41.2%	21.7%	Minimum	72.0%	36.8%	12.5%
B4-08.1	LKD	22.1	204	Minimum	60.6%	44.9%	28.1%	Minimum	72.3%	40.0%	13.1%
B4-08.2	Bed	12.5	104	Minimum	59.3%	43.0%	25.7%	Minimum	73.7%	40.7%	17.7%
B4-09.1	Studio	29.8	252	Medium	66.0%	52.3%	38.4%	Minimum	65.0%	25.5%	5.9%
B4-10.1	LKD	19.8	172	Medium	64.3%	50.0%	35.4%	Minimum	75.2%	45.5%	22.8%

Block B - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
B4-10.2	Bed	10.7	88	Medium	68.3%	54.3%	40.1%	Medium	79.3%	52.7%	30.0%
B4-11.1	LKD	24.2	226	Medium	67.5%	55.2%	42.7%	Minimum	75.7%	47.4%	24.2%
B4-11.2	Bed	11.6	99	Minimum	60.8%	44.8%	24.4%	Minimum	77.4%	49.8%	24.9%
B4-11.3	Bed	11.7	93	Medium	66.9%	53.7%	39.4%	Medium	80.3%	54.6%	34.6%
B5-01.1	LKD	22.1	204	Minimum	65.5%	47.9%	27.4%	Minimum	78.7%	48.4%	20.5%
B5-01.2	Bed	12.5	104	Minimum	61.8%	42.9%	19.1%	Minimum	78.4%	45.7%	13.7%
B5-02.1	LKD	19.8	172	Minimum	66.7%	49.8%	30.6%	Medium	79.9%	50.3%	23.2%
B5-02.2	Bed	10.7	88	Medium	71.1%	55.0%	37.3%	Medium	82.5%	55.8%	32.7%
B5-03.1	LKD	22.1	204	Minimum	66.6%	49.8%	30.8%	Medium	79.9%	50.1%	23.6%
B5-03.2	Bed	12.5	104	Minimum	65.0%	46.8%	26.0%	Minimum	78.6%	46.0%	14.3%
B5-04.1	LKD	22.1	204	Medium	72.0%	59.5%	47.9%	Medium	80.4%	56.2%	37.3%
B5-04.2	Bed	12.5	104	Minimum	61.5%	46.7%	28.7%	Minimum	75.7%	45.1%	22.7%
B5-05.1	Studio	29.8	252	Medium	67.8%	55.4%	42.6%	Minimum	69.8%	34.2%	8.4%
B5-06.1	LKD	19.8	172	Medium	66.6%	53.2%	38.5%	Medium	77.6%	50.3%	28.7%
B5-06.2	Bed	10.7	88	Medium	69.5%	56.3%	42.0%	Medium	80.4%	55.4%	34.3%
B5-07.1	LKD	24.2	226	High	81.4%	72.6%	63.2%	High	83.1%	63.6%	50.8%
B5-07.2	Bed	11.6	99	Minimum	63.3%	48.7%	29.9%	Medium	78.7%	51.5%	28.6%
B5-07.3	Bed	11.7	93	Medium	69.1%	55.6%	41.8%	Medium	81.7%	58.2%	39.7%
B6-01.1	LKD	22.1	204	Medium	72.7%	56.8%	40.8%	Medium	82.8%	56.9%	33.7%
B6-01.2	Bed	12.5	104	Minimum	65.2%	47.1%	25.7%	Minimum	78.5%	46.2%	14.9%
B6-02.1	LKD	19.8	172	Medium	74.0%	59.0%	43.2%	Medium	82.6%	56.4%	33.5%
B6-02.2	Bed	10.7	88	Medium	73.2%	57.6%	41.5%	Medium	83.2%	58.1%	37.2%
B6-03.1	LKD	22.1	204	Medium	72.0%	56.9%	40.7%	Medium	82.2%	55.9%	32.6%
B6-03.2	Bed	12.5	104	Minimum	67.8%	49.9%	31.2%	Minimum	79.3%	48.4%	20.1%
B6-04.1	LKD	22.1	204	High	77.6%	65.9%	55.8%	Medium	83.1%	62.8%	48.1%
B6-04.2	Bed	12.5	104	Medium	64.7%	50.2%	33.4%	Medium	78.4%	50.3%	28.0%
B6-05.1	Studio	29.8	252	High	75.5%	63.7%	51.8%	Minimum	77.2%	48.3%	24.2%
B6-06.1	LKD	19.8	172	High	74.6%	62.6%	50.5%	Medium	82.2%	60.2%	42.0%
B6-06.2	Bed	10.7	88	Medium	72.6%	60.1%	46.4%	Medium	82.4%	61.1%	42.8%
B6-07.1	LKD	24.2	226	High	83.4%	77.1%	67.7%	High	85.5%	68.1%	56.1%
B6-07.2	Bed	11.6	99	Medium	72.0%	59.3%	46.6%	Medium	83.0%	62.4%	45.8%
B6-07.3	Bed	11.7	93	Medium	71.0%	57.9%	45.5%	Medium	82.9%	61.7%	44.4%

Table 25: Daylight provision individual values for all habitable rooms to IS EN 17037:2018+A1:2021




Level 1



Level 2



Level 3

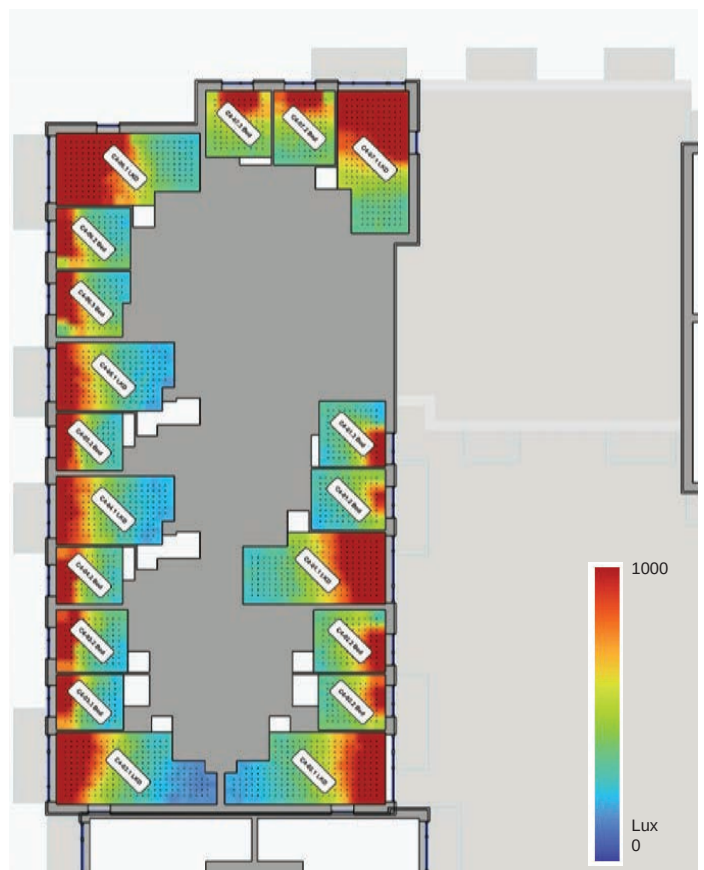

Level 4

Figure 41: Block C - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

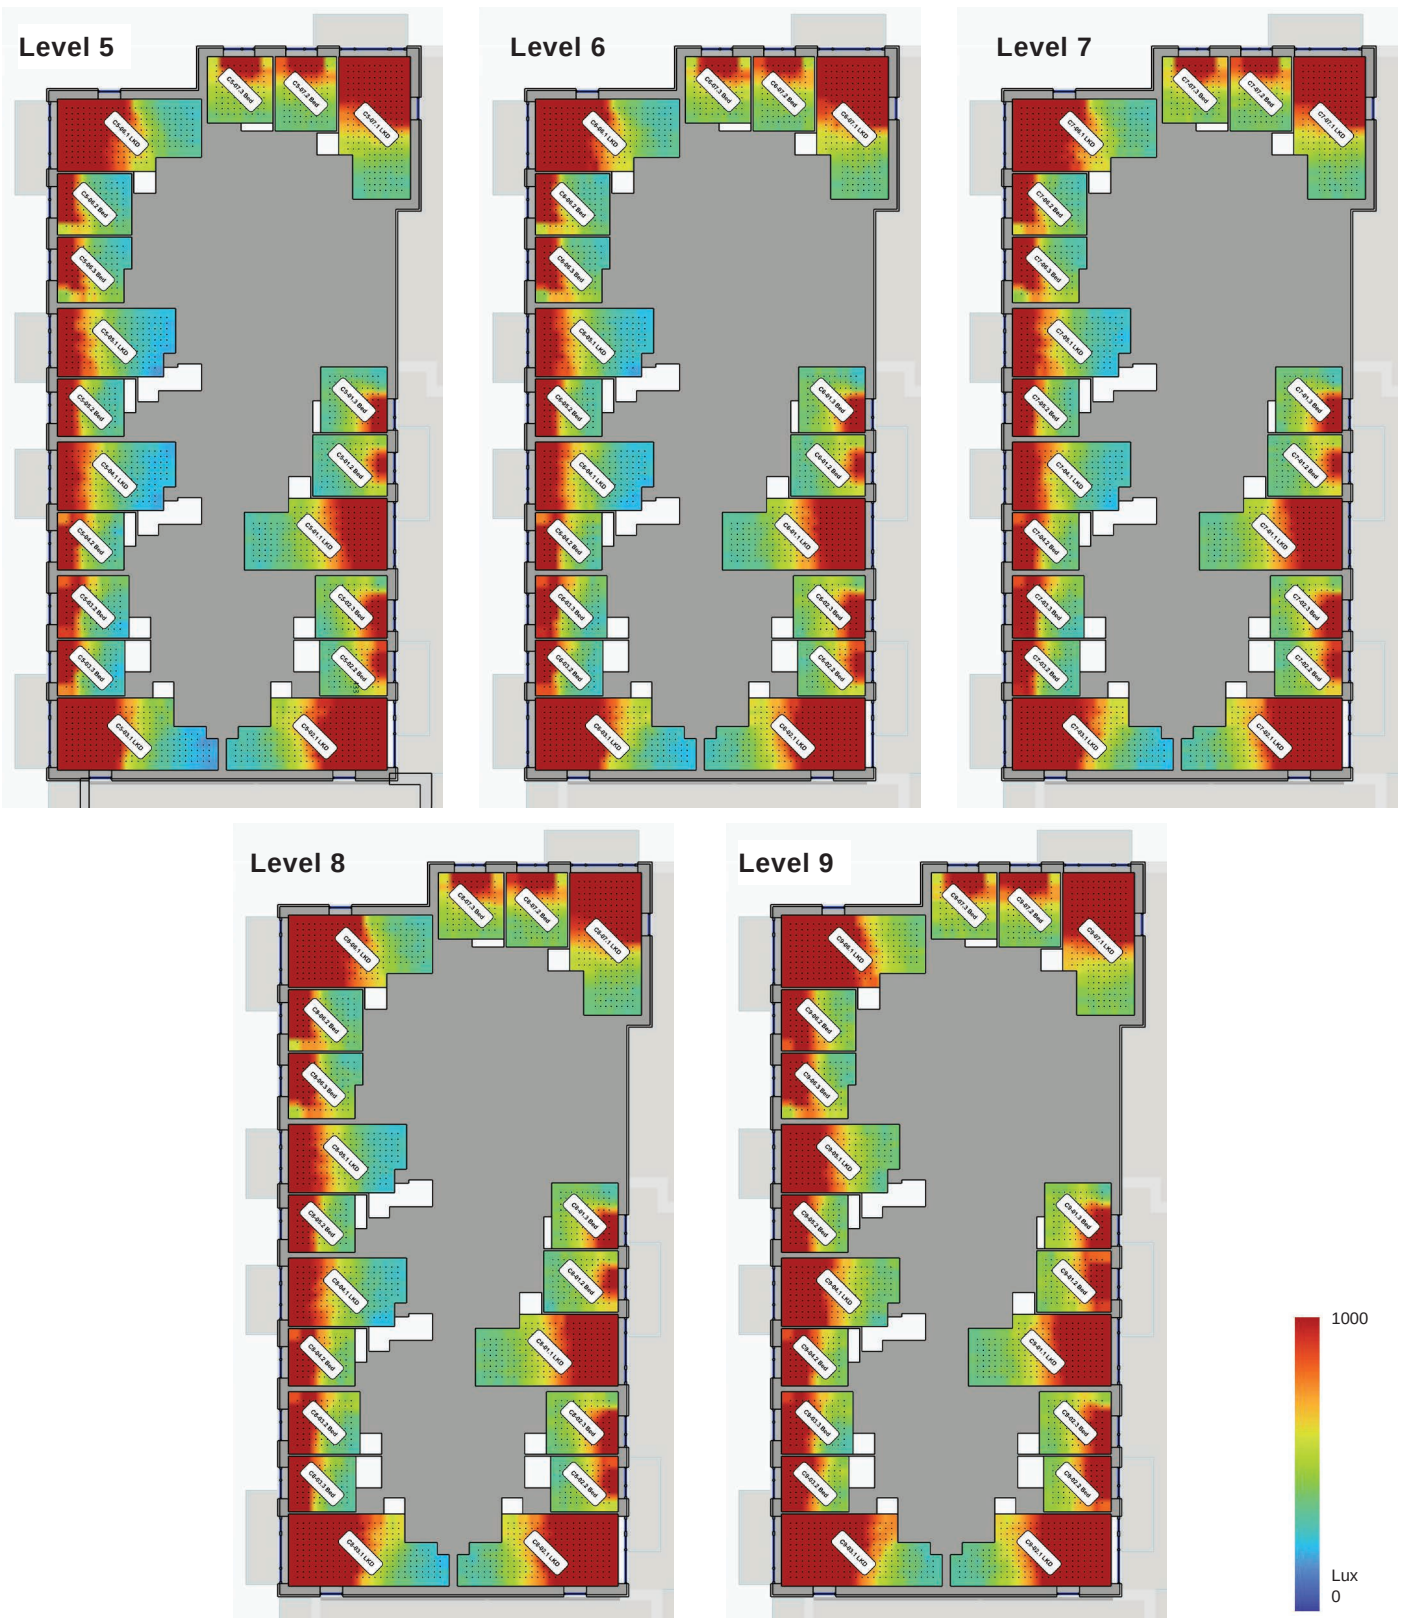


Figure 42: Block C - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

Block C - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
C1-08.1	LKD	19.8	172	Minimum	58.7%	39.8%	14.1%	Minimum	72.0%	32.4%	3.6%
C1-08.2	Bed	9.7	80	Minimum	59.2%	38.5%	12.2%	Minimum	78.4%	44.4%	13.3%
C1-09.1	LKD	19.7	182	Minimum	60.3%	41.6%	17.5%	Minimum	75.0%	37.7%	6.7%
C1-09.2	Bed	10.5	81	Minimum	62.3%	42.8%	17.4%	Minimum	79.0%	46.1%	16.5%
C1-10.1	LKD	19.7	182	Minimum	51.2%	31.9%	19.6%	Minimum	72.5%	33.1%	16.9%
C1-10.2	Bed	10.5	81	Minimum	62.0%	42.6%	28.2%	Minimum	77.6%	42.5%	25.1%

Block C - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
C1-11.1	Studio	29.8	252	Minimum	53.1%	32.2%	18.9%	Minimum	67.0%	23.4%	9.5%
C2-08.1	LKD	19.8	172	Minimum	60.9%	42.2%	16.8%	Minimum	75.1%	36.5%	4.0%
C2-08.2	Bed	9.7	80	Minimum	61.9%	42.9%	18.0%	Minimum	79.8%	49.6%	19.3%
C2-09.1	LKD	19.7	182	Minimum	61.9%	43.5%	20.4%	Minimum	76.8%	42.1%	9.1%
C2-09.2	Bed	10.5	81	Minimum	64.4%	45.5%	21.9%	Medium	80.3%	50.9%	23.4%
C2-10.1	LKD	19.7	182	Minimum	52.5%	33.2%	20.1%	Minimum	74.2%	35.3%	17.6%
C2-10.2	Bed	10.5	81	Minimum	66.5%	48.4%	32.8%	Minimum	79.7%	48.6%	28.4%
C2-11.1	Studio	29.8	252	Minimum	55.0%	33.9%	19.3%	Minimum	69.5%	26.8%	10.2%
C3-01.1	LKD	24.4	221	Minimum	65.7%	48.0%	30.2%	Minimum	72.5%	33.9%	10.3%
C3-01.2	Bed	11.6	99	Fail	45.7%	23.4%	7.4%	Minimum	66.8%	25.7%	5.9%
C3-01.3	Bed	11.1	90	Fail	41.7%	18.7%	5.5%	Minimum	64.8%	21.1%	4.5%
C3-02.1	LKD	25.9	236	Minimum	60.9%	41.8%	22.1%	Minimum	66.0%	22.9%	1.4%
C3-02.2	Bed	9.5	80	Minimum	59.4%	40.0%	19.4%	Minimum	77.2%	42.6%	17.7%
C3-02.3	Bed	11.4	90	Minimum	62.3%	43.0%	23.8%	Minimum	78.6%	46.1%	21.6%
C3-03.1	LKD	25.9	236	Minimum	51.2%	31.9%	9.7%	Minimum	53.1%	5.0%	0.3%
C3-03.2	Bed	9.5	80	Fail	49.5%	24.2%	5.9%	Minimum	65.2%	22.9%	2.4%
C3-03.3	Bed	11.4	90	Minimum	53.7%	34.5%	10.5%	Minimum	65.8%	27.4%	4.5%
C3-04.1	LKD	19.8	172	Minimum	50.5%	28.0%	8.7%	Minimum	61.6%	14.9%	1.3%
C3-04.2	Bed	9.7	80	Minimum	54.5%	36.7%	13.8%	Minimum	70.1%	34.9%	6.1%
C3-05.1	LKD	19.8	172	Minimum	52.3%	30.4%	9.4%	Minimum	62.5%	16.1%	2.9%
C3-05.2	Bed	9.7	80	Minimum	54.2%	34.1%	10.3%	Minimum	68.3%	31.4%	6.1%
C3-06.1	LKD	24.8	230	Medium	73.5%	59.6%	45.7%	Minimum	73.5%	37.2%	7.3%
C3-06.2	Bed	11.6	99	Minimum	52.8%	31.7%	10.3%	Minimum	67.8%	29.6%	6.4%
C3-06.3	Bed	11.7	93	Minimum	55.5%	35.6%	12.8%	Minimum	69.5%	32.8%	7.0%
C3-07.1	LKD	24.4	221	Minimum	64.1%	46.0%	23.7%	Minimum	76.0%	39.2%	4.2%
C3-07.2	Bed	11.6	99	Minimum	63.4%	44.8%	20.4%	Medium	80.1%	50.2%	20.0%
C3-07.3	Bed	11.1	90	Minimum	67.6%	49.3%	27.0%	Medium	81.8%	54.6%	28.6%
C3-08.1	LKD	19.8	172	Medium	69.6%	52.8%	34.3%	Minimum	79.3%	49.2%	18.5%
C3-08.2	Bed	9.7	80	Minimum	67.9%	49.7%	26.6%	Medium	81.7%	54.5%	27.8%
C3-09.1	LKD	19.7	182	Medium	70.6%	54.6%	37.0%	Medium	80.9%	53.0%	28.5%
C3-09.2	Bed	10.5	81	Medium	68.7%	51.2%	30.3%	Medium	81.8%	54.7%	30.2%
C3-10.1	LKD	19.7	182	Minimum	63.2%	46.0%	30.5%	Minimum	77.9%	45.0%	25.9%
C3-10.2	Bed	10.5	81	Medium	68.4%	51.4%	35.1%	Medium	79.9%	50.8%	30.4%
C3-11.1	Studio	29.8	252	Minimum	64.7%	45.7%	28.1%	Minimum	73.9%	32.9%	13.4%
C4-01.1	LKD	24.4	221	Medium	67.4%	50.2%	33.2%	Minimum	75.0%	38.6%	13.9%
C4-01.2	Bed	11.6	99	Minimum	52.0%	29.8%	8.9%	Minimum	71.5%	31.5%	6.3%
C4-01.3	Bed	11.1	90	Minimum	53.7%	30.2%	10.8%	Minimum	74.6%	34.3%	8.0%
C4-02.1	LKD	25.9	236	Minimum	63.2%	44.4%	24.2%	Minimum	67.3%	24.1%	1.5%
C4-02.2	Bed	9.5	80	Minimum	61.7%	42.6%	21.8%	Minimum	78.9%	47.7%	21.3%
C4-02.2	Bed	11.4	90	Minimum	64.7%	46.1%	26.0%	Minimum	80.0%	49.4%	24.2%
C4-03.1	LKD	25.9	236	Minimum	53.8%	36.9%	12.8%	Minimum	57.4%	6.8%	0.8%
C4-03.2	Bed	11.4	90	Minimum	55.7%	37.2%	16.3%	Minimum	67.9%	33.0%	6.0%
C4-03.3	Bed	9.5	80	Minimum	54.1%	33.9%	8.7%	Minimum	67.8%	29.7%	3.3%
C4-04.1	LKD	19.8	172	Minimum	53.9%	34.5%	10.2%	Minimum	63.6%	20.7%	2.3%
C4-04.2	Bed	9.7	80	Minimum	58.2%	40.6%	21.6%	Minimum	71.9%	39.4%	9.8%
C4-05.1	LKD	19.8	172	Minimum	54.2%	34.1%	10.5%	Minimum	64.2%	21.8%	3.2%
C4-05.2	Bed	9.7	80	Minimum	55.8%	36.4%	12.2%	Minimum	72.1%	37.4%	7.2%
C4-06.1	LKD	24.8	230	Medium	73.7%	59.9%	46.7%	Minimum	75.0%	41.4%	9.8%
C4-06.2	Bed	11.6	99	Minimum	53.7%	33.2%	10.8%	Minimum	70.6%	34.5%	8.4%
C4-06.3	Bed	11.7	93	Minimum	56.6%	37.6%	14.7%	Minimum	71.1%	36.2%	7.7%

Block C - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule


Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
C4-07.1	LKD	24.4	221	High	77.5%	64.3%	50.6%	Medium	80.5%	53.3%	26.6%
C4-07.2	Bed	11.6	99	Minimum	64.5%	46.1%	22.9%	Medium	80.6%	52.4%	24.2%
C4-07.3	Bed	11.1	90	Medium	67.9%	50.3%	27.9%	Medium	83.1%	56.6%	32.9%
C5-01.1	LKD	24.4	221	Medium	71.2%	55.1%	39.2%	Minimum	77.5%	45.3%	19.1%
C5-01.2	Bed	11.6	99	Minimum	58.2%	37.4%	15.6%	Minimum	78.3%	44.7%	16.2%
C5-01.3	Bed	11.1	90	Minimum	60.0%	40.0%	17.5%	Minimum	79.1%	46.3%	19.3%
C5-02.1	LKD	25.9	236	High	76.5%	63.4%	50.2%	Minimum	75.5%	42.9%	15.4%
C5-02.2	Bed	9.5	80	Minimum	64.2%	45.9%	24.7%	Minimum	79.0%	48.5%	22.4%
C5-02.3	Bed	11.4	90	Minimum	65.6%	47.7%	27.4%	Medium	81.3%	52.4%	26.2%
C5-03.1	LKD	25.9	236	Medium	67.3%	54.5%	42.7%	Minimum	64.2%	26.9%	6.1%
C5-03.2	Bed	11.4	90	Minimum	57.6%	39.7%	18.7%	Minimum	72.2%	38.8%	7.7%
C5-03.3	Bed	9.5	80	Minimum	56.8%	38.0%	11.3%	Minimum	70.0%	33.6%	5.5%
C5-04.1	LKD	19.8	172	Minimum	55.1%	37.3%	12.4%	Minimum	66.3%	27.2%	4.1%
C5-04.2	Bed	9.7	80	Minimum	59.8%	43.7%	24.6%	Minimum	74.0%	42.9%	14.9%
C5-05.1	LKD	19.8	172	Minimum	56.1%	38.4%	12.1%	Minimum	66.1%	27.6%	4.8%
C5-05.2	Bed	9.7	80	Minimum	57.3%	40.0%	18.0%	Minimum	72.9%	41.1%	11.4%
C5-06.1	LKD	24.8	230	Medium	74.7%	61.6%	48.8%	Minimum	76.2%	43.5%	11.5%
C5-06.2	Bed	11.6	99	Minimum	56.6%	38.5%	16.1%	Minimum	71.6%	37.1%	9.7%
C5-06.3	Bed	11.7	93	Minimum	58.5%	40.6%	17.7%	Minimum	73.4%	40.0%	10.2%
C5-07.1	LKD	24.4	221	High	78.4%	66.8%	52.9%	Medium	80.8%	54.1%	29.6%
C5-07.2	Bed	11.6	99	Minimum	65.5%	47.1%	24.5%	Medium	81.6%	54.4%	27.7%
C5-07.3	Bed	11.1	90	Medium	69.1%	51.8%	31.5%	Medium	83.5%	57.7%	34.8%
C6-01.1	LKD	24.4	221	Medium	72.2%	57.2%	41.8%	Minimum	79.2%	49.6%	23.0%
C6-01.2	Bed	11.6	99	Minimum	61.3%	42.0%	18.4%	Minimum	79.4%	49.2%	21.2%
C6-01.3	Bed	11.1	90	Minimum	63.1%	43.9%	21.2%	Minimum	79.9%	48.6%	21.6%
C6-02.1	LKD	25.9	236	High	78.3%	66.8%	54.6%	Minimum	77.5%	48.2%	22.0%
C6-02.2	Bed	9.5	80	Minimum	65.9%	48.5%	27.4%	Medium	80.8%	51.8%	26.6%
C6-02.3	Bed	11.4	90	Minimum	67.5%	50.0%	30.5%	Medium	82.7%	56.5%	33.0%
C6-03.1	LKD	25.9	236	Medium	73.4%	61.2%	49.3%	Minimum	68.9%	37.5%	11.7%
C6-03.2	Bed	9.5	80	Minimum	59.2%	42.1%	17.5%	Minimum	73.4%	41.1%	7.6%
C6-03.3	Bed	11.4	90	Minimum	59.4%	43.1%	21.5%	Minimum	73.2%	41.4%	13.5%
C6-04.1	LKD	19.8	172	Minimum	57.3%	41.0%	16.5%	Minimum	68.6%	32.8%	6.7%
C6-04.2	Bed	9.7	80	Minimum	61.4%	46.4%	28.1%	Minimum	75.8%	45.7%	20.9%
C6-05.1	LKD	19.8	172	Minimum	57.9%	41.8%	16.3%	Minimum	69.4%	32.8%	6.5%
C6-05.2	Bed	9.7	80	Minimum	59.7%	44.2%	22.5%	Minimum	75.0%	44.4%	16.4%
C6-06.1	LKD	24.8	230	High	75.9%	63.2%	50.5%	Minimum	76.8%	45.6%	14.7%
C6-06.2	Bed	11.6	99	Minimum	57.3%	40.1%	17.6%	Minimum	74.7%	43.0%	13.6%
C6-06.3	Bed	11.7	93	Minimum	58.8%	41.7%	19.8%	Minimum	75.4%	44.0%	15.6%
C6-07.1	LKD	24.4	221	High	78.6%	67.3%	53.6%	Medium	81.5%	55.2%	31.4%
C6-07.2	Bed	11.6	99	Minimum	66.2%	48.3%	26.2%	Medium	81.8%	54.6%	29.6%
C6-07.3	Bed	11.1	90	Medium	70.2%	53.4%	34.5%	Medium	83.7%	58.1%	36.2%
C7-01.1	LKD	24.4	221	Medium	73.7%	58.8%	43.9%	Medium	80.6%	52.2%	27.4%
C7-01.2	Bed	11.6	99	Minimum	62.5%	43.9%	20.2%	Medium	80.9%	52.0%	26.3%
C7-01.3	Bed	11.1	90	Minimum	64.3%	46.3%	24.3%	Medium	80.5%	50.7%	23.5%
C7-02.1	LKD	25.9	236	High	78.5%	67.2%	55.3%	Medium	78.4%	50.3%	23.5%
C7-02.2	Bed	9.5	80	Minimum	66.1%	49.0%	29.0%	Medium	80.9%	52.1%	27.0%
C7-02.3	Bed	11.4	90	Minimum	67.5%	50.0%	30.6%	Medium	82.6%	55.9%	32.2%
C7-03.1	LKD	25.9	236	High	75.0%	62.4%	50.9%	Minimum	70.0%	40.6%	12.9%
C7-03.2	Bed	9.5	80	Minimum	61.0%	46.0%	24.2%	Minimum	76.0%	46.3%	14.6%
C7-03.3	Bed	11.4	90	Minimum	61.6%	46.9%	27.8%	Minimum	74.3%	44.6%	15.8%

Block C - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule


Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
C7-04.1	LKD	19.8	172	Minimum	59.0%	43.5%	21.9%	Minimum	71.0%	37.7%	8.9%
C7-04.2	Bed	9.7	80	Minimum	63.4%	49.5%	33.1%	Minimum	77.2%	48.8%	25.4%
C7-05.1	LKD	19.8	172	Minimum	59.2%	44.3%	21.9%	Minimum	70.7%	34.9%	7.8%
C7-05.2	Bed	9.7	80	Minimum	61.8%	48.1%	27.5%	Minimum	76.0%	46.8%	18.9%
C7-06.1	LKD	24.8	230	High	76.4%	63.6%	51.7%	Minimum	77.5%	47.9%	18.4%
C7-06.2	Bed	11.6	99	Minimum	58.7%	42.0%	20.2%	Minimum	74.8%	43.5%	15.3%
C7-06.3	Bed	11.7	93	Minimum	60.8%	44.6%	23.3%	Minimum	75.3%	44.7%	17.7%
C7-07.1	LKD	24.4	221	High	78.6%	67.5%	54.0%	Medium	81.5%	55.5%	31.5%
C7-07.2	Bed	11.6	99	Minimum	66.5%	48.4%	26.8%	Medium	82.1%	55.9%	31.4%
C7-07.3	Bed	11.1	90	Medium	69.9%	53.3%	33.7%	Medium	83.5%	58.5%	36.4%
C8-01.1	LKD	24.4	221	Medium	73.5%	58.9%	44.1%	Medium	81.0%	52.7%	29.2%
C8-01.2	Bed	11.6	99	Minimum	63.0%	44.8%	21.2%	Medium	81.2%	52.7%	27.5%
C8-01.3	Bed	11.1	90	Minimum	66.2%	48.6%	27.8%	Medium	81.5%	53.2%	27.5%
C8-02.1	LKD	25.9	236	High	78.3%	66.5%	55.0%	Medium	78.9%	51.5%	24.6%
C8-02.2	Bed	9.5	80	Minimum	66.2%	49.2%	29.3%	Medium	80.1%	51.1%	25.4%
C8-02.3	Bed	11.4	90	Medium	67.6%	50.2%	31.2%	Medium	82.7%	56.4%	33.6%
C8-03.1	LKD	25.9	236	High	75.5%	63.0%	51.9%	Minimum	71.5%	42.7%	13.2%
C8-03.2	Bed	11.4	90	Minimum	63.8%	49.8%	31.1%	Minimum	76.4%	47.6%	23.2%
C8-03.3	Bed	9.5	80	Minimum	61.7%	47.6%	26.6%	Minimum	76.4%	47.2%	16.6%
C8-04.1	LKD	19.8	172	Minimum	60.0%	45.6%	26.2%	Minimum	71.8%	39.9%	8.9%
C8-04.2	Bed	9.7	80	Medium	65.3%	52.0%	37.1%	Medium	77.8%	50.2%	28.2%
C8-05.1	LKD	19.8	172	Minimum	60.9%	46.8%	26.5%	Minimum	71.9%	38.9%	8.9%
C8-05.2	Bed	9.7	80	Minimum	62.7%	49.1%	31.0%	Minimum	76.8%	48.1%	23.4%
C8-06.1	LKD	24.8	230	High	76.5%	64.0%	52.0%	Minimum	78.0%	49.5%	20.7%
C8-06.2	Bed	11.6	99	Minimum	60.7%	45.3%	25.0%	Minimum	75.8%	45.3%	17.2%
C8-06.3	Bed	11.7	93	Minimum	62.3%	47.2%	28.1%	Minimum	76.1%	46.3%	19.2%
C8-07.1	LKD	24.4	221	High	78.7%	67.8%	54.2%	Medium	81.4%	55.5%	31.9%
C8-07.2	Bed	11.6	99	Minimum	66.5%	48.6%	26.7%	Medium	82.0%	55.3%	30.5%
C8-07.3	Bed	11.1	90	Medium	70.3%	53.9%	35.5%	Medium	84.0%	58.9%	37.5%
C9-01.1	LKD	24.4	221	Medium	75.4%	61.6%	47.0%	Medium	81.8%	54.7%	30.8%
C9-01.2	Bed	11.6	99	Medium	71.5%	55.3%	38.0%	Medium	83.9%	60.0%	39.0%
C9-01.3	Bed	11.1	90	Medium	68.5%	51.4%	33.4%	Medium	82.5%	56.5%	34.6%
C9-02.1	LKD	25.9	236	High	79.2%	68.2%	57.2%	Medium	79.4%	52.5%	25.7%
C9-02.2	Bed	9.5	80	Medium	74.5%	58.9%	43.0%	Medium	84.1%	59.9%	39.6%
C9-02.3	Bed	11.4	90	Medium	69.4%	52.9%	35.2%	Medium	83.2%	58.0%	36.2%
C9-03.1	LKD	25.9	236	High	77.5%	66.2%	57.0%	Minimum	76.4%	49.0%	27.1%
C9-03.2	Bed	9.5	80	Medium	67.7%	55.5%	42.6%	Medium	78.6%	52.5%	33.1%
C9-03.3	Bed	11.4	90	Medium	65.4%	52.0%	36.1%	Minimum	76.5%	48.1%	23.0%
C9-04.1	LKD	19.8	172	Medium	66.8%	54.3%	41.3%	Minimum	77.4%	49.6%	28.0%
C9-04.2	Bed	9.7	80	Medium	67.5%	55.5%	41.6%	Medium	78.5%	52.6%	31.9%
C9-05.1	LKD	19.8	172	Medium	66.8%	54.2%	40.9%	Minimum	77.3%	49.5%	26.3%
C9-05.2	Bed	9.7	80	Medium	66.6%	53.6%	39.4%	Medium	78.5%	52.3%	30.0%
C9-06.1	LKD	24.8	230	High	78.9%	68.6%	57.4%	Medium	79.9%	54.4%	33.1%
C9-06.2	Bed	11.6	99	Medium	64.4%	50.8%	33.1%	Medium	78.0%	50.0%	25.5%
C9-06.3	Bed	11.7	93	Medium	64.1%	50.5%	31.6%	Minimum	77.3%	49.0%	24.2%
C9-07.1	LKD	24.4	221	High	80.6%	71.5%	58.3%	Medium	83.8%	58.6%	38.7%
C9-07.2	Bed	11.6	99	Medium	68.8%	51.4%	31.1%	Medium	83.2%	57.0%	34.5%
C9-07.3	Bed	11.1	90	Medium	69.5%	53.1%	33.5%	Medium	83.2%	58.0%	36.4%

Table 26: Daylight provision individual values for all habitable rooms to IS EN 17037:2018+A1:2021


Level 0

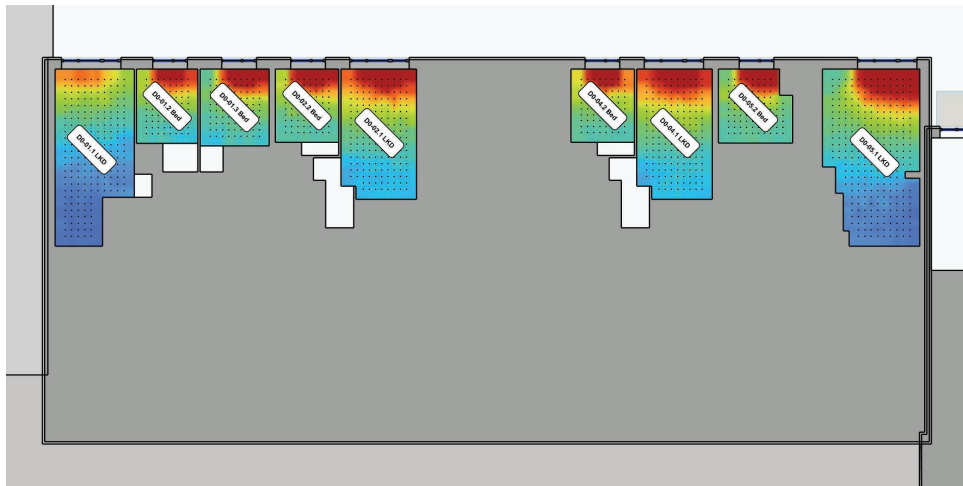

Level 1

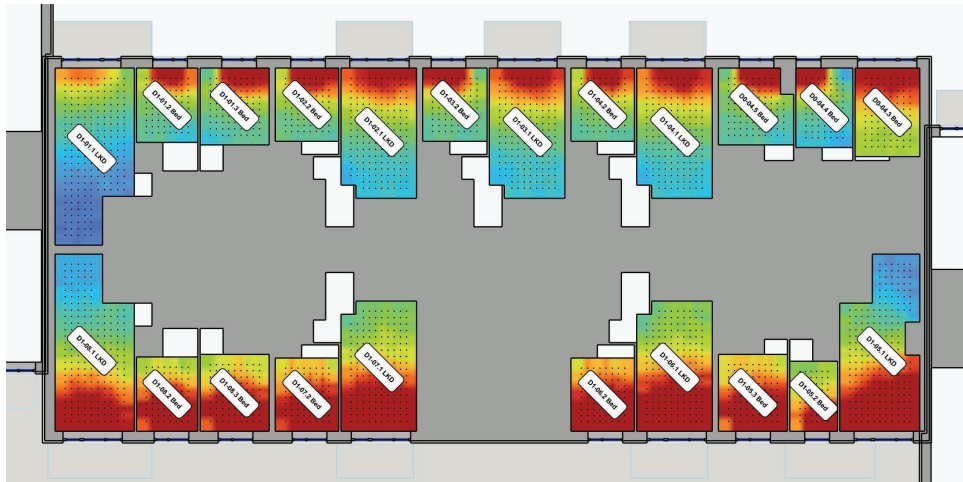

Level 3

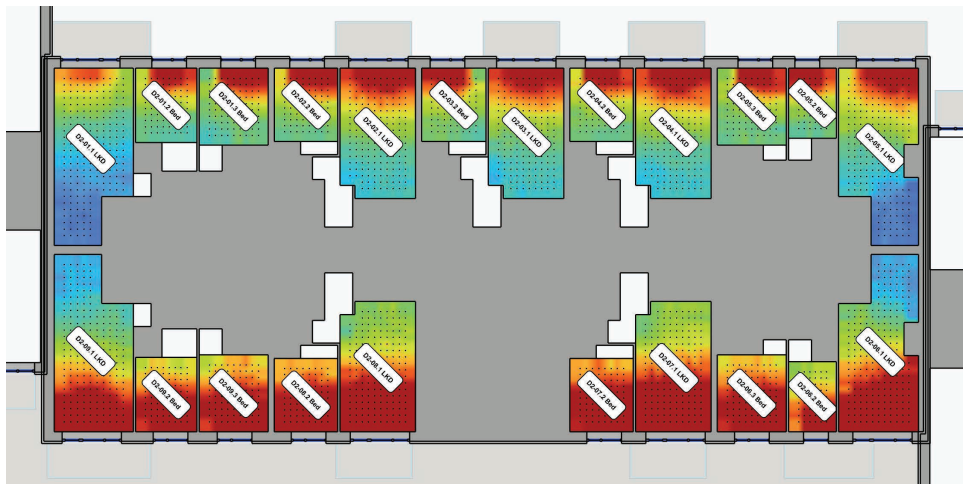

Level 4


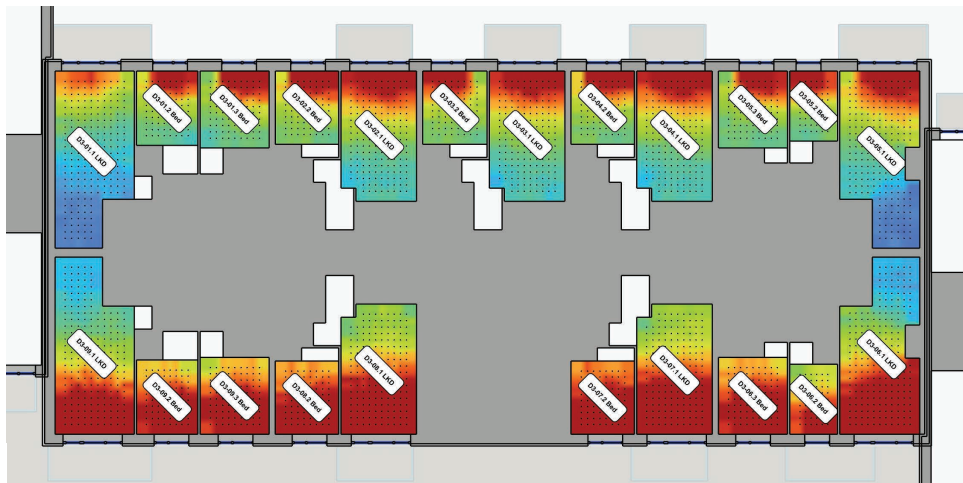


Figure 43: Block D - Floor plans indicating Daylight Provision to BS EN17037:2021+A1 Table NA.1

Level 5

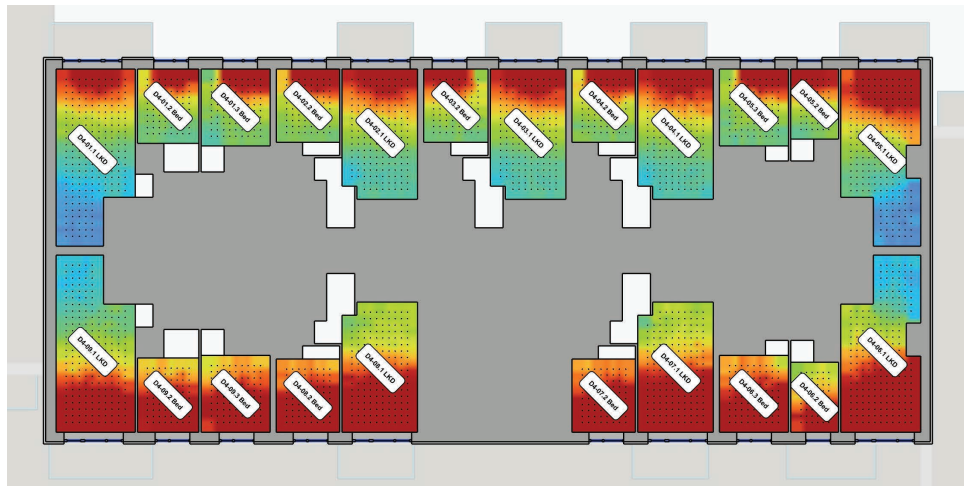

Level 6

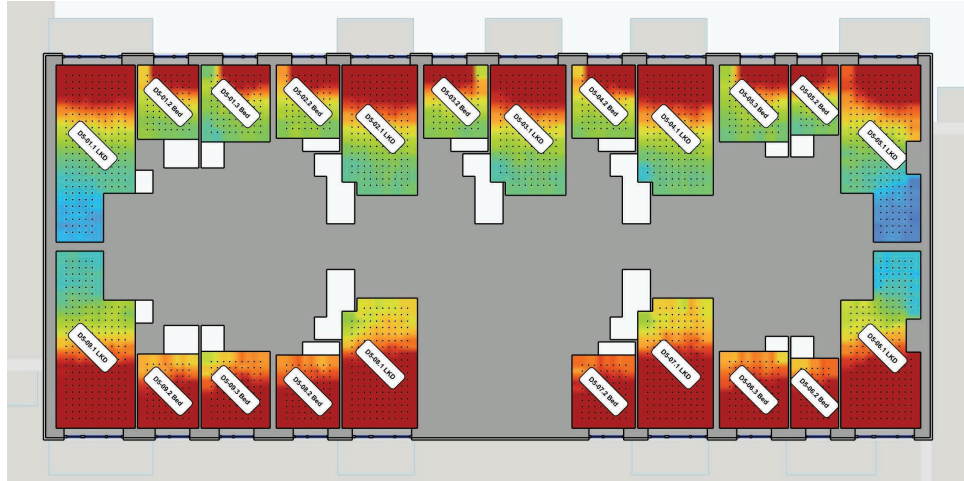


Figure 44: Block D - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

Block D - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule												
Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95	
D0-01.1	LKD	26.0	215	Fail	30.5%	1.0%	0.0%	Fail	42.4%	0.0%	0.0%	
D0-01.2	Bed	9.5	80	Minimum	62.0%	41.4%	14.1%	Minimum	76.8%	37.8%	6.0%	
D0-01.3	Bed	11.1	90	Minimum	58.5%	35.9%	10.5%	Minimum	77.1%	39.3%	8.2%	
D0-02.1	LKD	20.1	176	Minimum	55.6%	31.5%	7.3%	Minimum	69.7%	22.7%	2.1%	
D0-02.2	Bed	9.7	80	Minimum	63.1%	43.6%	17.4%	Minimum	78.3%	43.2%	13.9%	
D0-04.1	LKD	20.1	176	Minimum	56.3%	33.2%	8.1%	Minimum	71.4%	25.4%	3.2%	
D0-04.2	Bed	9.7	80	Minimum	63.3%	43.2%	17.5%	Minimum	78.2%	43.5%	13.3%	
D0-04.3	Bed	11.9	96	Medium	72.8%	56.7%	40.8%	Medium	85.4%	62.5%	43.6%	
D0-04.4	Bed	9.4	77	Minimum	50.6%	22.6%	4.5%	Minimum	71.9%	27.5%	3.0%	
D0-04.5	Bed	11.3	92	Minimum	59.8%	39.0%	11.8%	Minimum	78.2%	43.1%	11.6%	
D0-05.1	LKD	32.5	285	Fail	48.1%	18.1%	3.4%	Minimum	51.4%	1.5%	0.0%	
D0-05.2	Bed	10.7	92	Minimum	60.9%	39.7%	13.5%	Minimum	79.3%	46.5%	15.4%	
D1-01.1	LKD	26.0	215	Fail	36.8%	3.7%	0.0%	Fail	48.1%	0.0%	0.0%	
D1-01.2	Bed	9.5	80	Minimum	62.5%	42.3%	16.4%	Minimum	78.5%	44.4%	11.1%	
D1-01.3	Bed	11.1	90	Minimum	61.7%	41.8%	15.5%	Minimum	78.8%	45.3%	14.2%	
D1-02.1	LKD	20.1	176	Minimum	56.6%	35.1%	11.1%	Minimum	72.6%	31.1%	3.7%	
D1-02.2	Bed	9.7	80	Minimum	65.8%	47.6%	23.8%	Minimum	79.8%	49.2%	20.2%	
D1-03.1	LKD	20.1	176	Minimum	57.6%	37.3%	11.6%	Minimum	73.4%	31.6%	3.2%	
D1-03.2	Bed	9.8	80	Minimum	64.4%	45.1%	20.6%	Minimum	79.2%	46.2%	15.4%	
D1-04.1	LKD	20.1	176	Minimum	57.8%	37.8%	12.4%	Minimum	73.9%	33.5%	3.7%	
D1-04.2	Bed	9.7	80	Minimum	65.6%	46.2%	22.5%	Medium	80.3%	50.7%	21.2%	

Block D - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
D1-05.1	LKD	25.2	226	Minimum	58.2%	42.8%	29.9%	Minimum	52.3%	13.4%	5.0%
D1-05.2	Bed	7.0	54	Minimum	61.6%	47.1%	34.2%	Minimum	77.7%	49.2%	31.6%
D1-05.3	Bed	11.1	90	Medium	69.2%	54.8%	42.1%	Medium	81.6%	57.5%	40.5%
D1-06.1	LKD	20.1	176	Medium	64.6%	50.4%	37.4%	Minimum	77.2%	47.9%	30.4%
D1-06.2	Bed	9.7	80	Medium	72.2%	57.9%	45.0%	Medium	82.2%	59.2%	42.1%
D1-07.1	LKD	20.1	176	Minimum	64.2%	48.8%	34.5%	Minimum	76.9%	45.4%	27.4%
D1-07.2	Bed	9.7	80	Medium	71.3%	56.1%	42.0%	Medium	82.6%	58.1%	39.8%
D1-08.1	LKD	26.0	215	Minimum	53.0%	34.0%	21.5%	Minimum	59.0%	19.5%	6.7%
D1-08.2	Bed	9.5	80	Medium	70.6%	53.7%	39.4%	Medium	81.8%	55.2%	36.3%
D1-08.3	Bed	11.1	90	Medium	68.6%	52.7%	38.9%	Medium	81.4%	55.8%	37.3%
D2-01.1	LKD	26.0	215	Fail	41.1%	5.9%	0.1%	Minimum	52.9%	0.0%	0.0%
D2-01.2	Bed	9.5	80	Minimum	66.6%	47.9%	24.1%	Minimum	79.3%	47.5%	16.6%
D2-01.3	Bed	11.1	90	Minimum	65.0%	46.1%	21.3%	Minimum	79.1%	47.1%	16.7%
D2-02.1	LKD	20.1	176	Minimum	60.3%	41.9%	16.2%	Minimum	75.1%	37.6%	4.2%
D2-02.2	Bed	9.7	80	Medium	68.7%	51.2%	30.5%	Medium	80.7%	52.2%	24.1%
D2-03.1	LKD	20.1	176	Minimum	59.7%	40.8%	14.9%	Minimum	75.8%	37.7%	4.8%
D2-03.2	Bed	9.8	80	Minimum	66.6%	48.1%	25.9%	Medium	80.5%	51.1%	20.6%
D2-04.1	LKD	20.1	176	Minimum	60.6%	41.8%	16.2%	Minimum	75.2%	36.4%	4.0%
D2-04.2	Bed	9.7	80	Minimum	67.9%	49.8%	26.9%	Medium	80.9%	52.8%	26.2%
D2-05.1	LKD	25.2	226	Minimum	55.8%	32.2%	6.4%	Minimum	52.1%	0.7%	0.0%
D2-05.2	Bed	7.0	54	Medium	68.9%	50.9%	28.8%	Medium	80.2%	50.9%	20.5%
D2-05.3	Bed	11.1	90	Minimum	65.4%	46.4%	22.5%	Medium	81.2%	52.9%	25.6%
D2-06.1	LKD	25.2	226	Minimum	61.4%	47.1%	33.8%	Minimum	57.2%	16.8%	4.3%
D2-06.2	Bed	7.0	54	Medium	65.8%	51.6%	39.2%	Medium	79.7%	53.2%	36.5%
D2-06.3	Bed	11.1	90	Medium	72.1%	58.3%	45.2%	Medium	83.0%	60.5%	44.3%
D2-07.1	LKD	20.1	176	Medium	67.4%	53.4%	40.8%	Medium	78.5%	50.5%	32.6%
D2-07.2	Bed	9.7	80	Medium	74.5%	60.9%	49.5%	Medium	83.8%	62.6%	47.8%
D2-08.1	LKD	20.1	176	Medium	67.3%	52.9%	39.5%	Minimum	78.3%	49.2%	30.1%
D2-08.2	Bed	9.7	80	Medium	73.9%	59.2%	46.8%	Medium	83.9%	62.3%	46.1%
D2-09.1	LKD	26.0	215	Minimum	57.1%	37.4%	24.1%	Minimum	62.0%	21.0%	6.5%
D2-09.2	Bed	9.5	80	Medium	72.6%	57.1%	42.5%	Medium	82.4%	57.6%	37.6%
D2-09.3	Bed	11.1	90	Medium	72.6%	57.3%	43.6%	Medium	82.7%	59.3%	41.4%
D3-01.1	LKD	26.0	215	Fail	45.2%	11.5%	0.3%	Minimum	56.1%	0.4%	0.0%
D3-01.2	Bed	9.5	80	Medium	68.4%	50.2%	27.4%	Medium	79.7%	50.3%	20.4%
D3-01.3	Bed	11.1	90	Minimum	66.7%	48.2%	24.7%	Medium	80.1%	51.1%	23.3%
D3-02.1	LKD	20.1	176	Minimum	61.8%	43.4%	19.8%	Minimum	76.8%	40.8%	6.2%
D3-02.2	Bed	9.7	80	Medium	69.0%	51.9%	31.0%	Medium	81.6%	54.8%	30.3%
D3-03.1	LKD	20.1	176	Minimum	62.4%	44.0%	20.0%	Minimum	77.0%	41.2%	6.3%
D3-03.2	Bed	9.8	80	Minimum	67.5%	49.8%	27.3%	Medium	82.1%	55.5%	30.5%
D3-04.1	LKD	20.1	176	Minimum	63.3%	45.3%	21.0%	Minimum	77.3%	42.6%	7.9%
D3-04.2	Bed	9.7	80	Medium	69.5%	52.3%	33.3%	Medium	81.7%	54.3%	28.5%
D3-05.1	LKD	25.2	226	Minimum	57.7%	37.0%	9.1%	Minimum	53.4%	1.6%	0.0%
D3-05.2	Bed	7.0	54	Medium	69.6%	52.2%	32.6%	Medium	81.0%	53.4%	25.0%
D3-05.3	Bed	11.1	90	Minimum	66.4%	48.0%	24.9%	Medium	81.5%	53.9%	27.1%
D3-06.1	LKD	25.2	226	Minimum	63.7%	48.9%	36.0%	Minimum	60.7%	19.9%	4.8%
D3-06.2	Bed	7.0	54	Medium	67.6%	54.0%	41.8%	Medium	80.6%	55.7%	38.8%
D3-06.3	Bed	11.1	90	Medium	73.2%	59.7%	47.5%	Medium	83.8%	62.6%	46.7%
D3-07.1	LKD	20.1	176	Medium	69.4%	56.2%	44.0%	Medium	79.6%	53.4%	35.9%
D3-07.2	Bed	9.7	80	High	75.0%	61.5%	50.4%	Medium	84.6%	64.7%	49.7%
D3-08.1	LKD	20.1	176	Medium	69.0%	54.9%	41.6%	Medium	79.1%	51.3%	32.6%

Block D - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
D3-08.2	Bed	9.7	80	Medium	75.7%	61.4%	49.8%	Medium	84.2%	63.3%	47.7%
D3-09.1	LKD	26.0	215	Minimum	58.3%	39.4%	24.8%	Minimum	65.0%	23.3%	7.3%
D3-09.2	Bed	9.5	80	Medium	74.1%	59.1%	45.7%	Medium	83.7%	60.7%	42.5%
D3-09.3	Bed	11.1	90	Medium	74.0%	59.2%	46.6%	Medium	83.6%	60.9%	44.7%
D4-01.1	LKD	26.0	215	Minimum	55.6%	32.1%	5.9%	Minimum	62.8%	4.0%	0.1%
D4-01.2	Bed	9.5	80	Medium	68.7%	51.5%	29.6%	Medium	81.2%	53.7%	26.6%
D4-01.3	Bed	11.1	90	Minimum	67.5%	49.8%	27.4%	Medium	81.4%	53.5%	26.8%
D4-02.1	LKD	20.1	176	Minimum	64.2%	45.9%	23.5%	Minimum	78.4%	45.5%	11.5%
D4-02.2	Bed	9.7	80	Medium	70.0%	53.5%	35.2%	Medium	83.2%	57.2%	35.2%
D4-03.1	LKD	20.1	176	Minimum	64.1%	46.1%	23.0%	Minimum	78.1%	45.0%	10.5%
D4-03.2	Bed	9.8	80	Medium	69.1%	51.8%	31.6%	Medium	82.6%	55.7%	31.1%
D4-04.1	LKD	20.1	176	Minimum	64.7%	46.6%	23.9%	Minimum	78.4%	45.6%	11.4%
D4-04.2	Bed	9.7	80	Medium	70.3%	53.9%	34.9%	Medium	82.7%	56.4%	33.0%
D4-05.1	LKD	25.2	226	Minimum	65.8%	47.5%	23.5%	Minimum	62.3%	4.9%	0.0%
D4-05.2	Bed	7.0	54	Medium	70.3%	53.9%	34.9%	Medium	82.8%	55.9%	31.5%
D4-05.3	Bed	11.1	90	Minimum	67.3%	49.2%	26.7%	Medium	81.7%	54.5%	27.9%
D4-06.1	LKD	25.2	226	Medium	67.6%	54.2%	40.6%	Minimum	63.4%	23.7%	7.2%
D4-06.2	Bed	7.0	54	Medium	67.9%	54.6%	41.4%	Medium	80.8%	56.6%	39.6%
D4-06.3	Bed	11.1	90	Medium	74.2%	60.9%	49.1%	Medium	84.2%	64.0%	48.8%
D4-07.1	LKD	20.1	176	Medium	71.0%	57.4%	45.2%	Medium	80.5%	55.5%	37.7%
D4-07.2	Bed	9.7	80	High	76.2%	63.2%	51.7%	High	84.5%	65.5%	50.3%
D4-08.1	LKD	20.1	176	Medium	70.5%	56.3%	43.1%	Medium	80.5%	54.5%	36.1%
D4-08.2	Bed	9.7	80	High	75.5%	61.7%	50.1%	Medium	84.5%	65.0%	49.4%
D4-09.1	LKD	26.0	215	Minimum	59.8%	42.1%	27.4%	Minimum	67.6%	27.1%	9.0%
D4-09.2	Bed	9.5	80	Medium	75.1%	60.8%	48.6%	Medium	83.5%	60.8%	43.2%
D4-09.3	Bed	11.1	90	Medium	74.7%	60.3%	47.7%	Medium	83.7%	61.8%	45.2%
D5-01.1	LKD	26.0	215	Minimum	63.7%	45.5%	21.0%	Minimum	70.2%	20.8%	2.0%
D5-01.2	Bed	9.5	80	Medium	70.3%	53.9%	35.8%	Medium	83.4%	57.5%	35.5%
D5-01.3	Bed	11.1	90	Medium	68.6%	51.2%	29.6%	Medium	82.9%	56.3%	31.0%
D5-02.1	LKD	20.1	176	Medium	70.9%	54.5%	36.9%	Medium	81.0%	53.0%	25.4%
D5-02.2	Bed	9.7	80	Medium	71.8%	55.7%	37.9%	Medium	84.2%	59.3%	38.4%
D5-03.1	LKD	20.1	176	Medium	71.5%	55.2%	38.1%	Medium	80.8%	52.8%	24.8%
D5-03.2	Bed	9.8	80	Medium	70.7%	54.1%	36.4%	Medium	83.2%	57.6%	35.8%
D5-04.1	LKD	20.1	176	Medium	71.9%	55.9%	38.6%	Medium	81.3%	53.8%	26.3%
D5-04.2	Bed	9.7	80	Medium	72.4%	56.4%	38.8%	Medium	84.5%	59.8%	40.0%
D5-05.1	LKD	25.2	226	Minimum	65.1%	47.3%	25.0%	Minimum	61.2%	2.9%	0.0%
D5-05.2	Bed	7.0	54	Medium	70.5%	53.9%	35.5%	Medium	82.0%	55.4%	30.6%
D5-05.3	Bed	11.1	90	Medium	68.5%	51.6%	30.0%	Medium	83.3%	57.1%	34.7%
D5-06.1	LKD	25.2	226	Medium	70.8%	57.4%	45.5%	Minimum	66.7%	28.9%	8.5%
D5-06.2	Bed	7.0	54	High	76.2%	63.2%	52.7%	High	84.6%	65.5%	50.7%
D5-06.3	Bed	11.1	90	High	75.5%	62.5%	51.3%	High	84.6%	65.9%	51.0%
D5-07.1	LKD	20.1	176	High	75.6%	62.8%	51.7%	Medium	82.8%	61.1%	45.1%
D5-07.2	Bed	9.7	80	High	77.1%	64.8%	53.4%	High	85.3%	67.5%	52.5%
D5-08.1	LKD	20.1	176	High	75.9%	62.4%	51.2%	Medium	82.2%	59.8%	42.7%
D5-08.2	Bed	9.7	80	High	76.8%	63.9%	52.1%	Medium	84.6%	65.6%	49.9%
D5-09.1	LKD	26.0	215	Medium	67.5%	52.2%	37.7%	Minimum	71.6%	35.4%	16.4%
D5-09.2	Bed	9.5	80	High	75.9%	62.0%	50.2%	Medium	84.1%	63.2%	46.9%
D5-09.3	Bed	11.1	90	Medium	75.3%	61.2%	49.3%	Medium	84.1%	63.4%	47.2%


Table 27: Daylight provision individual values for all habitable rooms to IS EN 17037:2018+A1:2021



Level 0



Level 1

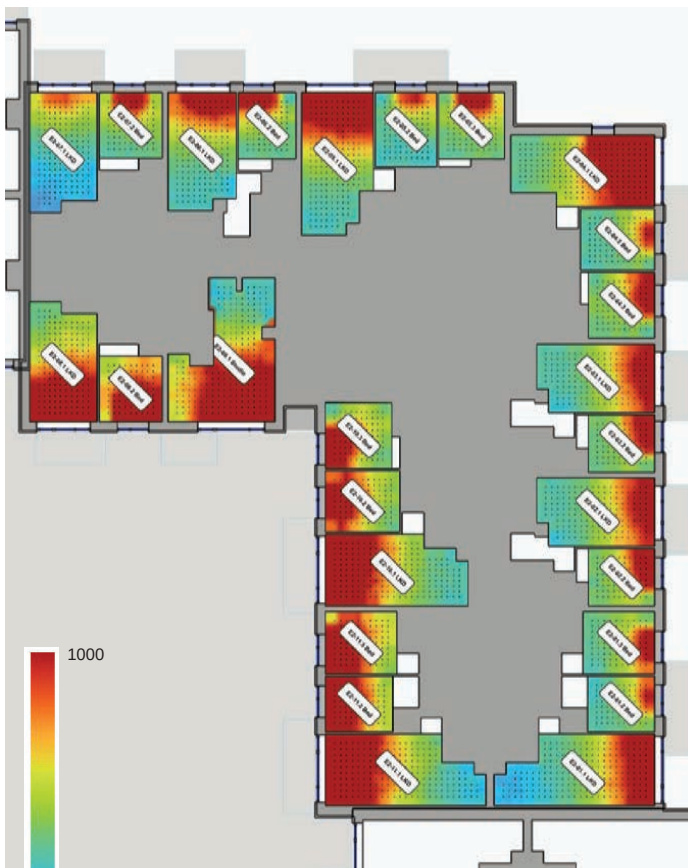

Level 3



Level 4



Figure 45: Block E - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

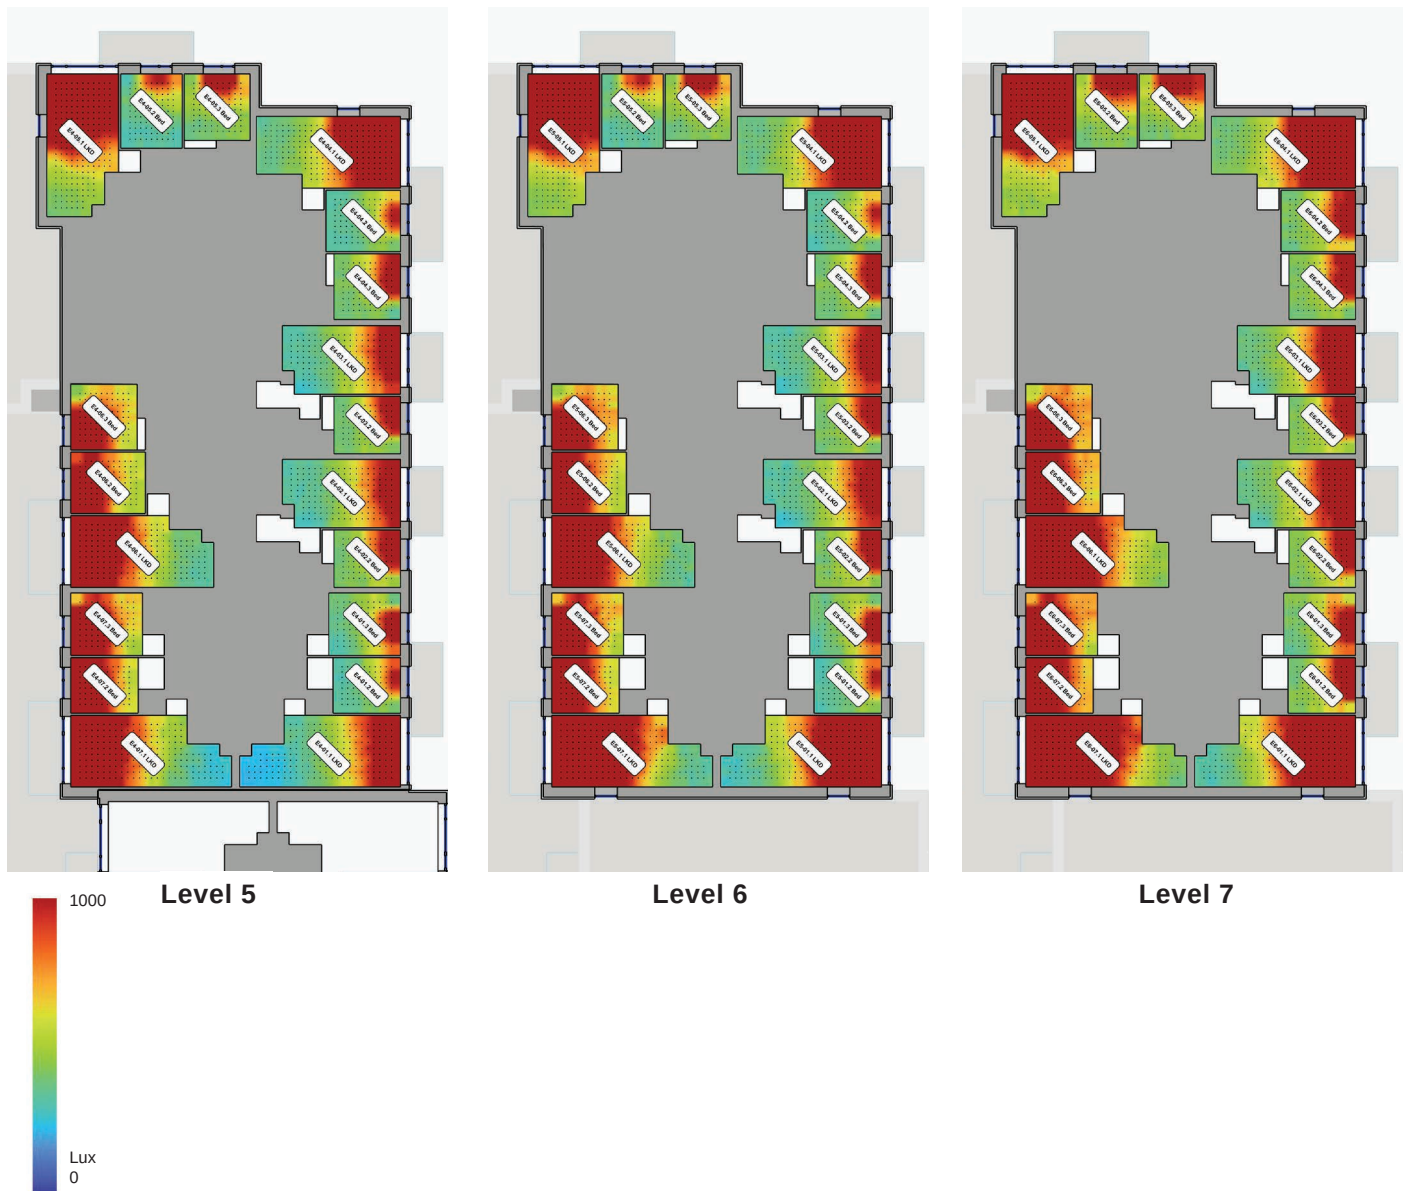


Figure 46: Block E - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

Block E - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule											
Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
E0-01.1	LKD	25.6	211	Minimum	61.9%	38.6%	13.4%	Minimum	71.2%	19.9%	1.8%
E0-01.2	Bed	9.5	80	Minimum	62.0%	38.8%	12.8%	Minimum	79.5%	46.1%	13.6%
E0-01.3	Bed	11.4	90	Minimum	62.8%	40.0%	15.3%	Minimum	80.3%	46.7%	15.4%
E0-02.1	LKD	19.8	172	Minimum	65.1%	44.5%	19.3%	Minimum	78.9%	44.0%	13.6%
E0-02.2	Bed	9.7	80	Minimum	67.0%	46.4%	21.2%	Medium	82.3%	53.7%	22.9%
E0-03.1	LKD	24.6	230	High	77.9%	64.7%	50.2%	Medium	81.0%	51.6%	20.0%
E0-03.2	Bed	11.6	99	Minimum	59.6%	35.1%	10.6%	Minimum	80.1%	47.9%	15.6%
E0-03.3	Bed	11.1	90	Minimum	63.0%	41.1%	16.2%	Medium	81.7%	51.6%	20.6%
E0-04.1	LKD	24.0	217	Minimum	65.1%	46.0%	21.1%	Minimum	74.0%	33.2%	3.8%
E0-04.2	Bed	11.6	99	Minimum	54.7%	27.0%	4.5%	Minimum	77.4%	40.2%	6.1%
E0-04.3	Bed	11.1	90	Minimum	62.4%	41.9%	14.5%	Minimum	79.8%	48.2%	15.9%
E0-05.1	LKD	19.8	172	Minimum	60.3%	39.8%	12.2%	Minimum	74.1%	31.9%	3.4%
E0-05.2	Bed	9.7	80	Minimum	60.6%	39.2%	13.1%	Minimum	78.7%	44.4%	12.2%
E0-06.1	LKD	19.4	177	Minimum	50.6%	16.4%	0.6%	Minimum	66.4%	7.9%	0.0%
E0-06.2	Bed	10.5	81	Minimum	62.0%	41.0%	13.0%	Minimum	78.7%	43.5%	11.0%

Block E - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
E1-01.1	LKD	25.6	211	Minimum	63.6%	43.1%	17.2%	Minimum	72.6%	27.2%	1.9%
E1-01.2	Bed	9.5	80	Minimum	59.0%	34.8%	9.3%	Minimum	78.7%	44.2%	11.6%
E1-01.3	Bed	11.4	90	Minimum	62.9%	41.6%	16.7%	Minimum	80.6%	48.6%	17.4%
E1-02.1	LKD	19.8	172	Minimum	63.3%	42.7%	17.8%	Minimum	78.6%	44.8%	12.5%
E1-02.2	Bed	9.7	80	Minimum	67.0%	47.7%	23.1%	Medium	82.6%	55.3%	26.8%
E1-03.1	LKD	19.8	172	Minimum	63.2%	43.2%	18.1%	Minimum	78.5%	44.6%	12.5%
E1-03.2	Bed	9.7	80	Minimum	65.1%	45.4%	20.5%	Medium	82.4%	54.4%	24.8%
E1-04.1	LKD	24.6	230	High	78.0%	64.9%	50.9%	Medium	81.6%	53.7%	27.5%
E1-04.2	Bed	11.6	99	Minimum	57.2%	32.2%	7.0%	Minimum	78.8%	46.0%	12.9%
E1-04.3	Bed	11.1	90	Minimum	64.1%	43.8%	18.7%	Medium	82.0%	52.9%	23.2%
E1-05.1	LKD	24.0	217	Minimum	66.5%	48.7%	26.4%	Minimum	76.2%	40.3%	6.8%
E1-05.2	Bed	11.6	99	Minimum	52.4%	24.7%	3.4%	Minimum	76.3%	37.9%	4.3%
E1-05.3	Bed	11.1	90	Minimum	64.4%	44.8%	18.4%	Medium	80.3%	50.5%	18.8%
E1-06.1	LKD	19.8	172	Minimum	59.5%	39.2%	12.3%	Minimum	75.1%	35.6%	3.6%
E1-06.2	Bed	9.7	80	Minimum	61.7%	41.5%	15.4%	Minimum	79.7%	48.6%	17.4%
E1-07.1	LKD	19.4	177	Fail	48.6%	14.4%	0.2%	Minimum	69.1%	14.7%	0.0%
E1-07.2	Bed	10.5	81	Minimum	61.9%	41.9%	15.8%	Minimum	80.0%	48.8%	17.5%
E1-08.1	LKD	19.4	177	Medium	65.4%	51.2%	39.2%	Minimum	75.7%	46.5%	31.6%
E1-08.2	Bed	10.5	81	Medium	66.4%	52.0%	39.8%	Medium	79.4%	53.3%	38.1%
E1-09.1	Studio	29.4	242	Minimum	62.7%	48.1%	36.5%	Minimum	63.5%	31.5%	10.6%
E1-10.1	LKD	24.0	217	Minimum	61.6%	47.4%	34.9%	Minimum	72.3%	42.6%	23.3%
E1-10.2	Bed	11.6	99	Minimum	58.8%	44.5%	31.0%	Minimum	74.2%	44.3%	27.3%
E1-10.3	Bed	11.1	90	Minimum	52.8%	37.6%	25.0%	Minimum	71.0%	38.4%	21.6%
E1-11.1	LKD	25.6	211	Minimum	63.3%	49.6%	37.1%	Minimum	68.7%	35.9%	12.7%
E1-11.2	Bed	9.5	80	Medium	68.8%	54.9%	42.0%	Medium	78.9%	52.9%	35.0%
E1-11.3	Bed	11.4	90	Medium	64.3%	50.4%	37.4%	Medium	78.0%	50.7%	33.6%
E2-01.1	LKD	25.6	211	Minimum	64.0%	44.2%	19.3%	Minimum	72.8%	28.5%	1.7%
E2-01.2	Bed	9.5	80	Minimum	59.6%	37.6%	11.4%	Minimum	78.4%	44.3%	11.6%
E2-01.3	Bed	11.4	90	Minimum	64.4%	44.3%	19.3%	Medium	81.4%	51.4%	20.7%
E2-02.1	LKD	19.8	172	Minimum	64.2%	45.0%	19.7%	Minimum	78.6%	45.7%	13.6%
E2-02.2	Bed	9.7	80	Medium	68.9%	50.5%	27.7%	Medium	83.0%	56.5%	30.4%
E2-03.1	LKD	19.8	172	Minimum	64.0%	45.2%	19.7%	Minimum	78.7%	45.8%	13.0%
E2-03.2	Bed	9.7	80	Minimum	65.9%	46.8%	23.0%	Medium	82.6%	55.6%	27.9%
E2-04.1	LKD	24.6	230	High	78.4%	66.8%	52.7%	Medium	81.7%	54.1%	28.8%
E2-04.2	Bed	11.6	99	Minimum	58.0%	34.8%	8.0%	Minimum	79.5%	47.9%	16.0%
E2-04.3	Bed	11.1	90	Minimum	65.5%	46.4%	22.1%	Medium	82.5%	55.2%	28.1%
E2-05.1	LKD	24.0	217	Medium	69.5%	52.9%	33.5%	Minimum	77.6%	44.0%	10.2%
E2-05.2	Bed	11.6	99	Minimum	55.8%	31.6%	4.7%	Minimum	77.2%	41.3%	5.6%
E2-05.3	Bed	11.1	90	Minimum	66.6%	47.9%	22.7%	Medium	81.8%	54.5%	27.6%
E2-06.1	LKD	19.8	172	Minimum	61.6%	42.6%	16.8%	Minimum	77.2%	41.4%	6.6%
E2-06.2	Bed	9.7	80	Minimum	64.4%	45.2%	20.3%	Medium	80.7%	51.3%	22.1%
E2-07.1	LKD	19.4	177	Minimum	50.8%	21.2%	0.3%	Minimum	70.0%	17.6%	0.0%
E2-07.2	Bed	10.5	81	Minimum	64.9%	45.7%	19.9%	Medium	81.5%	53.3%	24.1%
E2-08.1	LKD	19.4	177	Medium	66.0%	52.3%	40.3%	Minimum	76.6%	48.8%	31.3%
E2-08.2	Bed	10.5	81	Medium	69.5%	55.7%	43.2%	Medium	81.1%	57.6%	41.7%
E2-09.1	Studio	29.4	242	Medium	66.1%	51.9%	41.0%	Minimum	67.4%	34.9%	12.2%
E2-10.1	LKD	24.0	217	Minimum	63.0%	49.4%	38.0%	Minimum	70.8%	40.3%	17.5%
E2-10.2	Bed	11.6	99	Minimum	62.6%	48.2%	34.8%	Minimum	76.1%	48.3%	30.9%
E2-10.3	Bed	11.1	90	Minimum	58.4%	42.9%	31.0%	Minimum	74.3%	44.0%	27.8%
E2-11.1	LKD	25.6	211	Medium	64.5%	50.8%	38.9%	Minimum	66.6%	35.4%	11.2%

Block E - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
E2-11.2	Bed	9.5	80	Medium	72.4%	58.8%	46.8%	Medium	80.3%	55.5%	39.7%
E2-11.3	Bed	11.4	90	Medium	67.4%	54.1%	43.1%	Medium	79.7%	54.6%	38.2%
E3-01.1	LKD	25.6	211	Minimum	64.2%	45.0%	21.0%	Minimum	73.2%	30.3%	1.7%
E3-01.2	Bed	9.5	80	Minimum	60.5%	39.3%	13.4%	Minimum	78.9%	46.4%	14.7%
E3-01.3	Bed	11.4	90	Minimum	64.5%	44.9%	20.2%	Medium	80.8%	50.2%	20.8%
E3-02.1	LKD	19.8	172	Minimum	64.8%	46.3%	21.4%	Minimum	78.8%	46.3%	13.8%
E3-02.2	Bed	9.7	80	Medium	68.8%	50.6%	28.1%	Medium	82.9%	56.6%	31.3%
E3-03.1	LKD	19.8	172	Minimum	64.5%	45.9%	21.5%	Minimum	78.9%	46.7%	14.1%
E3-03.2	Bed	9.7	80	Minimum	66.6%	48.0%	24.7%	Medium	82.7%	56.1%	30.6%
E3-04.1	LKD	24.6	230	High	78.4%	66.5%	52.9%	Medium	81.8%	54.6%	29.2%
E3-04.2	Bed	11.6	99	Minimum	58.2%	35.7%	9.3%	Minimum	78.9%	46.7%	14.7%
E3-04.3	Bed	11.1	90	Minimum	64.9%	46.3%	21.4%	Medium	82.3%	54.9%	28.8%
E3-05.1	LKD	24.0	217	Medium	70.5%	54.1%	36.5%	Minimum	78.5%	46.6%	14.5%
E3-05.2	Bed	11.6	99	Minimum	56.8%	34.5%	6.6%	Minimum	78.9%	46.8%	13.4%
E3-05.3	Bed	11.1	90	Minimum	67.5%	49.5%	26.1%	Medium	82.2%	55.7%	29.6%
E3-06.1	LKD	19.8	172	Medium	70.2%	53.6%	34.4%	Medium	80.3%	51.8%	21.3%
E3-06.2	Bed	9.7	80	Medium	69.0%	51.3%	30.9%	Medium	83.2%	57.1%	34.5%
E3-07.1	LKD	19.4	177	Minimum	61.2%	40.0%	8.9%	Minimum	76.1%	35.1%	0.5%
E3-07.2	Bed	10.5	81	Minimum	68.0%	49.5%	27.4%	Medium	82.8%	56.0%	31.3%
E3-08.1	LKD	19.4	177	Medium	73.8%	61.1%	48.8%	Medium	80.8%	56.0%	40.4%
E3-08.2	Bed	10.5	81	Medium	72.2%	59.0%	47.1%	Medium	82.0%	60.1%	45.0%
E3-09.1	Studio	29.4	242	Medium	69.8%	56.4%	44.6%	Minimum	71.7%	39.4%	18.5%
E3-10.1	LKD	24.0	217	Medium	65.4%	51.8%	40.6%	Minimum	72.4%	44.1%	20.6%
E3-10.2	Bed	11.6	99	Medium	64.7%	51.1%	38.8%	Medium	78.2%	51.4%	34.6%
E3-10.3	Bed	11.1	90	Minimum	61.7%	46.8%	34.4%	Minimum	77.0%	48.8%	32.9%
E3-11.1	LKD	25.6	211	Medium	66.5%	53.6%	41.9%	Minimum	68.7%	37.6%	11.0%
E3-11.2	Bed	9.5	80	Medium	72.7%	60.0%	47.6%	Medium	81.9%	58.8%	42.1%
E3-11.3	Bed	11.4	90	Medium	69.9%	56.6%	45.1%	Medium	80.5%	55.8%	39.9%
E4-01.1	LKD	25.6	211	Minimum	64.5%	45.8%	22.2%	Minimum	73.7%	30.9%	1.9%
E4-01.2	Bed	9.5	80	Minimum	60.8%	40.0%	13.1%	Minimum	79.2%	47.9%	17.3%
E4-01.3	Bed	11.4	90	Minimum	64.5%	45.4%	20.7%	Medium	80.8%	50.5%	20.7%
E4-02.1	LKD	19.8	172	Minimum	64.8%	46.5%	22.4%	Minimum	78.9%	46.7%	15.1%
E4-02.2	Bed	9.7	80	Medium	69.2%	51.2%	29.2%	Medium	83.1%	57.4%	33.5%
E4-03.1	LKD	19.8	172	Minimum	64.6%	46.2%	22.2%	Minimum	79.0%	47.1%	15.9%
E4-03.2	Bed	9.7	80	Minimum	67.1%	48.7%	26.2%	Medium	82.7%	56.2%	31.1%
E4-04.1	LKD	24.6	230	High	78.6%	67.1%	53.3%	Medium	82.1%	55.6%	31.3%
E4-04.2	Bed	11.6	99	Minimum	59.1%	37.0%	10.3%	Minimum	79.5%	48.7%	18.2%
E4-04.3	Bed	11.1	90	Minimum	65.8%	47.4%	23.5%	Medium	82.8%	56.4%	31.1%
E4-05.1	LKD	24.0	217	High	79.3%	68.9%	56.6%	Medium	81.8%	57.4%	37.0%
E4-05.2	Bed	11.6	99	Minimum	56.9%	35.2%	5.9%	Minimum	78.6%	45.9%	10.1%
E4-05.3	Bed	11.1	90	Medium	68.4%	51.2%	28.2%	Medium	83.0%	56.7%	31.9%
E4-06.1	LKD	24.0	217	Medium	68.0%	55.8%	44.1%	Minimum	74.8%	46.7%	24.4%
E4-06.2	Bed	11.6	99	Medium	67.9%	55.5%	43.0%	Medium	80.8%	57.3%	40.4%
E4-06.3	Bed	11.1	90	Medium	67.1%	54.8%	41.8%	Medium	81.4%	57.6%	41.3%
E4-07.1	LKD	25.6	211	Medium	67.2%	55.1%	43.4%	Minimum	69.5%	38.1%	10.7%
E4-07.2	Bed	9.5	80	High	74.7%	62.3%	51.4%	Medium	82.4%	60.2%	43.9%
E4-07.3	Bed	11.4	90	Medium	70.9%	58.1%	46.7%	Medium	81.8%	59.0%	42.4%
E5-01.1	LKD	25.6	211	High	78.2%	66.3%	54.0%	Minimum	78.2%	47.3%	19.5%
E5-01.2	Bed	9.5	80	Minimum	61.5%	41.8%	14.8%	Minimum	79.1%	47.6%	16.5%
E5-01.3	Bed	11.4	90	Minimum	64.0%	44.5%	20.3%	Medium	81.7%	52.6%	25.8%

Block E - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
E5-02.1	LKD	19.8	172	Minimum	65.0%	46.6%	22.9%	Minimum	78.7%	46.4%	15.3%
E5-02.2	Bed	9.7	80	Medium	68.7%	50.6%	29.4%	Medium	82.6%	56.5%	32.2%
E5-03.1	LKD	19.8	172	Minimum	65.7%	47.7%	24.3%	Minimum	78.8%	46.9%	15.9%
E5-03.2	Bed	9.7	80	Medium	68.5%	50.3%	27.8%	Medium	82.8%	56.8%	32.2%
E5-04.1	LKD	24.6	230	High	78.8%	67.7%	53.9%	Medium	82.2%	55.7%	31.5%
E5-04.2	Bed	11.6	99	Minimum	58.9%	36.9%	10.6%	Minimum	79.0%	47.6%	15.9%
E5-04.3	Bed	11.1	90	Minimum	66.8%	48.4%	25.4%	Medium	82.7%	56.5%	31.6%
E5-05.1	LKD	24.0	217	High	79.9%	70.3%	58.9%	Medium	82.7%	59.7%	40.4%
E5-05.2	Bed	11.6	99	Minimum	58.3%	38.3%	9.6%	Minimum	79.2%	48.4%	14.9%
E5-05.3	Bed	11.1	90	Medium	68.8%	51.6%	29.4%	Medium	83.4%	57.4%	34.6%
E5-06.1	LKD	24.0	217	Medium	69.8%	58.1%	45.8%	Minimum	76.1%	48.9%	28.5%
E5-06.2	Bed	11.6	99	Medium	71.4%	58.5%	46.7%	Medium	81.6%	58.9%	42.5%
E5-06.3	Bed	11.1	90	Medium	70.6%	57.7%	45.6%	Medium	82.2%	60.1%	44.4%
E5-07.1	LKD	25.6	211	High	79.8%	69.5%	61.3%	Medium	76.7%	50.7%	29.2%
E5-07.2	Bed	9.5	80	High	74.3%	62.0%	50.9%	Medium	82.4%	60.8%	44.3%
E5-07.3	Bed	11.4	90	Medium	71.4%	58.8%	47.0%	Medium	82.3%	60.3%	44.2%
E6-01.1	LKD	25.6	211	High	79.1%	67.9%	56.3%	Minimum	78.9%	50.0%	23.0%
E6-01.2	Bed	9.5	80	Medium	71.9%	55.3%	35.8%	Medium	82.7%	56.3%	31.8%
E6-01.3	Bed	11.4	90	Minimum	67.4%	48.8%	26.6%	Medium	82.4%	55.7%	29.8%
E6-02.1	LKD	19.8	172	Medium	71.8%	55.4%	37.0%	Medium	81.8%	53.3%	26.4%
E6-02.2	Bed	9.7	80	Medium	71.1%	54.1%	34.5%	Medium	83.9%	59.1%	37.4%
E6-03.1	LKD	19.8	172	Medium	71.8%	55.5%	37.3%	Medium	81.9%	53.6%	26.7%
E6-03.2	Bed	9.7	80	Medium	70.5%	53.4%	32.8%	Medium	83.9%	59.2%	37.4%
E6-04.1	LKD	24.6	230	High	79.7%	69.7%	56.0%	Medium	82.7%	57.1%	34.6%
E6-04.2	Bed	11.6	99	Medium	69.0%	51.0%	28.8%	Medium	83.0%	56.9%	32.4%
E6-04.3	Bed	11.1	90	Medium	68.8%	50.8%	29.2%	Medium	83.2%	57.6%	34.0%
E6-05.1	LKD	24.0	217	High	80.4%	71.3%	60.5%	Medium	83.9%	61.2%	43.5%
E6-05.2	Bed	11.6	99	Medium	69.1%	52.3%	30.8%	Medium	83.3%	57.2%	34.2%
E6-05.3	Bed	11.1	90	Medium	69.9%	53.1%	33.0%	Medium	84.0%	58.5%	37.1%
E6-06.1	LKD	24.0	217	High	76.6%	65.1%	54.7%	Medium	80.5%	56.4%	38.4%
E6-06.2	Bed	11.6	99	High	73.8%	61.4%	50.0%	Medium	83.0%	62.9%	48.3%
E6-06.3	Bed	11.1	90	Medium	70.9%	58.8%	46.9%	Medium	82.9%	62.6%	46.9%
E6-07.1	LKD	25.6	211	High	82.1%	75.0%	65.4%	Medium	79.8%	56.1%	41.4%
E6-07.2	Bed	9.5	80	High	76.6%	64.9%	54.2%	Medium	83.1%	63.4%	48.7%
E6-07.3	Bed	11.4	90	Medium	72.9%	60.3%	48.7%	Medium	83.3%	63.4%	47.9%

Table 28: Daylight provision individual values for all habitable rooms to IS EN 17037:2018+A1:2021

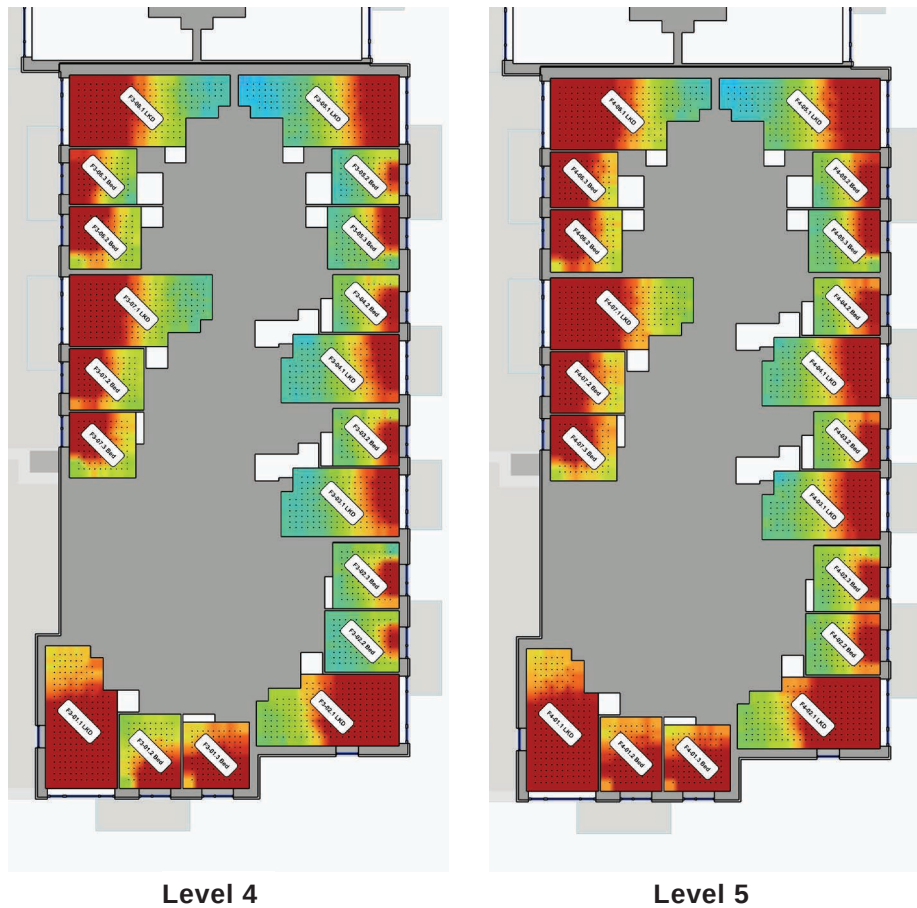


Figure 48: Block F - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

Block F - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule												
Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95	
F0-01.1	LKD	24.0	217	Medium	71.3%	57.0%	43.6%	Medium	78.2%	50.0%	31.8%	
F0-01.2	Bed	11.6	99	Minimum	63.9%	48.7%	33.6%	Medium	80.1%	53.6%	35.2%	
F0-01.3	Bed	11.1	90	Medium	69.7%	55.1%	41.0%	Medium	81.4%	57.5%	39.7%	
F0-02.1	LKD	24.0	217	High	79.1%	67.6%	55.5%	Medium	82.1%	55.5%	31.6%	
F0-02.2	Bed	11.6	99	Minimum	60.9%	38.1%	14.5%	Minimum	80.8%	49.6%	18.1%	
F0-02.3	Bed	11.1	90	Minimum	64.9%	43.7%	18.9%	Medium	81.9%	52.5%	22.2%	
F0-03.1	LKD	19.8	172	Minimum	65.1%	44.5%	19.3%	Minimum	78.7%	43.5%	13.1%	
F0-03.2	Bed	9.7	80	Minimum	67.4%	47.2%	23.3%	Medium	82.3%	53.9%	23.1%	
F0-04.1	LKD	25.6	211	Minimum	67.5%	47.7%	23.2%	Minimum	74.2%	27.0%	3.2%	
F0-04.2	Bed	9.5	80	Minimum	62.7%	40.7%	16.2%	Minimum	80.2%	47.5%	15.5%	
F0-04.3	Bed	11.4	90	Minimum	61.8%	38.5%	14.9%	Minimum	81.0%	48.7%	18.5%	
F1-01.1	LKD	24.0	217	Medium	73.3%	59.9%	47.2%	Medium	80.1%	55.3%	36.9%	
F1-01.2	Bed	11.6	99	Minimum	62.3%	46.3%	30.4%	Medium	79.8%	53.4%	33.0%	
F1-01.3	Bed	11.1	90	Medium	71.7%	57.5%	43.4%	Medium	82.8%	60.5%	43.4%	
F1-02.1	LKD	24.0	217	High	79.4%	68.2%	56.3%	Medium	82.4%	56.8%	34.3%	
F1-02.2	Bed	11.6	99	Minimum	57.8%	33.7%	8.5%	Minimum	79.0%	46.7%	15.1%	
F1-02.3	Bed	11.1	90	Minimum	64.4%	44.2%	19.7%	Medium	82.3%	54.2%	25.5%	
F1-03.1	LKD	19.8	172	Minimum	63.7%	43.3%	19.0%	Minimum	78.5%	44.1%	12.6%	
F1-03.2	Bed	9.7	80	Minimum	67.7%	48.6%	25.7%	Medium	82.4%	54.4%	26.2%	
F1-04.1	LKD	19.8	172	Minimum	63.5%	43.3%	18.5%	Minimum	78.3%	44.2%	12.5%	
F1-04.2	Bed	9.7	80	Minimum	68.7%	49.9%	27.1%	Medium	82.6%	55.0%	27.0%	
F1-05.1	LKD	25.6	211	Minimum	67.7%	48.9%	26.3%	Minimum	75.7%	34.5%	3.5%	

Block F - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule


Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
F1-05.2	Bed	9.5	80	Minimum	59.3%	36.0%	12.1%	Minimum	78.4%	44.0%	11.7%
F1-05.3	Bed	11.4	90	Minimum	62.1%	40.5%	17.0%	Minimum	80.7%	49.1%	19.1%
F1-06.1	LKD	25.6	211	Minimum	63.6%	49.1%	36.6%	Minimum	68.9%	35.9%	15.1%
F1-06.2	Bed	9.5	80	Minimum	59.9%	44.2%	29.9%	Minimum	74.7%	42.4%	24.3%
F1-06.3	Bed	11.4	90	Minimum	61.6%	45.6%	30.6%	Minimum	76.5%	45.7%	28.9%
F1-07.1	LKD	24.0	217	Minimum	60.2%	42.0%	27.5%	Minimum	70.8%	33.6%	16.3%
F1-07.2	Bed	11.6	99	Minimum	55.4%	35.1%	21.9%	Minimum	72.5%	34.2%	17.6%
F1-07.3	Bed	11.1	90	Fail	48.6%	27.5%	13.4%	Minimum	69.0%	28.0%	11.2%
F1-08.1	Studio	29.4	242	Minimum	57.0%	38.7%	21.4%	Minimum	55.4%	12.7%	1.8%
F1-09.1	LKD	25.6	211	Medium	69.1%	53.0%	37.4%	Minimum	70.0%	33.5%	10.0%
F1-09.2	Bed	9.5	80	Minimum	52.6%	32.6%	13.6%	Minimum	73.8%	37.2%	13.4%
F1-09.3	Bed	11.4	90	Minimum	55.6%	35.6%	16.1%	Minimum	74.6%	37.5%	12.6%
F1-10.1	LKD	25.6	211	Minimum	65.6%	49.0%	32.4%	Minimum	73.8%	38.0%	15.8%
F1-10.2	Bed	9.5	80	Minimum	64.5%	48.6%	32.4%	Medium	79.5%	51.8%	31.6%
F1-10.3	Bed	11.4	90	Medium	67.1%	52.0%	37.1%	Medium	80.8%	55.4%	36.6%
F1-11.1	LKD	19.8	172	Medium	68.3%	54.0%	39.8%	Medium	79.6%	52.6%	34.3%
F1-11.2	Bed	9.7	80	Medium	69.5%	54.7%	40.8%	Medium	81.8%	58.7%	41.0%
F2-01.1	LKD	24.0	217	High	74.6%	61.7%	50.2%	Medium	81.1%	57.3%	40.2%
F2-01.2	Bed	11.6	99	Medium	64.9%	50.2%	33.3%	Medium	80.5%	55.9%	37.0%
F2-01.3	Bed	11.1	90	Medium	73.5%	59.5%	46.4%	Medium	84.0%	63.8%	47.9%
F2-02.1	LKD	24.0	217	High	80.2%	69.8%	58.7%	Medium	82.5%	57.7%	35.5%
F2-02.2	Bed	11.6	99	Minimum	58.4%	35.8%	10.0%	Minimum	79.3%	48.0%	16.7%
F2-02.3	Bed	11.1	90	Minimum	65.8%	47.0%	23.6%	Medium	82.7%	55.9%	29.2%
F2-03.1	LKD	19.8	172	Minimum	64.5%	45.4%	21.5%	Minimum	78.8%	46.3%	14.3%
F2-03.2	Bed	9.7	80	Minimum	67.7%	48.7%	26.9%	Medium	82.4%	55.4%	29.7%
F2-04.1	LKD	19.8	172	Minimum	64.5%	45.4%	21.2%	Minimum	78.5%	45.4%	13.4%
F2-04.2	Bed	9.7	80	Medium	69.3%	51.1%	28.5%	Medium	83.1%	57.2%	31.7%
F2-05.1	LKD	25.6	211	Minimum	68.0%	49.9%	28.0%	Minimum	75.8%	36.2%	3.7%
F2-05.2	Bed	9.5	80	Minimum	60.7%	39.7%	15.2%	Minimum	79.1%	47.0%	16.2%
F2-05.3	Bed	11.4	90	Minimum	62.5%	41.7%	17.2%	Medium	81.2%	51.0%	21.5%
F2-06.1	LKD	25.6	211	Medium	67.2%	53.9%	41.7%	Minimum	71.4%	38.9%	16.7%
F2-06.2	Bed	9.5	80	Minimum	63.4%	49.2%	34.4%	Minimum	77.1%	49.0%	30.2%
F2-06.3	Bed	11.4	90	Minimum	63.6%	49.2%	35.3%	Medium	78.6%	51.0%	32.7%
F2-07.1	LKD	24.0	217	Medium	64.2%	50.5%	35.5%	Minimum	73.9%	40.4%	19.4%
F2-07.2	Bed	11.6	99	Minimum	61.4%	44.9%	29.2%	Minimum	77.0%	46.0%	27.3%
F2-07.3	Bed	11.1	90	Minimum	56.0%	36.9%	20.6%	Minimum	73.9%	36.3%	17.6%
F2-08.1	Studio	29.4	242	Minimum	64.8%	48.0%	31.7%	Minimum	61.1%	20.0%	3.9%
F2-09.1	LKD	25.6	211	Medium	72.5%	57.8%	44.1%	Minimum	72.5%	38.7%	13.4%
F2-09.2	Bed	9.5	80	Medium	67.9%	50.8%	34.1%	Minimum	78.9%	49.5%	28.2%
F2-09.3	Bed	11.4	90	Minimum	63.3%	45.3%	27.4%	Minimum	77.4%	45.9%	23.2%
F2-10.1	LKD	25.6	211	Medium	70.1%	55.4%	39.3%	Minimum	76.6%	43.6%	20.8%
F2-10.2	Bed	9.5	80	Medium	75.4%	61.5%	49.2%	Medium	83.8%	62.4%	45.2%
F2-10.3	Bed	11.4	90	Medium	71.9%	57.4%	43.8%	Medium	82.9%	61.0%	43.3%
F2-11.1	LKD	19.8	172	High	75.0%	61.7%	50.3%	Medium	82.3%	60.2%	43.5%
F2-11.2	Bed	9.7	80	Medium	73.3%	60.0%	46.8%	Medium	83.7%	63.0%	46.8%
F3-01.1	LKD	24.0	217	High	81.8%	74.5%	65.0%	High	84.0%	65.1%	51.5%
F3-01.2	Bed	11.6	99	Medium	65.3%	50.5%	33.8%	Medium	80.6%	56.3%	37.7%
F3-01.3	Bed	11.2	100	Medium	73.4%	59.6%	46.6%	Medium	83.8%	63.5%	47.1%
F3-02.1	LKD	24.0	217	High	80.1%	69.7%	58.9%	Medium	82.6%	58.6%	37.6%
F3-02.2	Bed	11.6	99	Minimum	58.6%	36.7%	11.4%	Minimum	79.1%	48.1%	17.1%

Block F - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule


Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
F3-02.3	Bed	11.1	90	Minimum	67.6%	48.6%	26.2%	Medium	82.6%	55.5%	29.1%
F3-03.1	LKD	19.8	172	Minimum	65.3%	47.1%	23.2%	Minimum	78.8%	46.6%	14.9%
F3-03.2	Bed	9.7	80	Medium	69.5%	52.3%	31.1%	Medium	83.1%	57.2%	32.9%
F3-04.1	LKD	19.8	172	Minimum	64.6%	45.8%	22.4%	Minimum	78.9%	46.8%	15.5%
F3-04.2	Bed	9.7	80	Medium	69.6%	52.1%	30.5%	Medium	82.9%	57.0%	32.2%
F3-05.1	LKD	25.6	211	Medium	68.7%	51.0%	30.0%	Minimum	75.6%	35.8%	3.5%
F3-05.2	Bed	9.5	80	Minimum	61.6%	41.0%	16.1%	Minimum	78.5%	45.9%	14.4%
F3-05.3	Bed	11.4	90	Minimum	63.3%	43.2%	19.3%	Medium	81.3%	51.5%	23.2%
F3-06.1	LKD	25.6	211	Medium	68.6%	55.5%	43.4%	Minimum	72.6%	41.2%	17.1%
F3-06.2	Bed	11.4	90	Medium	65.9%	53.2%	38.8%	Medium	79.9%	54.8%	37.0%
F3-06.3	Bed	9.5	80	Medium	65.2%	51.9%	37.9%	Medium	78.1%	51.5%	33.2%
F3-07.1	LKD	24.0	217	Medium	67.8%	55.2%	42.5%	Minimum	76.2%	47.4%	25.4%
F3-07.2	Bed	11.6	99	Medium	67.2%	54.4%	40.3%	Medium	80.3%	55.5%	36.8%
F3-07.3	Bed	11.1	90	Medium	66.9%	53.6%	39.0%	Medium	80.1%	55.3%	36.5%
F4-01.1	LKD	24.0	217	High	82.3%	75.8%	66.1%	High	84.1%	65.6%	52.4%
F4-01.2	Bed	11.6	99	Medium	73.4%	59.8%	47.2%	Medium	84.1%	64.3%	49.2%
F4-01.3	Bed	11.2	100	Medium	74.1%	61.0%	48.7%	Medium	84.2%	64.5%	49.2%
F4-02.1	LKD	24.0	217	High	81.0%	71.6%	60.7%	Medium	82.9%	59.4%	39.1%
F4-02.2	Bed	11.6	99	Medium	69.0%	51.0%	29.3%	Medium	82.9%	56.9%	32.5%
F4-02.3	Bed	11.1	90	Medium	69.9%	52.7%	31.3%	Medium	83.6%	58.8%	36.0%
F4-03.1	LKD	19.8	172	Medium	71.4%	55.0%	36.4%	Medium	81.7%	52.7%	25.0%
F4-03.2	Bed	9.7	80	Medium	72.2%	55.8%	36.7%	Medium	84.2%	59.8%	38.1%
F4-04.1	LKD	19.8	172	Medium	72.1%	55.7%	37.4%	Medium	81.8%	53.1%	25.7%
F4-04.2	Bed	9.7	80	Medium	71.7%	55.2%	36.3%	Medium	83.8%	58.9%	36.2%
F4-05.1	LKD	25.6	211	Medium	70.4%	53.4%	33.9%	Minimum	76.5%	39.8%	6.5%
F4-05.2	Bed	9.5	80	Medium	72.4%	56.0%	37.0%	Medium	82.8%	56.4%	30.3%
F4-05.3	Bed	11.4	90	Minimum	67.9%	49.2%	26.3%	Medium	82.3%	54.7%	28.9%
F4-06.1	LKD	25.6	211	Medium	72.2%	60.1%	48.3%	Minimum	75.0%	45.7%	24.0%
F4-06.2	Bed	11.4	90	Medium	70.5%	57.6%	44.9%	Medium	82.1%	59.3%	42.4%
F4-06.3	Bed	9.5	80	High	75.4%	63.9%	52.5%	Medium	82.7%	61.6%	44.9%
F4-07.1	LKD	24.0	217	High	75.4%	63.7%	52.8%	Medium	79.9%	55.0%	36.5%
F4-07.2	Bed	11.6	99	Medium	73.2%	60.0%	48.0%	Medium	82.6%	61.0%	44.3%
F4-07.3	Bed	11.1	90	Medium	70.2%	57.2%	44.7%	Medium	82.5%	60.6%	44.5%

Table 29: Daylight provision individual values for all habitable rooms to IS EN 17037:2018+A1:2021


Level 0

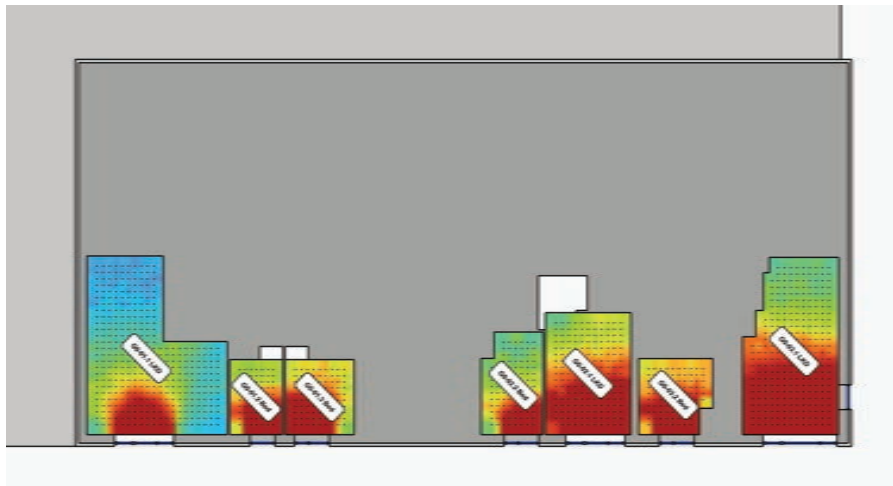

Level 1

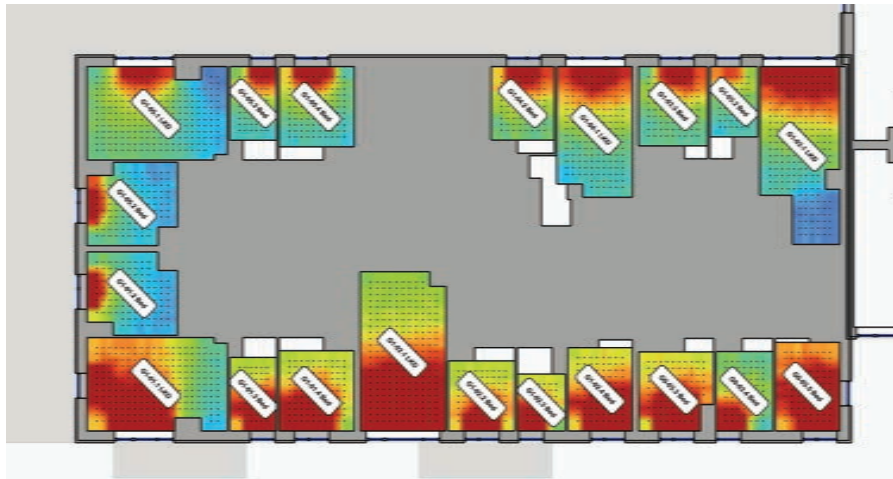

Level 3

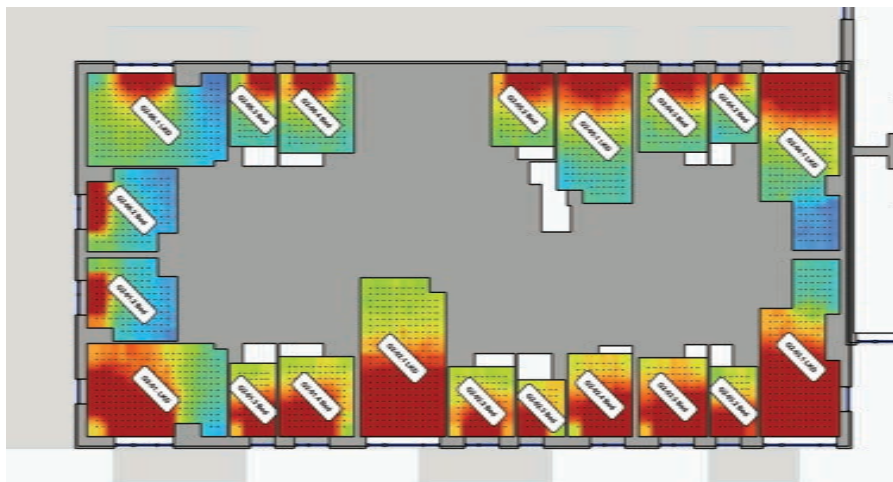

Level 4

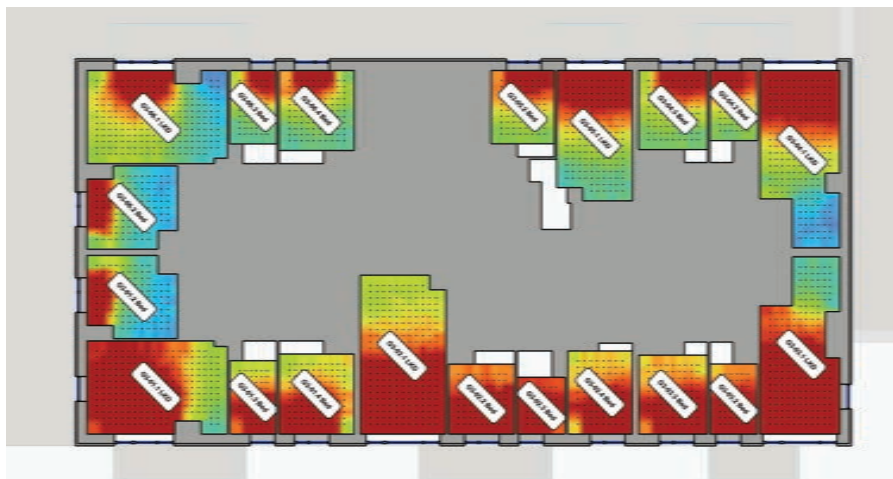


Figure 49: Block G - Daylight Provision and Annual Average Illuminance to all Habitable Rooms

Block G - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
G0-01.1	LKD	40.8	390	Fail	39.5%	22.1%	9.3%	Minimum	58.4%	15.3%	4.9%
G0-01.2	Bed	8.3	70	Minimum	65.1%	47.3%	32.7%	Medium	79.6%	50.3%	30.6%
G0-01.3	Bed	10.8	90	Medium	66.6%	51.1%	36.7%	Medium	80.6%	53.4%	36.4%
G0-02.1	LKD	21.7	187	Medium	68.4%	52.9%	39.3%	Medium	80.0%	52.2%	34.5%
G0-02.2	Bed	12.5	104	Minimum	56.4%	37.8%	21.6%	Minimum	75.1%	40.7%	19.0%
G0-03.1	LKD	32.2	291	Medium	70.4%	56.0%	41.7%	Minimum	76.9%	45.2%	26.1%
G0-03.2	Bed	11.0	92	Medium	69.0%	53.7%	40.6%	Medium	82.4%	59.5%	41.3%
G0-03.3	Bed	11.6	92	Medium	67.8%	52.8%	39.2%	Medium	81.6%	57.5%	39.6%
G0-03.4	Bed	9.4	77	Minimum	55.1%	37.2%	21.4%	Minimum	75.0%	41.6%	22.0%
G0-03.5	Bed	11.9	96	High	77.7%	66.0%	53.3%	High	85.4%	67.6%	52.0%
G1-01.1	LKD	26.4	246	Medium	68.3%	52.0%	37.6%	Minimum	73.1%	37.1%	18.7%
G1-01.2	Bed	14.2	115	Fail	35.6%	16.3%	5.0%	Minimum	57.9%	17.8%	2.8%
G1-01.3	Bed	7.2	60	Medium	67.9%	51.1%	35.3%	Medium	80.8%	54.0%	33.9%
G1-01.4	Bed	12.5	110	Minimum	65.3%	49.7%	34.6%	Medium	80.5%	53.6%	34.8%
G1-02.1	LKD	27.8	249	Medium	68.2%	52.9%	38.9%	Medium	79.7%	52.2%	33.0%
G1-02.2	Bed	9.7	81	Minimum	64.5%	48.9%	33.2%	Medium	81.1%	55.9%	36.9%
G1-02.3	Bed	5.7	42	Medium	66.3%	51.2%	36.1%	Medium	81.3%	56.6%	38.8%
G1-02.4	Bed	11.2	88	Medium	69.3%	53.9%	40.2%	Medium	81.9%	57.7%	40.3%
G1-03.1	LKD	25.6	230	Minimum	57.8%	39.7%	19.4%	Minimum	50.8%	4.3%	0.0%
G1-03.2	Bed	7.0	54	Minimum	54.1%	34.3%	12.8%	Minimum	74.2%	38.0%	11.3%
G1-03.3	Bed	11.4	90	Minimum	60.7%	41.7%	21.6%	Minimum	77.9%	45.0%	19.8%
G1-04.1	LKD	19.8	172	Minimum	58.9%	41.3%	21.3%	Minimum	74.0%	37.1%	10.5%
G1-04.2	Bed	9.7	80	Medium	68.1%	50.2%	31.9%	Medium	79.7%	50.1%	25.8%
G1-05.1	LKD	26.4	246	Minimum	53.7%	33.4%	12.5%	Minimum	65.6%	18.8%	0.5%
G1-05.2	Bed	14.2	115	Fail	35.3%	16.3%	5.0%	Minimum	56.9%	17.0%	2.8%
G1-05.3	Bed	7.2	60	Minimum	61.7%	42.1%	19.6%	Minimum	76.8%	40.8%	12.0%
G1-05.4	Bed	12.5	110	Minimum	59.1%	39.3%	17.4%	Minimum	76.3%	38.5%	11.8%
G2-01.1	LKD	26.4	246	Medium	69.8%	54.6%	41.1%	Minimum	74.1%	40.7%	22.1%
G2-01.2	Bed	14.2	115	Fail	38.5%	19.0%	6.0%	Minimum	58.8%	17.6%	2.1%
G2-01.3	Bed	7.2	60	Medium	68.5%	51.9%	36.5%	Medium	81.2%	55.0%	34.6%
G2-01.4	Bed	12.5	110	Medium	67.3%	51.9%	36.9%	Medium	80.7%	54.3%	35.7%
G2-02.1	LKD	27.8	249	Medium	70.0%	55.0%	41.1%	Medium	80.4%	54.5%	35.5%
G2-02.2	Bed	9.7	81	Medium	65.2%	50.0%	34.1%	Medium	80.9%	56.3%	37.1%
G2-02.3	Bed	5.7	42	Medium	66.5%	51.5%	36.4%	Medium	82.2%	58.8%	41.2%
G2-02.4	Bed	11.2	88	Medium	70.3%	55.2%	41.6%	Medium	82.7%	59.9%	42.0%
G2-03.1	LKD	24.8	222	High	77.9%	67.3%	55.3%	Minimum	73.5%	38.0%	16.5%
G2-03.2	Bed	7.0	54	Medium	66.5%	51.9%	37.6%	Medium	80.6%	56.3%	38.2%
G2-03.3	Bed	11.4	90	Medium	71.1%	56.9%	43.1%	Medium	83.1%	61.0%	43.1%
G2-04.1	LKD	25.6	230	Minimum	62.8%	45.6%	28.2%	Minimum	55.5%	8.1%	0.0%
G2-04.2	Bed	7.0	54	Minimum	57.6%	39.0%	19.5%	Minimum	76.4%	42.3%	17.1%
G2-04.3	Bed	11.4	90	Minimum	63.9%	45.6%	27.4%	Minimum	78.9%	48.7%	26.5%
G2-05.1	LKD	19.8	172	Minimum	61.7%	43.9%	26.1%	Minimum	74.9%	40.0%	13.4%
G2-05.2	Bed	9.7	80	Medium	69.9%	53.0%	36.3%	Medium	81.2%	53.5%	33.3%
G2-06.1	LKD	26.4	246	Minimum	55.9%	36.5%	15.6%	Minimum	64.8%	19.4%	0.3%
G2-06.2	Bed	14.2	115	Fail	38.9%	18.9%	6.4%	Minimum	57.1%	15.8%	2.4%
G2-06.3	Bed	7.2	60	Minimum	65.3%	46.0%	25.1%	Minimum	78.4%	45.2%	19.3%
G2-06.4	Bed	12.5	110	Minimum	61.4%	42.5%	22.1%	Minimum	78.5%	45.6%	19.2%
G3-01.1	LKD	26.4	246	High	76.4%	63.3%	51.3%	Medium	79.0%	50.8%	34.8%
G3-01.2	Bed	14.2	115	Fail	43.6%	23.2%	6.9%	Minimum	61.1%	20.4%	3.6%
G3-01.3	Bed	7.2	60	Medium	70.8%	54.9%	41.2%	Medium	81.3%	56.3%	37.7%

Block G - IS EN 17037:2018+A1:2021 Daylight Provision Room Schedule

Space ID	Description	Area m2	Sensor Count	Target Illuminance	300lux_50	500lux_50	750lux_50	Minimum Target Illuminance	100lux_95	300lux_95	500lux_95
G3-01.4	Bed	12.5	110	Medium	68.0%	52.9%	38.6%	Medium	81.0%	55.6%	37.6%
G3-02.1	LKD	27.8	249	Medium	72.8%	58.4%	45.3%	Medium	81.3%	56.9%	38.8%
G3-02.2	Bed	9.7	81	High	76.6%	63.3%	51.1%	Medium	84.4%	65.5%	49.8%
G3-02.3	Bed	5.7	42	High	76.8%	63.9%	52.1%	High	85.5%	68.4%	53.2%
G3-02.4	Bed	11.2	88	Medium	70.9%	56.7%	43.0%	Medium	83.2%	61.1%	43.9%
G3-03.1	LKD	24.8	222	High	79.9%	70.3%	60.0%	Minimum	75.2%	42.4%	20.0%
G3-03.2	Bed	7.0	54	High	75.9%	62.4%	50.3%	Medium	84.4%	65.1%	49.2%
G3-03.3	Bed	11.4	90	Medium	72.1%	57.9%	44.7%	Medium	83.2%	61.8%	44.9%
G3-04.1	LKD	25.6	230	Medium	70.3%	54.6%	39.3%	Minimum	62.5%	17.7%	0.6%
G3-04.2	Bed	7.0	54	Medium	71.1%	54.8%	38.8%	Medium	81.7%	55.5%	34.8%
G3-04.3	Bed	11.4	90	Medium	67.9%	50.1%	33.1%	Medium	80.9%	53.3%	32.0%
G3-05.1	LKD	19.8	172	Medium	70.3%	54.2%	37.7%	Minimum	78.9%	49.0%	25.8%
G3-05.2	Bed	9.7	80	Medium	72.7%	56.0%	40.9%	Medium	83.1%	57.0%	36.8%
G3-06.1	LKD	26.4	246	Minimum	66.2%	48.4%	29.5%	Minimum	74.2%	33.7%	5.2%
G3-06.2	Bed	14.2	115	Fail	43.0%	22.9%	6.3%	Minimum	62.4%	21.7%	3.8%
G3-06.3	Bed	7.2	60	Medium	68.2%	50.5%	32.5%	Medium	80.2%	50.5%	27.4%
G3-06.4	Bed	12.5	110	Minimum	63.2%	44.7%	25.4%	Minimum	79.7%	49.0%	25.0%

Table 30: Daylight provision individual values for all habitable rooms to IS EN 17037:2018+A1:2021

Appendix C - Sunlight Hours to Habitable Rooms Within the Proposed Development

Sunlight Hours Apartments Block A				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
A1-01.1	LKD	Yes	2.5	Minimum
A1-02.1	LKD	Yes	2.3	Minimum
A1-03.1	LKD	Yes	1.9	Minimum
A2-01.1	LKD	Yes	2.5	Minimum
A2-02.1	LKD	Yes	2.3	Minimum
A2-03.1	LKD	Yes	1.9	Minimum
A2-04.1	LKD	Yes	2.3	Minimum
A2-05.1	LKD	Yes	2.2	Minimum
A3-01.1	LKD	Yes	2.5	Minimum
A3-02.1	LKD	Yes	2.3	Minimum
A3-03.1	LKD	Yes	1.9	Minimum
A3-04.1	LKD	Yes	2.3	Minimum
A3-05.1	LKD	Yes	2.2	Minimum
A3-06.1	LKD	No	3.4	Medium
A3-07.1	LKD	No	3.3	Medium
A3-08.1	LKD	No	3.4	Medium
A3-09.1	LKD	No	6.5	High
A3-10.1	LKD	No	5.1	High
A3-11.1	LKD	No	3.6	Medium
A4-01.1	LKD	Yes	2.5	Minimum
A4-02.1	LKD	Yes	2.3	Minimum
A4-03.1	LKD	Yes	1.9	Minimum
A4-04.1	LKD	Yes	2.3	Minimum
A4-05.1	LKD	Yes	2.2	Minimum
A4-06.1	LKD	No	6.2	High
A4-07.1	LKD	No	6.4	High
A4-08.1	LKD	No	3.8	Medium
A4-09.1	LKD	No	6.7	High
A4-10.1	LKD	No	5.6	High
A4-11.1	LKD	No	6.5	High
A5-01.1	LKD	Yes	2.5	Minimum
A5-02.1	LKD	Yes	2.3	Minimum
A5-03.1	LKD	Yes	1.9	Minimum
A5-04.1	LKD	No	4.3	High
A5-05.1	LKD	No	7.1	High
A5-06.1	LKD	No	5.8	High
A5-07.1	LKD	No	4.3	High
A6-01.1	LKD	Yes	2.5	Minimum
A6-02.1	LKD	Yes	2.3	Minimum
A6-03.1	LKD	Yes	2.3	Minimum
A6-04.1	LKD	No	7.3	High
A6-05.1	LKD	No	7.4	High
A6-06.1	LKD	No	7.3	High
A6-07.1	LKD	No	7.5	High

Table 31: Sunlight Hours

Sunlight Hours Apartments Block B				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
B2-01.1	LKD	Yes	2.2	Minimum
B2-02.1	LKD	Yes	1.8	Minimum
B2-03.1	LKD	Yes	1.5	Minimum
B3-01.1	LKD	Yes	2.2	Minimum
B3-02.1	LKD	Yes	1.8	Minimum
B3-03.1	LKD	Yes	1.5	Minimum
B3-04.1	LKD	Yes	1.7	Minimum
B3-05.1	LKD	Yes	2.0	Minimum
B3-06.1	LKD	No	1.1	Below criteria
B3-07.1	LKD	No	1.9	Minimum
B3-08.1	LKD	No	3.0	Medium
B3-09.1	LKD	No	3.5	Medium
B3-10.1	LKD	No	4.6	High
B3-11.1	LKD	No	5.8	High
B4-01.1	LKD	Yes	2.2	Minimum
B4-02.1	LKD	Yes	1.8	Minimum
B4-03.1	LKD	Yes	1.8	Minimum
B4-04.1	LKD	Yes	2.2	Minimum
B4-05.1	LKD	Yes	2.4	Minimum
B4-06.1	LKD	No	4.0	High
B4-07.1	LKD	No	4.6	High
B4-08.1	LKD	No	3.0	Medium
B4-09.1	LKD	No	3.5	Medium
B4-10.1	LKD	No	4.9	High
B4-11.1	LKD	No	6.3	High
B5-01.1	LKD	Yes	2.2	Minimum
B5-02.1	LKD	Yes	1.8	Minimum
B5-03.1	LKD	Yes	1.8	Minimum
B5-04.1	LKD	No	3.0	Medium
B5-05.1	LKD	No	3.7	Medium
B5-06.1	LKD	No	4.9	High
B5-07.1	LKD	No	6.7	High
B6-01.1	LKD	Yes	2.2	Minimum
B6-02.1	LKD	Yes	2.2	Minimum
B6-03.1	LKD	Yes	2.2	Minimum
B6-04.1	LKD	No	5.1	High
B6-05.1	LKD	No	5.8	High
B6-06.1	LKD	No	6.2	High
B6-07.1	LKD	No	6.9	High

Table 32: Sunlight Hours

Sunlight Hours Apartments Block C				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
C1-08.1	LKD	No	0.6	Below criteria
C1-09.1	LKD	No	0.7	Below criteria
C1-10.1	LKD	Yes	3.7	Medium
C1-11.1	LKD	Yes	2.8	Minimum
C2-08.1	LKD	No	0.8	Below criteria
C2-09.1	LKD	No	1.2	Below criteria
C2-10.1	LKD	Yes	2.8	Minimum
C2-11.1	LKD	Yes	3.4	Medium
C3-01.1	LKD	Yes	1.9	Minimum
C3-02.3	Bed	Yes	1.0	Below criteria
C3-03.1	LKD	No	1.8	Minimum
C3-04.2	Bed	No	2.4	Minimum
C3-05.2	Bed	No	2.5	Minimum
C3-06.1	LKD	No	2.0	Minimum
C3-07.1	LKD	No	1.5	Minimum
C3-08.1	LKD	No	1.1	Below criteria
C3-09.1	LKD	No	1.4	Below criteria
C3-10.1	LKD	No	3.3	Medium
C3-11.1	LKD	No	3.8	Medium
C4-01.1	LKD	Yes	2.3	Minimum
C4-02.2	Bed	Yes	1.3	Below criteria
C4-03.1	LKD	No	1.8	Minimum
C4-04.2	Bed	No	2.6	Minimum
C4-05.2	LKD	No	2.8	Minimum
C4-06.1	LKD	No	2.3	Minimum
C4-07.1	LKD	No	1.8	Minimum
C5-01.1	LKD	Yes	2.3	Minimum
C5-02.3	Bed	Yes	1.3	Below criteria
C5-03.1	LKD	No	1.8	Minimum
C5-04.2	Bed	No	2.8	Minimum
C5-05.1	LKD	No	1.7	Minimum
C5-06.1	LKD	No	2.7	Minimum
C5-07.1	LKD	No	2.2	Minimum
C6-01.1	LKD	Yes	2.3	Minimum
C6-02.1	LKD	Yes	2.4	Minimum
C6-03.1	LKD	Yes	5.3	High
C6-04.2	Bed	No	3.0	Medium
C6-05.1	LKD	No	1.9	Minimum
C6-06.1	LKD	No	3.0	Medium
C6-07.1	LKD	No	2.4	Minimum
C7-01.1	LKD	Yes	2.3	Minimum
C7-02.1	LKD	Yes	2.4	Minimum
C7-03.1	LKD	Yes	6.3	High
C7-04.2	Bed	No	3.4	Medium
C7-05.1	LKD	No	2.1	Minimum
C7-06.1	LKD	No	3.2	Medium
C7-07.1	LKD	No	2.4	Minimum
C8-01.1	LKD	Yes	2.3	Minimum
C8-02.1	LKD	Yes	2.4	Minimum
C8-03.1	LKD	Yes	6.4	High

Sunlight Hours Apartments Block C				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
C8-04.1	LKD	No	1.9	Minimum
C8-05.1	LKD	No	2.6	Minimum
C8-06.1	LKD	No	3.4	Medium
C8-07.1	LKD	No	2.4	Minimum
C9-01.1	LKD	Yes	2.4	Minimum
C9-02.1	LKD	Yes	2.4	Minimum
C9-03.1	LKD	Yes	6.4	High
C9-04.1	LKD	No	5.2	High
C9-05.1	LKD	No	5.9	High
C9-06.1	LKD	No	6.3	High
C9-07.1	LKD	No	2.4	Minimum

Table 33: Sunlight Hours

Sunlight Hours Apartments Block D				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
D0-01.1	LKD	No	0.0	Below criteria
D0-02.1	LKD	No	0.8	Below criteria
D0-03.1	LKD	No	0.9	Below criteria
D0-04.3	Bed	No	1.6	Minimum
D1-01.3	Bed	No	0.3	Below criteria
D1-02.1	LKD	No	1.2	Below criteria
D1-03.1	LKD	No	1.0	Below criteria
D1-04.1	LKD	No	1.1	Below criteria
D1-05.1	LKD	Yes	3.0	Medium
D1-06.1	LKD	Yes	3.5	Medium
D1-07.1	LKD	Yes	3.8	Medium
D1-08.1	LKD	Yes	3.7	Medium
D2-01.3	Bed	No	0.5	Below criteria
D2-02.1	LKD	No	1.4	Below criteria
D2-03.1	LKD	No	1.3	Below criteria
D2-04.1	LKD	No	1.5	Minimum
D2-05.1	LKD	No	1.6	Minimum
D2-06.1	LKD	Yes	3.1	Medium
D2-07.1	LKD	Yes	3.8	Medium
D2-08.1	LKD	Yes	3.9	Medium
D2-09.1	LKD	Yes	4.3	High
D3-01.3	Bed	No	0.8	Below criteria
D3-02.1	LKD	No	1.6	Minimum
D3-03.1	LKD	No	1.6	Minimum
D3-04.1	LKD	No	1.7	Minimum
D3-05.1	LKD	No	1.7	Minimum
D3-06.1	LKD	Yes	3.1	Medium
D3-07.1	LKD	Yes	4.0	High
D3-08.1	LKD	Yes	4.3	High
D3-09.1	LKD	Yes	4.5	High
D4-01.3	Bed	No	1.0	Below criteria
D4-02.1	LKD	No	2.0	Minimum
D4-03.1	LKD	No	1.8	Minimum

Sunlight Hours Apartments Block D				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
D4-04.1	LKD	No	1.8	Minimum
D4-05.1	LKD	No	2.1	Minimum
D4-06.1	LKD	Yes	4.0	High
D4-07.1	LKD	Yes	4.3	High
D4-08.1	LKD	Yes	4.7	High
D4-09.1	LKD	Yes	4.5	High
D5-01.3	Bed	No	1.3	Below criteria
D5-02.1	LKD	No	2.2	Minimum
D5-03.1	LKD	No	2.2	Minimum
D5-04.1	LKD	No	2.2	Minimum
D5-05.1	LKD	No	2.2	Minimum
D5-06.1	LKD	Yes	6.8	High
D5-07.1	LKD	Yes	7.5	High
D5-08.1	LKD	Yes	7.5	High
D5-09.1	LKD	Yes	6.3	High

Table 34: Sunlight Hours

Sunlight Hours Apartments Block E				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
E0-01.3	Bed	No	1.3	Below criteria
E0-02.2	Bed	No	1.3	Below criteria
E0-03.1	LKD	No	2.0	Minimum
E0-04.1	LKD	No	0.9	Below criteria
E0-05.1	LKD	No	1.0	Below criteria
E0-06.2	Bed	No	0.2	Below criteria
E1-01.3	Bed	No	1.3	Below criteria
E1-02.2	Bed	No	1.3	Below criteria
E1-03.1	LKD	No	1.9	Minimum
E1-04.1	LKD	No	1.8	Minimum
E1-05.1	LKD	No	0.9	Below criteria
E1-06.1	LKD	No	1.0	Below criteria
E1-07.2	Bed	No	0.1	Below criteria
E1-08.1	LKD	Yes	4.4	High
E1-09.1	LKD	Yes	1.9	Minimum
E1-10.1	LKD	Yes	2.4	Minimum
E1-11.1	LKD	Yes	2.3	Minimum
E2-01.3	Bed	No	1.3	Below criteria
E2-02.2	Bed	No	1.3	Below criteria
E2-03.1	LKD	No	1.9	Minimum
E2-04.1	LKD	No	1.8	Minimum
E2-05.1	LKD	No	1.3	Below criteria
E2-06.1	LKD	No	1.2	Below criteria
E2-07.2	Bed	No	0.1	Below criteria
E2-08.1	LKD	Yes	4.7	High
E2-09.1	LKD	Yes	1.9	Minimum
E2-10.1	LKD	Yes	2.7	Minimum
E2-11.1	LKD	Yes	2.5	Minimum
E3-01.3	Bed	No	1.3	Below criteria

Sunlight Hours Apartments Block E				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
E3-02.2	Bed	No	1.3	Below criteria
E3-03.1	LKD	No	1.9	Minimum
E3-04.1	LKD	No	1.8	Minimum
E3-05.1	LKD	No	2.1	Minimum
E3-06.1	LKD	No	1.5	Minimum
E3-07.2	Bed	No	0.3	Below criteria
E3-08.1	LKD	Yes	6.2	High
E3-09.1	LKD	Yes	4.8	High
E3-10.1	LKD	Yes	2.8	Minimum
E3-11.1	LKD	Yes	2.9	Minimum
E4-01.3	Bed	No	1.3	Below criteria
E4-02.2	Bed	No	1.3	Below criteria
E4-03.1	LKD	No	1.9	Minimum
E4-04.1	LKD	No	1.8	Minimum
E4-05.1	LKD	No	2.3	Minimum
E4-06.1	LKD	Yes	3.3	Medium
E4-07.1	LKD	Yes	3.3	Medium
E5-01.1	LKD	Yes	6.2	High
E5-02.1	LKD	No	2.2	Minimum
E5-03.1	LKD	No	1.9	Minimum
E5-04.1	LKD	No	1.8	Minimum
E5-05.1	LKD	No	2.3	Minimum
E5-06.1	LKD	Yes	3.8	Medium
E5-07.1	LKD	Yes	4.0	High
E6-01.1	LKD	Yes	6.2	High
E6-02.1	LKD	No	2.2	Minimum
E6-03.1	LKD	No	2.2	Minimum
E6-04.1	LKD	No	2.4	Minimum
E6-05.1	LKD	No	2.4	Minimum
E6-06.1	LKD	Yes	7.6	High
E6-07.1	LKD	Yes	7.6	High

Table 35: Sunlight Hours

Sunlight Hours Apartments Block F				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
F0-01.1	LKD	Yes	6.8	High
F0-02.1	LKD	No	2.4	Minimum
F0-03.1	LKD	No	2.0	Minimum
F0-04.1	LKD	No	2.0	Minimum
F1-01.1	LKD	Yes	7.3	High
F1-02.1	LKD	No	2.4	Minimum
F1-03.1	LKD	No	1.8	Minimum
F1-04.1	LKD	No	1.8	Minimum
F1-05.1	LKD	No	1.8	Minimum
F1-06.1	LKD	Yes	2.3	Minimum
F1-07.1	LKD	Yes	2.3	Minimum
F1-08.1	LKD	No	0.0	Below criteria
F1-09.1	LKD	Yes	1.4	Below criteria
F1-10.1	LKD	Yes	4.3	High
F1-11.1	LKD	Yes	5.7	High
F2-01.1	LKD	Yes	7.7	High
F2-02.1	LKD	No	2.4	Minimum
F2-03.1	LKD	No	1.8	Minimum
F2-04.1	LKD	No	1.8	Minimum
F2-05.1	LKD	No	1.8	Minimum
F2-06.1	LKD	Yes	2.6	Minimum
F2-07.1	LKD	Yes	2.6	Minimum
F2-08.1	LKD	No	0.3	Below criteria
F2-09.1	LKD	Yes	2.1	Minimum
F2-10.1	LKD	Yes	4.7	High
F2-11.1	LKD	Yes	7.5	High
F3-01.1	LKD	Yes	7.7	High
F3-02.1	LKD	No	2.4	Minimum
F3-03.1	LKD	No	1.8	Minimum
F3-04.1	LKD	No	1.8	Minimum
F3-05.1	LKD	No	1.8	Minimum
F3-06.1	LKD	Yes	3.0	Medium
F3-07.1	LKD	Yes	2.8	Minimum
F4-01.1	LKD	Yes	7.7	High
F4-02.1	LKD	No	2.4	Minimum
F4-03.1	LKD	No	2.2	Minimum
F4-04.1	LKD	No	2.2	Minimum
F4-05.1	LKD	No	2.4	Minimum
F4-06.1	LKD	Yes	6.3	High
F4-07.1	LKD	Yes	6.1	High

Table 36: Sunlight Hours

Sunlight Hours Apartments Block G				
Unit ID	Room Use	Habitable room window within 90° south	No. sunlight hours on 21st March	EN17037:2018 Level of exposure to sunlight
G0-01.1	LKD	Yes	4.8	High
G0-02.1	LKD	Yes	5.2	High
G0-03.1	LKD	Yes	6.8	High
G1-01.1	LKD	Yes	5.0	High
G1-02.1	LKD	Yes	7.3	High
G1-03.1	LKD	No	0.0	Below criteria
G1-04.1	LKD	No	0.0	Below criteria
G1-05.2	Bed	Yes	1.8	Minimum
G2-01.1	LKD	Yes	6.3	High
G2-02.1	LKD	Yes	7.7	High
G2-03.1	LKD	No	4.8	High
G2-04.1	LKD	No	0.0	Below criteria
G2-05.1	LKD	Yes	0.0	Below criteria
G2-06.2	Bed	Yes	2.0	Minimum
G3-01.1	LKD	Yes	7.5	High
G3-02.1	LKD	Yes	7.7	High
G3-03.1	LKD	Yes	7.7	High
G3-04.1	LKD	No	0.3	Below criteria
G3-05.1	LKD	No	0.0	Below criteria
G3-06.2	LKD	Yes	2.1	Minimum

Table 37: Sunlight Hours