

LEGEND

SOFTWORKS

- Existing Trees & Planting To be retained and protected during works in accordance with BS5837
- Existing Trees & Planting To be removed
- Proposed Hedgerow planting *Ligustrum ovalifolium*
- Proposed Amenity Grassland

SURFACES

- Proposed Asphalt To pedestrian and Cycleway For detail refer to engineers drawing
- Proposed Asphalt Vehicular For detail refer to engineers drawing
- Proposed Gravel Path Refer to detail


FEATURES

- Existing Fencing To be retained / repaired as required
- Stack Proof Fencing Refer to detail
- Existing Fencing to be removed

MISCELLANEOUS

- Application under section 175(5)a - Park Application (RO)
- Application under section 51(4)a - Bridge Application (RO)
- Site Boundary - Application under Roads Act, Section 51(2)

- NOTES**
- All measurements shown are in metres, and all levels are to ordnance datum unless otherwise indicated.
 - All Coordinates are to Irish Grid (TM65), unless otherwise noted.
 - All hatches are indicative and do not relate to the actual laying or planting pattern.
 - Layout should be read in conjunction with all other drawing information and reports.
 - All new kerbs adjacent to existing roads will require a 300mm reinstatement strip within the carriageway running the entire length.
 - For proposed drainage refer to engineers layout.
 - For lighting, electrical requirements refer to M&E drawings.
8. Legend
All items with * are only relevant to Lifford

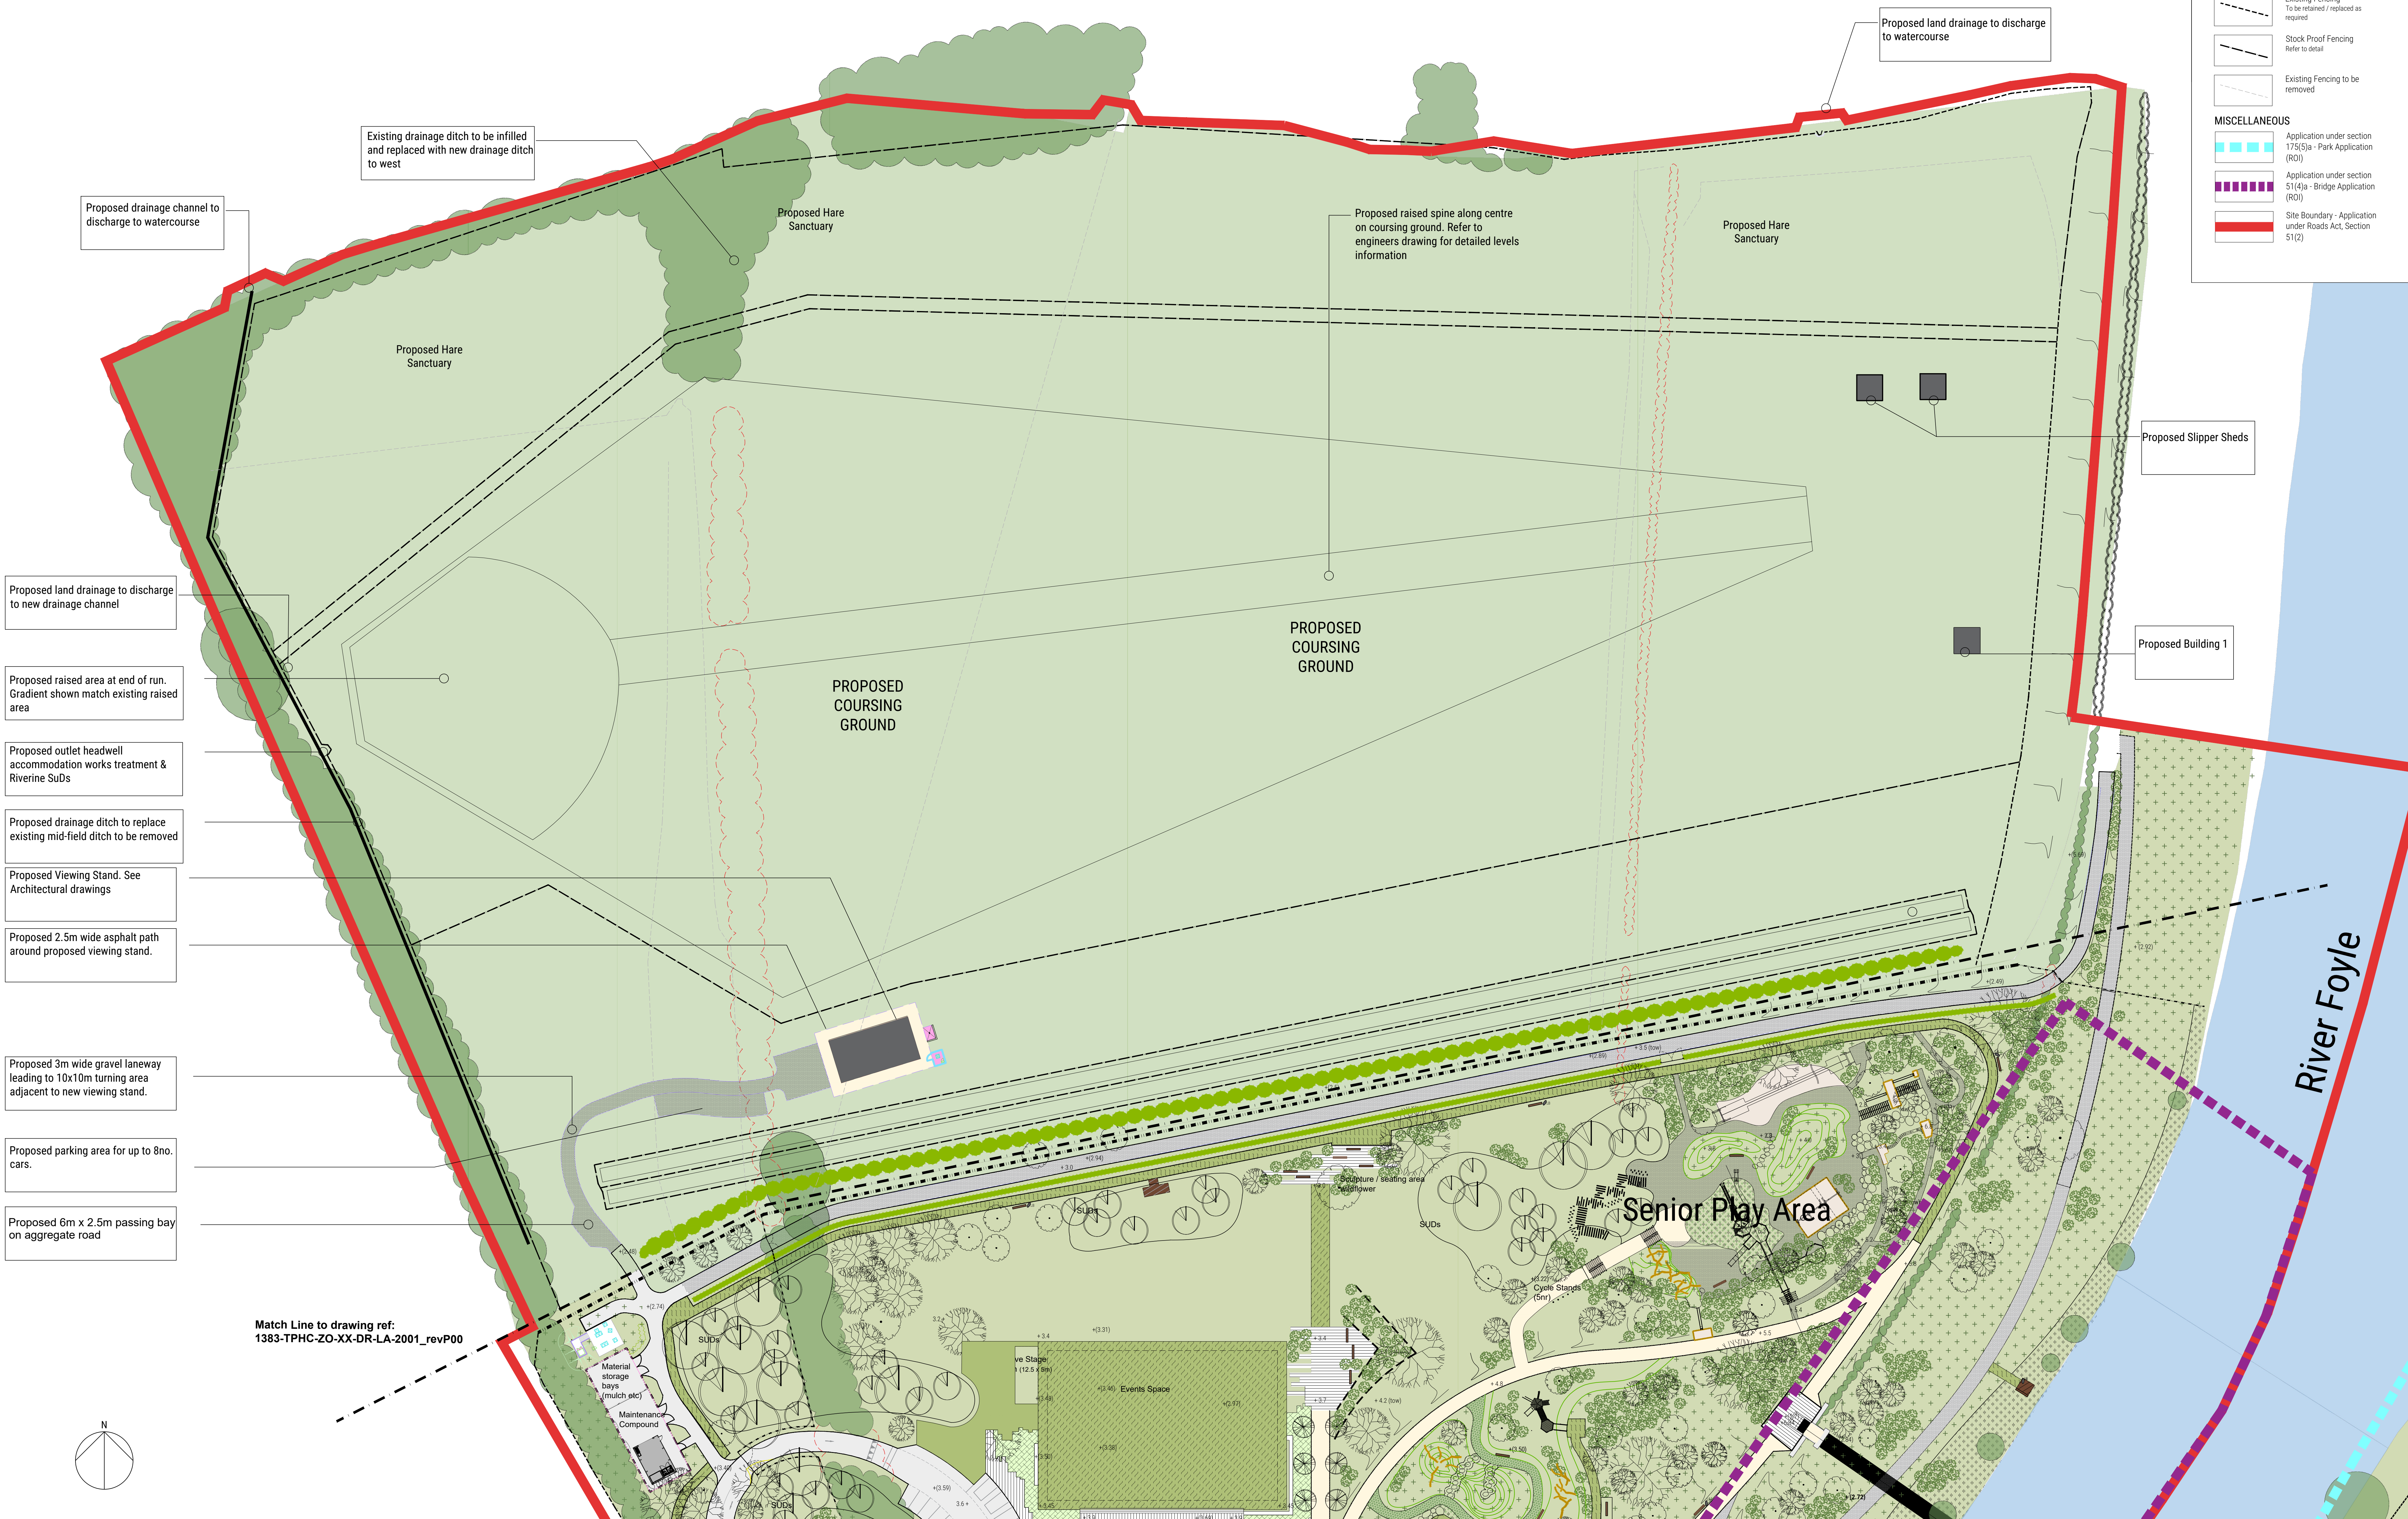

- Proposed drainage channel to discharge to watercourse
- Existing drainage ditch to be filled and replaced with new drainage ditch to west
- Proposed Hare Sanctuary
- Proposed raised spine along centre on coursing ground. Refer to engineers drawing for detailed levels information
- Proposed Hare Sanctuary
- Proposed land drainage to discharge to new drainage channel
- Proposed raised area at end of run. Gradient shown match existing raised area
- Proposed outlet headwell accommodation works treatment & Riverine SuDs
- Proposed drainage ditch to replace existing mid-field ditch to be removed
- Proposed Viewing Stand. See Architectural drawings
- Proposed 2.5m wide asphalt path around proposed viewing stand.
- Proposed 3m wide gravel laneway leading to 10x10m turning area adjacent to new viewing stand.
- Proposed parking area for up to 8no. cars.
- Proposed 6m x 2.5m passing bay on aggregate road

The revision cloud highlighted areas of the park which were inaccessible for the

This is a concept design that illustrates the main elements to be delivered within the park. The exact location, layout and smaller details of the park may change during the detailed design phase.

Based upon Land and Property Services data with the permission of the controller of Her Majesty's Stationery Office, all Crown copyright and database rights (OS&LA 181)

Ordnance Survey Ireland mapping data used with permission in association with Donegal County Council - OS License 2003/07/CCMA/Donegal County Council. Copyright Ordnance Survey Ireland, Government of Ireland.

Rev	Issue Date	Description	App
P02	25.04.2022	Boundary changed cycle stands added and issued for planning.	DM
P01	13.09.2021	Issued for Planning	HB
P00	19.08.2021	Issued for Planning	HB

Quantity Surveys

Sammon

Sammon
9-11 Corporation Square
Belfast, BT1 3AJ

T 028 7127 1323
info@sammon.eu
www.sammon.eu

the paul hogarth company

The Paul Hogarth Company Ltd
Potter's Quay, 5 Ravenhill Road
Belfast, BT9 5DN

T 028 9073 6690
belfast@paulhogarth.com
www.paulhogarth.com

Project Manager, Civil & Structural Engineers

McAdams

ENHANCING LOCAL COMMUNITIES

14 Montgomery House
478 Clarendon Road
Belfast, BT5 6BQ

T 028 9040 2000
E: admin@mcadamsdesign.co.uk
www.mcadamsdesign.co.uk

Funder

Peace

Northern Ireland - Ireland

European Regional Development Fund

Client

Comhairle Contae
Dhúin na nGall
Donegal County Council

Derry City & Strabane District Council
Comhairle Chathair
Críche & Cheantar
an tOirthear

Project Status

STAGE 3 - PLANNING

Project

RIVERINE COMMUNITY PARK

Drawing

LIFFORD ACCOMMODATION WORKS (ROI PLANNING)

Drawn	Checked	Approved	DM
HB	DM	DM	DM
Date	Date	Date	Date
12.02.2021	12.02.2021	12.02.2021	19.08.2021

Scale: 1:500 @ A0

Project	Organisation	Zone	Level	Type	Role	Number	Revision
1383	TPHC	ZO	XX	DR	LA	2005	P02

Project Number	Status code & Description
1383	ST2 Issued for Information

All dimensions are in metres. Figured dimensions to be taken in preference to scaled dimensions. Dimensions to be checked on site. © 2021 McAdams Design Ltd.

Match Line to drawing ref:
1383-TPHC-ZO-XX-DR-LA-2001_revP00