APPENDIX 7-6

Collision Risk Assessment

Table of Contents

1. INTRODUCTION 1
2. METHODOLOGY 1
2.1 Modelling Process 1
2.2 Turbine Specifications 1
2.3 Vantage Point Surveys 2
2.4 Species Assessed 4
2.5 Photoperiod 9
3. RESULTS 10
3.1 Stage A Flight Activity 10
3.2 Stage B Number of Flights Through Rotors 11
3.3 Stage C Probability of Collision 11
3.4 Stage D Expected Collisions 12
3.5 Stage E Allowing for Avoidance and Attraction 13
3.6 Stage F Uncertainty 15
3.7 Predicted Collision Rates 16
4. WORKED EXAMPLE 18
4.1 Proposed Development Scenario 18
4.2 Bird Survey Scenario 18
4.3 Stage A: Flight Activity 20
4.4 Stage B: Number of Flights Through Rotors 23
4.5 Stage C: Probability of Collision 23
4.6 Stage D Expected Collisions 25
4.7 Stage E Allowing for Avoidance and Attraction 25
4.8 Stage F: Uncertainty 26
4.9 Worked Example Collision Rates 26
5. BIBLIOGRAPHY 27

1. INTRODUCTION

This document outlines the methodology used to conduct a collision risk assessment of the Killoshulan Wind Farm. This assessment calculates an annual collision rate using a mathematical model to predict the number of birds that may be killed by collision with moving wind turbine rotor blades. The modelling method used is the Collision Risk Model provided by Band (2024). This method is recommended by NatureScot (2024) and provides a standardised approach to collision risk assessment for onshore wind farms. Note that these are theoretical predictions, therefore the results must be interpreted with a degree of caution.

2. METHODOLOGY

2.1 Modelling Process

The collision risk model estimates the number of collisions through the following stages:

- **Stage A Flight activity** - uses bird survey data to establish the density of flying birds in the vicinity of the turbines, and the proportion flying at a risk height (between the lowest and highest points of the rotors).
- **Stage B Number of flights through rotors** – makes an estimate, based on the bird density and proportion at risk height, of the potential number of bird passages through rotors. The initial assumption is that birds will continue to make flights within the area at the same intensity as before.
- **Stage C Probability of collision** - calculates the probability of collision during a single bird rotor transit.
- **Stage D Expected collisions** - multiplies the outputs of stage B and C to yield the potential collision rate for the bird species, assuming current levels of bird use of the site but allowing for the proportion of time that turbines are not operational.
- **Stage E Allowing for avoidance and attraction** - takes account of the proportion of birds likely to avoid the wind farm or its turbines, either because they have been displaced from the site or because they take evasive action or are attracted to the wind farm.
- **Stage F Uncertainty** - each of these five stages is followed by a further stage, stage F, which describes how to express the uncertainty surrounding a collision risk estimate.

The general features and assumptions of the collision risk model are discussed in further detail in Band (2024)[1]. Using the model, a final predicted annual collision rate can be predicted for each species that can be used in the impact assessment

2.2 Turbine Specifications

The turbine specifications used in each model are provided in Table 7 - 6 - 1. The expected operational time of the turbines is 85% according to report by the British Wind Energy Association (BWEA; 2007) and Xiao *et al.* (2021) which identifies the standard operational period of the wind turbines.

Table 7 - 6 - 1 Turbine specifications

Component	Scenario Modelled
Latitude (°N)	52.745956
Turbine model	Nordex N163
Number of turbines	10

[1] *This assessment follows the standard methodology described by Band (2024), although it is acknowledged that there may be some scientific issues with some aspects of this methodology.*

Component	Scenario Modelled
Hub height (m)	103.5
Rotor diameter (m)	163
Blade pitch (°)	6
Maximum blade width (m)	4.5
Rotational speed (rpm)	6.75
Number of blades	3

The turbine blade profile used in the model is presented in Table 7 - 6 - 2. In the absence of a specific blade profile for each turbine model, the blade profile provided in the collision risk model spreadsheet in Band (2024) has been used in the three scenarios. This table provides the chord width values at 20 evenly spaced points along the blade, expressed relative to the maximum chord width. The ratio r/R represents the relative radial position along the blade, where 0 corresponds to the hub and 1 corresponds to the blade tip, while the ratio c/C represents the relative chord width. Further information on blade profiles is in Section 4 'Worked Example'.

Table 7 - 6 - 2 Turbine blade profile

r/R	c/C
0.00	0.690
0.05	0.730
0.10	0.790
0.15	0.880
0.20	0.960
0.25	1.000
0.30	0.980
0.35	0.920
0.40	0.850
0.45	0.800
0.50	0.750
0.55	0.700
0.60	0.640
0.65	0.580
0.70	0.520
0.75	0.470
0.80	0.410
0.85	0.370
0.90	0.300
0.95	0.240
1.00	0.000

2.3 Vantage Point Surveys

The assessment is based on vantage point surveys to monitor flight activity undertaken between October 2020 and September 2022 and October 2025 to September 2026. Surveys followed methodology from NatureScot (formerly Scottish Natural Heritage [SNH]) outlined in SNH (2017), which was revised in NatureScot (2025a). Surveys remain in accordance with the updated guidance.

Surveys were undertaken at four vantage points. Surveys undertaken from a fifth vantage point (VP3) are not included in the model because this vantage point does not overlook the proposed turbines in the final design. Viewsheds were calculated using the Visibility Analysis plugin (Version 1.8) over a raster digital

terrain model (DTM) in QGIS (Version 3.28). A point 1.75m in height (to represent the height of the surveyor) was created on a map using 10m contours terrain data, accounting for the relative height of any surrounding landscape features (e.g., trees). The software produced a 360° viewshed at 22m from ground level up to a 2km radius around the vantage point. The combined viewsheds from these vantage points provided coverage to a 500m radius of the potential turbine positions for each scenario. The vantage points and the area watched (i.e., the area of the viewsheds) are listed in Table 7 - 6 - 3.

Table 7 - 6 - 3 Vantage points

Vantage Point	Area Watched (ha)
VP1	298
VP2	150
VP4	348
VP5	424

The surveyor collected data on bird observations and flight activity from the scanning arc of 180° to a 2km radius at the fixed vantage point locations for two 3-hour watches separated by a minimum 30-minute break (i.e., 6 hours total) per month. The survey effort is presented in Table 7 - 6 - 4, expressed in terms of hours and seconds per month.

Table 7 - 6 - 4 Survey effort

Vantage Point	Month	Hours Survey	Seconds Survey
VP1	Jan	18.00	64,800
VP2	Jan	18.00	64,800
VP4	Jan	18.00	64,800
VP5	Jan	18.00	64,800
VP1	Feb	18.00	64,800
VP2	Feb	18.00	64,800
VP4	Feb	18.00	64,800
VP5	Feb	18.00	64,800
VP1	Mar	18.00	64,800
VP2	Mar	18.00	64,800
VP4	Mar	18.00	64,800
VP5	Mar	18.00	64,800
VP1	Apr	15.00	54,000
VP2	Apr	15.00	54,000
VP4	Apr	15.17	54,612
VP5	Apr	12.00	43,200
VP1	May	15.00	54,000
VP2	May	15.00	54,000
VP4	May	15.00	54,000
VP5	May	15.00	54,000
VP1	Jun	12.00	43,200
VP2	Jun	12.00	43,200
VP4	Jun	12.00	43,200
VP5	Jun	12.00	43,200
VP1	Jul	12.00	43,200
VP2	Jul	12.00	43,200
VP4	Jul	18.00	64,800

Vantage Point	Month	Hours Survey	Seconds Survey
VP5	Jul	18.00	64,800
VP1	Aug	30.00	108,000
VP2	Aug	30.00	108,000
VP4	Aug	36.00	129,600
VP5	Aug	30.00	108,000
VP1	Sep	18.00	64,800
VP2	Sep	18.00	64,800
VP4	Sep	12.00	43,200
VP5	Sep	18.00	64,800
VP1	Oct	15.00	54,000
VP2	Oct	15.00	54,000
VP4	Oct	12.00	43,200
VP5	Oct	15.00	54,000
VP1	Nov	21.00	75,600
VP2	Nov	21.00	75,600
VP4	Nov	24.00	86,400
VP5	Nov	21.00	75,600
VP1	Dec	18.00	64,800
VP2	Dec	18.00	64,800
VP4	Dec	18.00	64,800
VP5	Dec	18.00	64,800

Flight activity of target species was mapped and recorded as per defined flight bands which were chosen in relation to the dimensions of potential turbine models at the outset of surveys. These heights bands were:

- Band 1 = 0-10m
- Band 2 = 10-25m
- Band 3 = 25-200m
- Band 4 = 200+m

As the risk height range of the turbines are 22-185m, all flight activity in Bands 2 and 3 is considered to be at potential collision height.

2.4 Species Assessed

Collision rates were estimated for the species listed in Table 7 - 6 - 5. The months included for each species are also presented.

Table 7 - 6 - 5 Species assessed

Species	Months	Model
Golden Plover	Sep-Apr	nondirectional
Peregrine Falcon	Jan-Dec	nondirectional
Kestrel	Jan-Dec	nondirectional
Lapwing	Jan-Dec	nondirectional
Snipe	Jan-Dec	nondirectional
Woodcock	Jan-Dec	nondirectional

Species	Months	Model
Buzzard	Jan-Dec	nondirectional
Sparrowhawk	Jan-Dec	nondirectional

Species biometrics, such as body length, body width (i.e., wingspan) and flight speed, as well as whether a bird typically flaps or glides in flight, are required to calculate collision risk. This information was sourced from the best available literature.

In addition, a 'nocturnal activity factor is required'. There is considerable uncertainty about levels of bird flight activity by night (Band, 2024). There are no standard expert rankings available for terrestrial species and levels of activity may vary from season to season. Because of this, each species is ranked with a nocturnal activity factor of 0%, 25%, 50%, 75% and 100%. A ranking of 0% is given to represent hardly any flight activity at night and of 100% for much flight activity at night. As such, the figures used in the collision risk model take both day and night flights into account. The biometrics, flight type and nocturnal activity factor used in the model are presented in Table 7 - 6 - 6.

Table 7 - 6 - 6 Species biometrics, flight type and nocturnal activity factor

Species	Length (cm)	Width (cm)	Flight Speed (m/s)	Nocturnal Activity Factor	Flight Type
Buzzard	54	120.5	11.6	0%	flapping
Golden Plover	27.5	71.5	17.9	25%	flapping
Kestrel	33.5	75.5	10.1	0%	flapping
Lapwing	29.5	84.5	12.8	50%	flapping
Peregrine Falcon	44.5	105	12.1	0%	flapping
Snipe	25.5	42	17.1	100%	flapping
Sparrowhawk	33	62.5	10	0%	flapping
Woodcock	34	60	17.1	100%	flapping

To prepare the field survey data for analysis, the number of 'bird-seconds' per month per vantage point was calculated for each observation by multiplying the number of birds aloft by the duration of the flight (in seconds). This included time spent in all recorded height bands, not just those bands within potential collision height. Time spent in bands within potential collision height is also presented separately. These values are presented per vantage point per month for each species in Table 7 - 6 - 7.

Table 7 - 6 - 7 Bird-seconds per vantage point per month

Species	Month	Vantage Point	Bird-Seconds	Potential Collision Height Bird-Seconds
Buzzard	Jan	VP1	154	134
	Feb	VP1	228	221
	Mar	VP1	8,791	5842
	Apr	VP1	2,333	2333
	May	VP1	512	512
	Jun	VP1	891	855
	Jul	VP1	908	908
	Aug	VP1	829	829
	Sep	VP1	149	138
	Oct	VP1	20	20
	Nov	VP1	673	673
	Dec	VP1	60	60
	Jan	VP2	5	5

Species	Month	Vantage Point	Bird-Seconds	Potential Collision Height Bird-Seconds
	Feb	VP2	1,709	1649
	Mar	VP2	5,207	3665
	Apr	VP2	546	606
	May	VP2	1,540	1370
	Jun	VP2	1,805	1755
	Jul	VP2	281	267
	Aug	VP2	2,546	2230
	Oct	VP2	1,208	1168
	Nov	VP2	30	20
	Dec	VP2	5	5
	Feb	VP4	129	129
	Mar	VP4	2,345	2325
	Apr	VP4	722	722
	May	VP4	145	140
	Jun	VP4	120	115
	Jul	VP4	469	469
	Aug	VP4	1,375	1375
	Sep	VP4	14	14
	Nov	VP4	135	135
	Dec	VP4	32	20
	Jan	VP5	154	70
	Feb	VP5	8	0
	Mar	VP5	6,602	6173
	Apr	VP5	436	380
	May	VP5	745	745
	Jun	VP5	120	120
	Jul	VP5	1,113	672
	Aug	VP5	6,594	4538
	Sep	VP5	427	300
	Oct	VP5	418	398
	Nov	VP5	20	0
	Dec	VP5	486	391
Golden Plover	Mar	VP1	2,280	2280
	Nov	VP1	640	640
	Dec	VP1	792	792
	Jan	VP2	2,130	2130
	Feb	VP2	52,440	49880
	Mar	VP2	20,560	18400
	Apr	VP2	60,786	67186
	Sep	VP2	453	434
	Oct	VP2	11,920	11470
	Nov	VP2	17,412	4672
	Dec	VP2	960	960

Species	Month	Vantage Point	Bird-Seconds	Potential Collision Height Bird-Seconds
	Jan	VP4	90	0
	Feb	VP4	15,600	14400
	Mar	VP4	60	60
	Apr	VP4	3	3
	Sep	VP4	231	231
	Oct	VP4	10,080	10080
	Nov	VP4	725	725
	Dec	VP4	9,720	1620
	Jan	VP5	3,480	1980
	Feb	VP5	3,070	3070
	Apr	VP5	20,320	20320
	Nov	VP5	570	570
Kestrel	Jan	VP1	7	0
	Feb	VP1	1,544	1343
	Mar	VP1	271	266
	Apr	VP1	702	702
	May	VP1	425	405
	Jun	VP1	323	270
	Jul	VP1	5,902	5875
	Aug	VP1	1,326	1301
	Sep	VP1	792	778
	Oct	VP1	129	124
	Nov	VP1	389	234
	Dec	VP1	25	5
	Jan	VP2	5	0
	Feb	VP2	939	915
	Mar	VP2	2,885	2875
	Apr	VP2	318	318
	May	VP2	2,769	2582
	Jun	VP2	170	160
	Jul	VP2	1,053	1013
	Aug	VP2	6,229	3631
	Sep	VP2	516	516
	Oct	VP2	324	409
	Dec	VP2	30	10
	Jan	VP4	2,823	2813
	Feb	VP4	20	20
	Mar	VP4	60	60
	Apr	VP4	175	225
	May	VP4	50	50
	Jun	VP4	1,343	1292
	Jul	VP4	281	281
	Aug	VP4	1,144	1144

Species	Month	Vantage Point	Bird-Seconds	Potential Collision Height Bird-Seconds
	Sep	VP4	167	167
	Oct	VP4	5	0
	Nov	VP4	49	97
	Dec	VP4	10	10
	Jan	VP5	7	0
	Mar	VP5	2,406	2318
	Apr	VP5	93	0
	May	VP5	801	769
	Jul	VP5	244	214
	Aug	VP5	977	455
	Sep	VP5	35	0
	Oct	VP5	211	149
	Nov	VP5	279	197
	Dec	VP5	114	86
Lapwing	Oct	VP5	10	0
Peregrine Falcon	Mar	VP1	150	150
	May	VP1	30	30
	Aug	VP1	76	76
	Sep	VP1	38	38
	Oct	VP1	24	24
	Dec	VP1	168	168
	Feb	VP2	30	30
	Jul	VP2	13	0
	Aug	VP2	388	388
	Nov	VP2	140	120
	Dec	VP2	1,413	1413
	Jan	VP4	21	21
	May	VP4	20	20
	Jun	VP4	10	10
	Aug	VP4	11	11
	Nov	VP4	40	20
	Jan	VP5	120	120
	Feb	VP5	14	14
	Mar	VP5	342	342
	Jul	VP5	38	38
Snipe	Jan	VP2	90	87
	Feb	VP2	30	24
	Sep	VP2	21	21
	Nov	VP2	31	5
	Feb	VP4	0	0
	Apr	VP4	293	293
	Oct	VP4	59	59
	Nov	VP4	5	5

Species	Month	Vantage Point	Bird-Seconds	Potential Collision Height Bird-Seconds
	Jan	VP5	24	10
Sparrowhawk	Jan	VP1	45	22
	Feb	VP1	229	229
	May	VP1	3	3
	Jun	VP1	258	258
	Jul	VP1	22	16
	Sep	VP1	18	0
	Oct	VP1	6	0
	Nov	VP1	20	35
	Dec	VP1	455	455
	Jan	VP2	858	858
	Mar	VP2	30	30
	May	VP2	120	120
	Jun	VP2	8	5
	Jul	VP2	28	28
	Aug	VP2	594	572
	Sep	VP2	12	0
	Oct	VP2	5	0
	Nov	VP2	20	20
	Dec	VP2	2,349	2322
	Jan	VP4	582	582
	Feb	VP4	384	384
	Mar	VP4	13	0
	May	VP4	40	40
	Aug	VP4	285	270
	Sep	VP4	16	11
	Nov	VP4	40	40
	Dec	VP4	84	78
	Feb	VP5	6	6
	Mar	VP5	84	84
	Apr	VP5	15	0
	Sep	VP5	17	0
	Oct	VP5	10	0
	Nov	VP5	11	0
	Dec	VP5	22	10
Woodcock	Feb	VP2	5	5
	Apr	VP2	45	45

2.5 Photoperiod

The photoperiod at the latitude of the turbines was acquired for the survey period. The daylight and nighttime hours per month are shown in Table 7 - 6 - 8. The total daylight hours were 4,485 and night-time hours was 4,275.

Table 7 - 6 - 8 Photoperiod

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Daylight hours	254.7	275.2	366.5	417.2	488.4	503.4	506.6	456.9	382.1	330.7	263.5	239.3
Nighttime hours	489.3	396.8	377.5	302.8	255.6	216.6	237.4	287.1	337.9	413.3	456.5	504.7

3. RESULTS

3.1 Stage A Flight Activity

Stage A of the modelling process uses the field survey data to establish the aerial density of flying birds in the vicinity of the turbines and the proportion flying at a risk height (between the lowest and highest points of the rotors). Aerial density was calculated following the formula provided by Band (2024; also see Section 4 'Worked Example'). Similarly, the proportion flying at risk height was calculated following the method in Band (2024; also see Section 4 'Worked Example'). The aerial density per month and the proportion flying at risk height for each species is shown for each scenario in Table 7 - 6 - 9.

Table 7 - 6 - 9 Aerial density and proportion flying at risk height

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Proportion
Golden Plover	0.009	0.2	0.06	0.2	-	-	-	-	0.002	0.05	0.04	0.01	0.74
Peregrine Falcon	0.0001	0.00009	0.0005	0	0.00007	0.00002	0.00008	0.0007	0.00005	0.00004	0.0003	0.004	0.75
Kestrel	0.003	0.004	0.01	0.002	0.01	0.004	0.02	0.01	0.003	0.001	0.0007	0.0002	0.57
Lapwing	0	0	0	0	0	0	0	0	0	0.00001	0	0	0.46
Snipe	0.0003	0.00008	0	0.0004	0	0	0	0	0.00005	0.0001	0.00007	0	0.64
Woodcock	0	0.00001	0	0.0001	0	0	0	0	0	0	0	0	0.25
Buzzard	0.0004	0.005	0.03	0.007	0.007	0.009	0.004	0.009	0.0006	0.004	0.0009	0.0006	0.69

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Proportion
Sparrowhawk	0.003	0.0007	0.0002	0.00002	0.0004	0.0005	0.0002	0.001	0.0001	0.00004	0.0001	0.007	0.46

3.2 Stage B Number of Flights Through Rotors

Stage B of the modelling process makes an estimate, based on the aerial density and proportion flying at risk height, of the potential number of bird passages through rotors. The projected number of transits through the rotor risk area was calculated following the formula provided by Band (2024; also see Section 4 'Worked Example'). Table 7 - 6 - 10 shows the projected number of transits per month for each species.

Table 7 - 6 - 10 Projected number of transits

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Golden Plover	200	3525	1565	6449	-	-	-	-	44	1412	921	317	14432.41
Peregrine Falcon	1	1	8	0	2	0.4	2	13	0.8	0.5	4	39	70.48
Kestrel	21	32	98	27	132	47	217	144	27	13	5	1	763.89
Lapwing	0	0	0	0	0	0	0	0	0	0.2	0	0	0.16
Snipe	10	3	0	14	0	0	0	0	2	4	3	0	34.45
Woodcock	0	0.2	0	2	0	0	0	0	0	0	0	0	2.14
Buzzard	3	49	449	105	118	167	81	150	8	51	9	5	1196.18
Sparrowhawk	16	4	1	0.2	4	6	2	10	0.8	0.2	0.6	34	78.75

3.3 Stage C Probability of Collision

Stage C of the modelling process calculates the probability of collision during a single bird rotor transit. The likelihood of a bird colliding with a turbine blade during a single pass through the rotor was calculated using the turbine specifications, species biometrics and flight characteristics outlined in the previous sections.

Collision risk was assessed across different parts of the rotor, as blade speed and width vary from the hub to the tip. Because of the geometry of the blades in relation to the flight direction, the collision risk for upwind flight is higher than for downwind (even if the bird's flight speed relative to the ground is taken to be the same), therefore collision risk probabilities were calculated separately for birds flying upwind and downwind. These were then averaged assuming a 50:50 weighting because both upwind and downwind flights

are equally likely (further information in Section 4 'Worked Example'). This produced a probability of collision for a bird during a single transit of the rotor, which is presented for each species in Table 7 - 6 - 11.

Table 7 - 6 - 11 Probability of collision

Species	Upwind	Downwind	Average
Golden Plover	0.047	0.037	0.042
Peregrine Falcon	0.056	0.042	0.049
Kestrel	0.055	0.038	0.047
Lapwing	0.051	0.038	0.044
Snipe	0.045	0.035	0.04
Woodcock	0.047	0.037	0.042
Buzzard	0.06	0.045	0.052
Sparrowhawk	0.055	0.037	0.046

3.4 Stage D Expected Collisions

Stage D of the modelling process multiplies the outputs of stage B and C to yield the expected collision rate for each bird species, accounting for the proportion of time the Proposed Wind Farm is expected to be operational. This is before considering avoidance behaviour, which is stage E. The number of expected collisions per month and the year total for each species are presented in Table 7 - 6 - 12.

Table 7 - 6 - 12 Expected collisions without avoidance

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Golden Plover	7.2	126	56	231	-	-	-	-	1.6	51	33	11	517
Peregrine Falcon	0.059	0.043	0.32	0	0.063	0.015	0.075	0.53	0.033	0.022	0.16	1.6	2.9
Kestrel	0.85	1.3	3.9	1.1	5.2	1.9	8.6	5.7	1.1	0.5	0.19	0.057	30
Lapwing	0	0	0	0	0	0	0	0	0	0.006	0	0	0.006
Snipe	0.32	0.089	0	0.48	0	0	0	0	0.067	0.13	0.089	0	1.2

Species	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Woodcock	0	0.0061	0	0.071	0	0	0	0	0	0	0	0	0.077
Buzzard	0.15	2.2	20	4.7	5.2	7.4	3.6	6.7	0.38	2.3	0.4	0.22	53
Sparrowhawk	0.61	0.16	0.051	0.007	0.17	0.22	0.063	0.4	0.03	0.0097	0.023	1.3	3.1

3.5 Stage E Allowing for Avoidance and Attraction

Stage E of the modelling process takes account of the proportion of birds likely to avoid the wind farm or its turbines, either because they have been displaced from the site or because they take evasive action or are attracted to the wind farm. Band (2024) states that the collision rate estimate should show potential collision mortality using a range of assumed avoidance rates. In the absence of specific avoidance information for the species in question, it is recommended that collision risks be evaluated assuming avoidance factors of 95%, 98%, 99%, 99.5% and 99.6%. These are presented in Table 7 - 6 – 13.

Table 7 - 6 - 13 Expected collisions with avoidance

Species	Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
Golden Plover	0.95	0.36	6.3	2.8	12	-	-	-	-	0.079	2.5	1.7	0.57	26
	0.98	0.14	2.5	1.1	4.6	-	-	-	-	0.031	1	0.66	0.23	10
	0.99	0.072	1.3	0.56	2.3	-	-	-	-	0.016	0.51	0.33	0.11	5.2
	0.995	0.036	0.63	0.28	1.2	-	-	-	-	0.0079	0.25	0.17	0.057	2.6
	0.996	0.029	0.51	0.22	0.92	-	-	-	-	0.0063	0.2	0.13	0.045	2.1
Peregrine Falcon	0.95	0.003	0.0022	0.016	0	0.0031	0.00073	0.0038	0.027	0.0016	0.0011	0.0079	0.081	0.15
	0.98	0.0012	0.00087	0.0065	0	0.0013	0.00029	0.0015	0.011	0.00066	0.00043	0.0032	0.032	0.059
	0.99	0.00059	0.00043	0.0032	0	0.00063	0.00015	0.00075	0.0053	0.00033	0.00022	0.0016	0.016	0.029
	0.995	0.0003	0.00022	0.0016	0	0.00031	0.000073	0.00038	0.0027	0.00016	0.00011	0.00079	0.0081	0.015
	0.996	0.00024	0.00017	0.0013	0	0.00025	0.000059	0.0003	0.0021	0.00013	0.000086	0.00063	0.0064	0.012
Kestrel	0.95	0.042	0.064	0.19	0.053	0.26	0.093	0.43	0.28	0.054	0.025	0.0096	0.0028	1.5
	0.98	0.017	0.026	0.077	0.021	0.1	0.037	0.17	0.11	0.021	0.01	0.0038	0.0011	0.6
	0.99	0.0085	0.013	0.039	0.011	0.052	0.019	0.086	0.057	0.011	0.005	0.0019	0.00057	0.3

Species	Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
	0.995	0.0042	0.0064	0.019	0.0053	0.026	0.0093	0.043	0.028	0.0054	0.0025	0.00096	0.00028	0.15
	0.996	0.0034	0.0051	0.015	0.0043	0.021	0.0075	0.034	0.023	0.0043	0.002	0.00077	0.00023	0.12
Lapwing	0.95	0	0	0	0	0	0	0	0	0	0.0003	0	0	0.0003
	0.98	0	0	0	0	0	0	0	0	0	0.00012	0	0	0.00012
	0.99	0	0	0	0	0	0	0	0	0	0.00006	0	0	0.00006
	0.995	0	0	0	0	0	0	0	0	0	0.00003	0	0	0.00003
	0.996	0	0	0	0	0	0	0	0	0	0.000024	0	0	0.000024
Snipe	0.95	0.016	0.0044	0	0.024	0	0	0	0	0.0033	0.0063	0.0045	0	0.058
	0.98	0.0065	0.0018	0	0.0095	0	0	0	0	0.0013	0.0025	0.0018	0	0.023
	0.99	0.0032	0.00089	0	0.0048	0	0	0	0	0.00067	0.0013	0.00089	0	0.012
	0.995	0.0016	0.00044	0	0.0024	0	0	0	0	0.00033	0.00063	0.00045	0	0.0058
	0.996	0.0013	0.00036	0	0.0019	0	0	0	0	0.00027	0.0005	0.00036	0	0.0047
Woodcock	0.95	0	0.0003	0	0.0035	0	0	0	0	0	0	0	0	0.0038
	0.98	0	0.00012	0	0.0014	0	0	0	0	0	0	0	0	0.0015
	0.99	0	0.000061	0	0.00071	0	0	0	0	0	0	0	0	0.00077
	0.995	0	0.00003	0	0.00035	0	0	0	0	0	0	0	0	0.00038
	0.996	0	0.000024	0	0.00028	0	0	0	0	0	0	0	0	0.00031
Buzzard	0.95	0.0073	0.11	1	0.23	0.26	0.37	0.18	0.33	0.019	0.11	0.02	0.011	2.7
	0.98	0.0029	0.044	0.4	0.093	0.1	0.15	0.072	0.13	0.0075	0.046	0.0081	0.0044	1.1
	0.99	0.0015	0.022	0.2	0.047	0.052	0.074	0.036	0.067	0.0038	0.023	0.004	0.0022	0.53
	0.995	0.00073	0.011	0.1	0.023	0.026	0.037	0.018	0.033	0.0019	0.011	0.002	0.0011	0.27
	0.996	0.00059	0.0087	0.08	0.019	0.021	0.03	0.014	0.027	0.0015	0.0091	0.0016	0.00089	0.21
Sparrowhawk	0.95	0.03	0.0082	0.0025	0.00035	0.0086	0.011	0.0031	0.02	0.0015	0.00048	0.0012	0.066	0.15
	0.98	0.012	0.0033	0.001	0.00014	0.0034	0.0044	0.0013	0.0081	0.0006	0.00019	0.00047	0.027	0.062
	0.99	0.0061	0.0016	0.00051	0.00007	0.0017	0.0022	0.00063	0.004	0.0003	0.000097	0.00023	0.013	0.031

Species	Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
	0.995	0.003	0.00082	0.00025	0.000035	0.00086	0.0011	0.00031	0.002	0.00015	0.000048	0.00012	0.0066	0.015
	0.996	0.0024	0.00066	0.0002	0.000028	0.00069	0.00088	0.00025	0.0016	0.00012	0.000039	0.000094	0.0053	0.012

3.6 Stage F Uncertainty

There are many sources of variability or uncertainty in the output of the Collision Risk Model. The main sources of uncertainty outlined in Band (2024) are:

- survey data is sampled, often both in time and space, and usually exhibits a high degree of variability. Mean estimates can only be representative of flight activity;
- survey data is unavailable for certain conditions, including nighttime and storm conditions;
- natural variability in bird populations, over time and space, for ecological reasons;
- flight height information may be subject to observer bias;
- the collision risk model uses a simplified geometry for turbine blades and bird shape;
- it does not include any risk of collision with turbine towers;
- details of blade dimension and pitch may be unavailable when making the estimate;
- turbines deployed may differ from those used in the collision risk analysis;
- bird parameters (length, wingspan, flight speed) are not fixed but have a distribution;
- bird speed is not a constant but is dependent on wind speed;
- insufficient knowledge about bird displacement and attraction effects;
- there is limited firm information on bird avoidance behaviour.

Because of this, a range of uncertainty is calculated for the predicted collision rates. The range of uncertainty should reflect:

- uncertainty or variability in flight activity data (including imprecision on flight height estimates and lack of knowledge about night-time behaviour);
- uncertainty due to the limitations of the collision model, including the variability of bird dimensions and flight speed, the simplification in shape of a bird and turbine blades;
- uncertainty arising from turbine options yet to be decided, in number, size and speed. These options should include a 'worst case' in terms of the option likely to present greatest bird collision risk.

To provide a measure of uncertainty in aerial density, the mean, standard deviation and relative standard deviation for the monthly values was calculated (see Section 4 'Worked Example'). Uncertainty due to simplifications in the collision risk model was assumed to be 0.20 (Band, 2024). Finally, uncertainty due to design options (including the blade profile, pitch, rotational speed and expected time operational) was considered to be 0.28. The overall range of uncertainty for each species is presented in Table 7 - 6 - 14.

Table 7 - 6 - 14 Range of uncertainty

Species	Months	Model	Mean	Standard Deviation	Relative Standard Deviation	Uncertainty
Golden Plover	Sep-Apr	non-directional	0.0681	0.0718	1.0547	1.11
Peregrine Falcon	Oct-Sep	non-directional	0.0005	0.001	2.1234	2.15
Kestrel	Oct-Sep	non-directional	0.0055	0.0049	0.884	0.95
Lapwing	Oct-Sep	non-directional	0	0	3.3166	3.33
Snipe	Oct-Sep	non-directional	0.0001	0.0001	1.4859	1.53
Woodcock	Oct-Sep	non-directional	0	0	3.023	3.04
Buzzard	Oct-Sep	non-directional	0.0067	0.0086	1.2777	1.32
Sparrowhawk	Oct-Sep	non-directional	0.0011	0.0019	1.7295	1.76

3.7 Predicted Collision Rates

To provide a best estimate of the collision rate for each species, the guidance on avoidance rates provided in NatureScot (2025b) and Gittings (2011) was consulted. This guidance suggests the most appropriate avoidance rate for each species; however it should be noted that the lack of research on most species' avoidance rates means that the confidence interval of the prediction may extend from the lowest to the highest avoidance rate in Table 7 – 6 – 13. For each species, the predicted number of collisions corresponding to the recommended avoidance rate was identified. These are presented in Table 7 - 6 - 15, along with the range of uncertainty, the predicted number of collisions over the operational lifetime of the facility and an estimation of the number of years for one collision to occur (details on these calculations are shown in Section 4 'Worked Example'). The results should be considered as a best estimate of collision risk, rather than a precise figure.

Table 7 - 6 - 15 Predicted collision rates

Species	Months	Model	Avoidance Factor	Annual Collision Rate	Range of Uncertainty	Collisions Over Lifetime	Years to One Collision
Golden Plover	Sep-Apr	non-directional	0.996	2.07	0-4.36	72.4	<1
Peregrine Falcon	Oct-Sep	non-directional	0.98	0.0587	0-0.185	2.05	17
Kestrel	Oct-Sep	non-directional	0.95	1.51	0.0755-2.95	52.9	<1
Lapwing	Oct-Sep	non-directional	0.98	0.000119	0-0.000517	0.00418	>35
Snipe	Oct-Sep	non-directional	0.98	0.0234	0-0.0591	0.818	>35

Species	Months	Model	Avoidance Factor	Annual Collision Rate	Range of Uncertainty	Collisions Over Lifetime	Years to One Collision
Woodcock	Oct-Sep	non-directional	0.98	0.00153	0-0.0062	0.0537	>35
Buzzard	Oct-Sep	non-directional	0.98	1.06	0-2.47	37.2	<1
Sparrowhawk	Oct-Sep	non-directional	0.98	0.0615	0-0.17	2.15	16

4. WORKED EXAMPLE

This section provides a worked example of the collision rate prediction for sparrowhawk at an imaginary facility. This example is deliberately simplified to assist readers with following the steps. The prediction is made using a short imaginary dataset presented in Section 4.2.

4.1 Proposed Development Scenario

In this example, a wind farm is proposed in farmland at a latitude of 53.4°N. The development consists of seven turbines. Each turbine has a hub height of 105m and rotor diameter of 150m, giving a rotor-swept height range of 30-180m. The turbines have a blade radius (R) of 75m, a blade pitch (λ) of 6°, and a maximum blade chord width (C) of 4.2m. Each turbine has 3 blades (b) and operates at an average rotational speed (Ω) of 11.4rpm. The proposed operational lifetime of 35 years, with turbines expected to be operational approximately 85% of the time.

The blade profile of the turbines is presented in Table 7 - 6 - 16. This table provides the chord width values at 20 evenly spaced points along the blade, expressed relative to the maximum chord width. In this context, r denotes the distance from the hub, and R represents the total blade length (i.e., the rotor radius). The ratio r/R therefore represents the relative radial position along the blade, where 0 corresponds to the hub and 1 corresponds to the blade tip. Similarly, c represents the chord width at a given distance (r) from the hub, and C is the maximum chord width of the blade. Therefore, the ratio c/C represents the relative chord width.

Table 7 - 6 - 16 Blade profile of the turbines

r/R	c/C
0.00	0.690
0.05	0.730
0.10	0.790
0.15	0.880
0.20	0.960
0.25	1.000
0.30	0.980
0.35	0.920
0.40	0.850
0.45	0.800
0.50	0.750
0.55	0.700
0.60	0.640
0.65	0.580
0.70	0.520
0.75	0.470
0.80	0.410
0.85	0.370
0.90	0.300
0.95	0.240
1.00	0.000

4.2 Bird Survey Scenario

In this example, bird surveys were conducted at the proposed wind farm site for a two year period (April 2023 to March 2025). Vantage point surveys to monitor flight activity were undertaken at two vantage

points. The combined viewsheds from these vantage points provided at least 500m coverage around all turbines in addition to coverage of the site and surrounds (Figure 7 - 6 - 1). The total viewshed area was 5.23km^2 for VP1 and 5.92km^2 for VP2.

Both vantage points were surveyed for 6 hours per month throughout the survey period, totalling 144 hours of survey at each location. For each recorded flight, the duration (in seconds) that bird spent within pre-defined height bands was recorded. These heights bands were:

- Band 1 = 0-15m
- Band 2 = 15-25m
- Band 3 = 25-200m
- Band 4 = 200m+

As the risk height range of the turbine is 30-180m, all flight activity in Band 3 is considered to be at potential collision height.

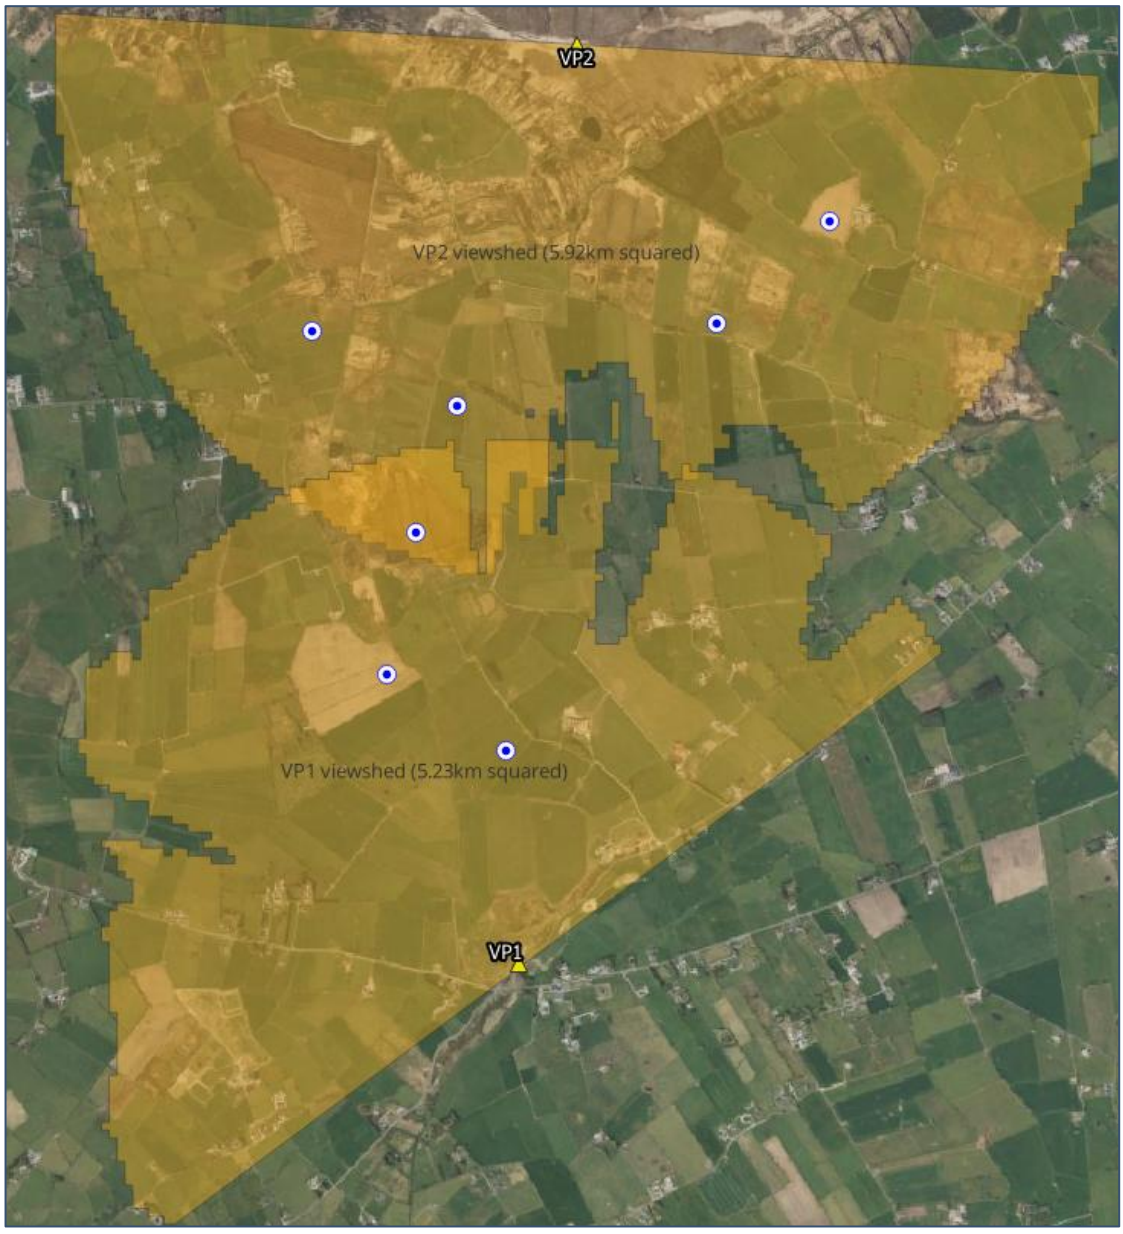


Figure 7 - 6 - 1 Vantage point survey locations and viewshed areas

In this example, a collision risk model will be conducted for the species sparrowhawk. All records for sparrowhawk collected during vantage point surveys are presented in Table 7 - 6 - 17. Records denoted '-' represent non-flight activity, for example when a bird is perched.

The data in Table 7 - 6 - 17 shows that sparrowhawk was present at the site throughout the survey period, in both the breeding and winter season. Therefore, all months of the year will be modelled.

Table 7 - 6 - 17 Sparrowhawk records from vantage point surveys

VP	Date	Time	Species	Number	Band 1	Band 2	Band 3	Band 4
VP2	17/11/2023	07:36	Sparrowhawk	1	17	0	0	0
VP2	17/11/2023	07:43	Sparrowhawk	1	-	-	-	-
VP1	12/12/2023	11:24	Sparrowhawk	1	-	-	-	-
VP1	12/01/2024	12:14	Sparrowhawk	2	14	0	15	0
VP2	30/01/2024	11:34	Sparrowhawk	1	87	0	0	0
VP2	21/02/2024	16:19	Sparrowhawk	1	35	0	0	0
VP1	14/03/2024	11:48	Sparrowhawk	1	50	12	0	0
VP1	03/05/2024	11:25	Sparrowhawk	2	19	0	0	0
VP2	09/05/2024	09:56	Sparrowhawk	1	6	0	0	0
VP1	19/06/2024	10:14	Sparrowhawk	1	15	3	0	0
VP1	19/06/2024	14:22	Sparrowhawk	1	0	0	139	0
VP1	09/07/2024	16:56	Sparrowhawk	1	21	0	0	0
VP2	26/07/2024	13:37	Sparrowhawk	1	17	0	0	0
VP1	03/10/2024	14:02	Sparrowhawk	1	32	9	0	0
VP1	06/11/2024	12:15	Sparrowhawk	1	14	4	0	0
VP1	29/11/2024	13:09	Sparrowhawk	1	0	18	81	0
VP1	29/11/2024	15:57	Sparrowhawk	1	16	0	0	0
VP2	31/01/2025	13:07	Sparrowhawk	1	20	48	0	0
VP2	13/03/2025	08:46	Sparrowhawk	1	0	83	0	0

4.3 Stage A: Flight Activity

Aerial bird density

In order to calculate the aerial bird density (D_A) for sparrowhawk, the following formula was used:

$$DA = b / (t \times A) \text{ bird-seconds } m^2$$

To calculate parameter b, the number of 'bird-seconds' per month per vantage point was calculated by multiplying the number of birds aloft by the duration of the flight (in seconds). This included time spent in all recorded height bands, not just those bands within potential collision height. These values are presented in Table 7 - 6 - 18. Note that sparrowhawk was not recorded in every month, therefore some months are not present in the table.

Table 7 - 6 - 18 Bird-seconds per vantage point per month

Month	Vantage Point	Bird-Seconds
Jan	VP1	58
Mar	VP1	62
May	VP1	38
Jun	VP1	157
Jul	VP1	21

Month	Vantage Point	Bird-Seconds
Oct	VP1	41
Nov	VP1	133
Jan	VP2	155
Feb	VP2	35
Mar	VP2	83
May	VP2	6
Jul	VP2	17
Nov	VP2	17

Parameter t, the time that the vantage point was watched, was obtained from the survey effort. The breakdown of survey time at each vantage point is presented in Table 7 - 6 - 19.

Table 7 - 6 - 19 Survey time at each vantage point in hours and seconds according to month

Vantage Point	Month	Time in hours	Time in seconds
VP1	Jan	12	43200
VP2	Jan	12	43200
VP1	Feb	12	43200
VP2	Feb	12	43200
VP1	Mar	12	43200
VP2	Mar	12	43200
VP1	Apr	12	43200
VP2	Apr	12	43200
VP1	May	12	43200
VP2	May	12	43200
VP1	Jun	12	43200
VP2	Jun	12	43200
VP1	Jul	12	43200
VP2	Jul	12	43200
VP1	Aug	12	43200
VP2	Aug	12	43200
VP1	Sep	12	43200
VP2	Sep	12	43200
VP1	Oct	12	43200
VP2	Oct	12	43200
VP1	Nov	12	43200
VP2	Nov	12	43200
VP1	Dec	12	43200
VP2	Dec	12	43200

Parameter A is the entire area of the vantage point viewsheds. As described above, these were:

- VP1 = 5.23km^2
- VP2 = 5.92km^2

The aerial bird density (D_A) was calculated for all vantage points, and then a mean value was obtained for each month. For example, D_A for January was calculated as:

VP1
b = 58
t = 43200
A = 5.23
D_A = 0.0002563467

VP2
b = 155
t = 43200
A = 5.92
D_A = 0.0006055715

Mean D_A for the month of January

(0002563467 X 0.0006055715)/2 = 0.0004309591

D_A for all months is presented in Table 7 - 6 - 20. Zero is input for months in which sparrowhawk was not recorded.

Table 7 - 6 - 20 Aerial bird density

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.0004	0.0001	0.0003	0	0.0001	0.0003	0.0001	0	0	0.0001	0.0003	0

Proportion of birds flying at risk height

The proportion of sparrowhawk flying at risk height (Q_AR) was calculated from the survey data in Table 7 - 6 - 17. Note that non-flight records are excluded from this calculation.

First, for each height band, the proportion of flights within that band relative to the total number of flights was calculated. Second, the proportion of each height band overlapping the rotor risk height (30-180m) was determined. Finally, these two proportions were multiplied. The workings for Band 3 (25-200m) are below.

Band 3
Total number of sparrowhawk flights = 17
Total number of sparrowhawk flights in band = 3
Proportion of flights in band = 0.176
Proportion of band overlapping rotor risk height = 0.858
0.176 X 0.858 = 0.151

This calculation was made for all bands. Then, the result from each band was summed to provide a total proportion of birds flying at risk height. Note that the result for bands that do not overlap with rotor risk height will be 0. Because Band 3 was the only band that overlapped with rotor risk height in this example, the final proportion of birds flying at risk height (Q_AR) was 0.151 or 15.1%.

Photoperiod

The photoperiod at the latitude of the site was acquired for the survey period. The daylight and nighttime hours per month (tday and tnight respectively) are shown in Table 7 - 6 - 21. The total daylight hours was 4,487.093 and night-time hours was 4,272.907.

Table 7 - 6 - 21 Photoperiod

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Daylight Hours	251.5	273.7	366.3	418.6	491.5	507.3	510.3	459.0	382.6	329.7	261.0	235.6
Nighttime Hours	492.5	398.3	377.7	301.4	252.5	212.7	233.7	285.0	337.4	414.3	459.0	508.4

4.4 Stage B: Number of Flights Through Rotors

To estimate the number of sparrowhawk flights through the rotors, firstly the total rotor frontal area for all turbines was calculated as:

$$\text{rotor frontal area} = T\ \pi R^2$$

where T is the number of turbines. In this example, that is 7 X π X 75^2 = 123700.2m^2

Sparrowhawk biometrics were taken from the best available literature:

- Length (l) = 0.33m
- Wingspan (w) = 0.625m
- Flight speed (v) = 10m/s
- Flight type = flapping
- Nocturnal activity ranking (fnight) = 1 (0% nighttime activity)

Using the values from previous sections, the density (D_v) for each month was calculated as:

$$Dv = (D_\lambda * Q_2R)/(2*R)$$

Then the projected number of transits through the rotor risk area was calculated as:

$$\text{transits} = v * Dv * \text{rotor frontal area} * ((tday + (tnight * (fnight/100))) * 3600)$$

In this example, the density for the month of January was (0.0004 X 0.151)/(2 X 75) = 4.349921^{-13}

The number of transits for the month of January was 10 X 4.349921^{-13} X 123700.2 X ((251.519 + (492.481 X (0/100))) X 3600) = 0.4872201. Table 7 - 6 - 22 shows the projected number of transits for all months. Note that a zero is input for months in which sparrowhawk was not recorded.

Table 7 - 6 - 22 Number of transits per month

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.487	0.084	0.493	0	0.211	0.791	0.183	0	0	0.134	0.384	0

4.5 Stage C: Probability of Collision

The probability of a sparrowhawk collision during a single rotor transit was calculated. Sparrowhawk biometrics, flight behaviour and the turbine specifications outlined in the previous sections were used to define how the bird interacts with the moving blades and derive the geometric parameters described below. Collision probability was determined separately for upwind and downwind flight directions. It was calculated as a function of radial position across the rotor disc, at increments of 0.05 from 0.05 to 1.0 (excluding the rotor centre).

At each radial position, collision probability was calculated for flight angles at increments of 10° from 0° to 180°, which assumes a uniform distribution of bird approach angles. For each flight angle, the flight angle (Φ) was converted from degrees to radians and turbine rotation speed (Ω) was converted from rpm to radians per second. The dimensionless radial position (radius) was converted to an absolute distance from the hub in metres. Then, the blade chord width at the radial position was estimated by interpolating the blade profile and scaling it by the maximum chord width, to reflect blade width changes from hub to tip. Flight direction (d) was set as 1 for upwind flight directions and -1 for downwind.

A standard dimensionless blade encounter rate multiplier was defined as:

$$b\ \Omega/2\ \pi v$$

where b is number of blades, Ω is rotation speed (now in rad s^{-1}), and v is bird flight speed.

The ratio of bird speed to blade tangential speed (α) was calculated as:

$$\alpha = v/\text{radius}\ \Omega$$

The blade pitch (λ) was converted from degrees to radians to obtain the blade tilt angle (θ) relative to the rotor plane:

$$\theta = \lambda\pi/180$$

Using these values, two collision lengths were calculated. The first was a blade-related component (accounting for blade chord width [c], blade tilt [θ], bird flight direction [d] and the ratio of bird speed to blade tangential speed [α]), which represents the effective 'interaction length' associated with blade motion and geometry:

$$|\ d\ c\ \sin(\theta)+\alpha\ c\ \cos(\theta)|$$

The second was a bird-size-related component (accounting for body length [l], wingspan [w] and flight type):

$$\max(l, w_{eff}\ \alpha)$$

Here, w_{eff} is the effective wingspan. For flapping flight, the full wingspan was used, but for gliding flight, the wingspan would be reduced by the absolute value of the cosine of the flight angle relative to the rotor plane (Φ) to represent the reduced projected cross-section when the bird's wings are angled relative to the rotor plane.

Finally, the collision probability was calculated as the blade encounter rate multiplier multiplied by the sum of the two collision lengths. The result is capped at a maximum of 1 so that probabilities cannot exceed 100%. This collision probability was then averaged over the flight angles at the radial position. The upwind and downwind collision probabilities calculated for each radial position for sparrowhawk are presented in Table 7 - 6 - 23.

Table 7 - 6 - 23 Upwind and downwind collision probabilities

Radial Position	Upwind	Downwind
0.05	0.486082	0.449547
0.1	0.269631	0.230093
0.15	0.204551	0.160508
0.2	0.171557	0.123511
0.25	0.1502	0.100152
0.3	0.130199	0.081152
0.35	0.11173	0.065686
0.4	0.096588	0.054047
0.45	0.086103	0.046065
0.5	0.077465	0.039929
0.55	0.070171	0.035137
0.6	0.06319	0.031159
0.65	0.057052	0.028024
0.7	0.051576	0.025551

Radial Position	Upwind	Downwind
0.75	0.047235	0.023713
0.8	0.042698	0.022178
0.85	0.039644	0.021126
0.9	0.035181	0.020167
0.95	0.031534	0.019522
1	0.01881	0.01881

Next, the collision probabilities were averaged for flights through the rotor disk for upwind values and downwind values as follows:

$$P = 2[(i=1\sum n-1 r_i p_i)+2p_n]\Delta r$$

Where P is the mean single-transit collision probability (upwind or downwind), r_i is the radial position, p_i is the collision probability at radial position r_i, p_n is the collision probability at the outermost radial position (i.e., the blade tip), $\Delta r = 0.05$ (i.e., the radial increments) and n is the number of evaluated radial positions

The average collision risk for flights through the rotor when moving upwind was calculated as 0.0672, and for downwind as 0.0402. A 50:50 weighting of upwind and downwind flight was assumed. Thus, the final probability of a sparrowhawk collision during a single rotor transit was calculated as the weighted average of these two estimates. The estimated probability of collision for a sparrowhawk during a single rotor transit was 0.0537.

4.6 Stage D Expected Collisions

The outputs of stage B and C were multiplied to yield the expected collision rate for sparrowhawk, and the product was multiplied by the proportion of time the wind farm is expected to be operational. In this example, the expected collisions for January was calculated as:

$$0.487 \text{ X } 0.0537 \text{ X } 0.85 = 0.02224467$$

The predicted number of collisions for each month is presented in Table 7 - 6 - 24. Note that these rates assume no avoidance of turbines or wind farms by sparrowhawk.

Table 7 - 6 - 24 Expected collisions per month (without avoidance)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.022	0.004	0.023	0.000	0.010	0.036	0.008	0.000	0.000	0.006	0.018	0.000

4.7 Stage E Allowing for Avoidance and Attraction

Stage E of the modelling process takes account of the proportion of sparrowhawk likely to avoid the wind farm or its turbines. This is calculated for a range of avoidance factors: 95%, 98%, 99% and 99.5%. The expected collisions per month calculated in stage D are multiplied by the avoidance rates to provide a collision rate with avoidance. These values are presented in Table 7 - 6 - 25.

Table 7 - 6 - 25 Expected collisions per month (with avoidance)

Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.95	0.0011	0.0002	0.0011	0.0000	0.0005	0.0018	0.0004	0.0000	0.0000	0.0003	0.0009	0.0000

Avoidance Factor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.98	0.0004	0.0001	0.0005	0.0000	0.0002	0.0007	0.0002	0.0000	0.0000	0.0001	0.0004	0.0000
0.99	0.0002	0.0000	0.0002	0.0000	0.0001	0.0004	0.0001	0.0000	0.0000	0.0001	0.0002	0.0000
0.995	0.0001	0.0000	0.0001	0.0000	0.0001	0.0002	0.0000	0.0000	0.0000	0.0000	0.0001	0.0000

4.8 Stage F: Uncertainty

To provide a measure of uncertainty in aerial density (u1), the relative standard deviation for the monthly values was used. First, the mean aerial density ($\overline{D_\lambda}$) for all months was calculated to be 0.0001445. Then, the relative standard deviation (RSD) was calculated as:

$$RSD = s / \overline{D_\lambda}$$

where s is the standard deviation of the monthly values. In this example:

$$0.00015/0.0001445 = 1.038062$$

Note that zero values (i.e., months in which the sparrowhawk was not recorded, such as April) were retained in this equation as they may represent true absence or intermittent use of the site.

Uncertainty due to simplifications in the collision risk model (u2) was assumed to be 20% (Band, 2024). Finally, uncertainty due to design options (u3) was considered to be 28%, as 4 of 14 turbine specifications were either not finalised or were approximate (blade profile, pitch, rotational speed and expected time operational). The overall range of uncertainty (u) was thus:

$$\sqrt{(u1^2 + u2^2 + u3^2)}$$

In this example, that is:

$$\sqrt{(1.038062^2 + 0.2^2 + 0.28^2)} = 1.093605$$

4.9 Worked Example Collision Rates

To provide a best estimate of the collision rate for sparrowhawk, the guidance on avoidance rates provided by NatureScot in NatureScot (2025b) was consulted. This guidance recommends a 98% avoidance rate for sparrowhawk. As such the predicted number of collisions corresponding to a 98% avoidance rate was identified and is presented in Table 7 - 6 - 26, along with the range of uncertainty and an estimation of the number of years for one collision to occur.

The column 'Annual Collision Rate' in Table 7 - 6 - 26 presents the final predicted annual collision rate for sparrowhawk that would be used in the impact assessment for this proposed development scenario: 0.0025 sparrowhawk per year. Due to the uncertainties discussed in stage F, this may range up to 0.0052 sparrowhawk per year. Dividing 1 by 0.0025 provides the number of years it would be expected for a collision to occur based on the model predictions.

Table 7 - 6 - 26 Predicted annual collision rate

Species	Annual Collision Rate	Range of Uncertainty	Years to one collision
Sparrowhawk	0.0025	0-0.0052	395

5. BIBLIOGRAPHY

Band, W. (2024). Using a collision risk model to assess bird collision risks for onshore wind farms. NatureScot Research Report 909. NatureScot, Inverness, Scotland. Available at: https://www.nature.scot/doc/naturescot-research-report-909-using-collision-risk-model-assess-bird-collision-risks-onshore-wind (accessed 18/02/2026)

Gittings, T. (2011). Golden plover avoidance rates. Report Number 2011-F1 to MKO.

NatureScot (2024) Guidance on using an updated collision risk model to assess bird collision risk at onshore wind farms. NatureScot, Inverness, Scotland. Available at: https://www.nature.scot/doc/guidance-using-updated-collision-risk-model-assess-bird-collision-risk-onshore-wind-farms

NatureScot (2025a). Recommended bird survey methods to inform impact assessment of onshore windfarms. NatureScot, Inverness, Scotland. Available at: https://www.nature.scot/doc/recommended-bird-survey-methods-inform-impact-assessment-onshore-windfarms (accessed 18/02/2026)

NatureScot (2025b). Wind farm impacts on birds - Use of Avoidance Rates in the NatureScot Wind Farm Collision Risk Model. NatureScot, Inverness, Scotland. Available at: https://www.nature.scot/doc/wind-farm-impacts-birds-use-avoidance-rates-naturescot-wind-farm-collision-risk-model (accessed 18/02/2026)

SNH (2017). Recommended bird survey methods to inform impact assessment of onshore windfarms. NatureScot, Inverness, Scotland.

Xiao, S., Lin, K., Liu, H. and Zhou, A. (2021). Performance analysis of monopile-supported wind turbines subjected to wind and operational loads. *Renewable Energy,* 179: 842-858.