





- 1. TACTILE PAVING SLABS 400X400mm BUFF IN COLOUR.
- 2. CONFIGURATION TO BE 2 ROWS, OF 6 NUMBER WIDE, 400mm sq. TACTILE TILES ON BOTH SIDES OF THE ROAD.
- 3. THE TACTILE DOMES ON THE TILES MUST BE LINED UP UP TO GIVE THE DIRECTION OF TRAVEL IN ORDER TO CROSS THE ROAD STRAIGHT.
- 4. UTILITY/SERVICE BOXES SHOULD NOT BE LOCATED IN TACTILE PAVED AREAS WHERE POSSIBLE.
- 5. TACTILE SLABS SHALL BE CUT SO AS TO MINIMIZE
- THE CREATION OF SLIVERS ALONG THE KERBLINE.
- 6. ANY GULLIES IN THE CROSSING TO BE RELOCATED.
- 7. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED.





THIS DRAWING HAS BEEN ISSUED FOR INFORMATION PURPOSES ONLY AND MUST NOT BE USED FOR CONSTRUCTION UNDER ANY CIRCUMSTANCES

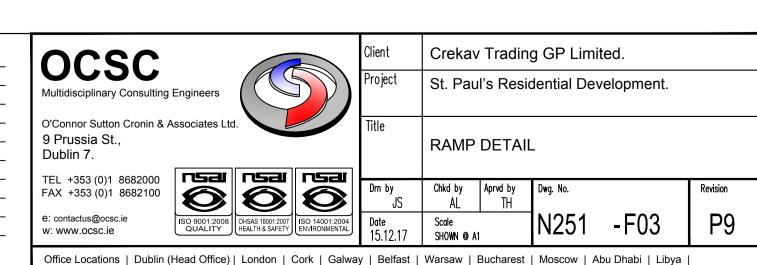

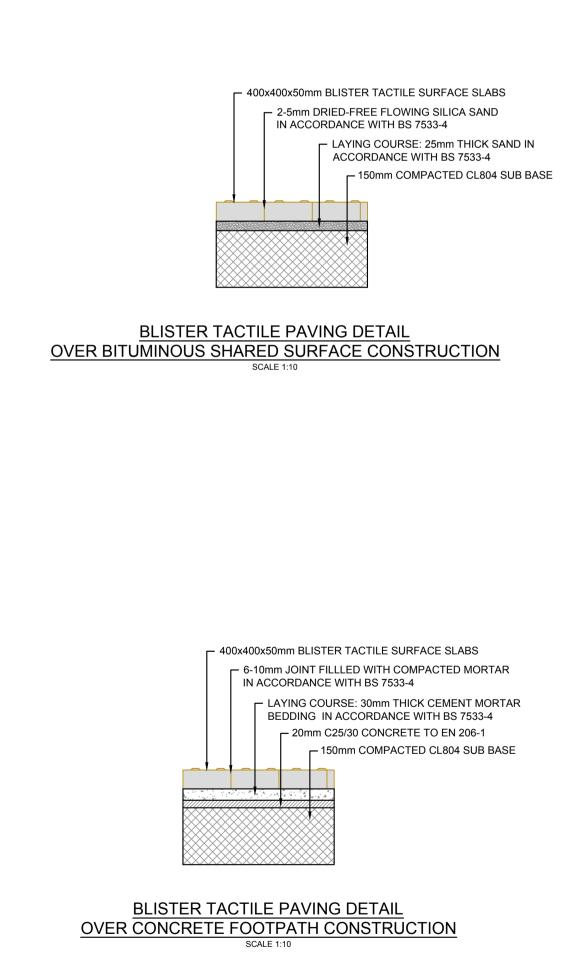

<u>NOTES</u>

other relevant drawings and Specifications.

DO NOT SCALE THIS DRAWING. Use figured dimensions only.

FOR PAVING DETAILS REFER TO DRAWING

2000mm

TACTILE PAVING

FOR PAVING DETAILS REFER TO DRAWING


SECTION A-A

Residential\_N251-D01.

SECTION B-B SCALE - 1:20

Residential\_N251-D01.

TRANSITION KERB

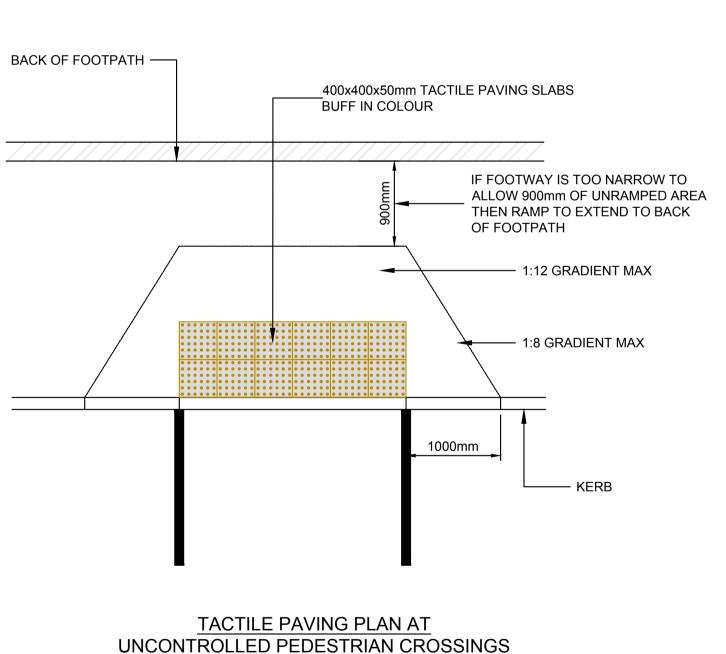

GEOTEXTILE LAYER - TERRAM T1000 OR SIMILAR APPROVED

TOP OF KERB —

Transition Kerb

PRE CAST CONCRETE KERB 75mm UPSTAND

TO TII-CC-SCD-01101.

UNCONTROLLED PEDESTRIAN CROSSINGS