

Tree Planting Detail in soft landscape

Tree Pit Planting Detail adjacent hard landscaping & Services

Priora concrete block paving Permeable joint filled with 6mm washed aggregate 50mm depth Capping layer depth by design. (Depending on ground conditions) Washed 20mm graded aggregate depth by design *not to scale

The levels of any two Joints are to be filled adjacent blocks should with dry sand or crushed be provided along the not differ by more rock fines with a max. perimeter; is to be than 2mm adequate to support anticipated loads and Concrete block retain the laying course material; to be formed and cured prior to any 2.5% (1:40) compaction taking place the underside level of the laying course, on

and shaped to the

required formation


Block Paving Detail

compacted hardcore, MoT

Section

type 1 or other approved———

Permeable Paving Detail

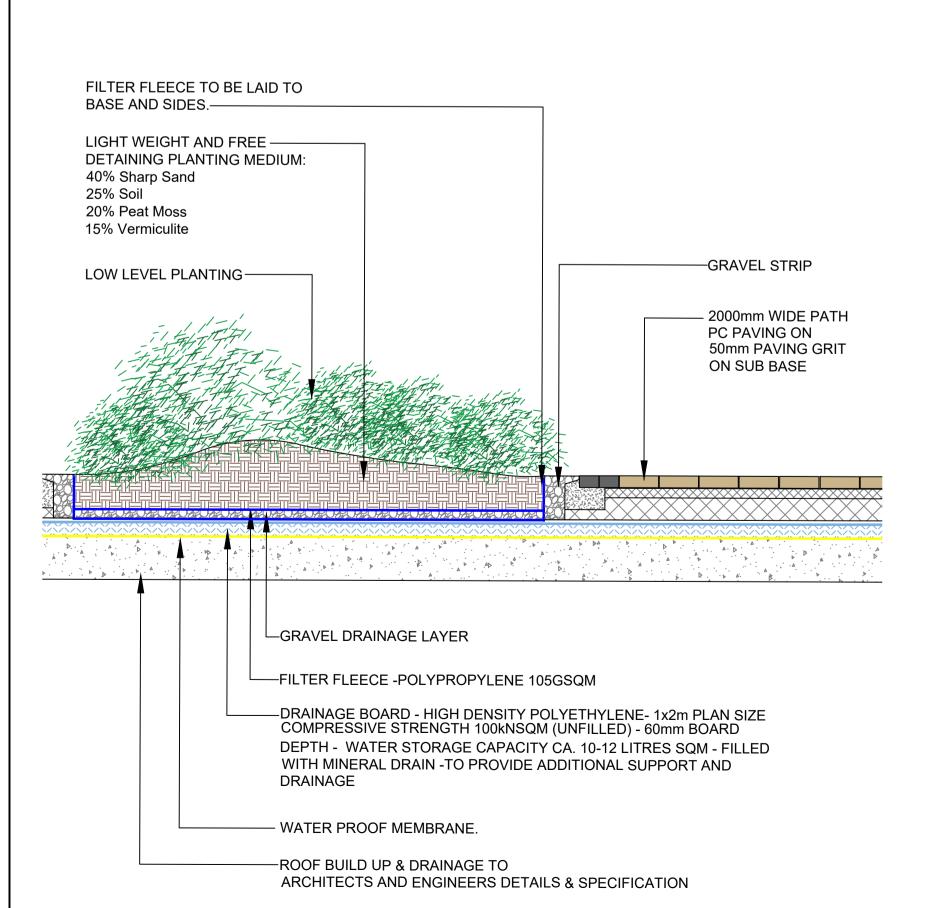

TO PLANTED AREAS.


TO PLANTED AREAS.

ENGINEERS DETAILS.


BS:3882:2015.—

DETAILS.

VARIES.-

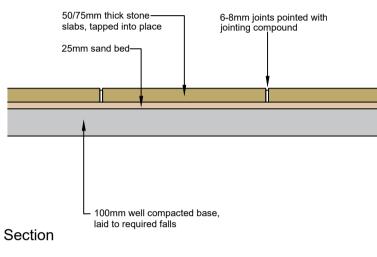

Flag Paving Detail

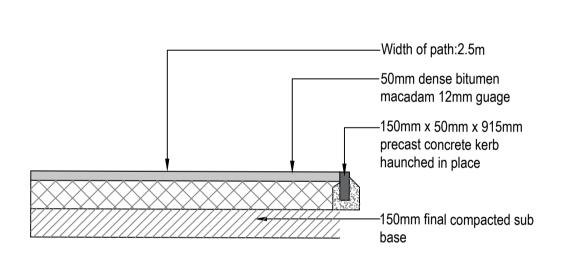

Tarmacadam Footpath Detail

GENERAL NOTES:

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECT/ENGINEERS DRAWINGS AND SPECIFICATIONS.

PRIOR TO ANY WORK, THE CONTRACTOR SHALL ENSURE EXACT LOCATION OF ALL SERVICES, BOTH UNDERGROUND AND OVERHEAD.

ALL PLANTING BEDS AND TREE PLANTING TO BE CARRIED OUT BY LANDSCAPE CONTRACTOR. AREAS TO BE SET OUT AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO

NO DAMAGE TO EXISTING BOUNDARIES OR OTHER FEATURES WITHIN SITE.

SCHEDULE OF IMPLEMENTATION:

1. WHERE INDICATED, ALL TREE AND HEDGEROW PLANTING IS TO BE CARRIED OUT DURING THE FIRST WINTER SEASON, I.E. NOVEMBER TO FEBRUARY INCLUSIVE 2. WHERE INDICATED, ALL LAWN AREAS ARE TO BE PREPARED

AND SEEDED DURING THE GROWING SEASON, I.E. APRIL TO OCTOBER INCLUSIVE

3. WHERE INDICATED, ALL CONTAINERISED SHRUB PLANTING MAY BE CARRIED OUT AT ANY TIME OF WHEN SOIL IS NOT FROZEN, WATERLOGGED OR EXCESSIVELY DRY.

PLANT NOTES:

ALL TREES, SHRUBS AND HEDGEROW PLANTS SHALL COMPLY WITH BS 3936, SPECIFICATION FOR NURSERY STOCK. ALL PRE-PLANTING SITE PREPARATION, PLANTING AND POST PLANTING MAINTENANCE WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF BS 4428 (1989) CODE OF PRACTICE FOR GENERAL LANDSCAPE OPERATIONS (EXCLUDING HARD

ALL NEW TREE PLANTING SHALL BE POSITIONED IN ACCORDANCE WITH THE REQUIREMENTS OF TABLE 3 OF BS 5837: 2005 TREE IN RELATION TO CONSTRUCTION: RECOMMENDATIONS, WHICH SPECIFIES MINIMUM DISTANCES BETWEEN NEW PLANTING AND STRUCTURES.

Landscape Specification

Subsoil & Topsoil Operations:

THE EXISTING SUBSOIL LAYER IS TO BE CULTIVATED/DECOMPACTED TO A DEPTH OF 350MM. SUCH WORKS ARE ONLY TO BE CARRIED OUT DURING DRY WEATHER CONDITIONS.

WHERE THERE IS PRESENCE OF STIFF CLAYS AND OTHER COHESIVE SUBSOILS THEY WILL BE RIPPED BY MEANS OF A SINGLE TINE RIPPER TO A DEPTH OF 450MM. THIS OPERATION SHALL BE CARRIED OUT WHEN THE SOIL IS IN A DRY CONDITION IN ORDER TO ACHIEVE MAXIMUM HEAVE. SUBSOIL IS TO BE GRADED TO SMOOTH FLOWING CONTOURS TO ACHIEVE SPECIFIED FINISHED LEVELS OF TOPSOIL.

SUBSOIL AND TOPSOIL SHALL NOT BE HANDLED WHEN THE SOIL IS WATERLOGGED, WHEN THE MOISTURE CONTENT OF THE SOIL EXCEEDS ITS PLASTIC LIMIT AS DEFINED IN BS 1377: 1990 DURING PRECIPITATION OR UNTIL AT LEAST TWO HOURS HAVE PASSED AFTER LIGHT RAINFALL.

REMOVE ANY STONES LARGER THAN 50MM.

LANDSCAPE PLANTING AREAS IN THE WORKS SHALL BE TOPSOILED TO A MINIMUM DEPTH OF 400MM, AREAS OF GRASS SEEDING SHALL BE TOPSOILED TO A MINIMUM DEPTH OF 200MM AND 1.5 CUBIC METRES OF TOPSOIL SHALL BE MADE AVAILABLE FOR EACH TREE PIT.

IMPORTED TOPSOIL SHALL CONFORM TO BS 3882: 1994 AND SHALL BE PLACED TO ALL GENERAL PLANTING AREAS IDENTIFIED IN THE LANDSCAPE DESIGN. THE TOPSOIL GRADE SHALL BE 'GENERAL PURPOSE GRADE'.

TOPSOIL IS TO BE SPREAD IN LAYERS NOT EXCEEDING 150MM, EACH LAYER IS TO BE LIGHTLY FIRMED BEFORE THE NEXT LAYER IS SPREAD. CARE IS TO BE TAKEN NOT TO COMPACT TOPSOIL; PRESERVE A FRIABLE TEXTURE OF SEPARATE VISIBLE CRUMBS WHEREVER POSSIBLE.

WHERE FINISHED LEVELS SHALL NOT HAVE BEEN GIVEN IN THE LANDSCAPE DESIGN, THE LEVELS SHALL BE SUCH THAT THE FINISHED SURFACE SHALL HAVE A SMOOTH EVEN FALL BETWEEN THE FINISHED LEVELS AND THE BOUNDARIES OF THE AREAS. ANY AREA UNDULY COMPACTED DURING THE WORK OR GRADING SHALL BE LOOSENED BY FORKING. THE USE OF HEAVY ROLLERS TO ROLL OUT MOUNDS SHALL NOT BE PERMITTED.

