


ICD

190003-DBFL-RD-SP-DR-C-5004

P02 29-04-21 NEW SHD STAGE 3 PLANNING

description

P01 | 15-12-20 | STAGE 3 SHD PLANNING

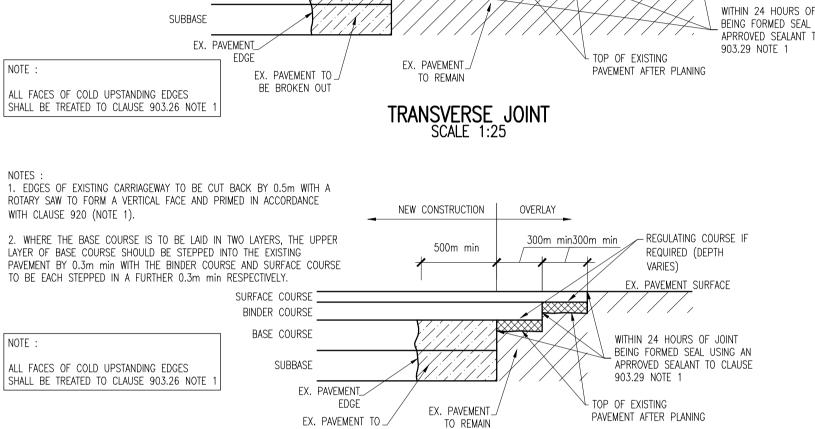

BE BROKEN OUT

WITH CLAUSE 920 (NOTE 1). 2. WHERE THE BASE COURSE IS TO BE LAID IN TWO LAYERS, THE UPPER LAYER OF BASE COURSE SHOULD BE STEPPED INTO THE EXISTING PAVEMENT BY 1.0m min WITH THE BINDER COURSE AND SURFACE COURSE TO BE EACH STEPPED IN A FURTHER 1.0m min REPECTIVELY.

NEW CONSTRUCTION | OVERLAY REGULATING COURSE IF REQUIRED (DEPTH VARIES) 1000m min EX. PAVEMENT SURFACE SURFACE COURSE BINDER COURSE BASE COURSE WITHIN 24 HOURS OF JOINT BEING FORMED SEAL USING AN APRROVED SEALANT TO CLAUSE

1. EDGES OF EXISTING CARRIAGEWAY TO BE CUT BACK BY 0.5m WITH A ROTARY SAW TO FORM A VERTICAL FACE AND PRIMED IN ACCORDANCE

WITH THE REQUIREMENTS OF CLAUSE 912 OF THE NRA's 'SPECIFICATION FOR ROAD WORKS' AND SHALL SATISFY THE REQUIREMENTS OF TABLE 9/2. IT SHALL BE LAID & COMPACTED IN ACCORDANCE WITH CLAUSE 901 & CLAUSE 2. DENSE BITUMEN MACADAM BINDER COURSE SHALL COMPLY

UNLESS THE EXPRESS CONSENT HAS BEEN OBTAINED IN ADVANCE, IN WRITING, FROM DBFL. NOTES: 1. CLOSE GRADED SURFACE COURSE MACADAM SHALL COMPLY

WITH THE REQUIREMENTS OF CLAUSE 906 OF THE NRA'S

'SPECIFICATION FOR ROAD WORKS' & SHALL SATISFY THE REQUIREMENTS OF TABLE 9/1. IT SHALL BE LAID & COMPACTED IN ACCORDANCE WITH CLAUSE 901 & CLAUSE

SUB-BASE MATERIAL SHALL COMPLY WITH CLAUSE 808

OF TABLE 8/4`& 8/2.

GRANULAR MATERIAL TYPE B OF NRA'S SPECIFICATION FOR

ROAD WORKS (SRW) & SHALL SATISFY THE REQUIREMENTS

4. SUB FORMATION & CAPPING MATERIAL SHALL COMPLY WITH

CLAUSE 613 OF THE NRA'S 'SPECIFICATION FOR ROAD

5. STONE BLINDING WITH 2-6.3mm AGGREGATE SHALL MEET

BS SIEVE SIZE (mm) % BY MASS PASSING

6. CRUSHED STONE WITH 4-20mm AGGREGATE SHALL MEET

BS SIEVE SIZE (mm) % BY MASS PASSING

THE FOLLOWING GRADINGS, IN ACCORDANCE WITH IS EN

ANY ROADS PROPOSED TO BE USED FOR CONSTRUCTION

THE DURATION OF CONSTRUCTION IN ACCORDANCE WITH

8. ALL WORKS SHALL BE COMPLETED IN ACCORDANCE WITH THE

REQUIREMENTS OF THE LOCAL AUTHORITY.

MANUFACTURERS SPECIFICATIONS.

TOWARD DRAINAGE PIPEWORK.

9. ALL GEOGRIDS TO BE LAID IN ACCORDANCE WITH

10. ALL PERMEABLE PAVING SUB-FORMATION TO BE LAID

DBFL SPECIFICATIONS.

TRAFFIC ARE TO HAVE INCREASED DEPTH OF SUB-BASE FOR

THE FOLLOWING GRADINGS, IN ACCORDANCE WITH IS EN

WORKS' & SHALL SATISFY THE REQUIREMENTS OF TABLE 6/1

98-100

98-100 90-99 25-70 0 - 15

80-99 0 - 20

NO CHANGES OF WHATSOEVER NATURE ARE TO BE MADE TO ANY DETAILS SET OUT OR CONTAINED IN ANY DBFL SPECIFICATIONS OR DRAWINGS

ENGINEERS. NO PART SHALL BE REPRODUCED OR TRANSMITTED WITHOUT THEIR WRITTEN PERMISSION.

© COPYRIGHT OF THIS DRAWING IS RESERVED BY DBFL CONSULTING

ON ORIGINAL