

Tree behind - Pinus nigra (Austrian Pine)

RootRain arbovent cast aluminium trafficable aeration inlet with 150mm square top and manifold - RRARBV150B

Resin bound gravel SureSet Natural aggregate color

Brown Granite Flush Kerb

Pinus Migo (Mountain Pine)

RootRain single inlet irrigation system with cast inlet

Granite Coping

Granite Cladding Mounted on existing concrete block

existing Retaining concrete block

Refer to planting plan for exact underplanted species

Root Director - RD1000RSA with concrete haunching

Concrete haunching Twin walled structural geonet(1)

Rootsoil 20 topsoil for use within top 600mm of soil profile - ROOTSOIL20

Install RootSpace side panels to installation as directed by engineer

20mm Open Reinforcing mesh(1)

10-20mm Clean angular drainage aggregate - GBUDRSA

Positive Drainage pipe - 110mm perforated pipe

Rootsoil sub subsoil for use within soil profiles 600mm or deeper - ROOTSOILSUBA

Arborguy aanchorplate strapped anchor system - SASAP10A

Brown Granite Flush Kerb

Slot Brick ACO channel to be connected to surface water network

Resin bound gravel SureSet Natural aggregate color - 6mm

Base: Butterscotch 18mm deep

Permeable bedding open graded asphalt min 70mm deep BS EN13108-1:2006.

Sub-base: A 175mm minimum depth of well compacted Type 3 granular sub-base to SHW clause 805

Permeable geotextile, as per Civil engineer detail

RootSpace structure 5 upright wide of GBURAC600B Loaded with corresponding soil.

RootSpace structure 5 upright wide of GBURAC400B Loaded with corresponding soil.

Install RootSpace side panels to installation as directed by engineer


Arbutus Unedo (Strawberry Tree)

Refer to planting plan for exact underplanted species

Perforated drain pipe layed in gravel bed, to be connect to surface water network.

NOTES:
 (1): Allow 20% additional for geotextile and reinforced geogrid for overlap and cutting requirements
 Additional twinwall Geonet(GLTWGN) to be installed where sub-base is installed below 3% CBR - min 2%
 For all exact species, refer to Landscape Planting Plan drawing (486_WS_15_00_03).
 For all exact material, refer to Landscape Material Specification drawing (486_WS_15_00_04).
 All Level (Such as TOK, FFL, RDL, & RL) given are indicative only. Refer to civil engineer road design for exact road level. Refer to architectural footprint level drawings for others. Same conditions apply for building detail or road/footpath build up.
 Where tree is planted along a slope or embankment(maximum 1:4 grade) local depression to allow for water to collect around base of tree.
 Copyright of this drawing is vested in the Architect and it must not be copied or reproduced without consent. Signed dimensions only are to be taken from this drawing. All contractors must visit site and be responsible for setting and checking all dimensions relative their work. PLUS Architecture are to be advised of any variation between drawings and site conditions.
 DO NOT SCALE DIMENSIONS - USE DIMENSIONS - OR AS SHOWN ON PLAN

REV.	DATE:	DETAILS:	INITIALS:

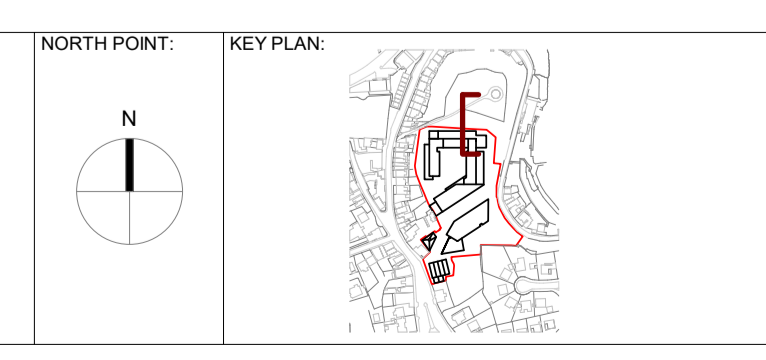

++
PLUSARCHITECTURE
 Chancery Lane, Dublin 8, D08 C98X, Ireland. W: www.plusarchitecture.ie T: 353 (0) 1 521 3378

PROJECT: Balscadden	DRAWN BY: VA	DATE: 18/02/2022
CLIENT: Balscadden GP3 Ltd.	CHECKED BY: DTRB	REVISION NO.:
TITLE: Boundary Section 03 - Detail	PROJECT: Balscadden	SCALE AT A1 (Long): 1/10
ISSUE TYPE: Planning	DRAWING NO: 486_WS_15_00_15	