



Area = $96.8m^2$ (OA $193.6m^2$)




ATTIC STORAGE PLAN - (Detached Type E) Scale 1:100 Usable floor area per unit



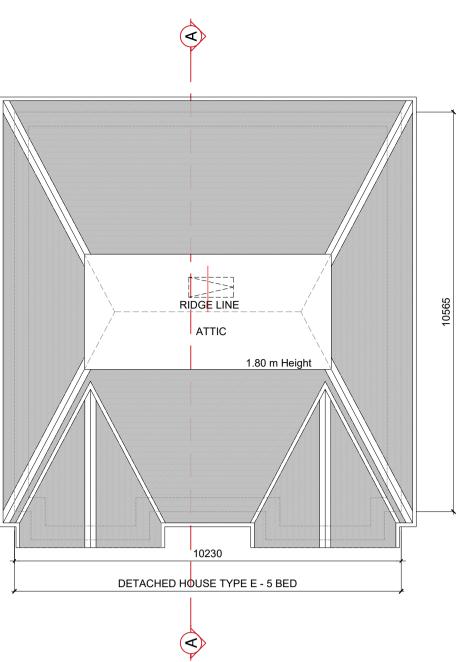

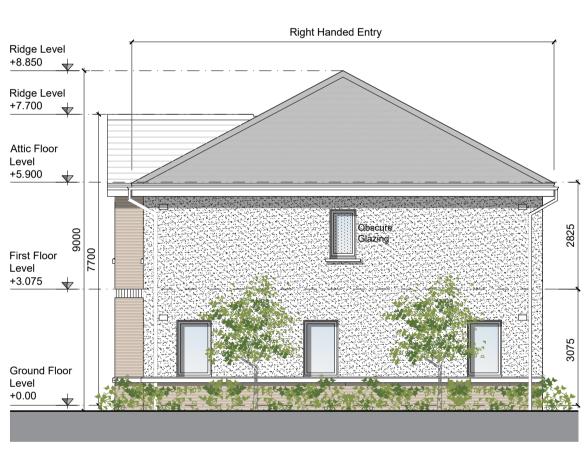


SIDE ELEVATION (Detached Type E) Scale 1:100

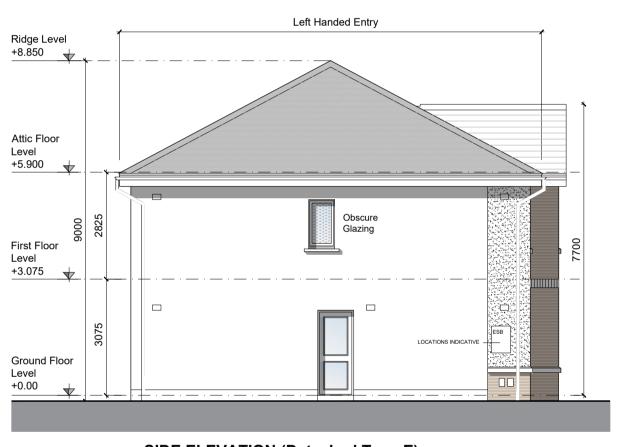


SIDE ELEVATION (Detached Type E) Scale 1:100



REAR ELEVATION (Detached Type E) Scale 1:100

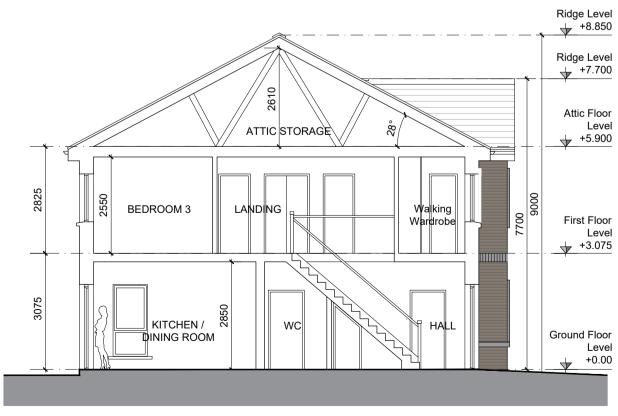

SECTION A-A (Detached Type E) Scale 1:100

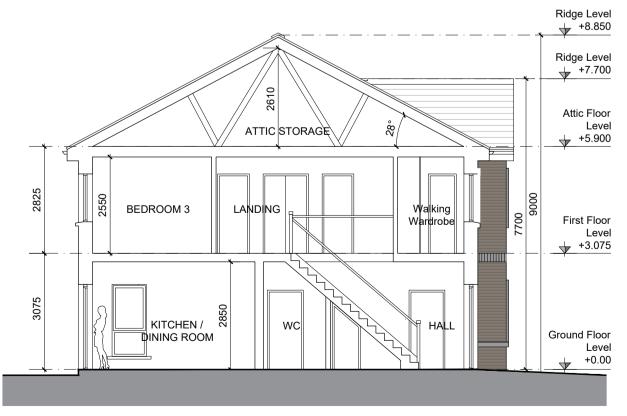

GENERAL NOTES

KEY PLAN - NTS

THIS DRAWING TO BE READ IN CONJUNCTION WITH ARCHITECT'S DRAWINGS, CONSULTANT ENGINEER'S DRAWINGS AND SPECIFICATIONS & LANDSCAPE ARCHITECTS DRAWINGS

REFER TO ARCHITECT'S SITE PLAN PL03 FOR NORTH ORIENTATION.

LEVELS GIVEN ON HOUSE TYPE DRAWINGS ARE GIVEN TO A LOCAL ABSOLUTE ZERO LEVEL. FOR SPECIFIC LEVELS DEPENDING ON INDIVIDUAL UNIT LOCATION, REFER TO ARCHITECT'S CONTEXT SECTIONS AND ENGINEER'S DRAWINGS WHERE LEVELS ARE ALL GIVEN IN RELATION TO LAND SURVEYOR'S BENCHMARK BASED ON MALIN HEAD DATUM LEVEL.

NOTES ON FINISHES:

TO BE FINISHED IN SLATE OR CONCRETE ROOF TILES IN SELECTED COLOUR OR SIMILAR APPROVED. CANOPIES TO BE METAL CLADDING OR SIMILAR.

SELECTED CLAY BRICKWORK WHERE INDICATED OTHERWISE PAINTED SAND / CEMENT RENDER OR SELF COLOURED

RENDER. EXPRESSED BANDS AROUND EXTERNAL OPES/ EXPRESSED LINTELS OVER EXTERNAL OPES WHERE INDICATED TO BE RECONSTITUTED STONE (LIGHT CREAM

LIMESTONE OR GRANITE EFFECT) OR RENDER. JOINERY:

ALL WINDOWS AND DOORS, FRAMES AND LEAVES, TO BE ALUMINIUM POWDER-COATED TO APPROVED COLOUR

OBSCURE GLAZING WHERE INDICATED TO SENSITIVE WINDOWS.

RAINWATER GOODS: GUTTERS, DOWNPIPES, AND FIXINGS TO BE uPVC OR ALUMINIUM POWDER COATED TO SELECTED COLOUR TO


MATCH ROOF SLATES






DISCREPANCIES.

SHD STAGE 3

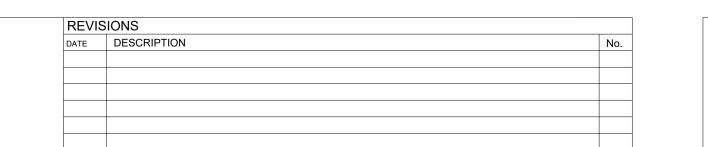

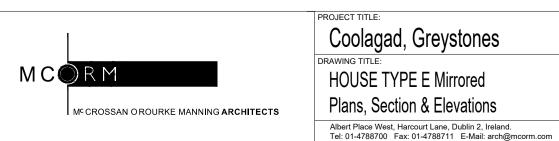

MAR '22 DG

20005 PL204.

1:100@A1