


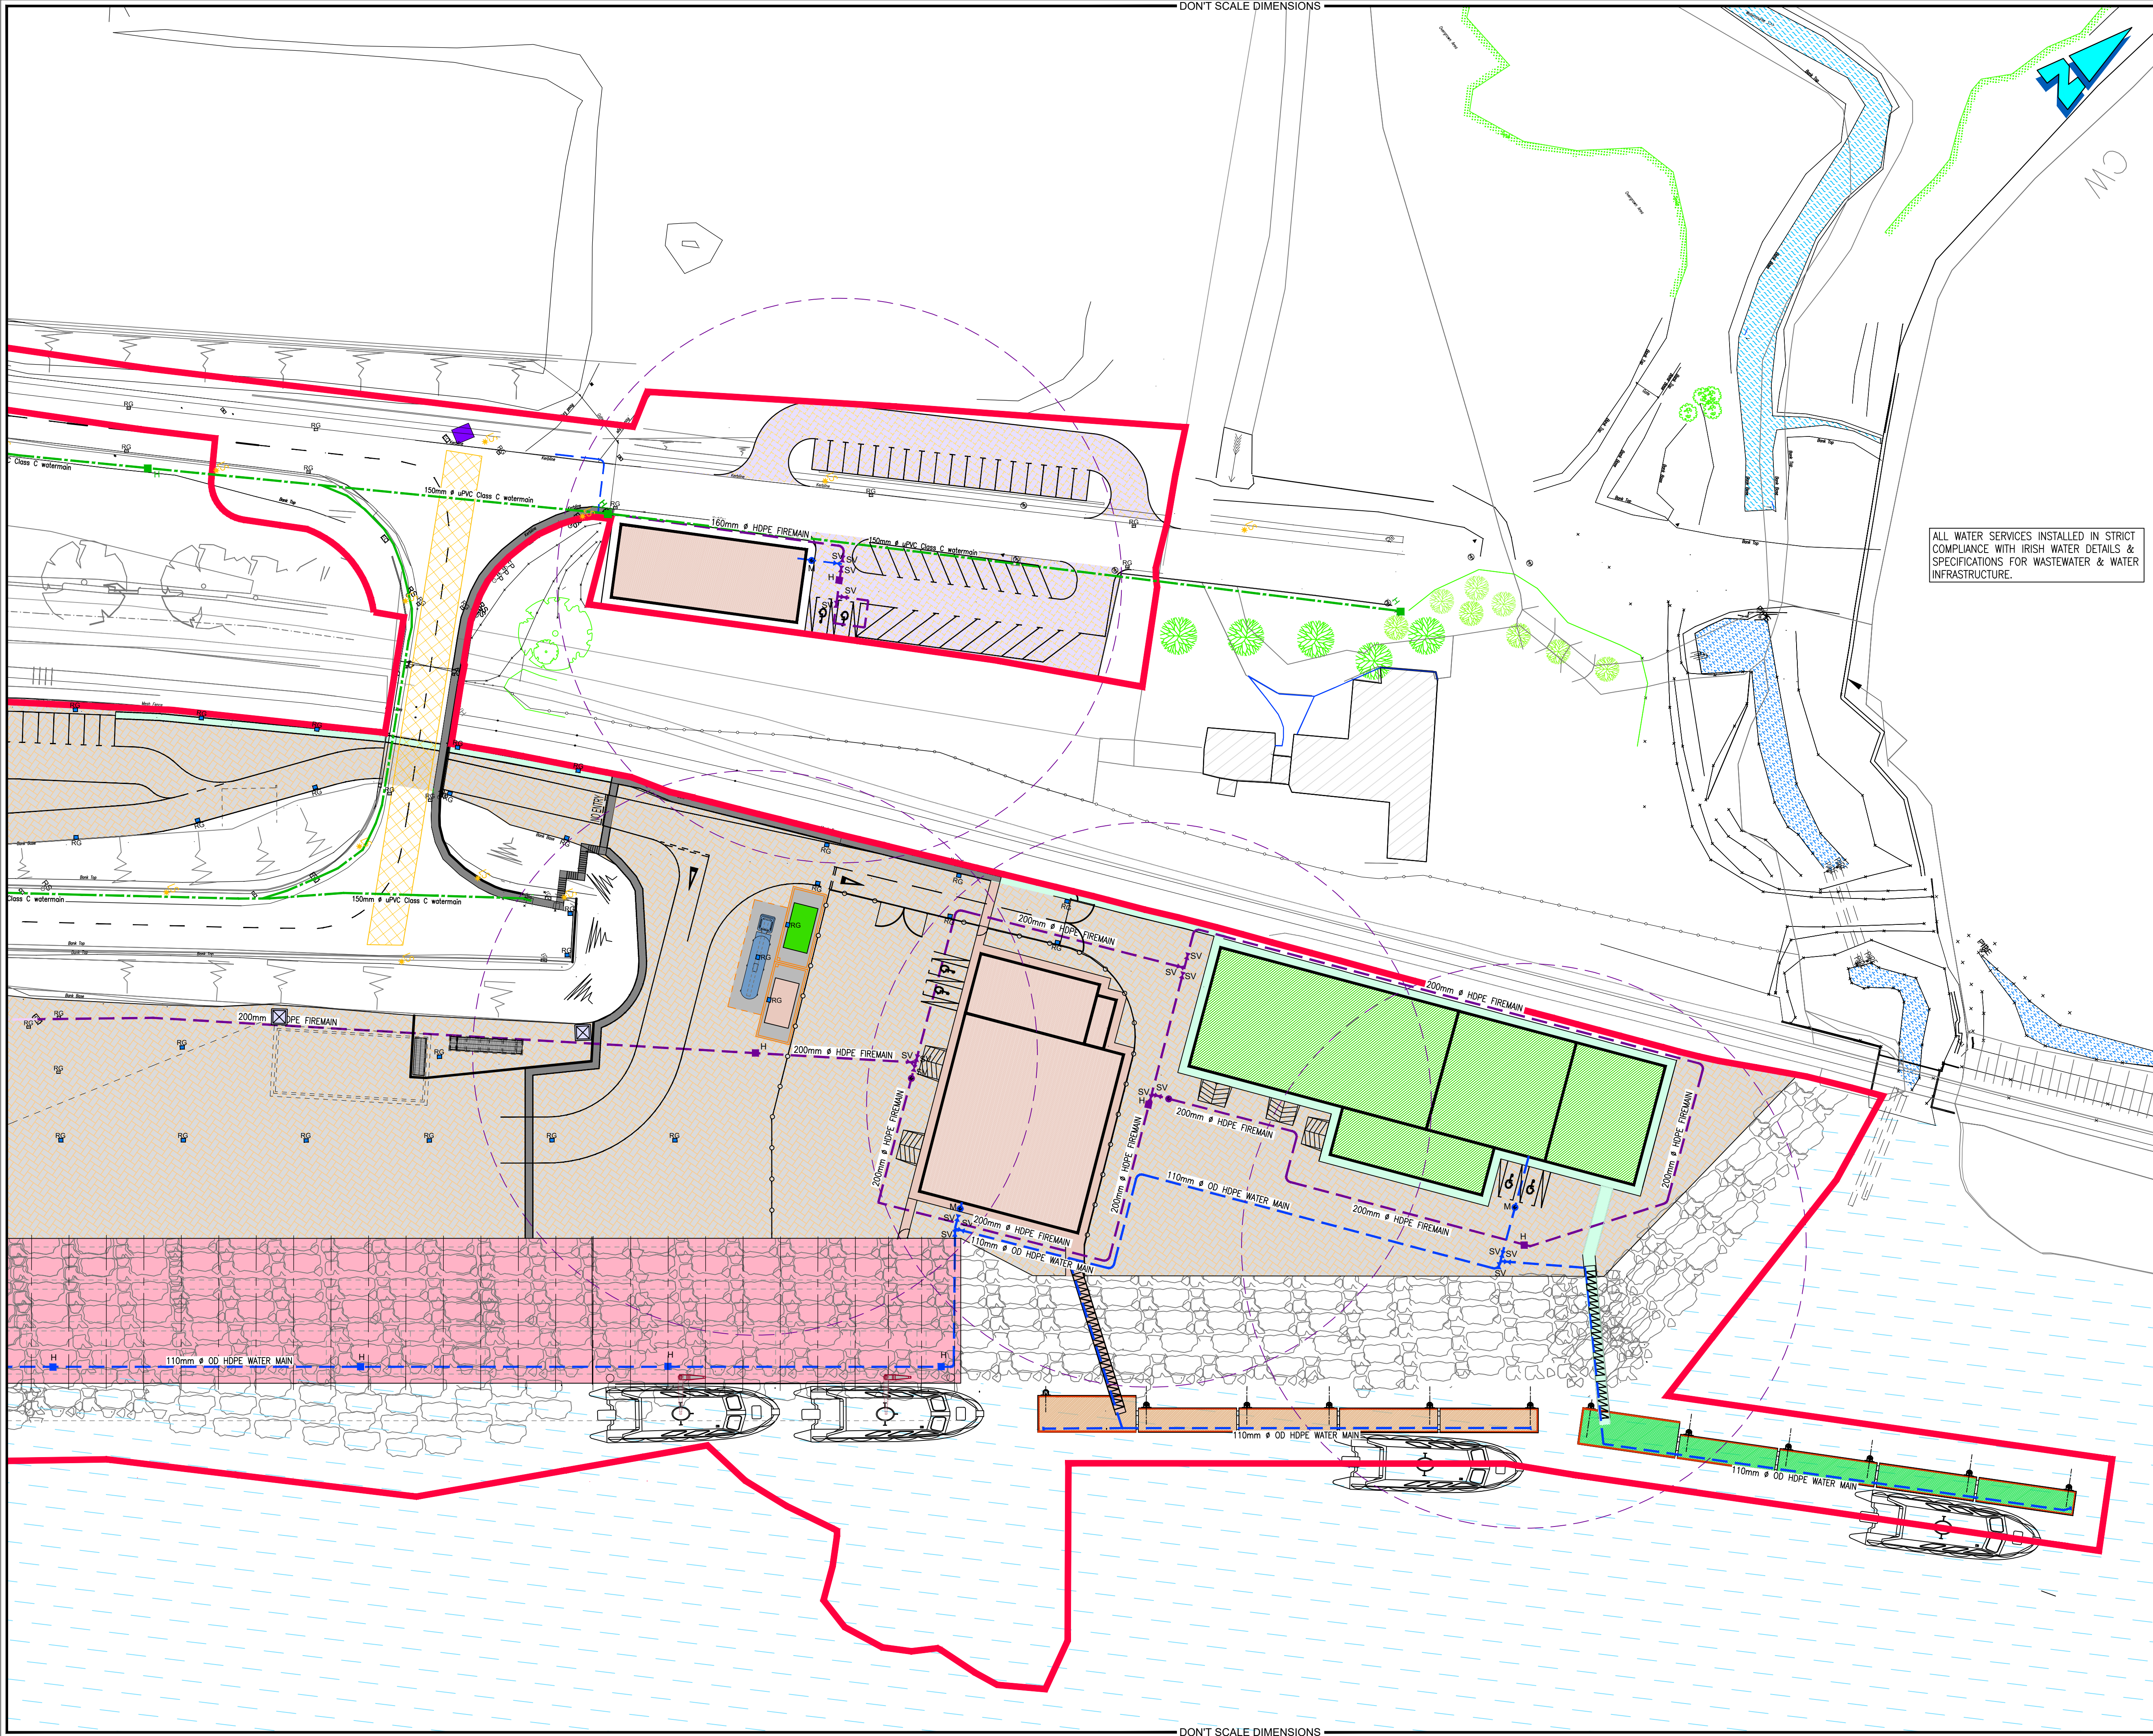

Health and Safety:

THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS, THE SPECIFICATION AND THE SAFETY AND HEALTH PLAN.

- Note:**
- NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR STORED IN ANY RETRIEVAL SYSTEM OF ANY NATURE WITHOUT THE WRITTEN PERMISSION OF MALONE O'REGAN CONSULTING ENGINEERS AS COPYRIGHT HOLDER EXCEPT AS AGREED FOR USE ON THE PROJECT FOR WHICH THE DRAWING WAS ORIGINALLY ISSUED.
 - ALL DIMENSIONS IN mm UNLESS NOTED OTHERWISE.
 - ALL LEVELS ARE TO POOLBEG DATUM.
 - ALL WORKS TO BE IN ACCORDANCE WITH IRISH WATER CODE OF PRACTICE DOCUMENT IW-CDS-5020-03 AND IRISH WATER STANDARD DETAILS IW-CDS-5020-01.
 - ALL WATERMAINS (EXCEPT AS NOTED) TO BE HDPE (PE-100) WITH SDR-17 RATING AND SHALL COMPLY WITH SECTION 3.9 OF IRISH WATER CODE OF PRACTICE.
 - CONCRETE ANCHOR BLOCKS AT DEAD ENDS, TEES, BOTH SIDES OF SLUICE VALVES AND AT ALL BENDS OVER 22.5°.
 - MIN. COVER TO WATERMAIN TO BE 900mm.
 - WATERMAINS TO BE PRESSURE TESTED IN ACCORDANCE WITH IRISH WATER CODE OF PRACTICE FOR WATER INFRASTRUCTURE SECTION 4.10.3.
 - PRIOR TO COMMISSIONING THE WATERMAIN SHALL BE SWABBED AND DISINFECTED IN ACCORDANCE WITH IRISH WATER CODE OF PRACTICE FOR WATER INFRASTRUCTURE.
 - SEE MANUFACTURER'S DETAILED INSTRUCTIONS PRIOR TO THE INSTALLATION OF WATER METER.
 - CHECK THAT FLOW ARROW DIRECTION IS POINTING IN THE SAME DIRECTION AS THE FLOW IN THE WATERMAIN.
 - DRAW-WIRES TO BE LEFT IN ALL DUCTS.
 - DF SPACER AND S.V. TO BE THE SAME Ø AS METER.
 - SEPARATION DISTANCES FROM EXISTING PLANTING SHALL COMPLY WITH IRISH WATER STANDARD DETAIL STD-W-12.
 - CONCRETE THRUST BLOCKS AT DEAD ENDS, TEES, BOTH SIDES OF SLUICE VALVES AND AT ALL BENDS OVER 22.5°. THRUST BLOCKS TO BE PROVIDED IN ACCORDANCE WITH IRISH WATER STANDARD DETAIL STD-W-28 (12-15 BAR TEST PRESSURE).
 - NO HYDRANTS OR SLUICE VALVES ARE TO BE LOCATED WITHIN TRAFFICKED AREAS.
 - SEPARATION DISTANCES FROM OTHER SERVICES, BOUNDARY WALLS, TREES, ETC. TO BE IN ACCORDANCE WITH IRISH WATER STANDARD DETAILS STD-W-11, STD-W-12, STD-W-12A.

- LEGEND:**
- PROPOSED PLANNING OUTLINE
DENOTED THUS:
- EXISTING uPVC WATERMAIN
DENOTED THUS:
- EXISTING DUCTILE IRON WATERMAIN
DENOTED THUS:
- EXISTING DUCTILE IRON FIREMAIN
DENOTED THUS:
- PROPOSED HDPE FIREMAIN
DENOTED THUS:
- PROPOSED HDPE WATERMAIN
DENOTED THUS:
- PROPOSED WATERMAIN SLUICE VALVE
DENOTED THUS:
- PROPOSED WATERMAIN HYDRANT
DENOTED THUS:
- PROPOSED WATER METER
DENOTED THUS:
- PROPOSED FIREMAIN SLUICE VALVE
DENOTED THUS:
- PROPOSED FIREMAIN HYDRANT
DENOTED THUS:
- PROPOSED HYDRANT COVERAGE
DENOTED THUS:

0	PLANNING ISSUE	05.09.2025	JD	ES
Rev.	Description	Date	Drawn	Chkd

Status: **P3 - ISSUED FOR PLANNING**

MALONE O'REGAN
CONSULTING ENGINEERS

3-4 Canada Street
Waterford.
X91 V52K

Tel: +353 51 876 855
Email: waterford@mor.ie
Web: www.maloneoregan.com

Offices also in:
DUBLIN : Tel: +353 1 260 2655
GALWAY: Tel: +353 91 531 069
LONDON: Tel: +44 208 5281685

Email: dublin@mor.ie
Email: galway@mor.ie
Email: london@mor.ie

Client: **PORT OF WATERFORD COMPANY**

Job: **PROPOSED OFFSHORE RENEWABLE ENERGY CAPABLE TERMINAL ON A 250m WHARF EXTENSION & ANCILLARY OPERATIONAL SUPPORT INFRASTRUCTURE**

Drawing: **PROPOSED WATERMAIN & FIREMAIN LAYOUT SHEET 2**

Job No	Revision	Approver	Scale	Sheet
W20088	0	ES	A1 1:500 A3 1:1,000	A1
Drg No	W20088-XX-XXX-DR-MOR-CE-01215			