


Note: All sub-bases to be confirmed by engineer

#### LEGEND:


- Permeable PC concrete block paving Size 600 x 300 x 80mm depth laid in a stretcher bond pattern. Colour -Sandstone.
- 2. 6mm grit brushed into the joints until they are completely filled
- 3. 50mm thickness of 6mm grit
- 4. 350mm thickness coarse graded aggregate
- 5. Geotextile
- 6. Well compacted sub-grade

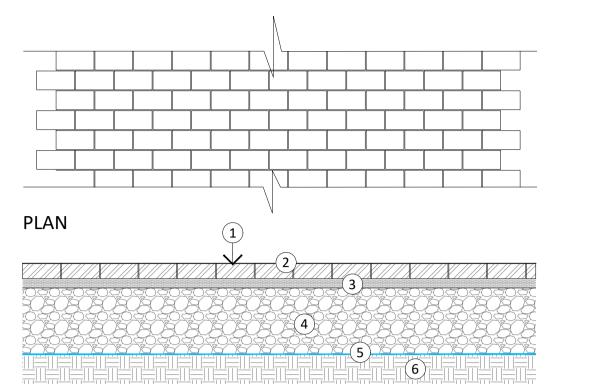

SECTION Note: All sub-bases to be confirmed by engineer

### LEGEND:


- Permeable PC concrete block paving. Size 200 x 100 x 50mm depth laid in a stretcher bond pattern. Colour. Heather
- 2. 6mm grit brushed into the joints until they are completely filled.
- 3. 50mm thickness of 6mm grit
- 4. 350mm thickness coarse graded aggregate
- 5. Geotextile
- 6. Well compacted sub-grade

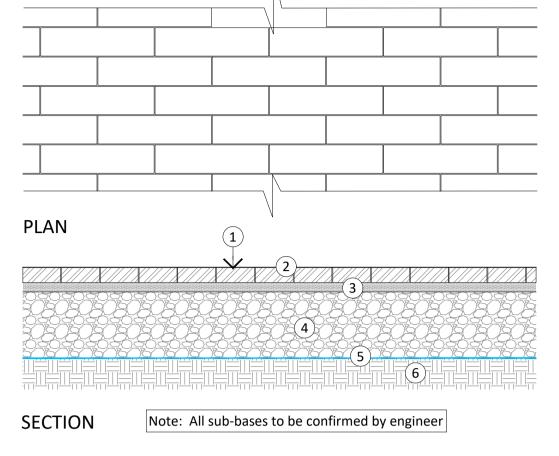

## LEGEND:

- Permeable PC concrete linear block paving Size 600 x 150 x80mm depth laid in a stretcher bond pattern. Colour silver grey.
- 2. 6mm grit brushed into the joints until they are completely filled.
- 3. 50mm thickness of 6mm grit
- 4. 350mm thickness coarse graded aggregate
- Geotextile
- 6. Well compacted sub-grade

02 Plan & Section Scale 1:20 Plan & Section Scale 1:20

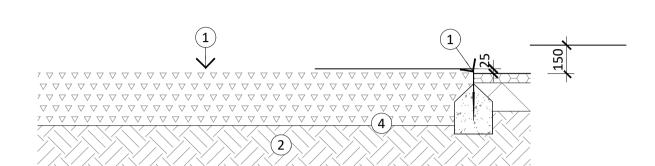


## SECTION

# LEGEND:

- 1. Bark fill 300mm depth.
- 2. Prepared sub-grade.
- 125mm Everedge Pro galvanised steel edging installed in concrete race. To be installed 25mm above finshed bark level.
- 4. Optional membrane.

07 P7 - PLAY SAFETY SURFACING - BARK MULCH
Scale 1:20

# O1 Plan & Section Scale 1:20

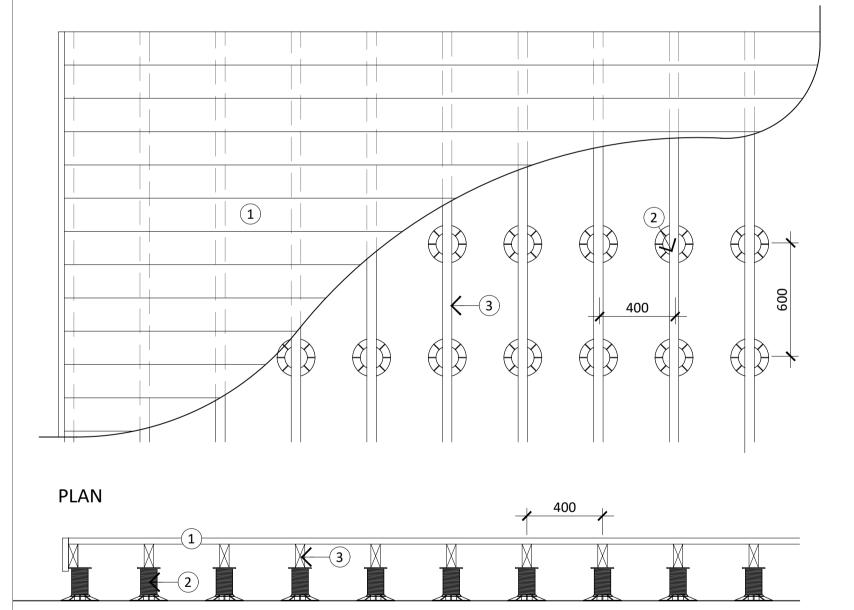

SECTION


Note: All sub-bases and sub frame to be confirmed by engineer and installer.


# LEGEND:

- Millboard Decking Square Edged Enhanced Grain. Colour: Limed Oak. Size 32mm THK x 176 x 3600. Screw fixed with 2 No. Millboard Dura Fix stainless steel screws as per connection to joist as per manufacturers instructions. 5mm below surface of board to ensure no fixings visible.
- 2. Duolift Joist Pedestals at 600mm centres to be a minimum of 400 mm in the ground.
- 3. 125 x 50 mm Plas-Pro Joists at 400mm centres to be fixed to bearers at every intersection. Refer to Millboard Installation Guide www.millboard.co.uk

O4 P4 - MILLBOARD DECK TERRACE
Section

Scale 1:20

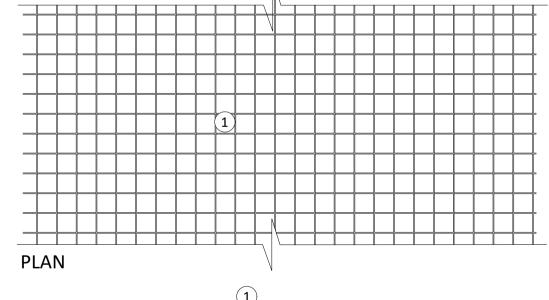

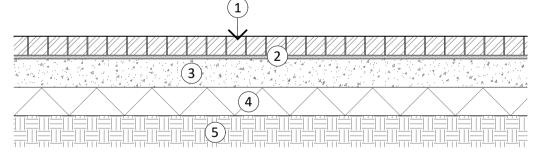


SECTION

Note: All sub-bases to be confirmed by engineer

# LEGEND:

- 1. Limestone paving. Size 100 x 100 x 100mm depth laid in stack bond pattern with 5mm joints max
- 20mm fully cured sharp sand screed or bedding mortar
- 3. 150mm concrete bed
- 4. Minimum 150mm compacted crusher run sub base
- 5. Well compacted sub-grade

P5 - GRANITE SETTS
Plan & Section Scale 1:20

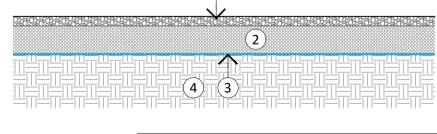


SECTION

Note: All sub-bases to be confirmed by engineer

# LEGEND:

- 1. 50mm deep self binding gravel.
- 150mm compacted crusher run stone 110mm nominal size
- 3. Geotextile fabric BGT100 by Terram or equal in all
- 4. Well compacted sub-grade

P6 - SELF BINDING GRAVEL
Section Scale 1:20

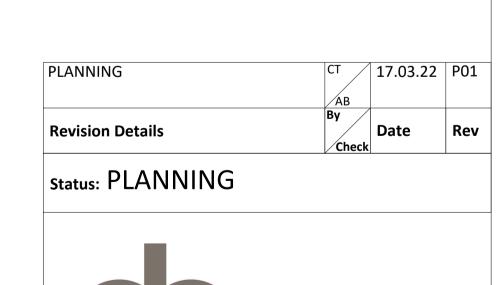



Hawarden House, 163 Upper Newtownards Road, Belfast, BT4 3HZ T: +44 (0)28 9029 8020 E: info@parkhood.com parkhood.com

Client :

: Tiznow Property Company Limited (Comer Group Ireland)

Date: March 2022

Project: City Park Development

at the Former Tedcastles Site, Centre Park Road, Cork City

Title: Landscape Details - Paving Sheet 01 of 2

Scale@A1: 1:20

**Dwg.no:** 7248-L-2900