

Cumulative Effects

- 12.13.15 **No significant effects** are predicted on the ground conditions as a result of the proposed development alone in either the demolition and construction or the operation stage so there is no potential for cumulative effects.

13 CLIMATE CHANGE

13.1 Introduction

- 13.1.1 This chapter of the EIAR reports on the likely significant Climate Change effects to arise from the demolition and construction stage, and the operation stage of the proposed development.
- 13.1.2 The chapter describes the climate change policy context; the methods used to assess the potential impacts and likely effects; the baseline conditions at and surrounding the site; the likely climate change effects taking into consideration embedded mitigation; the need for additional mitigation and enhancement; the significance of residual effects; and cumulative effects.
- 13.1.3 There are no technical appendices associated with this chapter.
- 13.1.4 The assessment has been informed by the following legislation, policies, and published guidance:
 - International Legislation:
 - The Paris Agreement, which builds upon the United National Framework Convention on Climate Change (UNFCCC)¹;
 - Kyoto Protocol of the UNFCCC²;
 - European Union (EU) Nationally Determined Contribution (INDCs)³ under the UNFCCC;
 - European Union Emission Trading Scheme (2015)⁴;
 - National Legislation and Policy:
 - The Climate Action and Low Carbon Development Act 2015 (Amendment Bill 2021)⁵;
 - Government of Ireland National Mitigation Plan (2017)⁶;
 - Government of Ireland Climate Action Plan (2021)⁷;
 - Climate Action and Low Carbon Development (Amendment) Act 2021⁸;

- Regional Policy:
 - Eastern and Midland Regional Assembly Corporate Plan 2019-2024⁹;
 - Eastern and Midland Regional Assembly Regional Spatial & Economic Strategy¹⁰;
- Local Policy:
 - South Dublin County Council (SDCC) Climate Change Action Plan 2019-2024¹¹;
 - SDCC 2020 - 2024 Corporate Plan, Theme 4 Environment, water and climate change, Objective 1: Create a sustainable low carbon and climate-resilient county¹²;
 - South Dublin County Council Development Plan 2022-2028 (2022)¹³
- Guidance and Industry Standards:
 - Institute of Environmental Management and Assessment (IEMA), Environmental Impact Assessment: Guide to assessing GHG emissions and evaluating their significance 2nd edition (2022)¹⁴;
 - IEMA's Environmental Impact Assessment Guide to Climate Change Resilience and Adaptation (2020)¹⁵;
 - Environmental Protection Agency research, National Risk Assessment of Impacts of Climate Change: Bridging the Gap to Adaptation Action (2016)¹⁶;
 - Ireland's Climate Change Advisory council report (2018)¹⁷;
 - EPA's Guidelines on the information to be contained in Environment Impact Assessment Reports (2022)¹⁸;
 - PAS 2080:2016 Carbon management in infrastructure¹⁹; and
 - RICS Guidance Whole life carbon assessment for the built environment (2017)²⁰.

13.2 Assessment Scope

- 13.2.1 There is currently no specific climate change assessment guidance in Ireland and therefore, this chapter provides a preliminary assessment of the potential climate impacts and effects from the demolition and construction, and operation stages of the proposed development, following the methodology set out in IEMA's aforementioned guidances^{14,15}. However, terminology regarding the scale of impacts has been altered to reflect that set out in the Environmental Protection Agency's (EPA) Guidelines¹⁸ on the information to be contained in Environment Impact Assessment Reports.

¹ UNFCCC, 2015, Paris Agreement. Available at: <https://unfccc.int/process-and-meetings/the-paris-agreement/the-paris-agreement> [Accessed 12/04/2021].

² UNFCCC, 1998, Kyoto Agreement. Available at https://unfccc.int/kyoto_protocol. [Accessed 25/08/2022]

³ UNFCCC, 2016. NDC User Guide. Available at: [https://unfccc.int/files/focus/indc_portal/application/pdf/ndc_parties_userguide_version_1__may_2016_\(2\).pdf](https://unfccc.int/files/focus/indc_portal/application/pdf/ndc_parties_userguide_version_1__may_2016_(2).pdf) [Accessed 25/08/2022].

⁴ EU Emissions Trading System (EU ETS). Available at: https://ec.europa.eu/clima/policies/ets_en [Accessed 25/08/2022].

⁵ Climate Action and Low Carbon Development (Amendment) Bill 2021. Available at: <https://www.gov.ie/en/publication/984d2-climate-action-and-low-carbon-development-amendment-bill-2020/> [Accessed 25/08/2022].

⁶ Department of Communications, Climate Action & Environment. National Mitigation Plan (2017). Available at: <https://www.climatecaseireland.ie/wp-content/uploads/2018/04/National-Mitigation-Plan-2017.pdf> [Accessed 25/08/2022].

⁷ Government of Ireland. Climate Action Plan (2021). Available at <https://www.gov.ie/en/publication/6223e-climate-action-plan-2021/> [Accessed 25/08/2022].

⁸ Climate Action and Low Carbon Development (Amendment) Act 2021. Available at: Climate Action and Low Carbon Development (Amendment) Act 2021 (irishstatutebook.ie) [Accessed 25/08/22].

⁹ Eastern and Midland Regional Assembly. Corporate Plan 2019-2024 (2019). Available at: https://emra.ie/dubh/wp-content/uploads/2020/11/EMRA_CorpPlan19-24-final.pdf [Accessed 22/08/2022].

¹⁰ Eastern and Midland Regional Assembly. Regional Spatial & Economic Strategy (2017). Available at: https://emra.ie/dubh/wp-content/uploads/2017/11/EMRA_IssuesPaper_Nov17.pdf [Accessed 22/08/2022].

¹¹ SDCC, 2019. South Dublin Climate Change Action Plan (CCAP) 2019-2024 [online]. Available at: SDCC's Climate Change Action Plan - SDCC [Accessed 25/08/2022].

¹² SDCC, 2020. Corporate Plan (2020) [online]. Available at: <https://www.sdcc.ie/en/services/our-council/policies-and-plans/corporate-plan/> [Accessed 25/08/2022].

¹³ SDCC, 2022. South Dublin County Council Development Plan 2022-2028 [online]. Available at: <https://www.sdcc.ie/en/devplan2022/adopted-plan/county-development-plan-written-statement/county-development-plan-written-statement.pdf> [Accessed on 25/08/2022].

¹⁴ IEMA, 2022. Institute of Environmental Management & Assessment (IEMA) Guide to Assessing GHG Emissions and Evaluating Their Significance 2nd Edition. Lincoln. IEMA.. Available at: <https://web.iema.net/iemanet-ay0iq/pages/edmcwrxjeevjgwanoi1neg.html?PageId=c102d3116374ec118943000d3a2d6712> [Accessed 25/08/2022].

¹⁵ IEMA, 2020, Climate Change Resilience and Adaptation. Available at: <https://www.iema.net/resources/reading-room/2020/06/26/iema-eia-guide-to-climate-change-resilience-and-adaptation-2020> [Accessed 25/08/2022].

¹⁶ EPA Research. (2016). National Risk Assessment of Impacts of Climate Change: Bridging the Gap to Adaptation Action Available at: https://www.epa.ie/publications/research/climate-change/Research_Report_346.pdf [Accessed 25/08/2022].

¹⁷ Climate Change Advisory Council. 2018. Annual Review 2018. Available at: https://www.climatecaseireland.ie/wp-content/uploads/2019/03/CCAC_AnnualReview2018.pdf [Accessed 30/09/2022].

¹⁸ Environmental Protection Agency, 2022. Guidelines on the information to be contained in Environmental Impact Assessment Reports (EIAR). Available at: https://www.epa.ie/publications/monitoring--assessment/assessment/EIAR_Guidelines_2022_Web.pdf [Accessed 22/08/2022].

¹⁹ BSI, 2016, PAS2080 Carbon management in infrastructure. Available at: <https://shop.bsigroup.com/ProductDetail?pid=000000000030323493> [Accessed 25/08/2022].

²⁰ RICS., 2017., Whole life carbon assessment for the built environment. Available at: <https://www.rics.org/globalassets/rics-website/media/news/whole-life-carbon-assessment-for-the-built-environment-november-2017.pdf> [Accessed 22/08/2022].

13.2.2 The technical scope of the assessment has considered the following:

- Climate Change Resilience (CCR);
- In-combination climate impacts (ICCI); and
- GHG emissions.

13.2.3 This chapter presents the proposed development’s demolition, construction and operational stages’ sources of GHG emissions. GHG emissions have been measured in carbon dioxide equivalent emissions (CO₂e), which is a measure used to compare the emissions from various GHGs based upon their global warming potential.

13.2.4 Table 13-1 presents the GHG emissions assessment boundaries.

Table 13-1: GHG Emissions Assessment Boundaries			
Item	Description	Input Data	Emissions Factors*
Demolition and Construction Stage			
Embodied GHG emissions	Embodied GHG emissions which are emitted during the manufacture, transport and construction of materials used in the construction works.	Estimated quantities construction materials	University of Bath Inventory of Carbon and Energy ²¹ and Average embodied carbon GHG emissions associated to PV from IEA (2015) ²² , Ecoinvent V3 ²³ and M. Ito (2011) ²⁴
Waste disposal GHG emissions	GHG emissions associated with the disposal of waste from construction, demolition, and excavation (CDE) works.	Estimated volumes of waste arisings and demolition material	UK Government GHG Emissions Factors ²⁵
On-site GHG emissions	GHG emissions associated with on-site energy requirements during demolition and construction works (e.g. electricity and water consumption).	Estimated energy consumption associated with the demolition and construction works	UK Government GHG Emissions Factors ²⁵
Transport GHG emissions	GHG emissions associated with vehicles travelling to and from the proposed development.	Distances travelled by construction vehicles	UK Emissions Factors Toolkit (EFT) v11 ²⁶
Operation Stage			
Operational energy demand	GHG emissions associated with the operation of the proposed development (emergency back-up generators)	Kilowatt hours (kWh) of energy and fuel consumption	UK Government GHG Emissions Factors ²⁵
Operational GHG emissions	GHG emissions associated with the operation of the proposed development (traffic)	Annual average daily traffic (AADT)	UK Emissions EFT v11 ²⁶

²¹ University of Bath Inventory of Carbon and Energy (ICE) Version 2.0. Available at: <http://www.circularecology.com/embodied-energy-and-carbon-footprint-database.html#.XPaGoFWyUk> [Accessed 25/08/2022]
²² International Energy Agency. 2022. Technology Collaboration Programme. Available at: https://iea-pvps.org/?id=314&eID=dam_frontend_push&docID=2391 [Accessed 30/09/2022].
²³ Ecoinvent. 2022. Available at: <https://ecoinvent.org/> [Accessed 30/09/2022].
²⁴ M.Ito. 2011. Life Cycle Assessment of PV systems. Available at: <https://www.intechopen.com/chapters/17733> [Accessed 30/09/2022].
²⁵ UK Government conversion factors for company reporting of greenhouse gas emissions. 2021. Available at: <https://www.gov.uk/government/publications/greenhouse-gas-reporting-conversion-factors-2021> [Accessed on 25/08/2022]

Table 13-1: GHG Emissions Assessment Boundaries			
Item	Description	Input Data	Emissions Factors*
associated to traffic			
Replacement	Replacement of solar photo-voltaic (PV) panels at the end of their design life (25 years) to cover for the assumed design life (60 years) of the proposed development.	PV panel kWp	Average embodied carbon GHG emissions associated to PV from IEA (2015) ²⁷ , Ecoinvent V3 ²⁸ and M. Ito (2011) ²⁹
* UK Government emissions factors have been used as there is no Irish Government equivalent available.			

Technical Scope

CCR and ICCI

13.2.5 The assessment of the potential impacts and likely effects of the proposed development on climate has considered the following:

- Vulnerability of the proposed development to extreme weather and projected climate change; and
- The additive impact that climate and climate change may have on impacts identified by other environmental topics as a result of the proposed development, now and in future years.

GHG Emissions

13.2.6 The assessment of GHG emissions, associated to demolition, construction, and operational activities, has considered the following emissions sources:

- GHG emissions resulting from the demolition and construction stage, such as primary extraction, manufacturing and transportation of materials and other demolition and construction processes associated with the proposed development; and
- GHG emissions resulting from the operation stage of the proposed development.

13.2.7 Sources of GHG emissions during the demolition and construction stage include:

- GHG emissions associated with the required raw materials, including raw material supply, transport, and manufacture; and
- GHG emissions associated with construction processes, including transport to/from works sites and construction/installation processes.

13.2.8 Sources of potential GHG emissions during the operation stage include:

- GHG emissions associated with the powering of the data center; and
- Transport of workers to and from the site.

²⁶ UK Emissions Factors Toolkit (EFT) v11. Available at: <https://laqm.defra.gov.uk/review-and-assessment/tools/emissions-factors-toolkit.html> [Accessed on 25/08/2022].
²⁷ International Energy Agency. 2022. Technology Collaboration Programme. Available at: https://iea-pvps.org/?id=314&eID=dam_frontend_push&docID=2391 [Accessed 30/09/2022].
²⁸ Ecoinvent. 2022. Available at: <https://ecoinvent.org/> [Accessed 30/09/2022].
²⁹ M.Ito. 2011. Life Cycle Assessment of PV systems. Available at: <https://www.intechopen.com/chapters/17733> [Accessed 30/09/2022].

Spatial Scope

CCR and ICCI

13.2.9 The study area for the CCR and ICCI assessments comprised the demolition and construction footprint of the proposed development, including compounds and temporary land take (i.e. the site).

GHG Emissions

13.2.10For the assessment of GHG emissions associated with the demolition and construction stage, the study area has taken account of GHG emissions associated with extraction, processing, and transport of materials from outside of the site (red line) boundary alongside site-based emissions that result from construction activities within the site (red line) boundary.

13.2.11The study area for GHG emissions associated with operation energy consumption of the proposed development comprised the site (redline) boundary. The study area for operation stage GHG transport emissions was consistent with the area selected for the proposed development’s traffic model. This area is described in the study area section of Chapter 8: Air quality of this EIAR Volume. Emissions that result from maintenance and repair activities arise from outside of the site (red line) boundary.

Temporal Scope

13.2.12The assessment has considered impacts arising during the demolition and construction stage which would be of expected to be temporary (less than one year), and from the operational stage, which would be expected to be long-term (15 to 60 years) in nature.

13.2.13The assessment of the proposed development has been undertaken in line with the information provided in Chapter 5: Construction Description of this EIAR Volume. The works are anticipated to be undertaken over a 11-month period, with a completion targeted of Q4 2024. The indicative start of operation is 2025 and the estimated design life of the proposed development is 60 years³⁰. There is no phasing during the construction of the Proposed Development.

13.2.14For the operation stage climate assessment, consideration has been given to the modelling scenarios outlined in Chapter 2: EIA Process and Methodology. Three scenarios have been proposed as the proposed development would be powered via the EirGrid connection through the wider DUB-1 campus or powered by the consented Multifuel Generation Plant (MFGP) on the DUB-1 campus. The MFGP has been designed to include the proposed development and no change in capacity will be required to power the proposed development. The proposed development would not result in an increase in the MFGP emissions, which have previously been assessed and reported within the DUB-1 EIAR. The proposed development does not create any additional MFGP emissions that have not already been assessed and permitted, and therefore no assessment of the MFGP emissions have been carried out in this EIAR.

13.2.15From a climate perspective, Chapter 2: EIA Process and Methodology proposed scenario 1 and scenario 2 would not generate additional GHG emissions that have not already been assessed and permitted and have therefore been scoped out of this assessment. Only the Emergency scenario (Scenario 3) listed in Chapter 2: EIA Process and Methodology, has been assessed for the proposed development.

13.2.16The proposed development is an extension to the July 2022 DUB-1 permitted development and would operate as part the wider data center campus. As per Chapter 2: EIA Process and Methodology, the future baseline includes the operation of the July 2022 DUB-1 permitted development reported within the DUB-1 EIAR. The proposed development operation future baseline has been assumed to be 2025, which is the projected year when the proposed development would become operational and is also when

the July 2022 DUB-1 permitted development would become fully operational with the MFGP powered by gas.

13.3 Baseline Characterisation Method
Desk Study

- 13.3.1 In order to establish the existing climate change baseline within the study area, relevant data was reviewed and assessed. The data sets and associated sources can be summarised as follows:
- Met Éireann, Dublin Airport 1981-2010 Averages³¹;
 - Met Éireann, A Summary of Climate Averages for Ireland 1981-2010³²;
 - EPA, 2019 GHG Emissions Projections Report for 2018-2040 Field Study (2020)³³; and
 - Met Éireann, Irelands Climate: The Road Ahead (2013)³⁴.

Field Study

13.3.2 Field study/data collection was not required at the site as the data provided by other sources was deemed to be adequate and representative of the site conditions.

13.4 Assessment Method
Methodology

Demolition and Construction Stage and Operation Stage

CCR and ICCI

- 13.4.1 The CCR assessment has assessed the vulnerabilities of the proposed development to climate change during the demolition and construction and operation stages of the proposed development. The ICCI assessment has evaluated the potential additive impact that climate change may have on receptors identified by other environmental topics. Professional judgement has been used to assess whether projected climate change could increase the magnitude of the effects as identified by the disciplines, change the sensitivity of the receptors, or reduce the effectiveness of embedded mitigation measures. In line with IEMA guidance¹⁵, qualitative assessments have been undertaken for the CCR and ICCI assessments by:
- Identifying sensitive receptors;
 - Analysing the current and future climate in the study area using data from the EPA and Met Éireann and assessing projected changes on climate variables;
 - Summary of embedded design and mitigation measures to improve resilience to extreme weather;
 - Assessing the likelihood and consequence of the climate impact on the proposed development to determine the significance; and
 - Identifying mitigation and adaptation measures for any significant effects, in liaison with the proposed development’s design team and relevant environmental discipline specialists.

³⁰ For the purposes of the GHG emissions assessment and in line with the reference study period specified in the RICS guidance, which is based on the principles outlined in EN 15978, a 60-years design life has been assumed for the proposed development.

³¹Met Éireann. Dublin Airport 1981-2010 Averages (2022). Available at: <https://www.met.ie/climate-ireland/1981-2010/dublin.html> [Accessed on 25/08/2022].

³² Met Éireann. A Summary of Climate Averages for Ireland 1981-2010 (2012). Available at: <https://www.met.ie/climate-ireland/SummaryClimAvg.pdf> [Accessed on 25/08/2022].

³³ EPA, 2020. 2019 GHG Emissions Projections Report for 2018-2040 Field Study. Available at: <https://www.epa.ie/publications/monitoring--assessment/climate-change/air-emissions/EPA-Irelands-Greenhouse-Gas-Emissions-Projections-report-2020-2040v2.pdf> [Accessed 25/08/2022].

³⁴ Met Éireann. Irelands Climate: the road Ahead (2013). Available at: <http://edepositireland.ie/handle/2262/71304> [Accessed on 25/08/2022].

GHG Emissions

- 13.4.2 The goal of the GHG emissions assessment is to estimate the emissions that would be generated or avoided by the proposed development, within the redline boundary during the demolition and construction and operation stages. The GHG assessment considers emissions associated to buildings/structures within the site. The GHG emissions associated with the July 2022 DUB-1 permitted development have been previously assessed and are reported on within the DUB-1 EIAR. Therefore, the GHG assessment of the proposed development has given regard to the GHG emissions from the July 2022 DUB-1 permitted development qualitatively as part of the future baseline within the assessment of effects and a quantitative assessment has not been undertaken. A quantitative assessment for the proposed development has been undertaken. Therefore, this chapter has:
- Estimated GHG emissions associated to the proposed development for the relevant scenarios: 'Do-Something' (i.e. with the proposed development (quantitative) and assuming the July 2022 DUB-1 permitted development has been implemented (qualitative)) and 'Do-Nothing' (i.e. no proposed development but assuming the July 2022 DUB-1 permitted development has been implemented (qualitative));
 - Enabled comparison of the 'Do-Something' scenario against the 'Do-Nothing scenario'; and
 - Enabled identification of emissions hot spots within the 'Do-Something' scenario to inform identification and prioritisation of mitigation measures.
- 13.4.3 The 'Do-Nothing' scenario includes an assessment of 'Business as usual', and therefore considers GHG emissions associated to buildings/ structures within the site. In this case this includes an approximately sized 305m² residential building (quantitative), as well as the July 2022 DUB-1 permitted development (qualitative).
- 13.4.4 As outlined in the 'Temporal Scope' section, the 'Do Something' assessment has assessed 'Scenario 3' the Emergency Scenario only. Therefore, this chapter has:
- Estimated GHG emissions associated with the 13 diesel powered back-up generators;
 - Estimated GHG emissions associated to the proposed development's additional traffic, using; and
 - Estimated GHG emissions associated with the replacement of PV panels at the end of their design life (25 years).
- 13.4.5 Furthermore, the IEMA guidance indicates that it is appropriate to contextualise emissions¹⁴. Therefore, the estimated GHG emissions associated with the proposed development have been compared to the carbon budgets for Ireland to provide a national context. The proposed carbon budgets are listed as follows:
- Carbon Budget 1 (2021-2025)- 295 Mt CO₂e;
 - Carbon Budget 2 (2026-2030)- 200 Mt CO₂e; and
 - Carbon Budget 3 (2031-2035)- 151 Mt CO₂e.
- 13.4.6 Demolition and Construction GHG emissions: Carbon has been assessed based on information provided by the design team and information from similar projects, including the use of products or materials, construction transport, construction plant and construction waste;
- 13.4.7 Demolition and construction and operation activities have been broken down into a product's life cycle stages as specified in PAS2080¹⁸.
- 13.4.8 End of life or decommissioning impacts have not been considered due to the long design life of the proposed development and given that emissions associated with end of life are commonly relatively small.

GHG emissions in each scenario have been compared to assess the contribution of the proposed development to climate change. Values are reported in MtCO₂e. This measure considers the six Kyoto Protocol gases: carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), sulphur hexafluoride (SF₆), hydrofluorocarbons (HFCs) and

perfluorocarbons (PFCs). This calculation normalises the global warming potential of the main GHG into one measure, based on the global warming potential of CO₂e.

Cumulative Stage

CCR

- 13.4.9 The climate resilience effects resulting from the demolition and construction and operation stages would be limited in their spatial extent to the site boundary and the proposed development in isolation. Therefore, cumulative climate change resilience effects with other schemes would not be considered.

ICCI

- 13.4.10The in-combination climate impacts resulting from the demolition and construction and operation stages would be limited in their spatial extent to the relevant technical assessments in the EIAR for the proposed development. Therefore, cumulative effects would not be considered for each technical discipline as opposed to in-combination with cumulative schemes.

GHG Emissions

- 13.4.11GHG emissions contribute cumulatively, with all sources globally, to cause climate change. In line with IEMA guidance¹⁴, the assessment would only consider GHG emissions in the context of those in local area and the UK.

13.5 Assessment Criteria

- 13.5.1 The assessment of significance of effect with regards to climate change is based on professional judgement of the sensitivity of the receptor and the magnitude of effect.
- 13.5.2 The general criteria used to assess if an effect is significant or not, is set out in Table 13-7 and Table 13-8. This is determined by consideration of the sensitivity of the receptor, probability of the impact and consequence of the impact for CCR and ICCI. In considering the significance of an effect, consideration has been given to the duration of the effect, the geographical extent of the effect and the application of professional judgement

Receptor Sensitivity/Value Criteria

CCR

- 13.5.3 In line with IEMA guidance¹⁵, the sensitivity of receptors to potential climate change impacts have been considered. In determining the sensitivity of receptors, the following factors have been considered as well as the value or importance of the receptor:
- Susceptibility of the receptor (e. g. ability to be affected by a change); and
 - Vulnerability of the receptor (e. g. potential exposure to a change).
- 13.5.4 The susceptibility of the receptors has been classified as low, moderate or high in accordance with the criteria set out in Table 13.4.

Table 13-4: Receptor Sensitivity Criteria	
Sensitivity	Criteria
Low	Climatic factors have little influence on the receptors (consider whether it is justifiable to assess such receptors further within the context of EIAR – i.e. it is likely that such issues should have been excluded through the EIAR scoping process).
Medium	Receptor has some limited ability to withstand/not be altered by the projected changes to the existing/prevaling climatic conditions (e.g. retain elements of its original function and form).

Table 13-4: Receptor Sensitivity Criteria

Sensitivity	Criteria
High	Receptor has no ability to withstand/not be substantially altered by the projected changes to the existing/prevaling climatic factors (e.g. lose much of its original function and form).

13.5.5 The vulnerability of a receptor can be defined on a scale from low to high in accordance with the criteria set out in Table 13-5.

Table 13-4: Receptor Vulnerability Criteria

Vulnerability	Criteria
Low	Climatic factors have little influence on the receptors (consider whether it is justifiable to assess such receptors further within the context of EIAR – i.e. it is likely that such issues should have been excluded through the EIAR scoping process).
Medium	Receptor is dependent on some climatic factors but able to tolerate a range of conditions (e.g. a species which has a wide geographic range across the entire UK but is not found in southern Spain);
High	Receptor is directly dependent on existing/prevaling climatic factors and reliant on these specific existing climate conditions continuing in future (e.g. river flows and groundwater level) or only able to tolerate a very limited variation in climate conditions);

ICCI

13.5.6 The ICCI assessment focuses on the potential for climate change to exacerbate the effects on receptors identified by individual environmental disciplines. For this reason, the sensitivity of the receptors is considered the same as that specified by the individual environmental assessments in the EIAR.

GHG Emissions

13.5.7 GHG emissions associated within the proposed development would be released to the global atmosphere. Therefore, the global atmosphere is considered to be the receptor and is considered to be of high sensitivity. In line with standard practice, the sensitivity of human and natural receptors is not considered within this assessment.

Impact Magnitude Criteria

CCR

13.5.8 The magnitude of impact has been assessed using professional judgement as a combination of both the probability (likelihood) of the impact and the consequence of the impact.

13.5.9 In line with IEMA guidance¹⁵, the probability of the impact refers to the likelihood of a climate impact occurring and having an impact on the proposed development, over its lifespan. This includes consideration of embedded mitigation measures within the design. The probability of the impact is classified as unlikely, possible (as likely as not) and likely in accordance with the criteria set out in Table 13-5.

Table 13-5: Probability of Impact Criteria

Likelihood level	Criteria
Unlikely	The climate impact is not anticipated to occur during the lifetime of the proposed development (60 years).
Possible (as likely as not)	The climate impact may occur a limited number of times during the lifetime of the proposed development (60 years).

Table 13-5: Probability of Impact Criteria

Likely	The climate impact may occur multiple times during the lifetime of the proposed development (60 years).
--------	---

13.5.10 In line with IEMA guidance¹⁵, consequence of the impact occurring considers the geographical extent of the effect or the number of receptors affected (e.g., scale), the complexity of the effect, degree of harm to those affected and the duration, frequency, and reversibility of effect. The consequence of the impact is classified as very low, low, medium, high, and very high in accordance with criteria set out in Table 13-6.

Table 13-6: Consequence of the Impact Criteria

Consequence Level	Health and Safety	Disruption to Construction/ Operation	Cost
Very High	Multiple fatalities	Site-wide disruption lasting more than one week	>10 % of the proposed development construction value
High	Single fatality / multiple long-term injuries	Site-wide disruption lasting more than one day but less than one week	8-10 % of the proposed development construction value
Medium	Long-term injury or illness, prolonged hospitalisation, or inability to work	Partial disruption across elements of the site / proposed development lasting more than one day but less than one week	4-8 % of the proposed development construction value
Low	Lost time injury or medical treatment required, short-term impact on persons affected	Partial disruption across elements of the site / proposed development lasting less than a day	1-3 % of the proposed development construction value
Very Low	Minor harm or near miss	Disruption to an isolated section of the site / proposed development lasting less than a day	<1 % of the proposed development construction value

13.5.11 The magnitude of climate change impacts have been assessed on the basis of the likelihood of impact and consequence as presented in matrix shown in Table 13-7.

Table 13-7: CCR Magnitude Criteria

Consequence Level	Probability/Likelihood of Impact		
	Unlikely	Possible	Likely
Very High	Medium	High	High
High	Medium	High	High
Medium	Low	Medium	High
Low	Low	Low	Medium
Very Low	Low	Low	Medium

ICCI

13.5.12 In line with the IEMA guidance, the ICCI assessment has been completed based on the likely environmental effects as identified and defined by the individual environmental assessments in the ES. Additional mitigation has been identified to address the potential for climate change to exacerbate these environmental effects.

GHG Emissions

13.5.13 In line with IEMA guidance¹⁴, it should be noted that the crux of significance for the GHG assessment is not whether a project emits GHG emissions, nor even the magnitude of GHG emissions alone, but whether it contributes to reducing GHG emissions relative to a comparable baseline consistent with a trajectory towards net zero by 2050. Contextualisation of the carbon footprint of a scheme determines whether or not it supports or undermines the trajectory towards net zero. Therefore, the total GHG emissions associated with the proposed development have been compared to the carbon budget for Ireland. Additional mitigation has been identified to reduce GHG emissions where necessary.

Scale of Effect Criteria

CCR and ICCI

13.5.14 Impacts have been assessed on the basis of the value/sensitivity of receptors against the magnitude of impact to determine the scale of effect as presented in Table 13-7.

Table 13-8: CCR Scale of Effect Criteria			
Magnitude	Value/Sensitivity		
	Unlikely	Possible	Likely
High	Slight to Moderate	Very Significant to Profound	Profound
Medium	Imperceptible to Not Significant	Slight to Moderate	Very Significant to Profound
Low	Imperceptible	Imperceptible to Not Significant	Slight to Moderate

13.5.15 Based on EPA Guidelines on the information to be contained in Environment Impact Assessment Reports¹⁸ (2022), as described in Chapter 2: EIA Process and Methodology, effects ranging from 'moderate' to 'profound' are considered 'significant' in terms of EIA.

GHG Emissions

13.5.16 In line with the updated IEMA guidance¹⁵, the scale of effects for the GHG assessment has been described in Table 13-9 below. However, the terms have been altered to reflect the Environmental Protection Agency's (EPA) guidance¹⁸.

Table 13-9: Greenhouse Gas Scale of Effect Criteria	
Scale	Description
Negative Effect	
Very Significant/ Profound	The proposed development's GHG emission impacts are not mitigated or are only compliant with do-minimum standards set through regulation, and do not provide further reductions required by existing SDCC and Ireland's policy for projects of this type. The proposed development is locking in emissions and does not make a meaningful contribution to the UK's trajectory towards net zero.
Significant	The proposed development's GHG emissions impacts are partially mitigated and may partially meet the applicable existing and emerging policy requirements but would not fully contribute to decarbonisation in line with SDCC and Ireland's policy goals for projects of this type. The proposed development falls short of fully contributing to the UK's trajectory towards net zero.
Non-Significant/ Slight/ Moderate	The proposed development's GHG emissions impacts would be fully consistent with applicable existing and emerging policy requirements and good practice design standards for projects of this type. The proposed development is fully in line with measures necessary to achieve Ireland's trajectory towards net zero.

Table 13-9: Greenhouse Gas Scale of Effect Criteria

Imperceptible Effect

The proposed development's GHG emissions impacts would be reduced through measures that go well beyond existing and emerging policy and design standards for projects of this type, such that radical decarbonisation or net zero is achieved well before 2050. The proposed development provides GHG emissions performance that is well 'ahead of the curve' for the trajectory towards net zero and has minimal residual emissions.

Positive Effect

The proposed development's net GHG emissions impacts are below zero and it causes a reduction in atmospheric GHG concentration, whether directly or indirectly, compared to the without-proposed development baseline. The proposed development substantially exceeds net zero requirements with a positive climate impact.

Nature of Effect Criteria

CCR and ICCI

13.5.17 The nature of the effect has been described as either negative, neutral, or positive as outlined in Chapter 2: EIA Process and Methodology.

GHG Emissions

13.5.18 In line with the EPA guidance¹⁸, the nature of effects for the GHG assessment has been described as either negative, neutral or positive, as follows.

- Negative – when the project follows a 'business-as-usual' or 'do minimum' approach and is not compatible with the Ireland's net zero trajectory or follows accepted aligned practice or area-based transition targets. Similarly, a project that is compatible with the budgeted, science-based 1.5°C trajectory (in terms of rate of emissions reduction) and which complies with up-to-date policy and 'good practice' reduction measures to achieve that can also be considered to have an adverse effect.
- Imperceptible – when the project achieves emissions mitigation that goes substantially beyond the Ireland's GHG reduction trajectory, or substantially beyond existing and emerging policy compatible with that trajectory and has minimal residual emissions.
- Positive – the project's net GHG emissions impacts are below zero and it causes a reduction in atmospheric GHG concentration, whether directly or indirectly, compared to the without-proposed development baseline. The proposed development substantially exceeds net zero requirements with a positive climate impact.

13.6 Assumptions and Limitations

CCR and ICCI

13.6.1 The assessments have relied on data provided by Met Éireann; the climate projections data are generated from Phase 5 of the Coupled Model Intercomparison Project (CMIP5) simulations. It has been assumed that these data sets have been reported correctly.

13.6.2 Climate projections can be used to determine likely future trends in climate conditions in the locality of the proposed development through its lifetime. The climate trends included in this assessment are based on a range of GHG emissions scenarios which are subject to a degree of uncertainty. How the climate would react to different levels of emissions is also uncertain. There are three key sources of uncertainty within climate projections:

- Natural climate variability: either from natural external influences on climate (e.g. change in atmospheric particulates due to volcanic activity), or changes in the energy received from the sun;

- Incomplete understanding of Earth system processes and their imperfect representation in climate models (modelling uncertainty); and
- Uncertainty in future man-made emissions of GHG emissions and other pollutants.

13.6.3 The ICCI assessment has also relied on the data and professional judgement of other chapters within this report.

GHG Emissions

13.6.4 The GHG emissions assessment presented in this chapter considers the demolition and construction, and operation stages GHG emissions, and should not be considered a full whole life carbon assessment. For example, emissions associated with end of life of the proposed development are not included in the GHG assessment as they are considered out of scope.

13.6.5 Estimated quantities of key materials associated to the construction of the proposed development were not available at the time of writing. Therefore, the estimated GHG emissions associated with the construction of the proposed development have been based on waste data included within Chapter 14: Waste of this EIAR. The waste estimates in this chapter were calculated from a detailed review as part of the July 2022 DUB-1 permitted development adjacent. When conducting the review, the proposed development's Gross Floor Area (GFA) was used to normalise the data and create key performance indicators (KPIs) to estimate potential waste volumes for the proposed development. In addition, the assessment took into consideration published data by the EPA in National Waste Reports. Demolition and construction material quantities were calculated by assuming the wastage quantities as a percentage of the total construction materials used in the development; the percentages were equivalent to the wastage rates described in the Waste and Resources Action Programme (WRAP) Net Waste Tool. Additionally, construction and demolition waste quantities have also been extracted from Chapter 14: Waste.

13.6.6 Furthermore, GHG emissions associated with the sourcing of raw materials, manufacturing and transport of PV panels were estimated utilising the kWp (40) included within the Energy Statement accompanying this EIAR and the PV panel embodied carbon KPI (2560 kgCO₂e/kWp)^{22,23,24}.

13.6.7 The kwh required for the estimation GHG emissions associated to the use of the PV panel have been estimated using the Photovoltaic Geographical Information System (PVGIS) Tool³⁵ provided by the European Commission. For the purposes of this assessment, the following assumptions were considered:

- PVGIS-Sarah 2 solar radiation database;
- Installed peak PV power [kWp] of 40;
- Roof added / Building integrated mounting position;
- Profile Park business park location;
- PV panel Slope angle of 40°;
- PV panel Azimuth angle of 0°; and
- System loss of 14%.

13.6.8 This tool produced the annual Kwh. This was converted to tCO₂e by the UK government conversion factors²⁵, due to the Irish equivalent figures not being produced. It was assumed PV panels would need to be replaced every 25 years, as this is considered to be the industry standard³⁶.

13.6.9 As complete data on materials and proposed material quantities for embodied carbon calculations are not available at the planning stage, this assessment should therefore be considered indicative. The materials included are those which are considered to represent the majority of embodied carbon emissions. Given the design life of the proposed development (approximately 60 years), technological

advancement, application and uptake of circular economy principles, and the recent commitments in Ireland as part of the Climate Action plan⁷ and Climate Act 2021⁵ to reach net zero emissions by no later than 2050, it is considered likely that accelerated carbon reduction would have occurred throughout the design life of the proposed development. The emissions from the deconstruction stage cannot be accurately quantified at this stage as a result of future uncertainty in methods of construction, deconstruction and decarbonisation across the industry. The full specification of construction materials is not anticipated to be known until detailed design has been completed.

13.6.10 In the assessment, there are assumed to be 13 back-up generators. This is the same number of generators as DUB-12, as per the July 2022 DUB-1 permitted development.

13.6.11 Power for the proposed development would be derived through the July 2022 DUB-1 permitted development via connection to the 110 kV substation south of Falcon Avenue or from the MFGP permitted as part of the July 2022 DUB-1 permitted development. As such GHG emissions associated with the proposed development during operation in normal circumstances (with power from these sources) have already been assessed as part of the DUB-1 EIAR and are not considered quantitatively as part of this assessment. Instead, the future baseline has been considered qualitatively within the assessment of effects section. Therefore, only GHG emissions from emergency back-up generators (Emergency scenario – 'Scenario 3') are assessed for the operation of the proposed development.

13.6.12 Emissions created by the transportation of materials to site and operation of on-site plant and machinery have been calculated using guidance from the Building Research Establish (BRE), which is 1,400kg of CO₂e per £100,000 of project value.

13.6.13 It has been assumed that the concrete hardstanding would not be demolished as part of this scheme, and therefore the associated quantities of concrete have not been included within the carbon calculations. However, if the concrete hardstanding is to be demolished, it is assumed that the concrete materials arising from demolition would be reused onsite, and therefore carbon emissions associated to the demolition of the concrete hardstanding would be minimum.

13.6.14 It has been assumed that the design life of the Proposed Development is 60 years, this has been based on the principles outlined in section 7.3 of the BS EN 15978: 2011 and the RICS guidance²⁰.

13.6.15 GHG emissions associated to the existing residential building have been estimated utilising the KPI (182.1 kWh/m²) specified by the European commission for residential buildings³⁷.

13.6.16 Vehicle movements associated with access and construction would vary through the demolition and construction stage programme, with short periods of peak Heavy Goods Vehicle (HGV) and Light Goods Vehicle (LGV) movements associated with delivery of material resources and waste. Values have been calculated using the Central Statistics Office Transport Omnibus 2019 Transport statistics.

13.6.17 Information on Republic of Ireland (ROI) traffic emissions is not readily available. Therefore, traffic emissions for this GHG assessment have been calculated using Defra's Emission Factors Toolkit (EFT) (v11.0)²⁶. The EFT allows users to calculate road vehicle pollutant emission rates for CO₂e for a specified year, road type, vehicle speed and vehicle fleet composition.

13.6.18 The EFT makes an estimate of future vehicle fleet mix and emission factors in the UK, including Northern Ireland, assumed as the representative region for the development area. In EFT v11, CO₂ emission factors have been factored to account for improved engine efficiency in future years, in line with DfT predictions. The EFT is updated periodically, considering the change in vehicle fleet compositions across the UK. For years 2031-2050, version 11 includes basic vehicle fleet composition data provided by DfT/HE for England (non-London) only. For Northern Ireland the EFT v11 provides predicted emission rates for all years up to 2030 only.

³⁵ European Commission.2022. Photovoltaic Geographical Information System (PVGIS). Available at: https://re.jrc.ec.europa.eu/pvg_tools/en/tools.html [Accessed 28/09/2022].

³⁶ Energy Saving Trust, Generating renewable electricity: Solar Panels (2022). Available at: <https://energysavingtrust.org.uk/advice/solar-panels/> [Accessed on 28/09/2022].

³⁷ European Commission, Energy Use in Buildings. Available at: https://ec.europa.eu/energy/eu-buildings-factsheets-topics-tree/energy-use-buildings_en [Accessed 28/09/2022]

13.6.19 The traffic flows for construction and operational stages were provided by the projects Transport Consultant, Ramboll. The construction emissions for DUB 13 were based on Peak 2024 traffic flows. The operational emissions were based on 2025 traffic flows. No future traffic flows have been provided and therefore the proposed development traffic flows have been assumed to remain constant during the assessment period.

13.6.20 The proposed development traffic flows are expected to arrive via the main R roads, therefore, an average speed of the 80 kilometres per hour (kph) has been inputted into the EFT, based on the current speed limits. The average vehicle kilometres travelled per year and day were estimated based on information from the Central Statistics Office Transport Omnibus 2019 Transport statistics. Note that this data assumed a decrease in transport emissions overtime in response to committing to the ROI's national net zero targets.

13.7 Baseline Conditions

Existing Baseline

CCR and ICCI

13.7.1 A local climate baseline has been provided by Met Éireann³² which presents a set of 30-year averages, covering the period 1981-2010 for a range of parameters and locations. The nearest meteorological station to the site is Dublin Airport³¹. Data from this station has been used to provide a baseline for this assessment and is a robust basis.

13.7.2 Climate data available for Dublin Airport shows a mean annual temperature of 9.8 °C (degrees Celsius), which is within the range for the whole of Ireland of 9-10 °C. The average annual maximum temperature at the vicinity of the proposed development is 13.3 °C; the average annual minimum temperature is 6.4°C with an annual mean of 29.4 air frost days. Higher temperature values in Ireland are generally found in coastal regions. The average annual rainfall within the proximity of the proposed development is 758.0 mm (millimetres), compared to an average for Ireland of 1,230 mm. The Dublin Airport station experiences a mean annual wind speed of 10.3 knots, with an average of 8.2 days with gales per year.

13.7.3 The Flood Risk Assessment (FRA) (Technical Appendix 10.2: Site-Specific Flood Risk Assessment, EIAR Volume 3) indicates the site is affected by the 0.1 % annual exceedance probability (AEP) and 1.0 % AEP flood events and it is suggested that the site is at risk from fluvial flooding.

13.7.4 Ireland's Climate: The Road Ahead (2013) details historic climate trends from 1900-2012, which can inform and provide context for future projections. The following trends have been observed across Ireland between 1900-2012:

- Mean annual temperature has increased by approximately 0.8 °C;
- A 5% increase in mean annual precipitation; and
- Increase in the number of days with heavy rain (10 mm or more) in the west and north-west of Ireland.

GHG Emissions

13.7.5 The site comprises a triangular parcel of agricultural land with a residential dwelling located in the north-west corner of the site, associated out-buildings and an area of hardstanding within the south-west of the site. It has been estimated that the existing building would produce 12 tCO₂e per year.

13.7.6 National CO₂ emissions statistics are published by the EPA³⁸. Total emissions in 2021 were 61.53 Mt CO₂e, which is +4.7 % lower than emission in 2020. There was a decrease of 3.4 % in emissions reported for 2020 compared to 2019. Emissions are over 1% higher than pre-pandemic 2019 figures. Since 2020,

residential, waste and commercial and public services sector showed decreases in emissions. However, emissions from the Agriculture, Transport, Energy and Industrial sectors increased since 2020.

13.7.7 Ireland's CO₂ emissions in 2021 consisted of 37.5 % from agriculture, 17.7 % from transport, 16.7 % from energy industries and 11.4 % from residential, 7.5 % from manufacturing combustion, and 4.0 % from industrial processes.

13.7.8 The total CO₂ emissions in South Dublin in 2021 was 1,874,753 tonnes of CO₂, equivalent to 6.7 tCO₂e per capita. The sectors that produced the most emissions were transport, commercial and residential, producing 39 %, 32 % and 24 % respectively, of total emissions in South Dublin³⁹. By 2021 South Dublin County had achieved a 34.4 % improvement in energy efficiency in the intervening years since 2009, reaching its target one year ahead of schedule. In addition, CO₂ emissions had been reduced by 33.6 % in the same period¹³.

13.7.9 However nationally, in the most recent review by the EPA, which details emissions up to 2018, the data published in 2020 states that Ireland has exceeded its 2018 annual limit set under the EU's Effort Sharing Decision (ESD), 406/2009/EC1 by 5.59 MtCO₂e.

13.7.10 Carbon Budgets

13.7.11 The National Policy Position provides a high-level policy direction for the adoption and implementation by Government of plans to enable Ireland to move to a low carbon economy by 2050. The Government of Ireland have committed to reducing its greenhouse gas emissions by 51 % by 2030 and reaching net zero by 2050 at the latest, across the electricity generation, built environment and transport sectors.

13.7.12 Note that this means operational emissions from electricity would begin to decline due to the gradual greening of the national grid if the substation follows Scenario 3, in which the proposed development is connected to via a substation.

13.7.13 The Minister for Communications, Climate Action and Environment has brought forward a new Climate Action (Amendment) Act that adopted the three five-year period carbon budgets presented below. Details of these carbon budgets were released in October 2021 within the Climate Change Advisory Council Carbon Budget Technical Report⁴⁰, although they have not yet been legislated by the government and Oireachtas.

- Carbon Budget 1 (2021-2025)- 295 Mt CO₂e;
- Carbon Budget 2 (2026-2030)- 200 Mt CO₂e; and
- Carbon Budget 3 (2031-2035)- 151 Mt CO₂e.

Future Baseline

CCR and ICCI

13.7.14 Future climate projections have been published by EPA through the Regional Climate Model (RCM) simulations which take the outputs from global climate models to produce more refined projections of the potential local and regional impacts of climate change. Climate projections can be used to determine the likely future climate conditions in the locality of the proposed development through its operational life. RCM simulations include projections of a range of climate variables, such as temperature and precipitation.

13.7.15 Climate projections are subject to uncertainty due to both natural variability and an incomplete understanding of the climate system. These uncertainties can create large outliers in the model ensemble which skew the mean projections. To allow for this, different percentiles are considered which allows a quantification of the likelihood of projections. There are also several Representative Concentrations

³⁸ Environment Protection Agency. Greenhouse Gas Emissions. Current Situation [online]. Available at: <https://www.epa.ie/our-services/monitoring--assessment/climate-change/ghg/> [Accessed on 22/08/2022].

³⁹ South Dublin County Council. South Dublin Baseline Emissions Report (2016). Available at: https://www.codema.ie/images/uploads/docs/South_Dublin_Baseline_Report.pdf [Accessed 25/08/2022].

⁴⁰ Climate Change Advisory Council. Carbon Budgets (2021). Available at: <https://www.climatecouncil.ie/carbonbudgets/> [Accessed on 22/08/2022].

Pathways (RCP) available for RCM simulations with each pathway resulting in a different range of global mean temperature increases over the 21st century. Simulating climatic changes under different RCP scenarios accounts for the uncertainty surrounding future GHG emissions. IEMA guidance recommends the use of RCP 8.5 at the 50 % percentile, for the 2071-2100 timeline to ensure a suitably conservative approach.

13.7.16 The projections informing this assessment were generated from a regional scale-down of eight datasets from phase 5 of the Coupled Model Intercomparison Project, using three RCMs for Ireland. The high spatial resolution (3.8 and 4 km) of these projections provides a good evaluation of regional climate variation. The RCM simulations were found to be robust when compared to observational datasets.

13.7.17 The general climate trends for Ireland have been described below, summarised from the RCM projections. The projections are for the future period of 2041-2060 compared to the baseline period of 1981-2000, simulated for RCP8.5:

- An increase of 1.3-1.6 °C in mean annual temperatures, with the largest increases seen in the east of the country;
- Warming would be enhanced at the extremes with an increase in summer daytime and winter night-time temperatures of 1-2.4 °C;
- Summer heatwave events are expected to occur more frequently, with the largest increases in the south of the country;
- Precipitation is expected to become more variable, with substantial projected increases in the occurrence of both dry periods and heavy precipitation events;
- A mean reduction in wind speed of 2.6 %, with a decrease in all seasons; and
- A decrease in the number of frost days of 58 % and ice days of 78 %.

13.7.18 The climate projections for Dublin indicate increased likelihood of milder wetter winters for the future assessment period in comparison to the 1981-2000 baseline, as shown in Figure 13-1 and Figure 13-3 respectively. However, due to natural variability, some cold and dry winters would still occur. Mean wind speeds are projected to decrease in all seasons, with the largest decreases for summer months as shown in Figure 13-2.

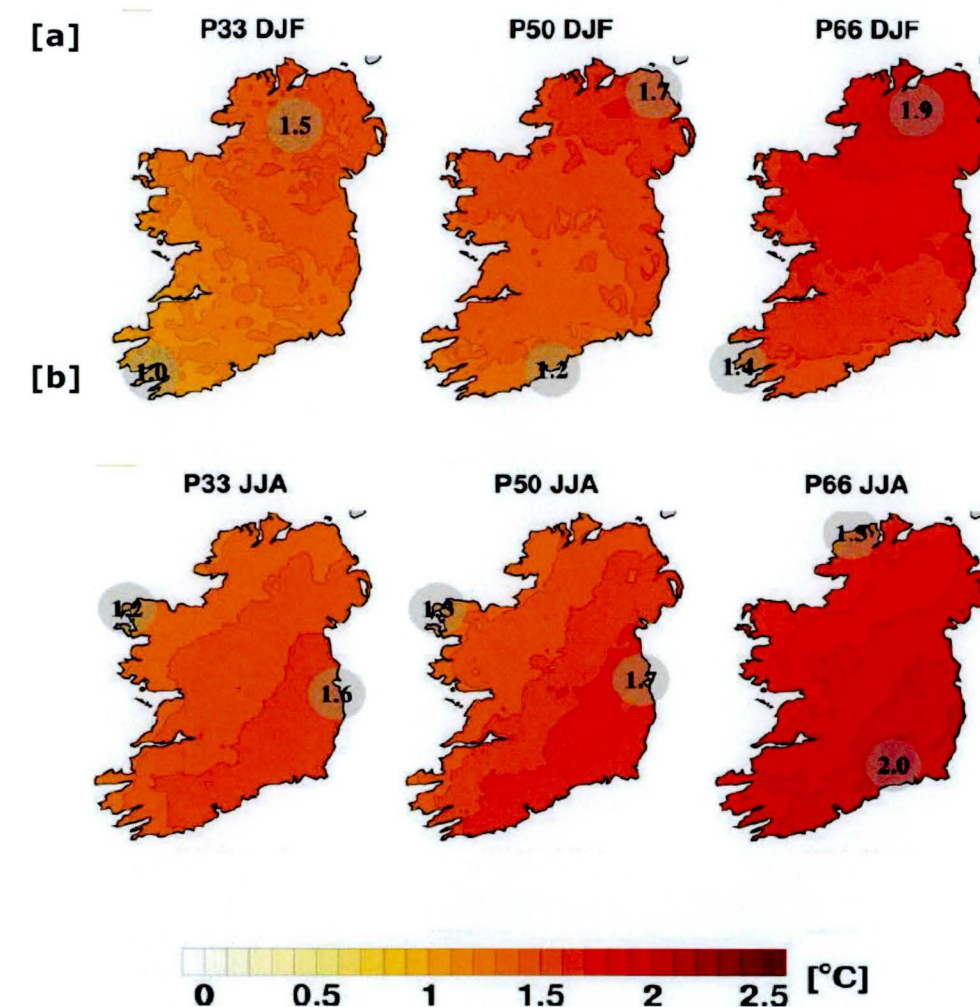


Figure 13-1 The 33rd, 50th and 66th percentiles of [a] winter and [b] summer temperature projections for the RCP 8.5 scenario. The future period (2041-2060) is compared with the reference period (1981-2000). The numbers on each plot are the minimum and maximum projected changes at their locations


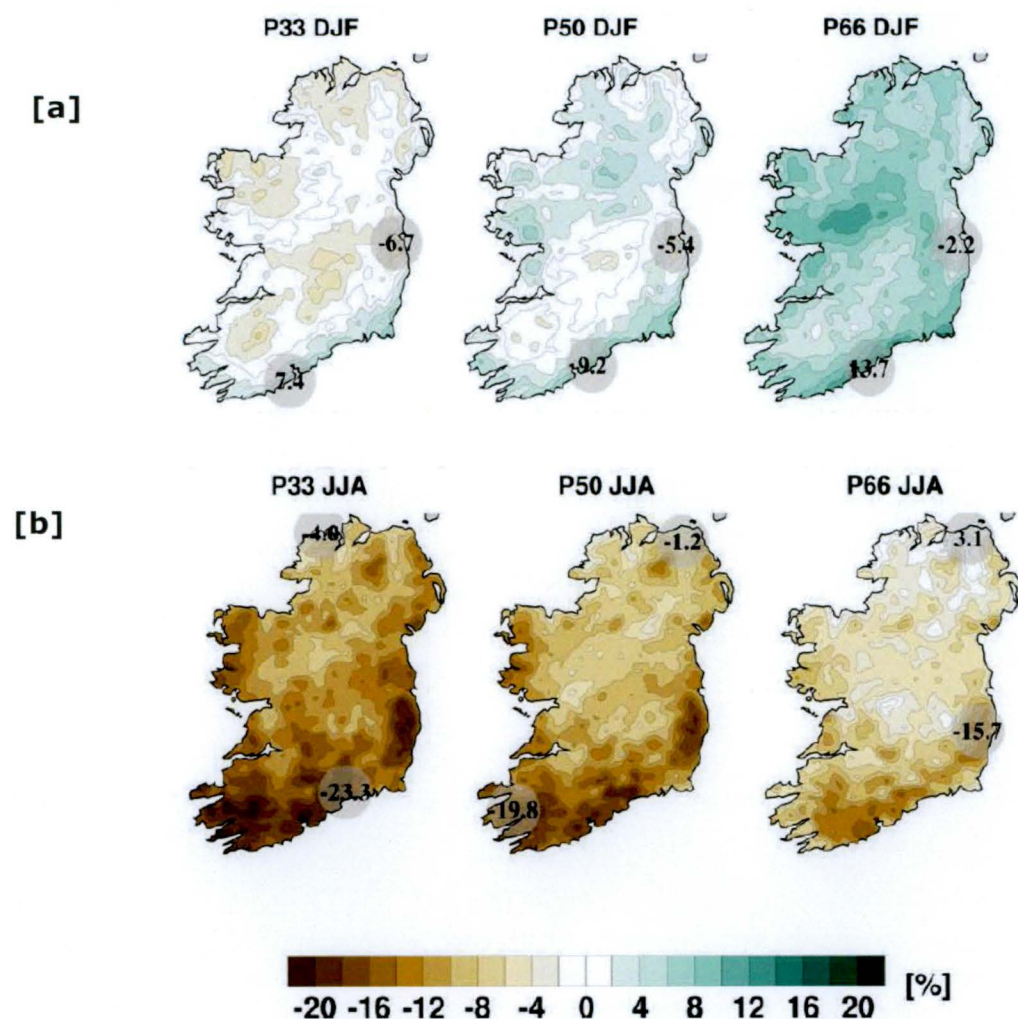


Figure 13- The 33rd, 50th and 66th percentiles of [a] winter and [b] summer wind speed projections for the RCP 8.5 scenario. The future period (2041-2060) is compared with the reference period (1981-2000). The numbers on each plot are the minimum and maximum projected changes at their locations.

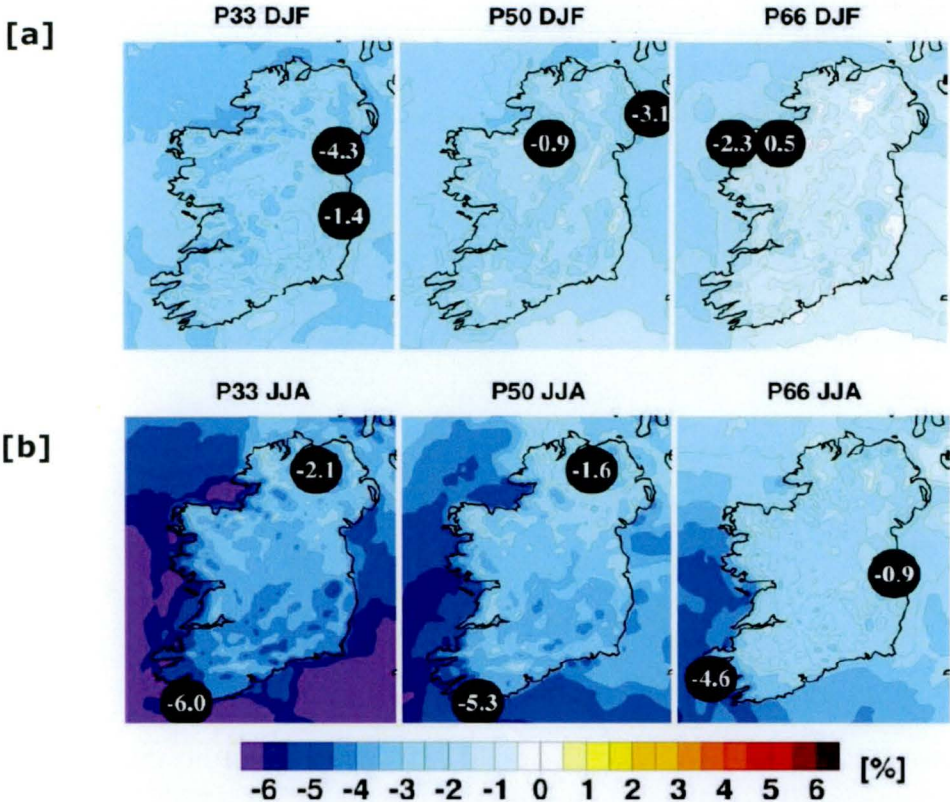

The 33rd, 50th and 66th percentiles of [a] winter and [b] summer mean precipitation projections for the RCP 8.5 scenario. The future period (2041-2060) is compared with the reference period (1981-2000). The numbers on each plot are the minimum and maximum projected changes at their locations

GHG Emissions

13.7.19In the absence of the proposed development (do-nothing), the GHG emissions from the site are anticipated to change compared to the existing baseline due to the operation of the July 2022 DUB-1 permitted development. The anticipated GHG emissions to be generated during the operation of the July 2022 DUB-1 permitted development for years between 2025-2084 are outlined in Table 13-9. Details of the methodology and scenarios associated with the July 2022 DUB-1 permitted development GHG emissions can be identified in the DUB-13 EIAR, Chapter 13: Climate Change.

Table 13-9: Estimated Operation ('use stage') GHG emissions for modelled opening year (2025) and total over the assumed 60-year operational period (2025-2084) for the July 2022 DUB-1 permitted development			
Main stage of project lifecycle	Sub-stage of lifecycle	Emissions (tCO ₂ e)	
		2025 (modelled opening year)	Total (cumulative) over modelled 60-year operation (2025*-2084)
Operation ('use-stage')	Use of the proposed development by the end-user – Scenario 1	2,024,425	151,986,822
	Use of the proposed development by the end-user – Scenario 1 with emergency backup	2,028,556	152,227,825

Table 13-9: Estimated Operation ('use stage') GHG emissions for modelled opening year (2025) and total over the assumed 60-year operational period (2025-2084) for the July 2022 DUB-1 permitted development			
	Use of the proposed development by the end-user – Scenario 1 with mitigation outlined in Table 13.12	2,024,421	151,983,905
	Use of the proposed development by the end-user – Scenario 2	105,339	6,323,046
	Use of the proposed development by the end-user – Scenario 2 with emergency backup	109,470	6,564,050
	Use of the proposed development by the end-user – Scenario 2 with mitigation outlined in Table 13.12	105,335	6,320,130
	Traffic associated with the proposed development	247	3,484.52
The opening modelled year was assessed as 2025 as this is the first year that DUB12 is operational, with electricity being consumed from EirGrid and with the MFGP running 24/7 on natural gas (Scenario 1), and electricity is being consumed from EirGrid with no MFGP in operation (Scenario 2). *DUB11 is operational from Q3 2023 and the GHG emissions associated with its operation using HVO in 2023 and 2024 are captured in the above.			

13.7.20The EPA has produced GHG emission projections for two scenarios; 'With Existing Measures' and a 'With Additional Measures' which include implementation of Ireland's 2019 Climate Action Plan. Under the 'With Existing Measures' scenario, the projections indicate that Ireland would have total emissions of 57.96 MtCO₂e by 2030. For the energy sector, emissions are project to increase by 1.4 % to 8.6 MtCO₂e over the period 2020 to 2030.

13.8 Assessment of Effects

Demolition and Construction Effects

CCR

13.8.1 A summary of potential CCR impacts during the demolition and construction stage, as well as embedded and additional mitigation measures have been provided in Table 13-11.

Table 13-11: Demolition and construction CCR Effects					
Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
Increased frequency and intensity of extreme weather events: Intense rainfall events	Demolition and construction	Receptor: Buildings and infrastructure Extreme rainfall events could result in the erosion of stockpiles and resultant silting of drainage assets. This could result in secondary impacts such as localised flooding.	As committed to in Chapter 5: Demolition and Construction Environmental Management, a detailed Construction Environmental Management Plan (CEMP) would be secured by means of an appropriately worded planning condition and would be prepared in advance of the construction works following the appointment of the key contractors. The detailed CEMP would include a Construction and Demolition Waste Management Plan (CDWMP) and would consider specific measures to minimise stockpiling on-site by avoiding and minimising the potential for contamination, for example by: <ul style="list-style-type: none">Ensuring deliveries would be 'just-in-time' to avoid storing large volumes of materials that could be affected;Minimise emissions from stockpiles by covering, seeding, fencing, or damping down;	Likelihood level: Unlikely Consequence level: Low as a result of partial disruption across elements of the site lasting less than a day. Temporal Scale: Temporary	Additional mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/extreme weather.

13.7.21Under the "With Additional Measures" scenario, which includes changing the source of electricity generation from coal and peat to wind power and diesel, and increasing use of electric vehicle engines, the projections indicate that Ireland would have a total emission of 47.87 MtCO₂e by 203022. The energy sector emissions are projected to decrease by 24.8 % to 6.3 MtCO₂e over the period 2020 to 2030.

Sensitive Receptors

CCR

13.7.22The receptors identified as sensitive to the proposed development, and which have been 'scoped-in' to the assessment are summarised in Table 13.10.

Table 13-10: Summary of Sensitive Receptors	
Receptor	Sensitivity
Buildings and infrastructure receptors (including equipment, materials and building operations)	High
Human health receptors (e. g. construction workers, occupants and site users)	High
Environmental receptors (e. g. integrity of landscape features, habitats and species)	High

ICCI

13.7.23The ICCI assessment is based on the receptors identified by each of the technical disciplines included within the EIAR.

GHG Emissions

13.7.24GHG emissions associated with demolition and construction and operation of the proposed development would be released to the global atmosphere. Therefore, this is the receptor and is of high sensitivity. In line with standard practice, the sensitivity of human and natural receptors is not considered within this assessment.

13.8.2 The CCR assessment for the proposed development has not identified any significant effects for the demolition and construction, taking into consideration the embedded mitigation measures of the proposed development. All impacts are considered to be of low consequence of impact with possible probability/likelihood of impact; therefore, the effects are considered to range from **Temporary Imperceptible to Not Significant, Negative** in nature and **Not significant** in terms of EIA.

Table 13-11: Demolition and construction CCR Effects					
Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
			<ul style="list-style-type: none"> Material stockpiles and structures would be inspected before and after extreme weather events to ensure stability and incorporating measures; and Covering, seeding, fencing, screening, or damping down of stockpiles would also occur; Appropriate storage, handling, and management of construction materials with due regard to the potential for mobilisation into surface drainage. Furthermore, re-vegetating earthworks of exposed soil stockpiles would occur as soon as practicable; Water pollution would be minimised by implementing adequate bunding for dust suppression on site roads, and regular plant maintenance. The Construction Industry Research and Information Association (CRIA) provides guidance on the control and management of water pollution from construction sites⁴¹; and as stated in EIAR Chapter 5: Demolition and Construction Environmental Management, material would be stored in sheltered parts of the site to minimise interaction with rainfall and damage by the weather; and As stated within the earthwork's specification, all work involving topsoil would not occur in heavy rain, or if areas of soil were exposed to 60mm of rainfall over the previous 60mm, unless permitted by the engineer. Stockpiles would also not exceed 1.5m in height and be on free draining ground. 	Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	
	Construction	Receptor: Buildings and Infrastructure / Programme Extreme rainfall events and their secondary impacts could affect the ability to undertake certain construction activities leading to programme delays (e.g. pouring of concrete and asphalt) increasing project costs.	In line with best practice, vulnerable activities such as the construction of earthworks would take place in appropriate weather conditions (considering construction programme timescale constraints). This would reduce the likelihood of weather-related delays to these activities and would be undertaken in accordance with measures detailed in the CEMP. The contractor would be required to ensure that site activities, such as site preparation works, are postponed during rainfall events. As stated in the outline CEMP, materials would be stored in sheltered parts of the site to minimise interaction with rainfall and damage by the weather, while stockpiling would be limited when possible. Covering, seeding, fencing/ screening, or damping down of stockpiles would also occur.	Likelihood level: Unlikely Consequence level: Low as a result of partial disruption across elements of the site lasting less than a day. Temporal Scale: Temporary Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	Additional mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.
	Construction	Receptor: Environment Extreme rainfall events could result in increased runoff of concrete or cement products when equipment and vehicles are being washed which, as well as flooding of the ground excavations, which could lead to contaminants entering nearby watercourses.	As committed to in EIAR Chapter 5: Demolition and Construction Environmental Management, which anticipates the environmental issues and necessary management controls that would need be covered within the CEMP, good practice measures would be employed on site to prevent uncontrolled runoff. This includes provision of on-site pollution control kits and use of settlement system prior to discharge. To ensure no contaminant-pathway-receptors pathways are created and to reduce the potential for contamination to occur during construction, all site activities would be undertaken in accordance with relevant water regulations. The Applicant would also be responsible for obtaining all necessary consents and ensuring compliance with the conditions of the consents. Within the CEMP, the following provisions would be covered: <ul style="list-style-type: none"> Handling of construction materials is undertaken with due care and consideration to minimise the risk of accidental spills; and 	Likelihood level: Unlikely Consequence level: Low as a result of partial disruption lasting less than a day. Temporal Scale: Temporary Scale of Effect: Imperceptible to Not Significant Nature:	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.

⁴¹ Control of Water Pollution from Construction Sites, Guidance for Consultants and Contractors – C532 CIRIA Report (Masters-Wouldiams et al, 2001)

Table 13-11: Demolition and construction CCR Effects

Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
			<ul style="list-style-type: none"> Material stockpiles should be adequately protected to avoid being washed or blown away from the immediate area. <p>Potential pathways for contamination would be minimised as follows:</p> <ul style="list-style-type: none"> Groundwater would be prevented from entering excavations by dewatering; Surface water would be prevented from entering excavations by using cut-off ditches, covering the excavation, or captured within the groundwater pumping system; Concrete preparation would be constrained to dedicated protected areas where contaminated water can be collected; Contaminated water from excavations would be collected within a settlement tank or lagoon to enable treatment prior to release; Implementing good construction practices including adequate bunding for oil containers, wheel washers and dust suppression on site roads, and regular plant maintenance; and Adhering to guidance provided by the Construction Industry Research and Information Association (CIRIA), that provide information on the control and management of water pollution from construction sites in their publication⁴¹. <p>The proximity of the site to potential sources, pathways, and impacts of pollution; and the historical uses of the site would be examined early in project planning and design, to ensure that suitable redesign and mitigation measures are undertaken as necessary.</p> <p>A contingency plan for pollution emergencies should also be developed and regularly updated, which would identify the actions to be taken in the event of a pollution incident.</p> <p>In addition, the construction drainage system for the proposed development would be designed and managed to comply with appropriate industry standards British Standard (BS) 6031:2009⁴² (or equivalent), which details methods that should be considered for the general control of drainage on construction sites. Further advice is also contained within BS 8004:2015⁴³ (or equivalent).</p> <p>Water pollution would be minimised by adequate bunding for oil containers, wheel washers and dust suppression on site roads, and regular plant maintenance. Practises would adhere to guidance specified by CIRIA⁴¹.</p> <p>As specified in Chapter 5: Demolition and Construction Environmental Management Earthwork operations should be designed with adequate drainage, falls and profile to control run-off and prevent flowing and the contamination of local water courses. Correct management would ensure that there would be minimal inflow of shallow/perched groundwater into any excavation.</p> <p>Care would be taken to ensure that exposed soil surfaces are stable to minimise erosion. All exposed soil surfaces would be within the main excavation site which limits the potential for any offsite impacts.</p>	<p>Negative</p> <p>EIA Significance:</p> <p>Not significant</p>	
Increased frequency and intensity of high temperatures: Drought conditions	Demolition and construction	Receptor: Human health Heatwaves, higher temperatures and drought conditions could impact dust generated during construction activities.	Best practice measures would be employed to reduce dust generating activities such as: storing cement products in enclosed tankers to prevent dust generation and pollution; dampening down areas of the site that have the potential to give rise to dust (i.e. stockpiles and earthworks); and covering or enclosing vehicles that deliver materials. The CEMP would focus on dust management, temporary dust screens as high as any stockpiles, preparing and implementation of a CDWMP, and appropriately sourcing materials. A Dust Management Plan (DMP) would also be developed to mitigate dust generation.	<p>Likelihood level:</p> <p>Unlikely</p> <p>Consequence level:</p> <p>Low as a result of health and safety impacts.</p> <p>Temporal Scale:</p> <p>Temporary</p>	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.

⁴² British Standard Institution, 2009. BS6031:2009 British Standard Code of Practice for Earthworks. London. BSi.

⁴³ British Standard Institution, 2015. BS8004:2015 Code of Practise for Foundations. London. BSi.

Table 13-11: Demolition and construction CCR Effects

Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
			<p>Construction practices would adhere to requirements as set out in the Safety, Health and Welfare at Work (Construction) Regulations 2013⁴⁴.</p> <p>Dust generated from construction works would also be managed by means of 2.4 m high site hoarding and dust suppression measures, such as the use of water sprays, dampening down of roads and covering of storage areas, such that the potential for negative dust generation is reduced. According to the Outline Construction Traffic Management Plan accompanying this application, hoarding would be inspected daily. Other measures design to mitigate the emissions and impact of dust include:</p> <ul style="list-style-type: none"> Carrying out regular dust soiling checks of buildings within 100 m and provide cleaning; Removing dusty materials from the application site; Cutting, grinding or sawing equipment only to be used with suitable dust suppression equipment or techniques; Re-using and recycling waste to reduce dust from waste materials; and Using tackifier, a sticky substance that temporally binds the surface of stockpiled material, reducing dust emissions. <p>EIAR Chapter 5: Demolition and Construction Environmental Management stipulates the following dust mitigation measures to be reviewed regularly:</p> <ul style="list-style-type: none"> The contact details of a person to contact regarding dust issues shall be displayed, while a Complaints Register relate to dust nuisance would be kept on site together with details of any remedial actions carried out; Where feasible, hoarding would be erected around site boundaries which would prevent larger particles from impacting nearby sensitive receptors; Vehicles delivering or collecting material with potential for dust emissions shall be enclosed or covered with tarpaulin at all times to restrict the escape of dust; <ul style="list-style-type: none"> At the main site traffic exits, a wheel wash facility shall be installed if feasible. All trucks leaving the site must pass through the wheel wash; and Re-vegetating areas, and only removing small areas during work and not all at once. 	<p>Scale of Effect: Imperceptible to Not Significant</p> <p>Nature: Negative</p> <p>EIA Significance: Not significant</p>	
Increased frequency of extreme weather events: Windstorms and wind gusts	Construction	<p>Receptor: Human health</p> <p>Winds gusts could result in the damage of stockpiles. Secondary impacts could include site personnel welfare impacts.</p>	<p>The following measures would be implemented during the construction of the proposed development:</p> <ul style="list-style-type: none"> Best practice measures for stockpile management would be utilised; Prefabrication off-site would be considered to minimise stockpiling on-site; <ul style="list-style-type: none"> The Principal Contractor or equivalent would monitor the contractors' performance to ensure that the proposed mitigation measures are implemented, and that dust impacts and nuisance are minimised; Where possible stockpiles should be located downwind of sensitive receptors; Deliveries would generally be 'just-in-time' to avoid storing large volumes of materials. Any construction materials that are stored on-site would be protected; and Construction practices would adhere to requirements as set out in the Safety, Health and Welfare at Work (Construction) Regulations 2013. <p>EIAR Chapter 5: Demolition and Construction Environmental Management stipulates the following dust mitigation measures to be reviewed regularly:</p> <ul style="list-style-type: none"> During working hours, dust control methods would be monitored as appropriate; 	<p>Likelihood level: Unlikely</p> <p>Consequence level: Low as a result of health and safety impacts.</p> <p>Temporal Scale: Temporary</p> <p>Scale of Effect: Imperceptible to Not Significant</p> <p>Nature: Negative</p> <p>EIA Significance: Not significant</p>	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.

⁴⁴ Government of Ireland, 2013. Safety, Health and Welfare at Work (Construction) Regulations 2013 (S.I. No. 291 of 2013).

Table 13-11: Demolition and construction CCR Effects					
Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
			<ul style="list-style-type: none">The name and contact details of a person to contact regarding air quality and dust issues shall be displayed on the site boundary, this notice board would also include head/regional office contact details;Community engagement shall be undertaken before works commence on site;A complaints register would be kept on site detailing all telephone calls and letters of complaint received in connection with dust nuisance or air quality concerns, together with details of any remedial actions carried out;The procedures put in place would be reviewed at regular intervals and monitoring conducted and recorded by the principal contractor. It is recommended that reviews are conducted monthly as a minimum;Overburden material would be protected from exposure to wind by storing the material in sheltered parts of the site;Regular watering would take place during dry/windy periods to ensure the moisture content is high enough to increase the stability of the soil and suppress dust;<ul style="list-style-type: none">Where feasible, hoarding would be erected around site boundaries which would prevent larger particles from impacting nearby sensitive receptors; andMore mitigation measures would be included as part of the DMP.		
Increased frequency and intensity of high temperatures: Heatwaves	Demolition and construction	Receptor: Human health Heatwaves, higher temperatures could impact on site construction personnel welfare, for example, causing heat stress and unsafe working conditions.	<p>All works on-site would be undertaken in accordance with the provisions of the Safety Health and Welfare at Work (Construction) Regulations 2013.</p> <p>The risk of heat stress to site personnel working outdoors would be managed through health and safety procedures. This would include provision of necessary Personal Protective Equipment (PPE) and Toolbox Talks to highlight risks of heatstroke.</p>	<p>Likelihood level: Possible</p> <p>Consequence level: Low as a result of health and safety impacts relating to heat stress.</p> <p>Temporal Scale: Temporary</p> <p>Scale of Effect: Imperceptible to Not Significant</p> <p>Nature: Negative</p> <p>EIA Significance: Not significant</p>	Additional mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.

ICCI

13.8.3 A summary of potential ICCI effects during the demolition and construction stage is provided in Table 13-14. The assessment is based on professional judgment informed by a review of individual technical assessments within the EIAR.

13.8.4 The ICCI assessment for the proposed development has not identified any significant effects for the demolition and construction stage, taking into account embedded mitigation measures of the proposed development. All effects are therefore considered to be **Temporary, Imperceptible to Not Significant, negative** in nature and **Not significant** in terms of EIA.

Table 13-12: Demolition and Construction Stage ICCI Effects					
Effect of Proposed Development on Receptors	Existing Design and Mitigation Measures	Climate Change Trend	Potential In-Combination Climate Impact on Individual Technical Effects or Embedded Mitigation	Is there a Significant In-Combination Climate Impact?	Additional Mitigation Required?
Population and Human Health Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Transport and Accessibility Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Air Quality					
Exposure of sensitive receptors to dust from demolition and construction activities.	A DMP would be prepared for the site and included as part of the CEMP. This would be secured by means of an appropriately worded planning condition. The DMP would include measures such as the implementation of dust suppression techniques. The CEMP would also include mitigation measures to minimise impacts from construction HGV traffic.	Increased frequency and intensity of high temperatures: Drought conditions.	Extended periods of drought could arise as a result of warmer summer months and limited precipitation. This may increase dust production and reduce deposition which has the potential to affect human health.	Temporary, negative, Imperceptible to Not Significant (not significant in terms of EIA) due to the design and mitigation measures committed to in the CEMP (e.g. increase the frequency of inspections during activities with a high potential to create dust or in prolonged dry weather; development and implementation of an DMP).	No additional measures required.
Exposure of sensitive receptors to dust from demolition and construction activities.	Control of dust would rely upon good site management and mitigation techniques, including some that rely on water, such as ensuring effective water suppression during demolition and construction.	Increased frequency and intensity of high temperatures: Drought conditions.	Drought conditions may reduce the availability of water for dust suppression mitigation measures, which would reduce the effectiveness of embedded mitigation measures.	Temporary, Imperceptible to Not Significant, negative (not significant in terms of EIA) due to mitigation measures which do not rely on water as committed to in the CEMP (e.g. covering stockpiles and minimising stockpile size).	No additional measures required. Temporary storage of water could be considered during the construction stage to be used for dust suppression in drought conditions.
Noise and Vibration Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Water Resources and Flood Risk					
Exposure of sensitive receptors to water from demolition and construction activities.	Demolition and construction works are to be undertaken in compliance with a Construction and Environmental Management Plan (CEMP), which will cover all potentially polluting activities and emergency response procedures.	Increased frequency and intensity of extreme weather events: Intense rainfall events	An increase in global temperature can increase the intensity and frequency of rainfall events.	Temporary, negative, Imperceptible to Not Significant (not significant in terms of EIA) as the FRA assessed that the site is not at risk of pluvial flood risk. Additionally, implementation of the drainage strategy in compliance with the Greater Dublin Strategic Drainage Strategy (GDSDS) would mitigate any risk of flood. The proposed surface water management strategy includes an allowance for climate change would result in a positive impact of low magnitude on the flood risk status (high sensitivity).	It is recommended that a Specific Flood Risk Mitigation Plan be prepared, in accordance with the Planning System and Flood Risk Management Guidelines for Planning Authorities. ⁴⁵
Ecology					

⁴⁵ Office of Public Works. 2009. Available at: <https://www.opw.ie/wp-content/uploads/2019/08/2009-Planning-System-Flood-Risk-Mgmt-1.pdf> [Accessed 28/09/2022].

Table 13-12: Demolition and Construction Stage ICCI Effects

Effect of Proposed Development on Receptors	Existing Design and Mitigation Measures	Climate Change Trend	Potential In-Combination Climate Impact on Individual Technical Effects or Embedded Mitigation	Is there a Significant In-Combination Climate Impact?	Additional Mitigation Required?
Exposure of sensitive receptors to demolition and construction, and construction activities.	The demolition and construction stage would adhere to all relevant legislation and best practise construction and pollution prevention methods.	Increased frequency and intensity of high temperatures: Drought conditions.	Potential impacts during the demolition and construction stage include indirect loss or damage of habitats as a result of dust and other air or water-borne pollution. This may have a negligible impact on the Baldonnel stream but will most likely be worsened by climate change.	Temporary, negative, Imperceptible to Not Significant (not significant in terms of EIA) as best practise, pollution prevention methods, and the DMP should mitigate effects. It is therefore expected to cause only negligible impact.	No additional measures required.
Ground Conditions					
Exposure of sensitive receptors (water) to demolition and construction activities	<p>A project-specific Construction and Environmental Management Plan (CEMP) will be established and maintained by the contractors during the demolition and construction stage which will cover all potentially polluting activities and emergency response procedures. All personnel working on the site would be trained in the implementation of the procedures.</p> <p>Run-off from excavations/earthworks cannot be prevented entirely and is largely a function of prevailing weather conditions. Earthwork operations will be carried out with adequate drainage, falls and profile to control run-off and prevent ponding and flowing. Correct management, as set out in the CEMP, will ensure that there will be minimal inflow of shallow/perched groundwater into any excavation.</p>	Increased frequency and intensity of extreme weather events: Intense rainfall events	An increase in global temperature can increase the intensity and frequency of rainfall events.	Temporary, negative, Imperceptible to Not Significant (not significant in terms of EIA) as the FRA assessed that the site is not at risk of pluvial flood risk. Additionally, implementation of the drainage strategy in compliance with the GSDS would mitigate any risk of flood. The proposed surface water management strategy includes an allowance for climate change would result in a positive impact of low magnitude on the flood risk status (high sensitivity).	No additional measures required.
Waste					
Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Material Assets					
Exposure of sensitive receptors (surface water) to demolition and construction activities via surface runoff	A project-specific CEMP would be established and maintained by the contractors during the demolition and construction stage which would cover all potentially polluting activities and emergency response procedures. All personnel working on the site would be trained in the implementation of the procedures.	Increased frequency and intensity of extreme weather events: Intense rainfall events	<p>An increase in global temperature can increase the intensity and frequency of rainfall events.</p> <p>The site currently drains into the Baldonnel Stream. Above ground surface water attenuation ponds would be constructed as part of the proposed development meaning they would be in place during most of the construction stage.</p> <p>As with all construction projects, there is potential for surface water runoff to become contaminated with pollutants associated with the demolition and construction works. Contaminated water which arises from construction sites can pose a risk to surface water quality within the stream.</p>	Temporary, negative, Imperceptible to Not Significant (not significant in terms of EIA) when considering the embedded mitigation measures outlined above and within Chapter 5: Demolition and Construction Environmental Management.	No additional measures required.
Exposure of sensitive receptors (water supply) to demolition and construction activities	Welfare facilities will be required for the construction staff. A temporary connection to the mains water supply would be established for the construction stage. The water demand during the construction stage would not be significant enough to effect	Increased frequency and intensity of high temperatures: Drought conditions.	Drought conditions may reduce the availability of water for the construction stage.	Temporary, Imperceptible to Not Significant, negative (not significant in terms of EIA), as effects associated with water supply are considered to be manageable.	No additional mitigation required.

Table 13-12: Demolition and Construction Stage ICCI Effects					
Effect of Proposed Development on Receptors	Existing Design and Mitigation Measures	Climate Change Trend	Potential In-Combination Climate Impact on Individual Technical Effects or Embedded Mitigation	Is there a Significant In-Combination Climate Impact?	Additional Mitigation Required?
	existing pressures and from discussions with the SDCC, it is understood that there is adequate capacity within the existing watermain network to supply the proposed development.				

GHG Emissions

- 13.8.5 The proposed development would result in GHG emissions during the demolition and construction stage. Embedded mitigation measures and potential impacts have been identified in this section and a preliminary assessment of effects has also been provided below.
- 13.8.6 Consideration has been given to the proposed development’s opportunities to reduce, minimise or avoid GHG emissions. In line with the Government of Ireland National Mitigation Plan (2017)⁶ the Government of Ireland Climate Action Plan (2019)⁷, and more specifically the SDCC Climate Change Action Plan 2019-2024¹¹, which set out the Irish Government’s carbon reduction plan targets, as part of the design process potential impacts on GHG emissions have been considered.
- 13.8.7 The proposed development has sought to minimise GHG emissions, wherever possible, to contribute to the achievement of Ireland’s GHG reduction targets and carbon budgets. The embedded mitigation measures relevant to the demolition and construction stage of the proposed development has been presented in Table 13-13.

Table 13-13: GHG mitigation measures during Demolition and Construction stage		
Mitigation measure	Mitigation detail	Method of reduction
Excavation of materials	Material excavated during construction would be processed for use in the works wherever possible to reduce the amount of material disposed of off-site, as well as imported from other sources and associated GHG emissions. Possible uses of excavated materials include general fill and other graded materials. Processing of material would take place on-site.	Reduce
Sustainable materials	Using sustainability sourced, recycled or secondary materials with lower embedded GHG emissions and water consumption; e.g. Specifying products with a high recycled content and (e.g. Pulverised Fuel Ash (PFA) replacement for up to 30 % of the cementitious material (i.e. as replacement for Portland cement); Using recycled crushed concrete in granular sub-base materials in pavements sourced from existing pavements on site to be demolished as part of the works;	Reduce
Reporting	Energy consumption and materials use would be recorded and reported on an ongoing basis during the construction phase of the development;	Reduce
Equipment	Using low-emissions or electric construction plant, including the potential for portable PV panels for use in powering temporary compound and equipment;	Reduce
Procurement	Procuring materials with Environmental Product Declarations (EPD) to allow for the most informed procurement choices; and procuring materials from suppliers that offer take back schemes, where possible;	Reduce
Reuse	Reusing the materials from the pre-existing building wherever possible.	Avoid/prevent
Minimising waste during construction	Following measures would be proposed in the CDWMP to minimise waste generation on-site; ordering the quantity of materials required for the job, thus reducing over-ordering.	Reduce

- 13.8.8 In addition, and to reduce GHG emissions associated with vehicles from workers, the following mitigation measures would be implemented:
- Cycle parking would be provided, and this would be covered and secure;
 - Facilities for changing and storing cycling clothes would be provided;

- The developer would investigate the provision of public transport vouchers to encourage workers to travel to the application site by bus or rail;
- The contractor would encourage workers to car share where possible and would set up a car sharing database to identify where matches could be made;
- Incentives such as a free breakfast once a week for those walking, cycling, car sharing or using public transport would be provided;
- Selecting electrically driven equipment where possible in preference to internal combustion powered; hydraulic power in preference to pneumatic; and wheeled in lieu of tracked plant;
- Operating plant at low speeds where possible and incorporating automatic low speed idling; and
- Switching off vehicle engines where vehicles are standing for extended periods and avoid unnecessary revving of vehicle engines.

13.8.9 This assessment presents an estimation of the GHG emissions for the ‘Do Something’ scenario, a comparison against the ‘Do Nothing’ baseline, and assessment against Ireland’s carbon budgets. The GHG emissions in this section are a high-level indication only and would be updated and refined as the proposed development’s design develops and updated traffic and air quality modelling becomes available.

13.8.10 Due to the embedded nature of the mitigation measures proposed, some of which have already been incorporated into the design and some of which are yet to be incorporated, it is not practicable to complete a quantitative assessment of ‘before’ and ‘after’ mitigation. Rather, the assessment shows a snapshot of the current design and an assessment with and without the use of PV panels. Construction and demolition activities have been broken down into a product’s life cycle stages as specified in PAS2080¹⁹

Table 13-14: Estimated GHG Emissions from demolition and construction activities			
Main stage of project lifecycle	Sub-stage of lifecycle		% of total construction emissions
Demolition	Demolition	Emissions (tCO ₂ e)	1
Construction stage	Product stage; including raw material supply, transport, and manufacture		11,634
	Construction process stage	Transport to/from works site	1,826
		Construction/installation processes	2,342
		Waste treatment / disposal	25
	Total		15,828

- 13.8.11 Emissions from the construction stage are predicted to total in the region of 15,828 tCO₂e. The largest GHG emissions during the demolition and construction activities (73.50 %) is likely to arise from the raw material supply, transport and manufacturing of materials, associated with demolition and construction of the proposed development. GHG emissions associated to construction/installation processes equate to 14.80 % of the total construction and demolition GHG emissions, and transport of materials accounts for 11.54 % of the GHG emissions.
- 13.8.12 The demolition and construction of the proposed development is expected to contribute 0.00537 % of Ireland’s proposed 295 MtCO₂e carbon budget for 2021-2025.
- 13.8.13 The demolition and construction GHG emissions have been reported in tCO₂e for the duration of the demolition and construction activities (approximately 11 months) for each scenario. The IEMA guidance¹⁴ indicates GHG emissions should be considered as ‘significant’ if they are not compatible with the

budgeted, science-based 1.5°C trajectory in terms of rate of emissions reduction and do not comply with up-to-date policy and 'good practice' reduction measures.

13.8.14 Due to the minor scale of the GHG emissions in comparison to the national, regional and projected sectoral carbon budgets and incorporation of the proposed mitigation measures, which include a net zero carbon offset payment, the proposed development is assessed as compatible with the budgeted, science-based 1.5 °C trajectory in terms of rate of emissions reduction. Therefore, whilst all GHG emissions contribute to climate change, the scale of effect of the proposed development on the likelihood of avoiding severe climate change, aligning with a science-based 1.5 °C compatible trajectory and achieving net zero by 2050, is considered to be **Temporary, Slight to Not-Significant Negative**, i.e. **Not significant** in terms of EIA.

Operation Effects

CCR

13.8.15 A summary of potential climate resilience impacts during the operation stage are provided in Table 13-15. Several preliminary general mitigation and adaptation measures to address the potential impacts

associated with climate change events have been considered. Most weather and climate-related resilience effects during the operation stage are expected to be mitigated through measures embedded in the design of the proposed development, providing a level of resilience throughout operation. Mitigation measures considered in this preliminary assessment include:

- Drainage infrastructure has been designed with sufficient allowance to account for climate change and to withstand extreme rainfall events;
- Provision of flood compensation storage areas; and
- Soft landscape features to be maintained following establishment through watering in periods of dry weather and carrying out periodic inspections to monitor the establishment of new planting.

13.8.16A comprehensive list of embedded mitigation and adaption measures for the operation of the proposed development for all climate impacts are included within the existing design and mitigation measures section of Table 13-15. Overall, the effects are considered to range from **long term, Imperceptible to Not Significant** and **Slight to Moderate, Negative** in nature and are **Not significant** in terms of EIA.

Table 13-15: Operation Stage CCR Effects					
Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
Increased frequency and intensity of extreme weather events: Intense rainfall events	Operation	Receptor: Buildings and Infrastructure Extreme rainfall events and increased frequency of intense rainfall events could result in the overwhelming of drainage assets. This could result in secondary impacts such as localised flooding of the proposed development.	Furthermore, the FRA, Section 2.6 Pluvial Flooding states that the site is not at risk from pluvial flooding. The FRA and Engineering Planning report has been prepared to accompany the planning application notes that localised flooding would be mitigated by the following: <ul style="list-style-type: none"> • Storm water mitigation designed in accordance with the GDSDS; • Improve the general surface water management of the site, by introducing interceptors, attenuation measures (e.g., 2 storage ponds providing a volume of 970 m³, swales and permeable paving storage providing a volume of 114m³); • Storm water from the rear roof areas and would be directed via rainwater pipes into an on-site reticulation system. This flow would then be transported to the surface water drainage network and discharged into storm-water storage ponds and swales; • Storm water from all car park areas and access roads / delivery areas would be drained by on-site gullies and channels that drain into a below ground gravity storm water system; • Permeable paving; • Consideration of levels and topography to provide a graduated fall in water levels from the proposed buildings to avoid pooling of water; • A drain on the building's frontal roof areas that drain into the permeable paving sub-base, prior to draining into storage ponds and then ultimate discharge into the ditch/stream to the east; and • Oil inceptors would be installed on all drainages systems that collects surface water from roads, loading docks and parking areas before it gets discharged into storage ponds for attenuation. <p>The total attenuation volume required has been calculated as being approximately 1,084m³. The storm water drainage within the entire development has been designed to accommodate a 1:2-year storm frequency as well as a 1:100year storm event + 20% climate change.</p> <p>According to the Engineering Report, storm water drainage proposals for the site have been designed in accordance with the GDSDS and ensures that Best Management Practise has been incorporated into the design.</p>	Likelihood level: Unlikely Consequence level: Medium as a result of partial disruption lasting more than one day but less than one week. Temporal Scale: long-term Scale of Effect: Slight to Moderate Nature: Negative EIA Significance: Not significant	<p>According to the FRA, Section 9-Residual Risk, there is a residual flood risk that must be addressed during their operational life, for example the failure of building drainage due to lack of maintenance. At present the site has blockages surrounding its inlets and culverts, for example, there is potential, for example in the event of culvert collapse, of the stream surcharging within the site to a level in excess of that predicted by the models.</p> <p>To address this residual risk, it is recommended that a Site-Specific Flood Risk Mitigation Plan prepared in accordance with the guidelines is implemented throughout the operational life of the proposed development. This must include a maintenance regime for all drainage features within the site and for regular inspection of drainage features immediately upstream and downstream of the site.</p> <p>This would mitigate against the effects.</p>

Table 13-15: Operation Stage CCR Effects

Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
	Operation	<p>Receptor: Buildings and Infrastructure</p> <p>Extreme rainfall events could lead to flooding of the underground foundations or services (electrical cables)</p>	<p>According to the FRA, an initial assessment of flood risk indicators suggested that the site could be at risk from fluvial flooding during 1.0% AEP and 0.1% AEP events. Cumulatively, the proposed development would increase floodplain storage by 2,018 m³ and would lead to a slight reduction in flood risk.</p> <p>It is noted in the SFRA that if all surface water mitigation measures in the Engineering report are implemented, then the proposed development would not be at risk of fluvial flooding. The FRA, Section 8 states that the site is not at risk from pluvial flooding.</p> <p>The materials used in the manufacture of electrical cables and ducts would be in accordance with BS 3506:1996⁴⁶ (or equivalent) to protect against weathering (Section 4.3 of Tender Document Volume 5: Scope 5.2 Contract Specifications).</p>	<p>Likelihood level: Unlikely</p> <p>Consequence level: Medium as a result of partial disruption lasting more than one day but less than one week.</p> <p>Temporal Scale: long-term</p> <p>Scale of Effect: Imperceptible to Not Significant</p> <p>Nature: Negative</p> <p>EIA Significance: Not significant</p>	<p>Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/extreme weather.</p>
	Operation	<p>Receptor: Buildings and Infrastructure</p> <p>Extreme rainfall events could lead to fluvial flooding, including of the Baldonnel stream highlighted within the FRA.</p> <p>This conclusion was identified based from a visual assessment of the channel of the stream and the culverts suggests that both pipes have significant blockages that could greatly reduce the overall capacity of the culvert; the extent of the blockages was such as that the survey could not be completed for the full length of the culvert.</p>	<p>Publicly available flood risk mapping (OPW, CFRAM and SFRA (as described in the FRA) suggests that there is no potential fluvial flood risk at the site during extreme events, with exception of the very south of the site. The Site may be at risk of flooding caused by inadequate hydraulic culvert capacity downstream of the Site.</p> <p>As described, the Baldonnel stream is culverted downstream of the site. There is potential for blockages, however a full survey could not be completed for the full length of the culvert. To mitigate this, it is recommended that an overflow be constructed from the site which would allow such excess to discharge to the stream immediately downstream of the Nangor Road. Subject to the capacity being available, this overflow could possibly discharge to existing surface water drainage in the Nangor Road but a dedicated surface water pipe might be required from the Site to a new outfall downstream of the Nangor Road.</p> <p>It is also proposed that finished floor levels (FFLs) be kept above the 1% AEP flood level with an appropriate allowance for freeboard. The maximum water level during a 1% AEP flood event is 72.15 m. The minimum floor level is 74.00m and the minimum parking level is 73.45 m and so both meet the recommendations of the guidelines.</p> <p>Storm water from the proposed development has been designed in accordance with the GDSDS and ensures that Best Management Practice has been incorporated into the design.</p> <p>The total attenuation volume required has been calculated as being approximately 1,084 m³. This would be provided via a combination of 2 storage ponds with an attenuation volume of 970 m³, and permeable paving. This attenuation would lead to a slight reduction in flood risk. The proposed development therefore meets the requirements of the Guidelines for Compensatory Storage.</p> <p>The subject site currently comprises a greenfield site and the proposed surface water measures are aimed at improving the general surface water management of the site, by introducing interceptors, attenuation measures and by restricting discharge to an acceptable rate. SuDS measures have been designed to accommodate a 1 in 100 annual probability storm event plus a 20% climate change allowance (a 20% increase in peak rainfall depths). The outflow from the proposed development would be to the Baldonnel</p>	<p>Likelihood level: Possible</p> <p>Consequence level: Medium</p> <p>Temporal Scale: long-term</p> <p>Scale of Effect: Slight to Moderate</p> <p>Nature: Negative</p> <p>EIA Significance: Not significant</p>	<p>A Site-Specific Flood Risk Mitigation Plan should also be prepared in accordance with the Guidelines is implemented throughout the operational life of the proposed development. This must include a maintenance regime for all drainage features within the Site and for regular inspection of drainage features immediately upstream and downstream of the site.</p> <p>This would ensure that the long-term residual operation effects would remain as reported in the assessment of effects section.</p>

⁴⁶ BSi, 1998. BS EN ISO 3506-3:1998 - Mechanical properties of corrosion-resistant stainless-steel fasteners. Set screws and similar fasteners not under tensile stress.

Table 13-15: Operation Stage CCR Effects

Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
			<p>Stream and would be restricted by way of a Hydrobrake which would limit the total discharge to 2.8 l/s (the calculated QBAR greenfield run-off rate).</p> <p>Storm water from all car park areas and delivery areas would be drained by a series of on-site gullies and channels that drain into a separate system of below ground gravity storm water.</p> <p>It is noted in the FRA that if all surface water mitigation measures are implemented, then the proposed development would not be at risk of fluvial flooding and would not give rise to fluvial flood risk elsewhere.</p>		
	Operation	<p>Receptor: Buildings and Environment and infrastructure</p> <p>Extreme rainfall events could lead to flooding of the drainage assets which could result in overflow of contaminated water from the foul and surface water infrastructure impacting the water quality and ecology of nearby watercourses.</p>	<p>Water quality would also be monitored to achieve the agreed discharge license levels with SDCC. Within FRA section 8, it is stated that pluvial flooding does not pose a risk and further assessment is not required.</p> <p>The storm water drainage within the entire development has been designed to accommodate a 1:2-year storm frequency. The pond, attenuation tank and permeable paving sub-base areas have been designed to accommodate a 1:100-year storm event +20 % climate change. The peak flows from the development the diverged stream would be restricted to match existing flow rates to ensure existing drainage regime is maintained.</p> <p>Storm water attenuation measures, e.g., SuDS would be incorporated into the proposed development as mentioned previously. All appropriate methods would be utilised to ensure that surface water arising during construction activities would contain minimum sediment, prior to the ultimate discharge to the proposed attenuation pond/tanks and the existing stream.</p> <p>Grease traps would be installed on foul sewers where necessary.</p> <p>Best practice in design and construction would be employed for the installation of surface water and sanitary drainage.</p> <p>As specified in the Engineering report, road gullies would be precast trapped gullies to the relevant standard BS5911:Part2:1982, which would minimise the risk of floating contamination of the surface water system. Hydrocarbon interceptors would be provided on storm water drainage sewers from car parking areas as required.</p> <p>A range of Separators for use within the Surface Water Drainage strategy, which would be used to prevent hydrocarbons from mixing with clean water located within drainage systems. This includes implementation of an oil alarm system. Prior to discharging into the proposed pond, the storm water from the car park and access roads, which is drained via the methods as described above, would be directed through an appropriately sized Conder Separators (or similar approved) petrol interceptor. Source control SUDS must also be considered and incorporated where suitable.</p>	<p>Likelihood level: Unlikely</p> <p>Consequence level: Low</p> <p>Temporal Scale: long-term</p> <p>Scale of Effect: Imperceptible to Not Significant</p> <p>Nature: Negative</p> <p>EIA Significance: Not significant</p>	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.
	Operation	<p>Receptor: Human health</p> <p>Increased frequency of intense rainfall events could result in wet pavement surface leading to reduced skid resistance leading to unsafe conditions for site personnel.</p>	<p>As committed to in the Engineering Report, storm water from all car park areas and access roads / delivery areas would be drained by a series of on-site gullies and channels that drain into a separate system of below ground gravity storm water, and Permeable Paving.</p>	<p>Likelihood level: Unlikely</p> <p>Consequence level: Medium as a result of health and safety impacts requiring medical treatment.</p> <p>Temporal Scale: long-term</p> <p>Scale of Effect: Imperceptible to Not Significant</p> <p>Nature:</p>	Existing design and mitigation measures are appropriate to account for climate change/ extreme weather. However, it is recommended that glass bead and grain mix should be applied on pavements to increase skid resistance and site personnel safety.

Table 13-15: Operation Stage CCR Effects

Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
				Negative EIA Significance: Not significant	
Increased frequency and intensity of high temperatures: Heatwave	Operation	Receptor: Environmental receptors Increased frequency and severity of extreme heat events (i.e., heat waves) could result in the landscape design being compromised (e.g., tree and shrubs die).	Climate change and long-term maintenance requirements would be key considerations for the selection of vegetation species: <ul style="list-style-type: none"> A diverse tree planting palette of 849 new trees and 4,449 saplings would be used to increase overall resilience to disease and climate change; The detailed planting design would promote sustainable planting by developing planting designs that are appropriate for their location, including the availability of sunlight and water; Drought tolerant and low maintenance species would be considered for street trees and planting to minimise water use; and Excess water from the data centre's cooling system can be used to water vegetation. 	Likelihood level: Possible Consequence level: Low due to cost implications of replacing plants Temporal Scale: long-term Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	Additional Mitigation not required – Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.
	Operation	Receptor: Buildings and Infrastructure Increased frequency and severity of extreme heat events could result in overheating of the electrical equipment (e.g. data servers).	As stated in the energy strategy, the recommended range of the data servers is 18-27 °C, and the allowable range is 15-32 °C. Under the RCP8.5 scenario, it is not predicted that the average temperature for the future baseline would exceed both the recommended and allowable ranges regularly. It is predicted future heatwaves with extreme high temperatures would occur more frequently. Air conditioning would be used to mitigate extreme heat on such days. This would include Chilled water will be produced by premium efficiency air-cooled chillers located on the roof, and 12 air handling units. Heating would reduce the risk of internal cold temperatures during operation. Electrical specification for electrical equipment including cabinets, should account for appropriate temperature thresholds to reduce risks of overheating during operation	Likelihood level: Unlikely Consequence level: low Temporal Scale: long-term Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.
	Operation	Receptor: Buildings and Infrastructure Transformers affected by urban heat islands and coincident air conditioning demand leading to overloading in summer months.	When operational the EirGrid substation would provide power to the site with power demand offset by the MFGP within the July 2022 DUB-1 permitted development. The EirGrid substation is subject to a separate SID application to ABP (due to be decided).	Likelihood level: Unlikely Consequence level: Medium Temporal Scale: long-term Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance:	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather. However, it is recommended that smart grid technology should be explored in order to store energy ready for peaks in energy demand.

Table 13-15: Operation Stage CCR Effects

Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
				Not Significant	
	Operation	Receptor: Buildings and Infrastructure High temperatures and heatwaves could result in overheating and unsuitable conditions e.g., discomfort for occupants in ancillary buildings and office spaces	Within the energy strategy, the Applicant has reviewed the following passive design measures for reducing overheating risk in the residential elements: <ul style="list-style-type: none"> Mechanical ventilation with heat recovery is proposed for to provide heat from the data modules to the administrative office areas; and Air conditioning would be used to mitigate extreme heat on such days. This would include Chilled water will be produced by premium efficiency air-cooled chillers located on the roof, and 12 air handling units. 	Likelihood level: Unlikely Consequence level: Low Temporal Scale: long-term Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather. However, it is recommended that passive design measures for reducing overheating are explored, including: <ul style="list-style-type: none"> Building shape/de-tailing (blinds); Low g-value glazing; and Openable windows.
	Operation	Receptor: Buildings and Infrastructure Heatwaves, higher temperatures could damage the building structure	As stated in the EIAR, Management Plans would specify measures to regularly inspect the data center. Materials required to construct the Vantage data center should be selected that provide increased tolerance to high temperatures in accordance with BS EN 1367-4:2008 ⁴⁷ - Test for thermal and weathering properties of aggregates – Part 4: Determination of dry shrinkage.	Likelihood level: Unlikely Consequence level: Medium Temporal Scale: long-term Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.
	Operation	Receptor: Buildings and Infrastructure Heatwaves, high temperatures and increased humidity could lead to lightning striking the data center resulting in damage to infrastructure or loss of power.	It is understood that emergency response and contingency plans would be put in place to manage the risk of lightning strikes. Back-up generators would be present to ensure the continual running of the data center despite a lack of electrical power.	Likelihood level: Unlikely Consequence level: High as a result of health and safety impacts and disruption to operations Temporal Scale: long-term Scale of Effect: Slight to Moderate Nature: Negative EIA Significance: Not significant	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.
Increased frequency and	Operation	Receptor: Infrastructure and human health	Emergency response and contingency plans would be put in place to manage the risk of fires.	Likelihood level: Unlikely	Additional Mitigation not required. Existing design and mitigation

⁴⁷ BSI, 2009. BS EN 1367-4:2008 – Tests for thermal and weathering properties of aggregates. Determination of drying shrinkage. June 2009.

Table 13-15: Operation Stage CCR Effects

Climate Change Trend	Stage	Climate (Change) Impact on Receptor	Existing Design and Mitigation Measures	Significance of Effect	Additional Mitigation Required
intensity of high temperatures: Drought		Prolonged periods of drought could lead to vegetation drying, increasing risk of grassland fires near the Data center. Secondary impacts include infrastructure damage and vegetation	As stated in the EIAR, Maintenance and Management Plans would specify measures to effectively manage vegetation to reduce risk of grassland fires. Native trees, shrub species and meadow grass seed mix would be planted that are suitable for the climate conditions of the area. Water used to cool the data center could be used to ensure vegetation did not become dry.	Consequence level: High as a result of health and safety impacts. Temporal Scale: long-term Scale of Effect: Slight to Moderate Nature: Negative EIA Significance: Not significant	measures are appropriate to account for climate change/ extreme weather.
Increased frequency and intensity of high temperatures: Drought	Operation	Receptor: Human health receptors Prolonged periods of drought could affect water and potable water availability.	The proposed development would comply with the following: <ul style="list-style-type: none"> A leak detection system capable of detecting a major water leak on the mains waterwould be installed; and Installation of flow control devices and water efficient sanitary fittings on WCs. 	Likelihood level: Unlikely Consequence level: Low Temporal Scale: long-term Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	Additional mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.
Extreme weather events: Cold weather events	Operation	Receptor: Buildings and Infrastructure and human health Freeze-thaw could damage the proposed development, e.g. cracking, deformation, that reduces the proposed development's service life.	Materials required to construct the proposed development should be selected that offer increased tolerance to temperatures in accordance with BS EN 1367-4:2008 - Test for thermal and weathering properties of aggregates – Part 4: Determination of dry shrinkage.	Likelihood level: Low Consequence level: Low Temporal Scale: long-term Scale of Effect: Imperceptible to Not Significant Nature: Negative EIA Significance: Not significant	Additional Mitigation not required. Existing design and mitigation measures are appropriate to account for climate change/ extreme weather.

ICCI

13.8.17The ICCI assessment for the proposed development has not identified any significant effects for the operation stage once existing design mitigation measures are taken into account. All effects are therefore

considered to be long term, **Imperceptible to Not Significant, negative** in nature and **not significant** in terms of EIA.

13.8.18A summary of potential ICCI effects during the operational stage is provided in Table 13-16. The assessment is based on professional judgment informed by a review of individual technical assessments within the EIAR.

Table 13-16: Operational Stage ICCI					
Effect of Proposed Development on Receptors	Existing Design and Mitigation Measures	Climate Change Trend	Potential In-Combination Climate Impact on Individual Technical Effects or Embedded Mitigation	Is there a Significant In-Combination Climate Impact?	Additional Mitigation Required?
Population and Human Health Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Transport and Accessibility Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Air Quality Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Noise and Vibration Potential interactions of climate change with the identified effects are considered to be Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Water Resources and Flood Risk					
Exposure of sensitive receptors to water during operation	Demolition and construction works are to be undertaken in compliance with a Construction and Environmental Management Plan (CEMP), which will cover all potentially polluting activities and emergency response procedures.	Increased frequency and intensity of extreme weather events: Intense rainfall events	An increase in global temperature can increase the intensity and frequency of rainfall events.	Long term, Imperceptible to Not Significant, negative (not significant in terms of EIA) as the FRA assessed that the site is not at risk of pluvial flood risk. Additionally, implementation of the drainage strategy in compliance with the GDSDS would mitigate any risk of flood. The proposed surface water management strategy includes an allowance for climate change would result in a positive impact of low magnitude on the flood risk status (high sensitivity).	It is recommended that a Specific Flood Risk Mitigation Plan be prepared, in accordance with the Planning System and Flood Risk Management Guidelines for Planning Authorities ⁴⁵ .
Ecology Potential interactions of climate change with the identified effects are considered to be long term, Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Ground Conditions Potential interactions of climate change with the identified effects are considered to be long term, Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Waste Potential interactions of climate change with the identified effects are considered to be long term, Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					
Material Assets Potential interactions of climate change with the identified effects are considered to be long term, Imperceptible to Not Significant, negative (not significant in terms of EIA) based on professional judgement and review of the topic EIAR chapter.					

GHG Emissions

13.8.19The proposed development would result in GHG emissions during the operation stages. Embedded mitigation measures and potential impacts have been identified in this section and a preliminary assessment of effects has also been provided below.

13.8.20Consideration has been given to the proposed development’s opportunities to reduce, minimise or avoid GHG emissions. In line with the Government of Ireland National Mitigation Plan (2017)⁶, the Government of Ireland Climate Action Plan (2019)⁷, and more specifically the SDCC Climate Change Action Plan 2019-2024¹¹, which set out the Irish Government’s carbon reduction plan targets, as part of the design process potential impacts on GHG emissions have been considered.

13.8.21Embedded mitigation measures have been described in Table 13-17.

Table 13-17: GHG mitigation measures during operation stage		
Mitigation measure	Mitigation detail	Method of reduction
Renewable Energy	Photovoltaic panels would be installed on the roof above the Administration block, in line with policy E7 of the SDCC Development Plan 2022-2028 ¹³ .	Avoid/prevent
Internal Lighting	Internal lighting would be provided by high-efficient, low energy LED luminaires combined with presence detection controls or local switching where appropriate, to reduce operational energy demand. LED luminaires are also to be used for the emergency lighting installation, which is de-signed to reduce energy demand, complying with requirements EN 1838 and IS 3217:2013+A1:2017;	Reduce
External Lighting	External lighting would make use of high efficiency, low energy LED luminaires. Secondary external lighting in areas such as the generator compound would be operated via daylight detection to minimize hours of operation and thus keep energy usage to a minimum.	Reduce
Transformers	To reduce electrical losses between HV/MV/LV conversions, the applicant would install low loss transformers which comply with the Ecodesign directive 548/2014 as a minimum.	Reduce
Cooling system	Chilled water would be produced by premium efficiency air-cooled chillers. The chillers would be selected for elevated supply and return temperature to maximise system efficiency. Chillers would have an integral economizer capability to allow the compressor energy to be reduced or eliminated as the outside ambient temperature decreases. This reduces energy consumption in weather conditions where they are not required.	Reduce
Ventilation System	Hot Aisle containment would be used to separate supply and return air paths and maximize system efficiency by allowing elevated supply air temperatures. During winter conditions the ambient air would be pre-heated using low temperature hot water (LTHW) supplied by the roof mounted heat pump (described later). High efficiency total enthalpy recovery wheel will be provided to recover energy from the exhaust system before discharge.	Remediate
Direct Drive EC Fans	All air supply and extract systems serving the data module rooms are provided with high efficiency direct drive fans. The EC direct drive fans are lighter in weight and require less power than a traditional centrifugal fan with variable speed drive (VSD). Typically, savings of 10-20% in power consumption is achievable with an EC fan versus a centrifugal fan.	Reduce

Table 13-17: GHG mitigation measures during operation stage			
Waste Heat Recovery		The waste heat from the data modules would be used to heat the administration office areas, assisted by heat pump technology. The return water from the cooling process will be used to maximize the water sourced heat pumps efficiency, used for the admin block heating system. The chilled water system could reject heat into a local heat network. The above provisions could allow the supply of heat energy to a future district heating scheme developed by others, external to the site boundary. A district heating system and energy from waste system are recommended for data centers as part of the SDCC development plan 2022-2028 ¹³ .	Remediate
Emergency Back-Up Generators-		Standby power to each electrical room would be provided by containerised, diesel-powered emergency back-up generators. These generators would only provide emergency back-up power in event of loss of the utility supply and therefore would be non-operational for most of time.	Reduce
Offices & Ancillary Areas		Building Energy Rating BER - A3 or higher is targeted for the office development with the utilisation of roof mounted air-cooled free cooling chillers and roof mounted PV Panels in compliance with nZEB “Nearly Zero – Energy Buildings” requirements. Heating to the office area would be provided by heat pumps and energy efficient heat recovery units, which would recover waste heat from the office spaces and re-use to pre-heat the air with the HRU. This would reduce the overall energy consumption for this system, and subsequently GHG emissions.	Remediate
Materials		It is assumed that materials/assets with longer lifespans would be specified. to avoid future need for replacement	Avoid/prevent
External Areas		Provision of 60 car parking spaces, 12 of which will be dedicated to EV charging. 3 dedicated disabled bays and 26 cycle parking spaces would also be provided. All car parking spaces would contain the potential for future electric hook-up.	Avoid/prevent

13.8.22This assessment presents an estimation of the GHG emissions for the ‘Do Something’ scenario, a comparison against the ‘Do Nothing’ baseline, and assessment against Ireland’s carbon budgets. The GHG emissions in this section are a high-level indication only and would be updated and refined as the proposed development’s design develops and updated traffic and air quality modelling becomes available.

13.8.23The GHG emissions associated with the operation of the proposed development are reported in tonnes of CO₂e for the first full year of operation, as well as over the estimated design life (approximately 60 years). The GHG emissions are summarised in Table 13.18.

Table 13-18: Estimated Operation ('use stage') GHG emissions for 2026 and total over the assumed 60-year operational period (2025-2085)			
Main stage of project lifecycle	Sub-stage of lifecycle	Emissions (tCO ₂ e)	
		2026 (modelled opening year)*	Total (cumulative) over modelled 60-year operation (2025-2085)
Operation	Emergency backup from diesel generators with PV panels	1,505	90,319
	Traffic associated with the proposed development	82	440

Table 13-18: Estimated Operation ('use stage') GHG emissions for 2026 and total over the assumed 60-year operational period (2025-2085)				
	Total	1,587	90,759	
*The opening modelled year has been stated as 2026 as this is the first full year that the proposed development is operational.				

- 13.8.24The operation of the proposed development is expected to contribute 0.00028 % of Ireland's proposed 295 MtCO₂e carbon budget for 2021-2025, 0.00392 % of the 250 MtCO₂e 2026-2030 carbon budget, and 0.00502 % of the 151 Mt 2031-2035 carbon budget.
- 13.8.25Due to the minor scale of the GHG emissions in comparison to the national, regional and projected sectoral carbon budgets and incorporation of the proposed mitigation measures, which include a net zero carbon offset payment, the proposed development is assessed as compatible with the budgeted, science-based 1.5 °C trajectory in terms of rate of emissions reduction. Therefore, whilst all GHG emissions contribute to climate change, the scale of effect of the proposed development on the likelihood of avoiding severe climate change, aligning with a science-based 1.5 °C compatible trajectory and achieving net zero by 2050, is considered to be **Slight to Non-Significant** in magnitude, **Negative** in nature and **Not Significant** in EIA terms.

Demolition, Construction and Operation - Assessment against Ireland's Carbon Budgets

- 13.8.26In line with IEMA guidance¹⁴, due to the nature of GHG emissions it is good practice to report whole life GHG emissions associated with the proposed development.
- 13.8.27The operational GHG emissions have been reported in tCO₂e for the anticipated opening year of the proposed development (Q1 2025) and for the period covering Ireland's carbon budgets (2021 to 2025, 2026 to 2030 and 2031 to 2035).
- 13.8.28The demolition, construction and operation of the proposed development is expected to contribute 0.00565 % of Ireland's proposed 295 MtCO₂e carbon budget for 2021-2025, 0.00392 % of the 250 MtCO₂e 2026-2030 carbon budget, and 0.00502 % of the 151 Mt 2031-2035 carbon budget.
- 13.8.29Due to the minor scale of the GHG emissions in comparison to the national carbon budgets and incorporation of the proposed mitigation measures, the proposed development is assessed as compatible with the budgeted, science-based 1.5 °C trajectory in terms of rate of emissions reduction. Therefore, whilst all GHG emissions contribute to climate change, the scale of effect of the proposed development on the likelihood of avoiding severe climate change, aligning with a science-based 1.5 °C compatible trajectory and achieving net zero by 2050, is considered to be **Slight to Non-Significant** in magnitude, **negative** in nature and **not significant** in EIA terms.

13.9 Additional Mitigation
Demolition and construction Stage
CCR and ICCI

- 13.9.1 The proposed development has been designed to improve its resilience to climate change through a range of design and construction standards, good engineering practice. No additional mitigation measures for the CCR and ICCI assessments beyond the mitigation already described in Table 13-12 would be required for the demolition and construction stage.

GHG Emissions

- 13.9.2 The IEMA guidance indicates GHG emissions should be considered as 'significant' if they are not compatible with the budgeted, science-based 1.5°C trajectory in terms of rate of emissions reduction and do not comply with up-to-date policy and 'good practice' reduction measures. As GHG Emissions from the demolition and construction stage of the proposed development are low in comparison to Ireland's Carbon Budget, no additional mitigation measures are required have been identified to be required..

Operation Stage

CCR

- 13.9.3 Taking into consideration the additional mitigation proposed in Chapter 10: Water Resources and Flood Risk, no additional mitigation is proposed for CCR.

ICCI

- 13.9.4 No additional mitigation is proposed for ICCI.

GHG Emissions

- 13.9.5 The IEMA guidance indicates GHG emissions should be considered as 'significant' if they are not compatible with the budgeted, science-based 1.5°C trajectory in terms of rate of emissions reduction and do not comply with up-to-date policy and 'good practice' reduction measures. As GHG emissions from the operation stage of the proposed development are low in comparison to Irelands Carbon Budget, no additional mitigation measures are required.

13.10 Enhancement Measures

- 13.10.1No enhancement measures are proposed or required in respect of Climate Change.

13.11 Assessment of Residual Effects

Demolition and Construction Residual Effects

CCR and ICCI

- 13.11.1As no additional mitigation would be required, the residual demolition and construction effects remain as reported in the Assessment of Effects section.

GHG Emissions

- 13.11.2As no additional mitigation would be required, the residual operation effects remain as reported in the Assessment of Effects section.

Operation Residual Effects

CCR

- 13.11.3Assuming that the residual risk of flooding from the Baldonnell stream and overwhelming of the drainage system would be mitigated through a Detailed Flood Mitigation Plan, the residual effects would be reduced from **Imperceptible to Not Significant** and **Slight to Moderate**, to **Imperceptible to Not Significant**.

- 13.11.4As such the impact of consequence of these residual effects are reduced as followed:

- Overwhelming of drainage assets: Likelihood level: **Possible**; Consequence level: **Low**; Scale of Effect: **Imperceptible to Not Significant (Not Significant** in terms of EIA); and
- Flooding of the Baldonnell stream: Likelihood level: **Possible**; Consequence level: **Low**; Scale of Effect: **Imperceptible to Not significant (Not Significant** in terms of EIA).

ICCI

13.11.5As no additional mitigation would be required, the residual operation effects remain as reported in the assessment of effects section.

GHG Emissions

13.11.6As no additional mitigation would be required, the residual operation effects remain as reported in the assessment of effects section.

Summary of Residual Effects

Table 13.19 provides a summary of the outcomes of the Climate Change assessment of the proposed development.

Table 13-19: Summary of Residual Effects									
Receptor	Description of Residual Effect	Additional Mitigation	Scale and Significance of Residual Effect **	Nature of Residual Effect*					
				+	L	D	R	M B T	
Demolition and construction									
CCR									
Buildings and Infrastructure	Extreme rainfall events could result in the erosion of stockpiles and resultant silting of drainage assets.	None required	Imperceptible to Not Significant	-	U	D	R	T	
Buildings and Infrastructure	Extreme rainfall events and their secondary impacts could affect the ability to undertake certain construction activities leading to programme delays (e.g. pouring of concrete and asphalt) increasing project costs.	None required	Imperceptible to Not Significant	-	U	D	R	T	
Environment	Extreme rainfall events could result in increased runoff of concrete or cement products nearby watercourses.	None required	Imperceptible to Not Significant	-	U	I	R	T	

Table 13-19: Summary of Residual Effects									
Human health	Heatwaves, higher temperatures and drought conditions could impact dust generated during construction activities.	None required	Imperceptible to Not Significant	-	U	D	R	T	
Human heath	Winds gusts could result in the damage of stockpiles. Secondary impacts could include site personnel welfare impacts.	None required	Imperceptible to Not Significant	-	U	I	R	T	
Human health	Heatwaves, higher temperatures could impact on site construction personnel welfare, for example, causing heat stress and unsafe working conditions.	None required	Imperceptible to Not Significant	-	U	D	R	T	
ICCI									
Population and Human Health Sensitive Receptors	Potential interactions of climate change with the identified Population and Human Health effects	None required	Imperceptible to Not Significant	-	U	D	R	Mt	
Transport Sensitive Receptors	Potential interactions of climate change with the identified transport effects.	None required	Imperceptible to Not Significant	-	U	D	R	Mt	
Air Quality Sensitive Receptors	Exposure of sensitive receptors to dust from demolition and construction activities.	None required	Not significant	-	U	D	R	Mt	
Air Quality Sensitive Receptors	Exposure of sensitive receptors to dust from demolition and construction activities.	None required	Not significant	-	U	D	R	Mt	
Noise and Vibration Sensitive Receptors	Potential interactions of climate change with the identified Noise and Vibration effects.	None required	Imperceptible to Not Significant	-	U	D	R	Mt	

Table 13-19: Summary of Residual Effects									
Water Resources and Flood Risk Sensitive Receptors	Exposure of sensitive receptors to water from demolition and construction activities.	None required	Imperceptible to Not Significant	--	U	D	R	Lt	
Ecology Sensitive Receptors	Exposure of sensitive receptors to demolition and construction activities.	None required	Imperceptible to Not Significant	-	U	I	IR	Mt	
Ground Conditions Sensitive Receptors	Exposure of sensitive receptors (water) to demolition and construction activities	None required	Imperceptible to Not Significant	-	U	D	R	Mt	
Waste Sensitive Receptors	Potential interactions of climate change with the identified Waste effects	None required	Imperceptible to Not Significant	-	U	D	R	Mt	
Material Assets Sensitive Receptors	Exposure of sensitive receptors (surface water) to demolition and construction activities	None required	Not significant	-	U	D	R	Mt	
Material Assets Sensitive Receptors	Exposure of sensitive receptors (water supply) to demolition and construction activities	None required	Imperceptible to Not Significant	-	U	I	R	Lt	
GHG Emissions									
Global Climate	GHG Emissions	None required	Slight to Not Significant (not significant)	-	IR	D	L	LT	
Operation									
CCR									
Buildings and Infrastructure	Extreme rainfall events and increased frequency of intense rainfall events could result in the overwhelming of drainage assets.	None Required	Imperceptible to Not Significant	-	U	D	R	Lt	
Buildings and Infrastructure	Extreme rainfall events could lead to flooding of the underground foundations or	None required	Imperceptible to Not Significant	-	U	D	R	Lt	

Table 13-19: Summary of Residual Effects									
	services (electrical cables)								
Buildings and Infrastructure	Extreme rainfall events could lead to fluvial flooding, including of the Bal-donnel stream highlighted within the FRA; culvert has potential blockages	Non required	Imperceptible to Not Significant	-	U	D	R	Lt	
Buildings and Infrastructure	Extreme rainfall events could lead to flooding of the drainage assets	None required	Imperceptible to Not Significant	-	U	I	R	Lt	
Human Health	Increased frequency of intense rainfall events could result in wet pavement surfaces leading to reduced skid resistance and unsafe conditions for site personnel.	None required	Imperceptible to Not Significant	-	U	D	R	Lt	
Environment	Increased frequency and severity of extreme heat events (i.e., heat waves) could result in the landscape design being compromised (e.g., tree and shrubs die).	None required	Imperceptible to Not Significant	-	U	I	R	Lt	
Buildings and Infrastructure	Increased frequency and severity of extreme heat events could result in overheating of the electrical equipment (e.g. data servers).	None required	Imperceptible to Not Significant	-	U	D	R	Lt	
Buildings and Infrastructure	Transformers affected by urban heat islands and coincident air conditioning demand leading to overloading in summer months.	None required	Imperceptible to Not Significant	-	U	D	R	Lt	
Buildings and Infrastructure	High temperatures and heatwaves could result in overheating and unsuitable conditions e.g., discomfort for	None required	Imperceptible to Not Significant	-	U	D	IR	Lt	

Table 13-19: Summary of Residual Effects							
	occupants in ancillary buildings and office spaces						
Buildings and Infrastructure	Heatwaves, higher temperatures could damage the building structure	None required	Imperceptible to Not Significant	-	U	D	IR Lt
Buildings and Infrastructure	Heatwaves, high temperatures and increased humidity could lead to lightning striking the data centre resulting in damage to infrastructure or loss of power.	None required	Imperceptible to Not Significant	-	U	D	R Lt
Infrastructure and Human Health	Prolonged periods of drought could lead to vegetation drying, increasing risk of grassland fires near the Data centre. Secondary impacts include infrastructure damage and vegetation	None required	Imperceptible to Not Significant	--	U	I	IR Lt
Human Health	Prolonged periods of drought could affect water and potable water availability.	None required	Imperceptible to Not Significant	-	U	D	R Lt
Buildings and Infrastructure and human health	Freeze-thaw could damage the proposed development, e.g. cracking, deformation, that reduces the proposed development's service life.	None required	Imperceptible to Not Significant	-	U	D	IR Lt
ICCI							
Population and Human Health Sensitive Receptors	Potential interactions of climate change with the identified Population and Human Health effects	None required	Imperceptible to Not Significant	-	U	D	R Lt

Table 13-19: Summary of Residual Effects							
Transport Sensitive Receptors	Potential interactions of climate change with the identified transport effects.	None required	Imperceptible to Not Significant	-	U	D	R Lt
Air Quality Sensitive Receptors	Potential interactions of climate change with the identified Air Quality effects	None required	Imperceptible to Not Significant	-	U	D	R Lt
Noise and Vibration Sensitive Receptors	Potential interactions of climate change with the identified Noise and Vibration effects	None required	Imperceptible to Not Significant	-		D	R Lt
Water Resources and Flood Risk Sensitive Receptors	Exposure of sensitive receptors to water from operational stage	None required	Imperceptible to Not Significant	-	U	D	R Lt
Ecology Sensitive Receptors	Potential interactions of climate change with the identified Ecological effects	None required	Imperceptible to Not Significant	-	U	D	R Lt
Ground Conditions Sensitive Receptors	Potential interactions of climate change with the identified Ground Conditions effects	None required	Imperceptible to Not Significant	-	U	D	R Lt
Waste Sensitive Receptors	Potential interactions of climate change with the identified Waste effects	None required	Imperceptible to Not Significant	-	U	D	R Lt
Material Assets Sensitive Receptors	Potential interactions of climate change with the identified Material effects	None required	Imperceptible to Not Significant	-	U	D	R Lt
GHG Emissions							
Global Climate	GHG Emissions	None required	Slight to Non Significant	-	IR	D	L LT
Notes: * - = Negative/ + = Positive / +/- = Neutral; R = Reversible, IR = Irreversible; D = Direct, ID = Indirect; L= Likely, U = Unlikely; M = Momentary, B = Brief, T= Temporary, St = Short-term, Mt = Medium-term, Lt = Long-term, P = Permanent. ** Imperceptible, Not Significant, Slight, Moderate, Significant, Very Significant, Profound.							

13.12 Cumulative Effects

Intra-Project Effects

13.12.1 As explained in Chapter 2: EIA Process and Methodology, intra-project cumulative effects are discussed in Chapter 16: Intra Cumulative Effects. However, in the instance of this climate assessment, in line with IEMA guidance, intra-cumulative effects have been considered in the ICCI assessment.

Inter-Project Effects

CCR

13.12.2 The climate resilience effects identified are limited in their spatial extent to the site boundary and the proposed development in isolation. Therefore, cumulative CCR effects with other schemes have not been considered.

ICCI

13.12.3 The ICCI identified are limited in their spatial extent to the relevant technical assessments in the EIAR for the proposed development. Therefore, cumulative effects have been considered for each technical discipline as opposed to in-combination with cumulative schemes.

GHG Emissions

13.12.4 GHG emissions contribute cumulatively with all sources of GHG emissions globally to cause climate change. This assessment has considered GHG emissions in the context of GHG emissions in Ireland and no further consideration of the proposed developments GHG emissions with other sources of GHG emissions is necessary.

13.13 Summary of Assessment

Background

13.13.1 This chapter has detailed the potential climate change effects due to the demolition and construction and operation stages of the proposed development. The assessment of demolition and construction and operation stages have been undertaken taking into account the relevant national and local guidance and regulations.

Demolition and construction Effects

13.13.2 During demolition and construction works, it is expected that general climate trends for Ireland, including extreme weather events (e.g., increased wind speeds, drought, intensity of precipitation events) would continue to occur irrespective of whether the proposed development is built or not.

CCR

13.13.3 The CCR assessment has reviewed the potential vulnerability of the proposed development to extreme weather and projected climate change. Considering embedded mitigation measures, all effects have been of low or medium magnitude and therefore the effects are considered to range from **Imperceptible to Not Significant, negative** in nature and **not significant** in terms of EIA.

ICCI

13.13.4 The basis of this assessment was to review the identified effects, the receptors and embedded mitigation measures for each technical assessment contained within the EIAR. Professional judgement has been used to assess whether projected climate change could increase the magnitude of the effects as identified

by the disciplines, change the sensitivity of the receptors, or reduce the effectiveness of embedded mitigation measures.

13.13.5 Overall, the effects are considered to be **Imperceptible to Not Significant, negative** in nature and **not significant** in terms of EIA.

GHG Emissions

13.13.6 The high-level GHG emissions assessment has estimated the demolition and construction of the proposed development would result in approximately 15,828 tCO₂e over the course of the demolition and construction stage. Considering embedded mitigation measures (shown in Table 13-13), the effect of GHG emissions are considered to be **Slight to Not Significant, (Not Significant** in terms of EIA) in comparison with Ireland's carbon budgets.

Operation Effects

13.13.7 During the operation stage, it is expected that general climate trends for Ireland, including extreme weather events, would continue to occur irrespective of whether the proposed development is built or not. This includes:

- an increase in mean annual temperatures;
- warming would be enhanced at the extremes with an increase in summer daytime and winter night-time temperatures;
- summer heatwave events are expected to occur more frequently;
- precipitation is expected to become more variable, with substantial projected increases in the occurrence of both dry periods and heavy precipitation events;
- a mean reduction in wind speeds; and
- a decrease in the number of frost days and ice days.

CCR

13.13.8 The CCR assessment has reviewed the potential vulnerability of the proposed development to extreme weather and projected climate change. Considering embedded mitigation measures, a medium effect was considered for the flooding of the Baldonnell stream, and the overwhelming of drainage assets, causing secondary flooding. However, with the consideration of embedded mitigation, and additional mitigation identified through technical chapter assessment the residual effects are considered to be low or medium magnitude. This effect is therefore considered to be **Imperceptible to Not Significant, Negative** in nature and **Not significant** in terms of EIA.

13.13.9 Considering embedded mitigation measures, all other effects have been of low magnitude and are therefore considered to range from **Imperceptible to Not Significant** to **Slight, negative** in nature and **not significant** in terms of EIA.

ICCI

13.13.10 The basis of this assessment was to review the identified effects, the receptors and embedded mitigation measures for each technical assessment contained within the EIAR. Professional judgement has been used to assess whether projected climate change could increase the magnitude of the effects as identified by the disciplines, change the sensitivity of the receptors, or reduce the effectiveness of embedded mitigation measures.

13.13.11 Overall, the effects are considered to be **Imperceptible to Not Significant, Negative** in nature and **Not significant** in terms of EIA.

GHG Emissions

13.13.12 The high-level GHG emissions assessment has estimated the operation of the proposed development would result in approximately 90,759 tCO₂e over the course of the operation stage.

Considering embedded mitigation measures (shown in Table 13-17), the effect of GHG emissions are considered to be **Slight to Not Significant Negative, (Not Significant)** in terms of EIA) in comparison with Ireland's carbon budgets

Demolition, Construction and Operation Stage – Assessment against Ireland Carbon Budgets

13.13.13 The demolition, construction and operation of the proposed development is expected to contribute 0.00565 % of Ireland's proposed 295 MtCO₂e carbon budget for 2021-2025, 0.00392 % of the 250 MtCO₂e 2026-2030 carbon budget, and 0.00502 % of the 151 Mt 2031-2035 carbon budget. And effects are considered to be **Slight to Not-Significant, Negative** in nature and **Not Significant** in EIA terms.

Cumulative Effects

CCR

13.13.14 The CCR identified are limited in their spatial extent to the site boundary and therefore no cumulative effect with other committed developments has been considered.

ICCI

13.13.15 The ICCI assessment identified are limited in their spatial extent to the relevant technical assessments in the EIAR for the proposed development. Therefore, cumulative effects have been considered for each technical discipline as opposed to in-combination with cumulative schemes.

GHG Emissions

13.13.16 GHG emissions contribute cumulatively with all sources of GHG emissions globally to cause climate change. This assessment has considered GHG emissions in the context of GHG emissions in Ireland and no further consideration of the proposed developments GHG emissions with other sources of GHGs is considered necessary.

14 WASTE

14.1 Introduction

- 14.1.1 This chapter of the EIAR reports on the likely significant waste effects to arise from the demolition and construction stage and the operation stage of the proposed development.
- 14.1.2 The chapter describes the waste policy context; the methods used to assess the potential impacts and likely effects; the baseline conditions at and surrounding the site; the likely waste effects taking into consideration embedded mitigation; the need for additional mitigation and enhancement; the significance of residual effects; and cumulative effects.
- 14.1.3 There are no technical appendices supporting this chapter.
- 14.1.4 The assessment has been informed by the following legislation, policies, and published guidance:
- International Legislation:
 - Waste Framework Directive (2008/98/EC)¹;
 - Landfill Directive (1999/31/EC), as amended in 2003 (2003/33/EC).
 - National Legislation and Policy:
 - Waste Management Act 1996 (as amended)²;
 - Waste Management (Licencing) Regulations 2004³;
 - European Communities (Waste Directive) Regulations 2011⁴;
 - National Climate Action Plan 2021⁵;
 - Draft Best Practice Guidelines for the Preparation of Waste Management Plans for Construction Demolition Projects (2021)⁶ – which revised previous Guidelines set in 2006⁷;
 - the Litter Pollution Act 1997 (revised in April 2022)⁸ ; and
 - Environmental Protection Agency (EPA) National Waste Statistics Summary Report for 2018⁹.
 - Regional Policy:
 - Eastern Midlands Regional Waste Management Plans 2015-2021 (2017)¹⁰;
 - Construction and Demolition (C&D) Waste: Soil and Stone Recovery/Disposal Capacity, Update Report (2020)¹¹;
 - National guidance and Industry Standards:
 - Waste Action Plan for a Circular Economy 2020-2025 (2021)¹²;
 - Guidance on Soil and Stone By-Products (2019)¹³;
 - Materials and Waste in Environmental Impact Assessment (2020)¹⁴; and

- A Resource Opportunity – Waste Management Policy in Ireland (2012)¹⁵.

14.2 Assessment Scope

- 14.2.1 In considering the generation and management of waste, it is important to define when, under current legislation and understanding, a material is considered to be waste. The Waste Framework Directive (2008/98/EC) defines waste as "...any substance or object which the holder discards, intends to discard or is required to discard".
- 14.2.2 More specifically, the Waste Action Plan for a Circular Economy (2021) describes C&D waste as waste from any building works, demolition, and development (including transport infrastructure).
- 14.2.3 The IEMA guidance relating to Materials and Waste in Environmental Impact Assessment¹⁴ and the EPA Best Practice Guidelines for the Preparation of Waste Management Plans for Construction Demolition Projects⁶ was used in the assessment. Furthermore, professional judgement, experience and best practice methods have been drawn upon to assess the significance of the potential effects of the proposed development. The assessment has taken account of all applicable legislation, policy, and industry guidance.
- 14.2.4 The site is located within the jurisdiction of South Dublin County Council (SDCC) and the SDCC Development Plan 2016-2022¹⁶ sets out a number of objectives and actions for the South Dublin area in line with the objectives of the Eastern Midlands Region (EMR) Waste Management Plan (WMP) 2015-2021⁸. The waste objectives with a particular relevance to the proposed development are as follows:
- IE5 Objective 1: To support the implementation of the EMR WMP 2015-2021 by adhering to overarching performance targets, policies, and policy actions.
 - IE5 Objective 2: To support waste prevention through behavioural change activities to de-couple economic growth and resource use.
 - IE5 Objective 3: To encourage the transition from a waste management economy to a green circular economy to enhance employment and increase the value recovery and recirculation of resources.
 - IE5 Objective 8: To secure appropriate provision for the sustainable management of waste within developments, including the provision of facilities for the storage, separation, and collection of such waste.
- 14.2.5 The waste types and estimated quantities used in this assessment have been based on published data by the Environmental Protection Agency (EPA) in National Waste Statistics¹⁷, data recorded from similar previous developments, and other available research sources.

¹ European Union, 2008. Directive 2008/98/EC of the European Parliament and of the Council of 19 November 2008 on waste and repealing certain Directives (Text with EEA relevance). Document 32008L0098.

² Government of Ireland, 1996. Waste Management Act 1996 (as amended). Updated to 27 August 2020.

³ Government of Ireland, 2004. Waste Management (Licencing) Regulations, 2004.

⁴ Government of Ireland, 2011. European Communities (Waste Directive) Regulations 2011.

⁵ Government of Ireland, 2021. National Climate Action Plan.

⁶ Government of Ireland, 2021. C&D Waste. Available at: <https://www.gov.ie/en/publication/c305a-construction-and-demolition-cd-waste/> [Last Accessed 08/09/2022].

⁷ Department of the Environment, Heritage and Local Government, 2006. Best Practice Guidelines of the Preparation of Waste Management Plans for C&S projects. Available at: <https://www.leanbusinessireland.ie/includes/documents/BPGConstructionand%20demolition.pdf> [Last Accessed 08/09/2022].

⁸ Government of Ireland, 1997/2009. Litter Pollution Act 1997; Electoral (Amendment) (No. 2) Act 2009 – An Act To Regulate Expenditure By Political Parties And Candidates; To Amend The Local Elections (Disclosure Of Donations And Expenditure) Act 1999; To Amend The Litter Pollution Act 1997; And To Provide For Related Matters.

⁹ Environmental Protection Agency (EPA), 2018. National Waste Statistics Summary Report for 2018. Available at: [EPA_Nat_Waste_Stats_Report_Web.pdf](https://www.epa.ie/national-waste-statistics-report-web.pdf) [Last Accessed 08/09/2022]

¹⁰ Eastern Midlands Region, 2017. Eastern Midlands Region Waste Management Plan 2015-2021. Available at: <http://emwr.ie/emwr-plan/> [Last Accessed 08/09/2022].

¹¹ Government of Ireland, 2020. C&D Waste Soil and Stone Recovery/ Disposal Capacity Update Report. Available at: <http://southernwasteregion.ie/sites/default/files/National%20C%20D%20Report%20Dec%202020%20for%20Publication.pdf> [Last Accessed 08/09/2022].

¹² Government of Ireland, 2020. Waste Action Plan for a Circular Economy. Available at: <https://www.gov.ie/en/publication/4221c-waste-action-plan-for-a-circular-economy/> [Last Accessed 08/09/2022].

¹³ EPA, 2010. Guidance on Soil and Stone By-products. Available at: https://www.epa.ie/publications/licensing--permitting/waste/Guidance_on_Soil_and_Stone_By_Product.pdf [Last Accessed 08/09/2022].

¹⁴ Institute of Environmental Management and Assessment (IEMA), 2020. Materials and Waste in Environmental Impact Assessment 2020. Available at: <https://www.iema.net/resources/reading-room/2020/03/30/materials-and-waste-in-environmental-impact-assessment> [Last Accessed 08/09/2022].

¹⁵ Government of Ireland, 2012. A Resource Opportunity – Waste management policy in Ireland. Available at: <https://www.gov.ie/en/publication/a9d98-a-resource-opportunity-waste-management-policy-in-ireland/> [Last Accessed 08/09/2022].

¹⁶ South Dublin County Council, 2016. South Dublin County Council Development Plan 2016-2022. Available at: <https://www.sdcc.ie/en/services/planning/development-plan/plan-2016-2022/> [Last Accessed 08/09/2022].

¹⁷ Environmental Protection Agency (EPA), 2022. National Waste Statistics. Available at: <https://www.epa.ie/our-services/monitoring--assessment/waste/national-waste-statistics/> [Last Accessed 08/09/2022].

Technical Scope

- 14.2.6 The assessment of the likely effects of the proposed development due to the generation and management of waste has considered the remaining landfill void capacity that would be depleted by waste produced during the demolition and construction stage and operation stage of the proposed development.

Spatial Scope

- 14.2.7 The study area for the waste assessment comprises the area of the Eastern Midlands Region of Ireland. This area has been used for baseline data investigation, and to locate potential sensitive receptors off-site, including surrounding landfill sites.

Temporal Scope

- 14.2.8 The assessment has considered impacts arising during the demolition and construction stage which would be expected to be temporary (less than a year) in nature and from the operation stage which would be expected to be long term (15 to 60 years) to permanent in nature (i.e., >60 years).

14.3 Baseline Characterisation Method

Desk Study

- 14.3.1 In order to establish baseline waste conditions in the study area, relevant data was reviewed and assessed. Data was obtained from the following sources:
- South Dublin County Council Development Plan 2016-2022¹⁴;
 - EMR WMP 2015-2021¹⁰;
 - Draft Best Practice Guidelines for the Preparation of Waste Management Plans for Construction Demolition Projects⁶;
 - Waste Action Plan for a Circular Economy¹²;
 - C&D Waste Soil and Stone Recovery/Disposal Capacity Update Report 2020¹¹;
 - Project Ireland 2040¹⁸; and
 - National Development Plan 2018-2027¹⁹.

Field Study

- 14.3.2 Field study/data collection was not required at the site as the data provided by other sources was deemed to be adequate and representative of the site conditions and conditions within the wider study areas.

14.4 Assessment Method

Methodology

Demolition and Construction Stage

- 14.4.1 The impacts of the proposed development, arising from the generation and management of waste, has been assessed. Due to the absence of EPA/Irish guidelines for waste assessments in EIA, the assessment has considered the methodology specified in Institute of Environmental Management and Assessment guidance documents¹⁴. An extensive document review to assist in identifying current and

future requirements of waste management including national and regional waste policy, waste strategies, management plans, legislative requirements and relevant reports has also been undertaken.

- 14.4.2 To assess the potential effects arising from the generation of waste during the demolition and construction, and operation stages, a desk study was carried out which included:
- A review of applicable policy and legislation to create the legal framework for waste management in Ireland;
 - Description of the typical waste materials that will be generated during the demolition and construction and operation stages; and
 - Identification of mitigation measures to prevent waste generation and promote management of waste in accordance with the waste hierarchy.
- 14.4.3 The waste estimates calculated for the demolition and construction stage of the proposed development have been calculated from a detailed review of the Dub 11/12 consented development adjacent. When conducting the review, the proposed development's Gross Floor Area (GFA) was used to normalise the data and create key performance indicators to estimate potential waste volumes for the proposed development. Additionally, the assessment has taken into consideration published data by the EPA in National Waste Reports.
- 14.4.4 Mitigation measures were also proposed to minimise the proposed development's environmental effects during the demolition and construction stage.

Operation Stage

- 14.4.5 The methodology for assessing likely operation stage effects is the same as that presented for the demolition and construction stage above.

Cumulative Stage

- 14.4.6 The combined effects of the proposed development and the cumulative development on a given receptor have been assessed for both stages of the proposed development.
- 14.4.7 This cumulative assessment has been considered qualitatively.

14.5 Assessment Criteria

- 14.5.1 The criteria used to assess if an effect is significant or not, is set out in subsequent sub-sections. This is determined by consideration of the sensitivity of the receptor, magnitude of impact and scale of the effect. In considering the significance of an effect, consideration has been given to the duration of the effect, the geographical extent of the effect and the application of professional judgement.

Receptor Sensitivity/Value Criteria

- 14.5.2 The sensitivity of waste relates to availability of regional (and where appropriate, national) landfill void capacity in the absence of the proposed development. Landfill capacity is recognised as an unsustainable and increasingly scarce option for managing waste.
- 14.5.3 Information presented in Table 14-1 has been used to determine the sensitivity of landfill void capacity. For the purposes of EIA, 'negligible' and 'low' are classed as Low; 'medium' is classed as Medium and 'high' and 'very high' are classed as High.

¹⁸ Government of Ireland, 2019. Project Ireland 2040 Documents and Information. Available at: <https://www.gov.ie/en/collection/580a9d-project-2040-documents/> [Last Accessed 30/06/21].

¹⁹ Government of Ireland, 2018. National Development Plan 2018-2027. Available at: <https://www.gov.ie/en/policy-information/07e507-national-development-plan-2018-2027/?referrer=/en/national-development-plan-2018-2027/> [Last Accessed 30/06/21].

Table 14-1: Receptor Sensitivity Criteria

Sensitivity	Criteria
Negligible	Across demolition and construction and/or operation phases, the baseline/future baseline (i.e., without development) of regional (or where justified, national) inert and non-hazardous landfill void capacity is expected to remain unchanged or is expected to increase through a committed change in capacity.
Low	Across demolition and construction and/or operation phases, the baseline/future baseline (i.e., without development) of regional (or where justified, national) inert and non-hazardous landfill void capacity is expected to reduce minimally by <1 % as a result of wastes forecast.
Medium	Across demolition and construction and/or operation phases, the baseline/future baseline (i.e., without development) of regional (or where justified, national) inert and non-hazardous landfill void capacity is expected to reduce noticeably by 1-5 % because of wastes forecast.
High	Across demolition and construction and/or operation phases, the baseline/future baseline (i.e., without development) of regional (or where justified, national) inert and non-hazardous landfill void capacity is expected to reduce considerably by 6-10 % because of wastes forecast.
Very High	Across demolition and construction and/or operation phases, the baseline/future baseline (i.e., without development) of regional (or where justified, national) inert and non-hazardous landfill void capacity is expected to reduce very considerably (by >10 %); end during construction or operation; is already known to be unavailable; or would require new capacity or infrastructure to be put in place to meet forecast demand.

Table 14-3: Scale of Effect Criteria

	Medium	Not Significant to Slight	Slight to Moderate	Moderate to Significant
	High	Slight to Moderate	Moderate to Significant	Very Significant to Profound

14.5.6 Based on professional judgement and Environmental Protection Agency’s (EPA) Guidelines on the information to be contained in Environment Impact Assessment Reports (2022), as described in Chapter 2: EIA Process and Methodology, effects ranging from moderate to profound are considered ‘significant’ in EIA terms.

Nature of Effect Criteria

- 14.5.7 The nature of the effect has been described as either negative, neutral, or positive as follows:
- Positive – An advantageous effect to a receptor;
 - Neutral – An effect that on balance, is neither positive;
 - Negative – A detrimental effect to a receptor.

14.6 Assumptions and Limitations

- 14.6.1 The assessment for waste receptors has been based on a review of the baseline information available at the time of assessment. Whilst the baseline data sources used in this assessment have been obtained from the most recently available information, it is still possible that conditions could have changed since their publication.
- 14.6.2 The quantities of materials to be used for the demolition and construction stage of the proposed development design, sources of materials and their mode of transport are yet to be finalised. Values have been estimated based on data obtained from a review of other similar data center applications in the surrounding area. It has been assumed that these data sets have been reported correctly.
- 14.6.3 It has been assumed that a Construction and Demolition Waste Management Plan (CDWMP) would be developed by the contractor. The CDWMP will ensure suitable management of construction, demolition, and excavation (CDE) waste, prevent (where practicable) and minimisation of waste arising and maximisation of waste re-use and recycling.

14.7 Baseline Conditions
Existing Baseline

- 14.7.1 For waste planning purposes, Ireland is divided into three regions: Connacht-Ulster; Southern; and Eastern Midlands¹². SDCC lies within the Eastern Midlands Region (EMR)¹⁰. Therefore, reference to Waste management, generation, and capacity of landfills will refer to both the wider EMR in addition to the local authority SDCC. In terms of waste management, the local authority responsible for setting and administering waste management activities in the site and study areas is SDCC. Waste management activities within the area is governed by the requirements set out in the EMR WMP 2015-2021.
- 14.7.2 The EU Waste Framework Directive 2008/98/EC requires that a target of 70% recovery by weight of construction and demolition (C&D) waste generated be met by the year 2020. National Waste Statistics reported that Ireland achieved 84% material recovery C&D waste in 2019, surpassing the 2020 target. This shows an improvement on the previously reported rate of 71% in 2016 and 77% 2018.
- 14.7.3 In general, the largest element of C&D waste consisted of excavated soil and stone (making up approximately 85% of total C&D waste)⁷. The remainder included concrete, brick, tiles, metal, glass,

Impact Magnitude Criteria

14.5.4 The magnitude of impact has been classified as ‘no change’, ‘low’, ‘medium’, ‘high’ and ‘major’ in accordance with the criteria set out in Table 14-2. For the purposes of EIA, ‘no change’ and ‘low’ are classed as Low; ‘medium’ is classed as Medium and ‘high’ and ‘major’ are classed as High.

Table 14-2: Impact Magnitude Criteria

Magnitude	Criteria
No Change	Zero waste generation and disposal from the development.
Low	Waste generated by the development will reduce regional landfill void capacity baseline by <1%
Medium	Waste generated by the development will reduce regional landfill void capacity by 1-5%.
High	Waste generated by the development will regional landfill void capacity by 6-10%.
Major	Waste generated by the development will reduce regional landfill void capacity by >10%.

Scale of Effect Criteria

14.5.5 Impacts have been assessed based on the value and sensitivity of receptors against the magnitude of impact to determine the scale of effect as presented in Table 14-3.

Table 14-3: Scale of Effect Criteria

		Magnitude		
		Low	Medium	High
Sensitivity	Low	Imperceptible to Not Significant	Not Significant to Slight	Slight to Moderate

wood, plastic, and metal¹². Currently, the majority of C&D waste generated in Ireland is recovered or reused. Where recovery or reuse is not feasible, it is disposed of at suitably licensed facilities.

14.7.4 Within Ireland, the total mass of waste produced in the year 2018 was 14.1 million tonnes across all sectors⁹. For C&D waste, approximately 8.8 million tonnes were collected by authorised waste collectors for treatment in 2019. This was significantly greater than the 6.2 million tonnes reported in 2018 and 4.7 million tonnes reported in 2017, which corresponded with increases in construction activity nationally⁹. All C&D waste arises predominantly from demolition of existing structures, and from materials brought to site that were not used for their intended purposes, such as damaged items, cut offs and surplus materials.

14.7.5 According to the latest figures, most of the C&D waste collected in 2019 consisted of soil and stones (85%). The remainder was made up of concrete, bricks, tiles, and gypsum waste (7%) and mixed C&D waste (5%). Only 2.5% of C&D waste was collected separately as single material streams (wood, glass, plastic, or metal). Soil and stone waste are typically managed at Local Authority-permitted infill sites. Backfilling activities account for a significant portion of the recovery rate being achieved. The most recent figures available for C&D waste arising in Ireland, and that waste's disposal and recovery routes, are shown in Table 14.4. It should be noted that these figures are likely to have increased since then and will continue to do so in the coming years, due to the renewed growth in the economy.

Table 14-4: Collection and Management of C&D Waste Excluding Soil and Stone

Management	Recycling (tonnes)	Energy recovery (tonnes)	Backfilling (tonnes)	Disposal (tonnes)	Total (tonnes)
Metal waste	193,242	0	0	0	193,242
Segregated wood, glass, and plastic waste	13,999	19,177	2,317	14	35,507
Concrete, brick, tile, and gypsum waste	284,265	0	3,309,401	151,641	630,370
Waste bituminous mixtures	64,599	0	36,932	164	101,694
Mixed construction and demolition waste	10,407	857	48,825	20,826	80,915
Waste soils, waste stones, and dredging spoil	29,649	0	6,764,078	643,041	7,436,769
Waste treatment residues	39	14,262	25,671	227,115	267,086
Total	596,200	34,296	7,208,763	906,324	8,745,584

14.7.6 According to the C&D Waste Update Report (2020)¹¹ there are 106 authorised facilities in the EMR for soil and stone acceptance, including:

- Four active licenced soil recovery facilities;
- Six licenced soil recovery facilities due to start providing capacity;
- Four active inert landfills;
- 49 permitted facilities; and
- 43 registered facilities with a Certificate of Registration (CoR).

14.7.7 Overall, licensed Soil Recovery Facility (SRF) capacities in the EMR are concentrated in the local authority areas of Fingal, Meath, Kildare, and Wicklow. There are no licensed SRFs outside the Greater Dublin Area (GDA).

14.7.8 Waste licence facilities in the EMR are of the scale required by the markets⁶. EMR's current active and available annual licenced market capacity for SRF is 2.4 million tonnes (Mt). Six of the ten licenced sites have annual capacity of 300,000 tonnes or more and one facility is licenced to accept 1,500,000

tonnes of soil wastes each year. This capacity is concentrated in the Greater Dublin Area. Licensed capacity is authorised on an annual basis. The capacity for uncontaminated soil comprises of 2.4 million tonnes annual licenced capacity.

14.7.9 The permitted and registered facilities offer a much smaller capacity to the Region. The EMR remaining permitted lifetime capacity is 1.3 million tonnes (at end-2018). The registered remaining lifetime capacity in the region is much smaller by comparison with just over 188,000 tonnes available (at end-2018). While permitted and registered capacity is authorised on a lifetime capacity, meaning that these cannot be aggregated and are reported separately, and 1.52 million tonnes lifetime capacity provided by permitted and registered sites.

14.7.10 The geographical spread of these sites is reasonably good. The local authorities within Dublin County have low counts of permitted or registered facilities with no area having more than one of each. A number of local authorities (Laois, Louth, Offaly, and Westmeath) have low registered capacities and are reliant on permitted facilities.

14.7.11 There are three inert landfills in Ireland, plus the Tara Mines facility, which are all located in the EMR, providing predominantly disposal capacity. The four active inert landfill facilities have approximately 6.1 million tonnes of remaining lifetime capacity.

14.7.12 The Integrated Materials Solutions Limited Partnership (IMS) facility had 3.9 million tonnes remaining, with 2.1 million tonnes remaining at Walshestown, at the end of 2018.

14.7.13 In addition, there are a number of non-hazardous municipal landfill sites in the region which have an ongoing requirement for soil and stone material for daily cover, capping and other remediation activities at the sites. These facilities relevant to the proposed development are presented in Table 14-5.

14.7.14 The acceptance of non-hazardous waste and inert soils has reduced since 2016 as available void capacity has diminished. At the end of 2018, the remaining capacity at Drehid was 636,085 m³ compared to 5,006,968 m³ of available capacity when the site commenced activity. Conversely, Ballynagran increased the intake of non-hazardous soil waste for recovery from 163 tonnes in 2017, to 22,002 tonnes in 2018 in response to market demand.

Table 14-5: Licensed Capacity at Active Landfills

Landfill Facility Name	Waste for disposal (maximum tonnes per annum)	Waste types for disposal (maximum tonnes per annum)	Waste types for recovery (maximum tonnes per annum)
Knockharley Landfill - Co. Meath	175,000	100,000 household 45,000 commercial 30,000 industrial	25,000 (C&D) 70,000 (inert waste)
Ballynagran Residual Landfill - Co. Wicklow	175,000	62,500 household 67,500 commercial 45,000 industrial	28,000 (C&D)
Drehid Waste Management Facility - Co. Kildare	120,000	120,000 non-hazardous municipal, commercial, and industrial wastes	No limit for inert waste were used in landfill engineering
Total	470,000	-	-

14.7.15 There are also a number of materials recover facilities/waste transfer stations in operation in the region which are suitable for the acceptance of C&D wastes should they be required. Details of the facilities relevant to the proposed development are presented in Table 14-6.

Table 14-6: Licensed Waste Transfer Stations that could potentially accept C&D waste	
Waste Transfer Station Name	Licensed Limitation from Acceptance of C&D Waste at Active Sites (tonnes per annum) at start of 2016
Starrus Eco Holdings Limited (now Greenstar) – Bray Depot	54,040
Nurendale Ltd., trading as Panda Waste – Rathdrinagh	120,000
Greyhound Recycling and Recovery – Clondalkin	3,000
Thorntons Recycling Centre – Dunboyne	28,020
Nurendale Ltd., trading as Panda Waste – Finglas	40,000
Dean Waste Company Ltd. – Upper Sherriff Street	105,000
Labre Park Civic Amenity Site – Ballyfermot	6,000
Total	356,060

- 14.7.16 There is no dedicated ‘hazardous waste to energy’ or landfill treatment capacity in Ireland. Hazardous soil materials, depending on the nature of the contamination, are treated, and stabilised at specialised indigenous facilities. Treatment activities at some of these facilities can change the characterisation of soil wastes from hazardous to non-hazardous, whereby the soil can then be directed back to non-hazardous facilities. The lack of final treatment capacity for hazardous soils nationally creates a reliance on overseas facilities for final treatment.
- 14.7.17 There has been a significant increase in the treatment of contaminated soils in Ireland. This rise in treatment of hazardous soil waste domestically, is associated with a drop in the volumes exported; in 2018 Ireland exported almost 75,000 tonnes of hazardous soil, a drop of over 26,000 tonnes from 2017, as presented in Table 14-7.

Table 14-7: Hazardous Soil Treatment and Exportation in Ireland					
Type	Waste (tonnes)				
	2014	2015	2016	2017	2018
Irish hazardous waste treatment facilities	1,630	5,938	682	608	18,733
Exported	5,701	14,329	79,591	101,440	74,912

Future Baseline

- 14.7.18 In the EIAR for the July 2022 DUB-1 permitted development it was estimated that the scheme would generate 44,472 tonnes of waste, with 42,616 tonnes reused, 1,970 tonnes recovered/recycled and 238 tonnes disposed.
- 14.7.19 Prediction of C&D waste was projected to increase to 8.2 million tonnes by 2025, and then increase again to 10 million tonnes by 2029. This figure is almost double that of the 2020 figure¹¹.
- 14.7.20 The generation of C&D waste, and the need for adequate management, is expected to grow over the medium- to long-term in line with the planned delivery of housing and infrastructure projects set out in Project Ireland 2040¹⁸, which sets out Ireland’s ambition and vision in terms of development over the next 20 years. The plan includes a number of major construction projects which presents huge potential in terms of preventing and recycling construction waste, as well as a challenge in terms of ensuring the generated waste is managed correctly.

²⁰ European Union, 2003. 2003/33/EC: Council Decision of 19 December 2002 establishing criteria and procedures for the acceptance of waste at landfills pursuant to Article 16 of and Annex II to Directive 1999/31/EC. Document 32003D0033.

- 14.7.21 If Ireland is to meet the targets as set out in the National Development Plan 2018-2027¹⁹, it is vital that there is sufficient capacity for the recovery and/or disposal of the envisaged increased C&D waste. It is expected that due to the contraction in the economy following COVID-19, the envisaged C&D waste quantities may increase in 2022/2023.
- 14.7.22 In July 2020, there were three license applications for new waste facilities in the EMR. The combined capacity of un-commenced facilities is 1.5 million tonnes per annum. This capacity contains 73 % of the future capacity expected nationally (including new applications and un-commenced operations), which is expected to exceed 2.1 million tonnes.

Sensitive Receptors

- 14.7.23 The receptors identified as sensitive to the proposed development, and which have been ‘scoped-in’ to the assessment are summarised in Table 14-8.

Table 14.8: Summary of Sensitive Receptors	
Receptor	Sensitivity
Landfills (i.e. reduction in capacity from disposal of waste)	Medium

14.8 Assessment of Effects Demolition and Construction Stage

Embedded Mitigation

- 14.8.1 Following the successful discharge of relevant pre-commencement planning conditions, and receipt of other required statutory permissions, on-site works would commence with enabling works (described in Chapter 5: Construction Description of this EIAR Volume and will be outlined in the CEMP).
- 14.8.2 Prior to commencement of construction works, a CDWMP would be prepared and agreed with the planning authority. This would be in accordance with the most up to date WMP for the EMR. The following mitigation measures would also be implemented at the demolition and construction stage:
- All excavations would be carefully monitored by a suitably qualified person to ensure that potentially contaminated soil is identified and segregated, if encountered. If any potentially contaminated material is encountered, it will be segregated from clean/inert material, tested, and classified as either non-hazardous or hazardous and further classified as clean, inert, non-hazardous, or hazardous in accordance with the EC Council Decision 2003/33/EC²⁰, which establishes the criteria for the acceptance of waste at landfills. All excavated material would be used.
 - Waste materials generated at the site compound would be stored in suitable receptacles in designated areas of the site compound.
 - On-site segregation of waste materials would be carried out to increase opportunities for off-site reuse, recycling, and recovery, to ensure that the majority of construction materials are either recyclable or recoverable – it is anticipated that the following waste types, at a minimum, would be segregated: made ground, soils and stones and trees/shrubbery. In addition, the following wastes would be segregated at the site compound: organic (food) waste, packaging (paper/card/plastic), mixed dry recyclables and mixed non-recyclable waste.
 - All waste contractors collecting waste from the site would hold a valid collection permit to transport waste, which is issued by the National Waste Collection Permit Office (NWCPO).
 - Construction wastes would be taken to suitably registered/permitted/licenced waste facilities for processing and segregation, recycling, recover and/or disposal. As stated in the baseline section, there are numerous licensed waste facilities in the local region that have sufficient capacity to accept

both hazardous and non-hazardous waste materials and could manage C&D waste from the proposed development.

- All waste leaving site will be reused, recycled, or recovered where possible to avoid material designated for disposal.
- All waste leaving the site would be transported by suitable permitted contractors and taken to suitably registered, permitted, or licenced facilities.
- All waste leaving the site would be recorded and copies of relevant documentation maintained.
- Any hazardous wastes generated (such as chemicals, solvents, glues, fuels, oils) would also be segregated and would be stored in appropriate receptacles (in suitably bunded areas, where required).
- A waste manager would be appointed by the main contractor to ensure effective management of waste during the excavation and construction works.
- All construction staff would be provided with training regarding the waste management procedures.
- The waste from deliveries into the two-bay truck loading bay would be compacted on-site.

- 14.8.3 These mitigation measures would ensure that the waste arising from the C&D phase of the development are dealt with in compliance with the provisions of the Waste Management Act 1996, as amended, and associated regulations including the Litter Pollution Act 1997 (revised in April 2022)²¹ and the EMR WMP (2015-2021). It will also ensure optimum levels of waste reduction, reuse, recycling, and recovery are achieved and will encourage sustainable consumption of resources.

Waste Generation Volumes

- 14.8.4 Waste arising from the site clearance, primary infrastructure and earthworks is expected to comprise of made ground/topsoil, rubble, bricks, concrete, tarmac from former hard standings, gravel, and clay material. It is important to note that the volume of waste generated from demolition would be more difficult to segregate than waste generated during construction, as many of the building materials will be bonded together or integrated.
- 14.8.5 As stated in the methodology, the estimated waste arisings from the proposed development, presented in Table 14-9, have been calculated from an extensive review of surrounding relevant data centers.

Table 14-9: Estimated Demolition Waste and End Destination

Waste Type	Estimated Quantities	Reuse		Recycle/ Recovery		Disposal	
	Tonnes	%	Tonnes	%	Tonnes	%	Tonnes
Glass	4	0	0	85	3	15	1
Concrete, bricks, Tiles, Ceramics	24	95	22	0	0	5	1
Plasterboard	2	0	0	85	2	15	0
Asphalts	38	0	0	95	36	5	2
Metals	7	0	0	95	7	5	0
Slate	4	0	0	85	3	15	1
Timber	6	0	0	90	5	10	1
Total	84	-	22	-	56	-	5

[NOTE: Values have been rounded to the nearest 1 tonne.]

²¹ Government of Ireland, 1997/2009. Litter Pollution Act 1997; Electoral (Amendment) (No. 2) Act 2009 – An Act To Regulate Expenditure By Political Parties And Candidates; To Amend The Local Elections (Disclosure Of Donations And Expenditure) Act 1999; To Amend The Litter Pollution Act 1997; And To Provide For Related Matters.

- 14.8.6 Site preparation, excavations and levelling works required to facilitate construction of the foundations, access roads and the installation of services would generate approximately 6,000 m³ of excavated material. It is currently proposed that all excavated material would be reused on-site.
- 14.8.7 The importation of approximately 12,500 m³ of fill materials would be required for construction of foundations and other ground preparation works. If any soils/stones are imported onto the site from another construction site as a by-product, this would need to be carried out in accordance with Article 27 of the European Communities (Waste Directive) Regulations 2011.
- 14.8.8 As stated in the methodology, the estimated construction waste arisings from the proposed development, presented in Table 14-10, have been calculated from an extensive review of surrounding relevant data centers and normalised using the GFAs.

Table 14-10: Estimated Construction and Excavation Waste and End Destination

Waste Type	Estimated Quantities	Reuse		Recycle/ Recovery		Disposal	
	Tonnes	%	Tonnes	%	Tonnes	%	Tonnes
Mixed C&D Waste	258	0	0	90	233	10	26
Timber	219	0	0	90	197	10	22
Plasterboard	78	0	0	90	71	10	8
Metals	63	0	0	100	63	0	0
Concrete	47	100	47	0	0	0	0
Other (including cabling, ducting, conduits, packaging, and plastic	117	0	0	80	94	20	23
Topsoil	8,215	100	8,215	0	0	0	0
Excavated materials	5,943	100	5,943	0	0	0	0
Total	14,941	-	14,205	-	657	-	79

[NOTE: Values have been rounded to the nearest 1 tonne.]

Demolition and Construction Worker Waste Generation

- 14.8.9 During the demolition and construction period the introduction of a demolition and construction workforce on site would generate municipal waste. These wastes would generally be organic/food waste, dry mixed recyclables (wastepaper, newspaper, plastic bottles, packaging, aluminium cans, tins, and Tetra Pak cartons) and mixed non-recyclables.
- 14.8.10 With consideration of the embedded mitigation measures outlined above, predicted impacts on landfill sites (medium sensitivity) are considered to be of low magnitude. It is expected that the municipal waste generated would be **Temporary, Not Significant to Slight** and **Negative** and **Not Significant in terms of EIA**.

Generation of Demolition and Construction Waste

- 14.8.11 Recycling of inert and non-hazardous waste on site and implementing the CDWMP would ensure that impacts of construction waste are minimised. In this assessment, it has been estimated that

approximately 15,000 tonnes of C&D waste would be generated. There is currently 1,786,000 tonnes of capacity remaining in the waste management facilities and 470,000 tonnes of capacity remaining in landfill sites.

- 14.8.12 Therefore, the reduction in capacity of waste management facilities would be <0.05 % and the reduction in landfill capacity would be <0.05 %. In addition, it is expected that 99.5 % of the C&D waste would be diverted from landfill.
- 14.8.13 With consideration of the embedded mitigation measures outlined above, predicted impacts on landfill sites (medium sensitivity) are considered to be of low magnitude. It is expected that the waste generated would be **Permanent, Not Significant to Slight** and **Negative** and **Not Significant in terms of EIA**.
- 14.8.14 During enabling works, there is the potential for the generation of hazardous waste through land excavation. A ground investigation has been completed and no significant ground contamination issues have been identified, thus it is considered unlikely that there will be any hazardous wastes arising from excavation.

Operation Stage

Embedded Mitigation

- 14.8.15 The following mitigation measures would be implemented during the operation stage of the proposed development:
- On-site segregation of all waste materials into appropriate categories including (but not limited to): dry mixed recyclables, organic food/green waste, mixed non-recyclable waste, batteries (non-hazardous and hazardous), waste electrical and electronic equipment (WEEE) including computers, printers and other ICT equipment and cleaning chemicals (solvents, pesticides, paints, adhesives, resins, detergents, etc.).
 - All waste materials would be stored in colour coded bins or other suitable receptacles in designated, easily accessible locations. Bins would be clearly labelled with the approved waste type to ensure there is no cross contamination of waste materials.
 - All waste collected from the development would be reused, recycled, or recovered where possible, with the exception of those waste streams where appropriate facilities are currently not available.
 - A network of waste facilities would be used to ensure waste is managed efficiently. The waste hierarchy would be implemented, and waste recovery techniques would be employed if recycling is not possible.
 - All waste leaving the site would be transported by suitable permitted contractors and taken to suitably registered, permitted, or licensed facilities.
 - All waste leaving the site would be recorded and copies of relevant documentation maintained.
 - Any waste classified as hazardous would be stored in a designated area (suitably bunded, where required) and would be removed off site by a licensed hazardous waste contractor(s).
- 14.8.16 It is essential that all waste materials are dealt with in accordance with regional and national legislation, as outlined previously, and that time and resources are dedicated to ensuring efficient waste management practices.
- 14.8.17 These mitigation measures would ensure the waste arising from the development is dealt with in compliance with the provisions of the Waste Management Act 1996, as amended, and associated regulations including the Litter Pollution Act 1997 and the EMR WMP (2015-2021). It will also ensure optimum levels of waste reduction, reuse, recycling, and recovery are achieved.

Waste Generation

- 14.8.18 Waste would be managed according to relevant national and regional legislation such as the waste framework directive. Waste collection vehicles would service the development regularly to ensure the resources are dedicated to ensuring efficient waste management practices.
- 14.8.19 Additionally, hazardous waste may be generated from batteries, contaminated chemical drums and other packaging. If the packaging contains residues of or if it is contaminated by dangerous substances, it may be classified as a hazardous waste (depending on the volume and concentration of contaminants). Volumes of potential hazardous wastes are considered likely to be negligible.
- 14.8.20 If the waste materials are not managed and stored correctly on-site, it is likely to lead to litter, health issues or pollution events at the site and/or on adjacent developments. As stated previously, the secondary effect of litter issues is the potential presence of vermin.

Operational Waste Stream Generation

- 14.8.21 The nature of the proposed development means that the generation of waste materials during the operation stage is unavoidable. However, it has not been possible to estimate the quantities of waste that would be generated by the proposed development due to the lack of data.
- 14.8.22 Networks of waste collection, treatment, recovery, and disposal infrastructure are in place in the region to manage waste efficiently from this type of development. Waste which is not suitable for recycling is typically sent for energy recovery. There are also facilities in the region for segregation of municipal recyclables which is typically exported for conversion into recycled products (e.g., paper mills and glass recycling).
- 14.8.23 Overall, the impact on void space in landfill sites is considered to be **Permanent, Not Significant to Slight**, and **Negative** and **Not Significant** in terms of EIA.

14.9 Additional Mitigation

- 14.9.1 No additional mitigation measures are proposed in respect of waste.

14.10 Enhancement Measures

- 14.10.1 No enhancement measures are proposed in respect of waste.

14.11 Assessment of Residual Effects

Demolition and Construction Residual Effects

- 14.11.1 The residual effects are as previously report in the Assessment of Effects section, which are:
- Effect on void space in landfill sites: **Permanent, Not Significant to Slight**, and **Negative (Not Significant)** in terms of EIA).

Operation Residual Effects

- 14.11.2 The residual effects are as previously report in the Assessment of Effects section, which are:
- Effect on void space in landfill sites: **Permanent, Not Significant to Slight**, and **Negative (Not Significant)** in terms of EIA).

- Effect on void space in landfill sites: **Permanent, Not Significant to Slight**, and **Negative (Not Significant in EIA terms)**.

Summary of Residual Effects

14.11.3 Table 14-11 provides a summary of the outcomes of the waste assessment of the proposed development. **Significant Positive** effects are likely these are highlighted in bold green and where **Significant Negative** effects are predicted these are highlighted in bold red.

Table 14-11: Summary of Residual Ground Conditions Effects								
Receptor	Description of Residual Effect	Additional Mitigation	Scale and Significance of Residual Effect**	Nature of Residual Effect*				
				+ -	L U	D I	R IR	M B T St Mt Lt P
Demolition and Construction								
Landfill Sites	Effect on void space	None required	Not significant to Slight	-	L	D	IR	P
Operation								
Landfill Sites	Effect on void space	None required	Not significant to slight	-	L	D	IR	P
Notes: * - = Negative/ + = Positive / +/- = Neutral; R = Reversible, IR = Irreversible; D = Direct, IR = Indirect; L= Likely, U = Unlikely; M = Momentary, B = Brief, T= Temporary, St = Short-term, Mt = medium-term, Lt = Long-term, P = Permanent, R = Reversible. ** Imperceptible, Not Significant, Slight, Moderate, Significant, Very Significant, Profound.								

14.12 Cumulative Effects

Intra-Project Effects

14.12.1 As explained in Chapter 2: EIA Process and Methodology, intra-project cumulative effects are discussed in Chapter 16: Intra Cumulative Effects.

Inter-Project Effects

- 14.12.2 There are numerous cumulative developments planned for in the surrounding area (as presented in Chapter 2: EIA Process and Methodology) that would have a cumulative impact by in-combination effects throughout the demolition and construction stage, and operation stage of the proposed development. However, it is not considered possible to reasonably undertake a quantitative cumulative assessment of the likely significant effects regarding waste for the reasons explained in the Assumptions and Limitations section of this chapter. Therefore, a qualitative assessment has been carried out.
- 14.12.3 It is reasonably considered that all the cumulative developments would be developed in line with the similar policy requirements as the proposed development; in particular with the requirements for maximising reuse and recycling of CDE waste through a CDWMP (or equivalent) and the meeting of targets for recycling and composting waste during operation. Therefore, results would be similar to that presented for residual effects; resulting in the following effects:
- Demolition and Construction Stage:
 - Effect on void space in landfill sites: **Permanent, Not Significant to Slight**, and **Negative (Not Significant in EIA terms)**;
 - Operation Stage:

14.13 Summary of Assessment Background

- 14.13.1 This chapter has detailed the potential waste effects for the demolition and construction stage, and operation stage of the proposed development. The assessment has been undertaken considering the relevant national and local guidance and regulations.
- 14.13.2 The baseline assessment was undertaken using publicly available information and indicates that:
- The local authority responsible for setting and administrating waste management activities in the site area is SDCC.
 - There are 106 authorised facilities in the EMR for soil and stone acceptance.
 - Licensed SRF capacities in the EMR are concentrated in the local authority areas of Fingal, Meath, Kildare, and Wicklow.
 - Waste licence facilities in the EMR are of the scale required by the current markets.
 - The four active inert landfill facilities located in the EMR have approximately 6.1 million tonnes of remaining lifetime capacity to accept lightly contaminated soils.
 - There are a number of non-hazardous municipal landfill sites in the region which have an ongoing requirement for soil and stone material for daily cover, capping and other remediation activities at the sites.
 - There are a number of materials recover facilities/waste transfer stations in operation in the region which are suitable for the acceptance of C&D wastes (should they be required).
 - There is no dedicated 'hazardous waste to energy' or landfill treatment capacity in Ireland.
- 14.13.3 Overall, the results of the baseline assessment identified numerous waste management infrastructure facilities and landfill sites within the surrounding area. Many of the facilities/sites were indicated to have sufficient capacity to support future influxes of C&D and operational waste.

Demolition and Construction Effects

- 14.13.4 During the demolition and construction stage, waste would be produced from the demolition of the single storey dwelling on-site, and the construction of the data centers and accommodating facilities.
- 14.13.5 Networks of waste collection, treatment, recovery, and disposal infrastructure are in place in the region to manage waste efficiently from this type of development. Waste which is not suitable for recycling is typically sent for energy recovery. There are also facilities in the region for segregation of municipal recyclables which is typically exported for conversion into recycled products (e.g., paper mills and glass recycling). According to the C&D Waste Update Report (2020)¹¹ there are 106 authorised facilities in the EMR for soil and stone acceptance, three landfill sites for C&D waste and a number of materials recover facilities/waste transfer stations in operation in the region which are suitable for the acceptance of C&D wastes should they be required.
- 14.13.6 It is anticipated that the proposed development would generate approximately 15,000 tonnes of C&D waste in addition to operational waste. However, mitigation measures such as segregating of waste, using appropriate storage, and implementing a CDWMP (and CEMP) would reduce likely negative impacts and maximise the reuse and recycling and/or recovery of waste. Therefore, the reduction in landfill capacity would be < 0.05 %. In addition, it is expected that 99.5 % of the C&D waste and over 90 % of operational waste would be diverted from landfill.

- 14.13.7 Overall, it is considered, with embedded mitigation in place, that the demolition and construction stage activities would result in a **Negative, Direct, and Not Significant to Slight** effect (**Not Significant** in terms of EIA) on landfill sites.

Operational Effects

- 14.13.8 During the operation stage, waste would be managed in accordance with relevant national and regional legislation such as the Waste Framework Directive. Waste collection vehicles would service the development regularly to ensure the resources are dedicated to ensuring efficient waste management practices.
- 14.13.9 Additionally, hazardous waste may be generated from batteries, contaminated chemical drums and other packaging. If the packaging contains residues of or if it is contaminated by dangerous substances, it may be classified as a hazardous waste (depending on the volume and concentration of contaminants).
- 14.13.10 Networks of waste collection, treatment, recovery, and disposal infrastructure are in place in the region to manage waste efficiently from this type of development. Waste which is not suitable for recycling is typically sent for energy recovery. There are also facilities in the region for segregation of municipal recyclables which is typically exported for conversion into recycled products (e.g., paper mills and glass recycling).
- 14.13.11 Overall, the effect on landfill sites is likely to be **Negative, Direct, Not Significant to Slight, and Not Significant** in terms of EIA.

Cumulative Effects

- 14.13.12 It is reasonably assumed that all the cumulative developments would be developed in line with the similar policy requirements as the proposed development, including the requirements for maximising reuse and recycling of CDE waste through a CDWMP (or equivalent) and the meeting of targets for recycling and composting waste during operation. Therefore, results would be similar to that of the proposed development, resulting in a cumulative effect that is **Negative, Direct, Not Significant to Slight, and Not Significant** in terms of EIA.

15 MATERIAL ASSETS

15.1 Introduction

- 15.1.1 This chapter of the EIAR reports on the likely significant material assets effects to arise from the demolition and construction stage and the operation stage of the proposed development.
- 15.1.2 The chapter describes the material assets policy context; the methods used to assess the potential impacts and likely effects; the baseline conditions at and surrounding the site; the likely material assets effects taking into consideration embedded mitigation; the need for additional mitigation and enhancement; the significance of residual effects; and cumulative effects.
- 15.1.3 There are no technical appendices supporting this chapter.
- 15.1.4 The 2011 EIA Directive (2011/92/EU) state that material assets include architectural and archaeological heritage. In accordance with the 2014 EIA Directive, those heritage aspects are dealt with as components of archaeology and cultural heritage which is assessed in EIAR Volume 2 Chapter 2: Cultural Heritage.
- 15.1.5 Additionally, the EPA EIA Report Guidelines 2022 state that material assets are now taken to mean built services and infrastructure, roads, and traffic, as well as waste management.
- 15.1.6 In this EIAR, the impacts on the material assets listed above have been considered in the following Chapters and are not considered further in this Chapter:
- Chapter 6: Population and Human Health;
 - Chapter 7: Transport;
 - Chapter 8: Air Quality; and
 - Chapter 14: Waste.
- 15.1.7 The European Commission refers to a number of examples of material assets including buildings, other structures, mineral resources, and water resources. The impacts on mineral resources and water resources have been considered in the following Chapters and are not considered further in this Chapter:
- Chapter 10: Water Resources and Flood Risk; and
 - Chapter 12: Ground Conditions.
- 15.1.8 As there is no published or formalised technical guidance relating to the assessment of material assets effects, professional judgement, experience, and best practice methods have been drawn upon to assess the significance of the potential effects of the proposed development. The assessment has also taken account of applicable legislation, guidance, and policy.

15.2 Assessment Scope

Technical Scope

- 15.2.1 The technical scope of the assessment has considered the following:
- Direct disturbance and damage to existing or proposed infrastructure; and
 - Indirect disturbance of assets in the surrounding area.

- 15.2.2 It has been assumed that the Proposed Development would not impact on any other structures.
- 15.2.3 The potential impacts on built services and infrastructure, if any, have been assessed in terms of the following:
- Power and Electricity Supply;
 - Gas Supply;
 - Water Services (including surface water and foul drainage infrastructure and water supply); and
 - Telecommunications.
- 15.2.4 As several of the assets mentioned above have been addressed in other chapters within this EIAR, they are not discussed in detail in this chapter, but references are provided to other EIAR chapters where appropriate.
- 15.2.5 Mitigation measures are proposed (where required) to minimise the effect of the proposed development on the environment during the demolition and construction and operation stages.

Spatial Scope

- 15.2.6 The site lies within the South Dublin County Council (SDCC) area in the north of the Profile Park. The study area is considered to comprise the surrounding utility network within Profile Park and the wider area.

Temporal Scope

- 15.2.7 The assessment has considered impacts arising during the demolition and construction stage, which would be expected to be temporary (less than a year) in nature, and from the operation stage which would be expected to be long-term (15-60 years) to permanent (>60 years) in nature.

15.3 Baseline Characterisation Method

Desk Study

- 15.3.1 In order to establish the existing baseline material assets conditions in the study area, relevant data was reviewed and assessed. The data sets and associated sources can be summarised as follows:
- Engineering Planning Report¹;
 - Drainage layout drawing²;
 - Existing Below Ground Services drawing³.

Field Study

- 15.3.2 Field study/data collection was not required at the site as the data provided by other sources was deemed to be adequate and representative of the site conditions.

¹ DUB13-RP-00-C001-V0-PL-PIN

² DUB13-DR-UG-C127-V2-PL-PIN

³ DUB13-DR-SP-C012-V2-PL-PIN

15.4 Assessment Method Methodology

15.4.1 To assess potential effects on material assets a desktop study was carried out on existing material assets found at the site and within the immediate surrounding area.

Demolition, Construction and Operation Stage

15.4.2 Projections of resource use on economic assets of human origin have been undertaken for the demolition and construction and operation stages of the proposed development, and the impacts have been assessed.

15.4.3 The baseline has been defined through a desktop review of existing and planned licences, studies, applications, datasets and review of the DUB-1 EIAR. This established the current status of known and planned infrastructure within the study area.

Cumulative Stage

15.4.4 For the purposes of assessing the cumulative effects, consideration has been given to all cumulative schemes that have the potential to result in a significant cumulative effect alongside the proposed development. Full details of all the cumulative schemes are given in Chapter 2: EIA Process and Methodology. The baseline and assessment of significance, and the judgement of the magnitude of change stages are as above for the demolition and construction and operation stages. Only receptors for which the proposed development is predicted to result in a significant residual effect alone are included in this part of the assessment.

15.5 Assessment Criteria

15.5.1 The criteria used to assess whether an effect is significant or not, are given in the EPA Guidelines 2022, and are set out in Table 2-3 in Chapter 2: EIA Process and Methodology. The significance of effects is determined by consideration of the sensitivity of the receptor, the magnitude of impact and scale of the effect. In assessing the significance of an effect, consideration has been given to the quality, duration, probability and type of the effect, and its geographical extent, and the application of professional judgement. There is some flexibility based on professional judgement to take account of any particular value a heritage asset or receptor may have because of its use or presentation for public amenity and tourism or education.

15.5.2 Based on professional judgement, effects of moderate significance and above are considered significant in EIA terms.

15.6 Assumptions and Limitations

15.6.1 The assessment has relied on data pertaining to existing licences or as-built infrastructure supplied by others. It has been assumed that these datasets have been reported correctly.

15.7 Baseline Conditions Existing Baseline

Land Ownership

15.7.1 The subject site is as described in Volume 1, Chapter 4: Description of Development.

15.7.2 The site itself is a material asset, as the land has been zoned for employment development and is owned by the Applicant. The nature of the proposed development means that the land's material asset should not be affected by the development and is not considered further.

Power and Electricity Supply

15.7.3 The main power supply to the Business Park is from the ESB EirGrid. This power network is known to be constrained in terms of providing electrical grid power to the area.

15.7.4 The main power supply to the Business Park is from the EirGrid. This power network is known to be constrained in terms of providing electrical grid power to the area.

15.7.5 The power requirements for the proposed development would be provided via a connection to a 110 kV EirGrid substation, which is subject to a SID application to ABP [An Bord Pleanála Ref - 312793]. The substation would then provide a 20 kV electrical power distribution at medium voltage throughout the site. The site distribution system supplies all electrical rooms where stepdown transformers are deployed to provide 400/230 V electricity to all loads.

15.7.6 To reduce electrical losses between HV/MV/LV conversions, the Applicant would install low loss transformers which comply with the Ecodesign directive 2009/125/EC as a minimum.

15.7.7 The MFGP consented under the July 2022 DUB-1 consented scheme would provide some supply to DUB-13 until the full electrical load is provided by the grid connection and then would be called upon for use on the local network drops in response to EirGrid's Data Centre Connection Offer Policy and Process (DCCOPP) regulations.

15.7.8 Photovoltaic panels would be installed at the site to comply with Part L of the building regulations, with an approximate ratio of 1 m2 per 20 m2 of office space.

Gas

15.7.9 The Business Park is served by the Gas Networks Ireland (GNI) network, which is a natural gas network. Supply is understood to not be constrained in the area.

Telecommunications

15.7.10 Multiple connection service lines currently exist along Falcon Avenue and Concorde Drive, including

- Virgin Media Fibre Cable;
- BT Fibre Cable;
- Colt Fibre Cable; and
- Eu Network Fibre Cable.

15.7.11 In addition, there are numerous Chambers situated along both Falcon Avenue and Concorde Drive, owned by Magnet and Virgin Media (UPC/NTL), that provide access to the underground utility services listed above.

15.7.12 A telecommunications network would be installed at the site which would serve all of the data center buildings on the site. The connection to the regional network would be implemented by the statutory network operator.

Surface Water Infrastructure

15.7.13 The Baldonnel Stream crosses under Profile Park Road and flows through the south of the site, entering the site in the southeast before meandering north-west and then leaving the site. Approximately 190 m downstream (west) it enters a short culvert, and downstream it discharges to a long twin-pipe culvert.

Foul Drainage Infrastructure

- 15.7.14 SDCC record drawings identified a 225mm Ø mains network, located adjacent to the south-eastern boundary of the site and within Falcon Avenue. This line forms part of reticulation network for Profile Park.
- 15.7.15 The existing foul sewer network is understood to have adequate capacity to cater for the proposed discharge from the site and there are no known issues noted with the sewer reticulation network.
- 15.7.16 A pre-connection enquiry (PCE) form has been submitted to Irish Water and a response is awaited.

Water Supply

- 15.7.17 SDCC record drawings identify an existing 6" (160mm) Ø main located along the south-eastern boundary of the property, within Falcon Avenue adjacent to the site. One 160mm Ø capped connection with sluice valves has been left off the aforementioned water main, in order to facilitate development at the site.
- 15.7.18 Additionally, there is an existing 700mm Ø trunk water main running parallel to the New Nangor Road adjacent to the northern boundary of the site.
- 15.7.19 From discussions with SDCC, it is understood that there is adequate capacity within the existing watermain network to supply the proposed development.

Future Baseline

- 15.7.20 As per the methodology set out in Chapter 2: EIA Process and Methodology, effects of the proposed development are to be assessed against a future baseline, which considers the July 2022 DUB-1 permitted development as operational.

Demolition and Construction

- 15.7.21 The proposed development demolition and construction works would commence in Q1 2024, with indicative completion targeted for Q4 2024 / Q1 2025. During this construction period there are no changes of relevance to material assets of the proposed development.

Operation

- 15.7.22 The changes to the future baseline with regard to material assets are associated with power and electricity supply and gas supply. When the July 2022 DUB-1 permitted development is operational the grid connection to the EirGrid will be available as the primary source of power to the proposed development. The MFGP consented as part of the July 2022 DUB-1 consented scheme will be operational and powered through a GNI connection source with hydrogenated vegetable oil (HVO) to be used as the primary back-up fuel.
- 15.7.23 The MFGP would provide some supply to DUB-13 until the full electrical load is provided by the grid connection and thereafter would operate as a peaking power unit and would address EirGrid's DCCOPP requirements and would have the capacity to provide equal energy to the amount consumed on-site. In the event of a local grid network failure this power generation facility would provide additional power to the network infrastructure on demand, in accordance with the EirGrid DCCOPP.

Sensitive Receptors

- 15.7.24 The receptors identified as sensitive to the proposed development, and which have been 'scoped-in' to the assessment are summarised in Table 15-1.

Table 15-1: Summary of Sensitive Receptors	
Receptor	Sensitivity
Electrical grid capacity	High

Table 15-1: Summary of Sensitive Receptors	
Receptor	Sensitivity
Surface water infrastructure	Medium
Foul water infrastructure network	Low
Gas Network	Low
Water supply network	Low
Telecommunications network	Low

15.8 Assessment of Effects
Demolition and Construction Stage Effects

Embedded Mitigation

- 15.8.1 As described in Chapter 5: Demolition and Construction Environmental Effects, a project-specific CEMP would be established and maintained by the contractors during the demolition and construction stage which would cover all potentially polluting activities and emergency response procedures. All personnel working on the site would be trained in the implementation of the procedures. The CEMP would be secured by means of an appropriately worded planning condition. An outline CEMP would be submitted as part of this application.

Power and Electrical Supply

- 15.8.2 During construction, contractors will require power for heating and lighting of the site and their facilities. Some on site equipment/plant will also require power and a construction compound and temporary power supply would be installed for the demolition and construction stage, however it is likely that that the construction compound would be facilitated within the July 2022 DUB-1 consented scheme
- 15.8.3 Power and electrical supply receptors are of high sensitivity as the development is located in what is noted as a constrained area in terms of electrical grid capacity.
- 15.8.4 Overall, the power demand and electrical effects from the demolition and construction stage are considered to be **Temporary, Imperceptible** and **Neutral** i.e. **Not Significant** in terms of EIA.

Gas Supply

- 15.8.5 There is currently no gas supply to the site and supply is not anticipated to be required during the demolition and construction stage.
- 15.8.6 Overall, effects during the demolition and construction stage are considered to be **Temporary, Imperceptible** and **Neutral** i.e. **Not Significant** in terms of EIA.

Surface Water Infrastructure

- 15.8.7 The site currently drains into the Baldonnel Stream. Above ground surface water attenuation ponds would be constructed as part of the proposed development meaning they would be in place during the majority of the construction stage, as outlined in Chapter 5: Construction Description.
- 15.8.8 As with all construction projects, there is potential for surface water runoff to become contaminated with pollutants associated with the demolition and construction works. Contaminated water which arises from construction sites can pose a risk to surface water quality within the stream. The potential main contaminants include:

- Increase in suspended solids due to muddy water with increase turbidity, arising from excavation and ground disturbance;
- Spills and releases of cement and concrete causing an increase turbidity and pH arising from the use of these construction materials;
- Spills and releases of wastewater (nutrient and microbial rich) arising from poor on-site toilets and washrooms.

- 15.8.9 There also is a risk of accidental pollution incidences from the following sources:
- spillage or leakage of temporary oils and fuels stored on-site;
 - spillage or leakage of oils and fuels from construction machinery or site vehicles;
 - spillage of oil or fuel from refuelling machinery on site; and
 - run-off from concrete and cement during pad foundation construction.
- 15.8.10 With consideration of the embedded mitigation measures outlined above and within Chapter 5: Demolition and Construction Description predicted impacts from surface water runoff would be low. Effects are considered to be **Temporary, Imperceptible, and Neutral i.e., Not Significant** in terms of EIA.

Foul Drainage Infrastructure

- 15.8.11 Welfare facilities required for the construction compound and workers with portable toilets would be provided for construction workers. A temporary connection to the foul water drainage network within Profile Park may also be required to accommodate the site welfare facilities during construction. It is understood that the foul water drainage network has sufficient available capacity for the wastewater discharges for the temporary demolition and construction stage.
- 15.8.12 The permanent foul connection to the wider network in Profile Park would be undertaken in consultation with Irish Water to ensure there is no impact on the network when the connection is made.
- 15.8.13 Accordingly, foul drainage effects on the public sewerage network during the demolition and construction stage are considered to be **Temporary, Imperceptible** and **Neutral i.e., Not Significant** in terms of EIA.

Water Supply

- 15.8.14 Welfare facilities will be required for the construction staff. A temporary connection to the mains water supply would be established for the construction phase. The water demand during the construction phase would not be significant enough to effect existing pressures and from discussions with the SDCC it is understood that there is adequate capacity within the existing watermain network to supply the proposed development.
- 15.8.15 Effects associated with water supply are considered to be **Temporary, Imperceptible** and **Neutral i.e., Not Significant** in terms of EIA.

Telecommunications

- 15.8.16 During the demolition and construction stage a mobile connection would be provided. A telecommunications network would be installed at the site which would serve all of the proposed data center buildings. The connection to the regional network would be implemented by the statutory network operator.
- 15.8.17 Effects associated with telecommunications during the demolition and construction stage are considered to be **Temporary, Imperceptible** and **Neutral i.e., Not Significant** in terms of EIA.

Operation Stage Effects

Embedded Mitigation

- 15.8.18 Prior to operation of the proposed development, a comprehensive set of operational procedures would be established which would include site-specific mitigation measures and emergency response measures, as outlined in Chapter 5: Demolition and Construction Environmental Management.
- 15.8.19 The primary potential impact on surface water infrastructure relates to a failure or accidental spill of diesel fuel which is stored and used on-site for back-up power generation.
- 15.8.20 The proposed development has been designed with the potential to connect to a local heat network in the future, as part of an external off-site district heating scheme developed by others, should there be a local demand. To ensure that the heating system of the proposed development has the flexibility to connect into such a system whilst also maintaining a live data centre, valved, and capped off connections would be provided on return water risers, ready for future connection to a district heating network. Whilst the proposed development has been designed to incorporate a future district heating scheme, this has not been considered as embedded mitigation in the assessment of effects as a district heating scheme within reasonable proximity to the site is yet to be established. On this basis district heating has not been considered further in this chapter.

Power and Electrical Supply

- 15.8.21 The power requirements for the proposed development would be provided via a connection to a 110 kV EirGrid substation, which is subject to a SID application to ABP (due to be decided). The substation would then provide a 20 kV electrical power distribution at medium voltage throughout the site. The site distribution system supplies all electrical rooms where stepdown transformers are deployed to provide 400/230 V electricity to all loads.
- 15.8.22 To reduce electrical losses between HV/MV/LV conversions, the Applicant would install low loss transformers which comply with the Ecodesign directive 2009/125/EC as a minimum.
- 15.8.23 The MFGP consented under the July 2022 DUB-1 scheme would provide some supply to DUB-13 until the full electrical load is provided by the above grid connection and then would be called upon for use on the local network drops in response to EirGrid DCCOPP regulations.
- 15.8.24 DUB-13 would connect to the MFGP through and internal connection through the July 2022 DUB-1 permitted development Photovoltaic panels would be installed at the site to comply with Part L of the building regulations, with an approximate ratio of 1 m² per 20 m² of office space.
- 15.8.25 Effects on power and electrical supply are considered to be **Permanent, Imperceptible** and **Neutral i.e., Not Significant** in terms of EIA.

Gas Supply

- 15.8.26 No gas supply is required as part of the proposed development. As such, it is considered there is **no effect** on gas supply.

Surface Water Infrastructure

- 15.8.27 Surface water from the proposed development has been designed in accordance with the Greater Dublin Strategic Drainage Strategy under Best Management Practice. The is site currently largely greenfield and the proposed surface water measures incorporate SuDs and are aimed at improving the general surface water management of the site, by introducing interceptors, attenuation measures and by restricting the ultimate discharge to the existing surface water network and to the Baldonnell Stream.
- 15.8.28 Surface water from the rear roof of the data center, would be directed via rainwater pipes into an on-site reticulation system. The outflow from this system would be connected into the surface water

drainage network collecting run-off from the road areas and would be discharged into an attenuation pond.

- 15.8.29 The front roof area of the buildings drain into the permeable paving sub-base, prior to ultimate discharge into Baldonnel Stream to the west via an attenuation pond.
- 15.8.30 Surface water from car park areas and access roads / delivery areas would be drained via a series of on-site gullies and channels into a separate system of below ground gravity surface water sewers and permeable paving.
- 15.8.31 The outflow from the proposed development would be restricted by way of a Hydrobrake facility, which would limit the total discharge to 2.8 l/s (litres per second) - the calculated QBAR greenfield run-off rate.
- 15.8.32 Oil and fuel leaks from fuel storage, parked cars, service vehicles, HGV deliveries etc. have the potential to impact surface water. This would be managed through the inclusion of hydrocarbon interceptors in the design for the surface water network draining these areas.
- 15.8.33 Surface water is discussed further in Chapter 10: Water Resource and Flood Risk and the Engineering Planning Report accompanying the application.
- 15.8.34 Effects associated with surface water infrastructure during operation are considered to be **Permanent, Imperceptible, and Neutral** i.e. **Not Significant** in terms of EIA.

Foul Drainage Infrastructure

- 15.8.35 The proposed development would lead to an increase in foul water discharge from the site. It is proposed to discharge foul water via a 225mm Ø gravity foul sewer outfall into the existing 225mm Ø spur connection laid along Falcon Avenue, which then runs in a southerly direction. It is understood that the foul water drainage network has sufficient available capacity for the wastewater discharges during operation.
- 15.8.36 As such, foul drainage effects on the public sewerage network during the operation stage are considered to be **Permanent, Imperceptible, and Neutral** i.e. **Not Significant** in terms of EIA.

Water Supply

- 15.8.37 It is proposed to serve the proposed development via connection off the 160mm Ø network, as located in Falcon Avenue. Water meters, sluice valves and hydrants, in line with Irish Water requirements and specifications, would be installed at the connections onto the aforementioned existing water mains, as required. It is understood that there is adequate capacity within the existing water main network to supply the proposed development.
- 15.8.38 As such, effects on water supply during the operation stage are considered to be **Permanent, Imperceptible, and Neutral** i.e., **Not Significant** in terms of EIA.

Telecommunications

- 15.8.39 Multiple connection service lines currently exist along Falcon Avenue and Concorde Drive and there is understood to be sufficient capacity available in the network to supply the proposed development with telecommunications. As such, effects associated with telecommunications during the operation stage are considered to be **Permanent, Imperceptible, and Neutral** i.e., **Not Significant** in terms of EIA.

15.9 Additional Mitigation

- 15.9.1 No additional mitigation measures are proposed.

15.10 Enhancement Measures

- 15.10.1 No enhancement measures are proposed aside from enhancements in flood risk and biodiversity associated with the Baldonnel Stream which are discussed in Chapter 10: Water Resource and Flood Risk and Chapter 11 Ecology.

Demolition and Construction Residual Effects

- 15.10.2 The residual demolition and construction effects remain as reported in the assessment of effects section:
- **Temporary, Imperceptible and Neutral** effects on power and electrical supply
 - **No effect** on gas supply.
 - **Temporary, Imperceptible and Neutral** effects on surface water infrastructure, foul drainage infrastructure, water supply and telecommunications.
- 15.10.3 These are Not Significant in terms of EIA.

Operation Residual Effects

- 15.10.4 The residual operation stage effects remain as reported in the assessment of effects section:
- **Permanent, Imperceptible and Neutral** effects on power and electrical supply.
 - Permanent, Imperceptible, and Neutral effects on gas supply.
 - **Permanent, Imperceptible, and Neutral** effects on surface water infrastructure, foul drainage infrastructure, water supply and telecommunications.
- 15.10.5 These are Not Significant in terms of EIA.

Summary of Residual Effects

- 15.10.6 Table 15-2 provides a tabulated summary of the outcomes of the material assets assessment of the proposed development. Where **Significant Positive** effects are likely these are highlighted in bold green and where **Significant Negative** effects are predicted these are highlighted in bold red.

Table 15-2: Summary of Residual Material Asset Effects

Receptor	Description of Residual Effect	Additional Mitigation	Scale and Significance of Residual Effect **	Nature of Residual Effect*				
				+ -	L U	D I	R IR	M B T St Mt Lt P
Demolition and Construction								
Power and Electrical Supply	Increased demand on the surrounding network	None required	Imperceptible	+/-	L	D	IR	T
Gas Supply				+/-	L	D	IR	T
Foul Water Infrastructure				+/-	L	D	IR	T
Water Supply				+/-	L	D	IR	T
Telecommunications				+/-	L	D	IR	T

Table 15-2: Summary of Residual Material Asset Effects

Surface Water Infrastructure	Risks of contamination from increased run-off, machinery on site, concrete activities, and/or accidental spillages.			+/-	L	D	IR	T
Operation								
Power and Electrical Supply	Increased demand on the surrounding network	None required	Imperceptible	+/-	L	D	IR	P
Gas Supply				+/-	L	D	IR	P
Foul Water Infrastructure				+/-	L	D	IR	P
Water Supply				+/-	L	D	IR	P
Telecommunications				+/-	L	D	IR	P
Surface Water Infrastructure	Risk of contamination to surrounding water environment.			+/-	L	D	IR	P
Notes: * - = Negative/ + = Positive / +/- = Neutral; R = Reversible, IR = Irreversible; D = Direct, ID = Indirect; L= Likely, U = Unlikely; M = Momentary, B = Brief, T= Temporary, St = Short-term, Mt = Medium-term, Lt = Long-term, P = Permanent. ** Imperceptible, Not Significant, Slight, Moderate, Significant, Very Significant, Profound.								

15.11 Cumulative Effects
Intra-Project Effects

15.11.1 As explained in Chapter 2: EIA Process and Methodology, intra-project cumulative effects are discussed in Chapter 16: Cumulative Effects.

Inter-Project Effects

15.11.2 Table 15-3 provides a summary of the likely cumulative effects resulting from the proposed development and the cumulative developments.

Table 15-3: Inter-Project Cumulative Effects

Cumulative Development	Demolition and Construction		Operational Stage	
	Cumulative Effects Likely?	Reason	Cumulative Effects Likely?	Reason
SD20A/0283 Microsoft, Grange Castle Business Park,	No	There is some overlap with the demolition and construction stages of the Microsoft, UBC Properties, Cyrus One,	No	The design of the proposed development is such that cumulative effects are unlikely.

Table 15-3: Inter-Project Cumulative Effects

Cumulative Development	Demolition and Construction		Operational Stage	
	Cumulative Effects Likely?	Reason	Cumulative Effects Likely?	Reason
Nangor Road Clondalkin, Dublin 22 VA06S.308585 SD20A/0121 UBC Properties, townlands within Grange Castle Business Park, Baldonnel, Dublin 22 ABP Ref - 308585 UBC Properties - Grange Castle South Business Park, Dublin 22 SD17A/0377 Digital Reality Trust - Profile Park, Baldonnel, Dublin 22, D22 TY06 SD18A/0134 Cyrus One - Grange Castle Business Park, Clondalkin, Dublin 22 SD20A/0295 (amendment to SD18A/0134) Cyrus One Townlands within Grange Castle South Business Park, Baldonnel, Dublin 22 ABP Ref - 309146 Cyrus One - Grange Castle South Business Park, Baldonnel, Dublin 22		Equinix and Centrica developments. However, during the demolition and construction stage demand on the network would be predominantly for minor temporary connections for welfare facilities and plant and or would be provided by mobile connections. The permanent connections to the wider network in Profile Park would be undertaken in consultation with statutory consultees to ensure there is no impact on the network when connections are made.		In particular electrical and gas demand is managed though the EirGrid connection and the MFGP, which would provide suitable capacity to support the development.

Table 15-3: Inter-Project Cumulative Effects				
Cumulative Development	Demolition and Construction		Operational Stage	
	Cumulative Effects Likely?	Reason	Cumulative Effects Likely?	Reason
SD21A/0186 Equinix (Ireland) Ltd – Plot 100, Profile Park, Nangor Road, Clondalkin, Dublin 22				
SD22A/0156 Equinix (Ireland) Ltd – Plot 100, Profile Park, Nangor Road, Clondalkin, Dublin 22				
SD21A/0217 Digital Netherlands VIII B.V - Profile Park, Nangor Road, Clondalkin, Dublin 22				
SD21A/0167 Centrica Business Solutions – Profile Park, Baldonnel, Dublin 22				
ABP Ref – 312793 Vantage Data Centers Dub 11 Limited - Profile Park Business Park and partly within Grange Castle Business Park, Dublin 22	No	The permanent electrical connection to the substation would occur before the proposed development is operational, and the connection would be undertaken in consultation with ESB to ensure there is no impact on the network when connections are made.	No	When operational the EirGrid substation will provide power to the site with power demand offset by the MFGP within the DUB-1 site. The EirGrid substation is subject to a separate SID application to ABP (due to be decided).

Demolition and Construction Cumulative Effects

15.11.3 Cumulative effects during the demolition and construction stage of the proposed development are unlikely for material assets and effects are considered to be **Temporary, Imperceptible and Neutral**.

Operation Cumulative Effects

15.11.4 Cumulative effects during the operation stage of the proposed development are unlikely for material assets and effects are considered to be **Permanent, Imperceptible, and Neutral**.

15.12 Summary of Assessment

- 15.12.1 This chapter has detailed the potential material assets effects due to the demolition and construction and operation stages of the proposed development. The assessment of demolition and construction and operational stages has been undertaken considering relevant national and local guidance and regulations.
- 15.12.2 The site lies in the north of the Profile Park and the study area is considered to comprise the surrounding utility network with Profile Park and the wider area.
- 15.12.3 The main power supply to the Business Park is from EirGrid. This power network is known to be constrained in terms of providing electrical grid power to the area.
- 15.12.4 The Business Park is served by the GNI network, which is a natural gas network. It is understood the network is not constrained.
- 15.12.5 The power requirements for the proposed development would be provided via a connection to a 110 kV EirGrid substation, which is subject to a SID application to ABP (due to be decided). The substation would then provide a 20 kV electrical power distribution at medium voltage throughout the site. The site distribution system supplies all electrical rooms where stepdown transformers are deployed to provide 400/230 V electricity to all loads.
- 15.12.6 The MFGP consented under the July 2022 DUB-1 scheme would provide some supply to DUB-13 until the full electrical load is provided by the above grid connection and then would be called upon for use on the local network drops in response to EirGrid DCCOPP regulations.
- 15.12.7 DUB-13 would connect to the MFGP through and internal connection through the July 2022 DUB-1 permitted development
- 15.12.8 In the event of a loss of power supply from EirGrid, the onsite emergency generators would provide a back-up supply.
- 15.12.9 The Baldonnel Stream crosses under Park Road and flows through the south of the site, entering the site in the southeast before meandering north-west and then leaving the site. Approximately 190 m downstream (west) it enters a short culvert, and downstream it discharges to a long twin-pipe culvert.
- 15.12.10 Surface water from the proposed development has been designed in accordance with the Greater Dublin Strategic Drainage Strategy. The is site currently greenfield and the proposed surface water measures incorporate SuDs and are aimed at improving the general surface water management of the site, by introducing interceptors, attenuation measures and by restricting the ultimate discharge to the existing surface water sewers and to the Baldonnel Stream) which will be restricted by way of a Hydrobrake, limiting the total discharge to the calculated QBAR greenfield run-off rate.
- 15.12.11 Foul water will be discharged via gravity sewer into the existing connection Falcon Avenue.
- 15.12.12 Water supply will be from a network connection located in Falcon Avenue. Water meters, sluice valves and hydrants will be installed at the connections. It is understood that there is suitable capacity in the network to supply to proposed development.
- 15.12.13 A telecommunications network will be installed at the site which will serve all of the data centers and will be connected to the regional network by the statutory network operator. It is understood that there is suitable capacity in the network to supply to proposed development.

Demolition and Construction Effects

- 15.12.14 During the demolition and construction stage demand on the networks outlined above will be predominantly for minor temporary connections for welfare facilities and plant and or will be provided by mobile connections.
- 15.12.15 The permanent connections to the wider network in Profile Park will be undertaken in consultation with statutory undertakers to ensure there is no impact on the network when connections are made.
- 15.12.16 Overall, effects during the demotion and construction are considered to be **Temporary, Imperceptible** and **Neutral** i.e., **Not Significant** in terms of EIA.

Operation Stage Effects

- 15.12.17 With consideration of the July 2022 DUB-1 consented scheme the assessment identified that there is adequate power and electrical provision for the proposed development. The assessment identified that there are adequate facilities in regard to foul water, water supply and telecommunications supplies for the operation stage of the proposed development.
- 15.12.18 Effects on power and electrical supply during operation and are considered to be **Permanent, Imperceptible, and Neutral** i.e., **Not Significant** in terms of EIA.
- 15.12.19 **No Effects** are predicted in regard to gas supply.
- 15.12.20 Surface water from the proposed development has been designed in accordance with the Greater Dublin Strategic Drainage Strategy with restricted discharge at greenfield run off rates to the existing surface water network and to the Baldonnel Stream. The network incorporates pollution presentation measures.
- 15.12.21 Effects surface and foul water infrastructure, water supply and telecommunications during operation are considered to be **Permanent, Imperceptible, and Neutral** i.e., **Not Significant** in terms of EIA.

Cumulative Effects

- 15.12.22 Cumulative effects during the demolition and construction and operation stages of the proposed development are considered to be unlikely for material assets.

16 CUMULATIVE EFFECTS

Introduction

- 16.1 The Planning and Development Regulations require that the likely significant environmental effects of a development are considered, including cumulative effects which are defined in the EPA EIA Report Guidelines 2022 as *"the addition of minor or significant effects, including effects of other projects, to create larger, more significant effects"*.
- 16.2 The relevant Institute of Environmental Management and Assessment (IEMA) Guidance¹ identifies two types of cumulative effects:
- Inter-project effects - incremental changes caused by other development schemes occurring together with the proposed development and the cumulative effects combining to worsen the effect of a particular impact; and
 - Intra-project effects - those effects that occur as a result of impact interaction between different environmental topics within the same project. For example, a project might affect bird species as a result of direct loss of habitat and by noise and light disturbance. Each of these when considered in isolation may have a limited effect but taken together the sum is greater than the parts.

Inter-Project Cumulative Effects

- 16.3 A list of cumulative schemes for consideration in the inter-project cumulative effect assessment of the proposed development is detailed in EIAR Volume 1, Chapter 2: EIA Process and Methodology.
- 16.4 Inter-project effects have been addressed in each technical chapter of the EIAR (Chapters 6-15 of EIAR Volume 1 and EIAR Volume 2), as appropriate. To avoid significant repetition, information on the potential combined effects of the proposed development together with cumulative schemes is not presented within this chapter of the EIAR.

Intra-Project Cumulative Effects

- 16.5 The potential for intra-project cumulative effects is considered within this chapter.

Intra-Project Cumulative Effects

Assessment Approach

- 16.6 As indicated earlier, there is no established EIA methodology for assessing and quantifying the combined effects of individual effects on sensitive receptors. Accordingly, Ramboll has developed an approach which uses the defined residual effects of the proposed development to determine the potential for interactions between effects and consequently the potential for significant intra-project cumulative effects to arise. This is a tried, tested, and robust approach that has been implemented and accepted on a wide range of planning applications over many years.
- 16.7 The approach comprised the following steps:
- First, a review of the likely residual effects (and in particular the likely significant environmental effects) presented within the EIAR was undertaken;
 - Second, the likely receptors or receptor groups were identified;

- Third, the individual effects which may impact a singular receptor or receptor group were listed in a matrix format;
- Fourth, the potential for individual effects to interact for a given receptor was identified; and
- Fifth, the scale of the combined intra-project cumulative effects was assessed.

- 16.8 To ensure a proportionate approach, no/non-standalone imperceptible and not significant effects have been disregarded. Where a range of effects has been predicted, the full range has been considered e.g., imperceptible/not-significant to slight, negative.
- 16.9 It is noted that intra-project cumulative effects are more likely to arise when the receptor or receptor group is of higher sensitivity to change, such as human receptors.
- 16.10 Within this EIAR, topics such as air quality, transport, noise and vibration and climate change are considered in their own right and also in the context of their associated human health effects; of which, these are then assessed against relevant receptor groups (which includes human health receptors and local residents etc.) as part of the population and human health assessment. Due to the nature of the population and human health assessment these are not considered within this intra-cumulative assessment, due to the need to ensure these effects are reported within their own right and are not double counted. As such, in the instance that human health effects result in an in-combination effect within the matrices presented in this section they are disregarded (as they are already considered from an intra-cumulative perspective in Chapter 6: Population and Human Health).
- 16.11 Where there is more than one effect likely to arise on a particular receptor or receptor group, the potential for effect interactions and the scale of the combined effect have been determined based on professional judgement and experience. The results of the assessment are presented within a matrix format in the Assessment Results section of this chapter.


Assessment Results

- 16.12 Based on the methodology detailed above, Figure 16.1 and Figure 16.2 present the results of the potential for interactions of individual effects on receptors during the demolition and construction stage and once the proposed development is in operation, respectively.

¹ Institute of Environmental Management and Assessment. The State of Environmental Impact Assessment Practice in the UK. 2011


Likely Residual Effects		Receptors and Receptor Groups																
		Local Economy and New Workers	Existing Off-Site Residents	Existing Pedestrians	Existing Road Users	Existing Cyclists	Surface Water Receptors	Groundwater	Fluvial Flood Risk	Off-site Designated/Protected Habitats	On-site Habitats and Species	Buildings and Infrastructure	Global Climate	Landfills	Existing Character Areas and Landscape Features	Site Landscape Features	Existing Views	Heritage Assets
Population and Human Health	Creation of Employment (Small Area Scale)																	
	Introduction of Resident Population (Small Area Scale)																	
	Air Quality Effects																	
	Noise Effects																	
	Transport Effects																	
Transport and Accessibility	Change in Pedestrian Severance, Delay, Amenity, Fear and Intimidation																	
	Change in Driver Delay																	
	Change in Accidents and Safety																	
Noise and Vibration	Demolition and Construction noise																	
	Demolition and Construction Traffic Noise																	
	Demolition and Construction Vibration																	
Water Resource and Flood Risk	Direct impacts on surface water quality and hydrodynamic status as a result of construction works																	
	Disruption of Groundwater during Construction Excavations																	
	Loss of floodplain volume during construction																	
Climate Change	GHG Emissions																	
Waste	Effect on Void Space																	
Landscape and Visual	Removal of vegetation and dwelling with stripping of soil and change of topography to accommodate proposed development and landscaping																	
	Disturbance impacts on function and character value of the Baldonnel Stream																	
	Construction activity within urban fringe area of Newcastle Lowlands LCA that has been allocated for development																	
	Disturbance of linked green infrastructure affecting landscape context and setting																	
	Disturbance and impacts on character amenity and tranquillity																	
Potential for Effect Interaction and so Combined Cumulative Effect?		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

Figure 16.1: Demolition and Construction Intra-Project Cumulative Effects

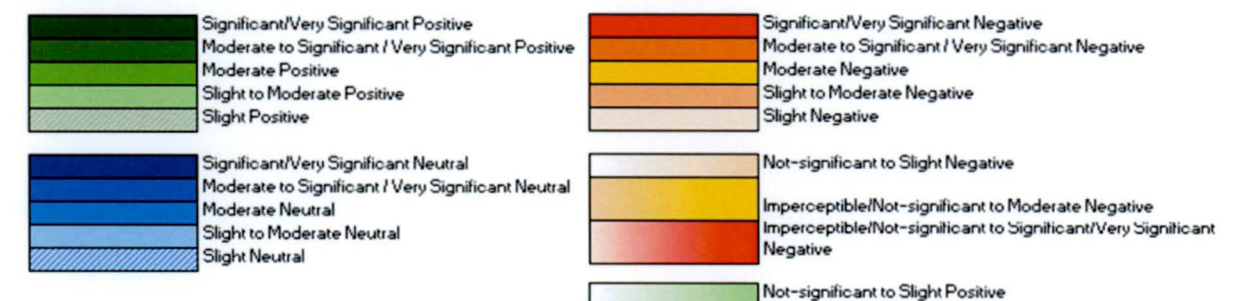

Likely Residual Effects		Receptors and Receptor Groups																
		Local Economy and New Workers	Existing and Future Off-Site Residents	Existing and Future Pedestrians	Existing and Future Road Users	Existing and Future Cyclists	Surface Water Flood Risk	Fluvial Flood Risk	Groundwater r	Off-site Designated/Protected Habitats	On-site Habitats and Species	Buildings and Infrastructure	Global Climate	Landfills	Existing Character Areas and Landscape Features	Site Landscape Features	Existing Views	Heritage Assets
Population and Human Health	Creation of Employment (Small Area Scale)																	
	Air Quality Effects																	
	Noise Effects																	
	Transport Effects																	
Transport and Accessibility	Change in Pedestrian Severance, Delay, Amenity, Fear and Intimidation																	
	Change in Driver Delay																	
	Change in Accidents and Safety																	
Noise and Vibration	Plant noise under worst case operation conditions (Scenario 1)																	
	Plant noise under vest-case operation conditions (Scenario 2)																	
	Plant noise under emergency operation conditions (Scenario 3)																	
Water Resource and Flood Risk	Flood risk from the Baldonnel Stream																	
	Changes to flood risk as a result of changes to the surface water runoff regime of the site																	
Ecology	Ecological Enhancement of the Baldonnel Stream																	
Climate Change	GHG Emissions																	
Waste	Effect on Void Space																	
Landscape and Visual	Enhancement with new riverine planting and features including wetland meadow and pond																	
	Enhancement of linked green infrastructure features and increased commercial development within setting																	
	Increased commercial development within setting																	
	A small addition to the view, in context with surrounding character																	
	A notable change within the view in keeping with the character of the area.																	
Potential for Effect Interaction and so Combined Cumulative Effect?		No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

Figure 16.2: Operation Intra-Project Cumulative Effect

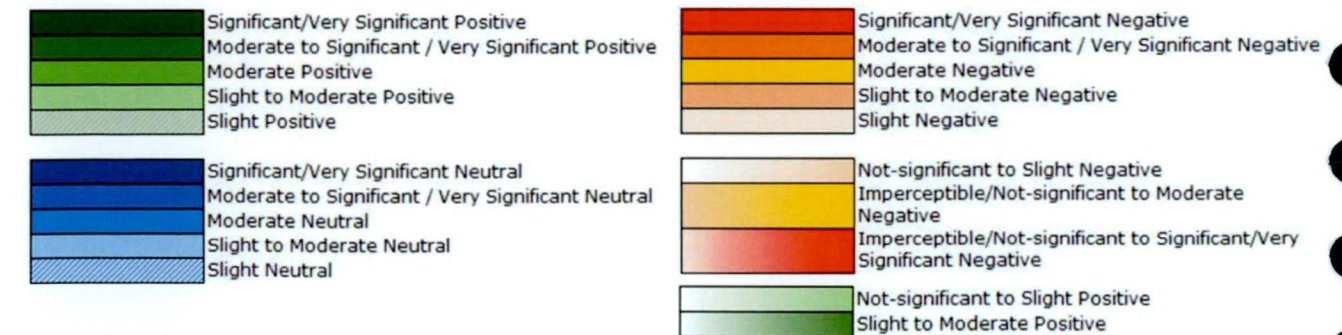

Demolition and Construction

- 16.13 As shown in Table 16.1, no effect interactions are likely to arise during the demolition and construction period.

Operation

- 16.14 As shown in Table 16.2, effect interactions are likely to arise during operation in relation to off-site human health effects, however as previously discussed, in-combination human-health effects have been disregarded due to the nature of the human health assessment (i.e., as these effects have already been considered from an intra-cumulative perspective in Chapter 6: Population and Human Health).
- 16.15 Therefore, no effect interactions are likely to arise during operation.

Conclusions

- 16.16 From the assessment of intra-project cumulative effects, no effects have been identified during demolition and construction or operation that have not already been discussed in Chapter 6: Population and Human Health.

17 RESIDUAL EFFECTS AND MITIGATION

Introduction

17.1 This chapter summarises the additional mitigation measures, the enhancement measures and the residual effects identified in the technical assessments of EIAR Volume 1 (Chapters 6-15) and EIAR Volume 2.

Additional Mitigation and Enhancement

- 17.2 As set out in Chapter 2: EIA Process and Methodology, the aim of an EIA is to develop measures to avoid, offset or reduce the significant negative environmental effects of a project and to enhance any beneficial effects.
- 17.3 Within each of the technical assessments, the need for additional mitigation measures has been considered in respect of likely significant negative effects as far as reasonably possible. In addition, opportunities for environmental enhancement have been explored where practicable. The proposed additional mitigation and enhancement measures are in addition to the embedded design and operational mitigation measures (as described in EIAR Chapter 4: Proposed Development Description) and standard embedded demolition and construction mitigation measures (as described in EIAR Chapter 5: Demolition and Construction Description), which have been considered within the technical assessments.
- 17.4 Table 17.1 presents a summary of the additional mitigation measures that have been identified over the course of the EIA of the proposed development categorised under the following stages:
- Demolition and Construction; and
 - Operation.
- 17.5 It is noted that no enhancement measures have been identified within the individual technical assessments.
- 17.6 Reference should be made to individual technical assessment chapters for more detail.

Table 17.1: Summary of Proposed Additional Mitigation	
Topic	Proposed Additional Mitigation
Demolition and Construction	
Population and Human Health	None
Transport and Accessibility	None
Air Quality	None
Noise and Vibration	None
Water Resource and Flood Risk	None
Ecology	<ul style="list-style-type: none">• Pre-commencement badger survey.• All excavations should be securely covered, or a suitable means of escape provided at the end of each working day.• Pre-construction breeding bird survey (only if works are undertaken between March and August)• No demolition of buildings within the swallow summer breeding season April – October. Pre-demolition check of building for nesting birds.

Table 17.1: Summary of Proposed Additional Mitigation	
Topic	Proposed Additional Mitigation
Ground Conditions	None
Climate Change	None
Waste	None
Material Assets	None
Landscape and Visual	None
Cultural Heritage	None
Operation	
Population and Human Health	None
Transport and Accessibility	None
Air Quality	None
Noise and Vibration	None
Water Resource and Flood Risk	<ul style="list-style-type: none">• Site-Specific Flood Risk Mitigation Plan and associated maintenance regime
Ecology	None
Ground Conditions	None
Climate Change	None
Waste	None
Material Assets	None
Landscape and Visual	None
Cultural Heritage	None

Residual Effects

- 17.7 This section summarises the likely residual environmental effects of the proposed development following the adoption and inclusion of the additional mitigation measures that are set out in Table 17.1.
- 17.8 Reference should be made to EIAR Chapters 6-15 in EIAR Volume 1 and Volume 2 for a detailed description of likely significant residual environmental effects.

Demolition and Construction Residual Effects

significant positive effects are likely these are highlighted in bold green and where significant negative effects are predicted these are highlighted in bold red.

17.9 Table 17.2 summarises the residual effects which have been identified by the individual technical assessments as likely to arise from the demolition and construction of the proposed development. Where

17.10 No significant positive or negative environmental effects have been identified.

Table 17.2: Demolition and Construction Residual Effects									
Topic	Receptor	Description of Residual Effect	Additional Mitigation	Scale and Significance of Residual Effect **	Nature of Residual Effect*				
					+ -	L U	D I	R IR	M B T St Mt Lt P **
Population and Human Health	Local Residents and Economy	Creation of Employment (Small area scale)	None required	Not-significant - Slight	+	L	D	R	T
	Local Residents and Economy	Creation of Employment (Electoral division and South Dublin County scale)	None required	Imperceptible	+	L	D/I	R	T
	Local Residents and Economy	Introduction of Resident Population (Small area scale)	None required	Not significant – Slight	-	L	D/I	IR	T
	Local residents	Air quality effects	None required	Not significant – Slight	-	L	D/I	IR	T
	Local residents	Noise effects	None required	Not Significant – Slight	-	L	D	IR	T
	Local residents	Transport effects	None required	Not Significant – Slight	-	L	D	IR	T
	Local residents	Amenity	None required	Imperceptible	-	L	D	R	T
Transport and Accessibility	Pedestrians	Change in Pedestrian Severance, Delay, Amenity, Fear and Intimidation	None required	Slight	-	L	R	D	T
	Road users	Change in Driver Delay	None required	Slight	-	L	R	D	T
	Road users, pedestrians and cyclists	Change in Accidents and Safety	None required	Slight	-	L	R	D	T
Air Quality	Existing Off-site Human Health and Amenity	Dust Soiling and PM ₁₀ due to demolition and construction works	None required	Imperceptible	-	L	D	R	T
	Existing Off-site Human Health	Change in NO ₂ , PM ₁₀ and PM _{2.5} levels due to vehicle emissions	None required	Imperceptible	-	L	D	R	T
Noise and Vibration	Local Residents (NSR 1)	Demolition and Construction Noise	None required	Not significant	-	L	D	IR	T
	Local Residents (NSR 2-5)	Demolition and Construction Noise	None required	Slight	-	L	D	IR	T
	Local Residents (NSR 1)	Demolition and Construction Traffic Noise	None required	Not significant	-	L	D	IR	T
	Local Residents (NSR 2-5)	Demolition and Construction Traffic Noise	None required	Slight	-	L	D	IR	T
	Local Residents (NSR 1)	Demolition and Construction Vibration	None required	Not significant	-	L	D	IR	T
	Local Residents (NSR 2-5)	Demolition and Construction Vibration	None required	Slight	-	L	D	IR	T
	Surface Water Receptors	Potential contamination as a result of silt-laden runoff across the demolition and construction site	None Required	Imperceptible/Not Significant	-	L	D	R	T

Table 17.2: Demolition and Construction Residual Effects									
Topic	Receptor	Description of Residual Effect	Additional Mitigation	Scale and Significance of Residual Effect **	Nature of Residual Effect*				
					+ -	L U	D I	R IR	M B T St Mt Lt P**
Water Resource and Flood Risk		and potential for contaminants to be introduced to surface water by construction activities through leakages/spillages							
	Surface Water Receptors	Direct impacts on surface water quality and hydrodynamic status as a result of construction works	None Required	Imperceptible/Not Significant	+	L	D	R	T
	Groundwater Supply	Disruption of Groundwater during Construction Excavations	None Required	Imperceptible	-	L	D	R	T
	Fluvial Flood Risk	Flood risk from the Baldonnel Stream	None Required	Imperceptible	+/-	U	D	R	T
	Water Supply and Foul Drainage Network	Water Supply and Foul Drainage Capacity During Construction	None Required	Imperceptible	+/-	U	D	R	T
Ecology	South Dublin Bay SAC, the North Dublin Bay SAC, the South Dublin Bay and River Tolka Estuary SPA and the North Bull Island SPA	Pollution	None required	Imperceptible/Not Significant	-	L	I	IR	T
	Grand Canal pNHA and Liffey Valley pNHA	Pollution	None required	Imperceptible/Not Significant	-	L	D	IR	T
	Baldonnel stream	Pollution	None required	Imperceptible	-	L	D	IR	T
	Terrestrial habitats	Habitat loss	None required	Imperceptible	-	L	D	R/IR	T
	Terrestrial habitats	Pollution	None required	Imperceptible	-	L	I	R	T
	Bats	Commuting and foraging habitat loss	None required	Imperceptible	-	L	D	R	T
	Badger	Disturbance / destruction of setts	Pre-construction badger survey	Imperceptible	-	L	D	R	T
		Accidental trapping within excavations	All excavations should be securely covered, or a suitable means of escape provided at the end of each working day.						
	Birds	Disturbance / destruction of nest	Pre-construction breeding bird survey (Only if works are undertaken between March and August)	Imperceptible to Not-significant	-	L	D	IR	T