

CONTENTS

INTRODUCTION	7-1
Background	7-1
Proposed Development.....	7-1
Existing And Proposed Water Management At The Site	7-1
Scope Of Work	7-4
Project Team	7-4
REGULATORY BACKGROUND	7-4
Legislation	7-4
Planning Policy And Development Control.....	7-5
Guidelines And Technical Standards	7-5
RECEIVING ENVIRONMENT	7-5
Study Area	7-5
Baseline Study Methodology.....	7-5
Sources Of Information	7-6
Rainfall And Climate	7-6
Soils And Geology.....	7-7
Surface Water - Hydrology	7-7
Groundwater - Hydrogeology.....	7-10
Water Framework Directive	7-15
Protected Areas.....	7-16
Water Environment Receptors.....	7-16
Baseline Summary	7-17
IMPACT ASSESSMENT	7-18
Evaluation Methodology	7-18
Construction Stage Impacts (No Mitigation)	7-18
Operational Stage Impacts (No Mitigation).....	7-19
Post - Operational Stage Impacts (No Mitigation).....	7-20
Rating Of Identified Potential Impacts	7-20
Significance Of Impacts	7-20
Cumulative Impacts.....	7-23



Unplanned Events	7-23
'Do-Nothing Scenario'	7-23
MITIGATION MEASURES	7-23
Existing And Proposed Mitigation Measures.....	7-23
Assessment Of Impacts With Mitigation Measures In Place	7-24
RESIDUAL IMPACT ASSESSMENT	7-24
MONITORING	7-25
Surface Water Monitoring.....	7-25
Groundwater Monitoring.....	7-25
TABLES	
Table 7-1 Regional Data Consultation	7-6
Table 7-2 LTA (1981-2010) Monthly Rainfall (Mm) For Ballyhaise	7-7
Table 7-3 EPA Biological Water Quality Ratings	7-9
Table 7-4 Details Of Existing Boreholes Well A And Well B (Environmental Considerations Report 2012).....	7-11
Table 7-5 Details Of Existing On-Site Monitoring Boreholes (2010).....	7-12
Table 7-6 GSI Vulnerability Mapping Guidelines	7-14
Table 7-7 Existing Environment - Significance And Sensitivity/Importance.....	7-16
Table 7-8 Description Of Impacts And Impact Rating.....	7-21
FIGURES	
Figure 7-1 Site Layout And Water Management.....	7-27
Figure 7-2 Proposed Site Layout With Borehole Locations	7-27
Figure 7-3 Surface Water Bodies Map.....	7-27
Figure 7-4 Bedrock Aquifer Map	7-27
Figure 7-5 Groundwater Bodies Map	7-27
Figure 7-6 Groundwater Wells Map (Gsi Database).....	7-27
Figure 7-7 Groundwater Vulnerability Map	7-27
Figure 7-8 Groundwater Recharge Map.....	7-27
Figure 7-9 Proposed Monitoring Locations	7-27
APPENDICES	
APPENDIX 7-A EU DIRECTIVES / NATIONAL LEGISLATION AND REGULATIONS / GUIDELINES / TECHNICAL STANDARDS	7-31

APPENDIX 7-B SCREENED SURFACE WATER QUALITY RESULTS	7-35
APPENDIX 7-C SURFACE WATER QUALITY RESULTS LABORATORY CERTIFICATES.....	7-37
APPENDIX 7-D SURFACE WATER SAMPLING FIELD RECORD SHEETS.....	7-39
APPENDIX 7-E COUNTY CAVAN GROUNDWATER PROTECTION SCHEME REPORT	7-41
APPENDIX 7-F WATER FRAMEWORK DIRECTIVE	7-43
APPENDIX 7-G RATING OF EXISTING ENVIRONMENT SIGNIFICANCE / SENSITIVITY	7-47
APPENDIX 7-H DESCRIPTIONS OF EFFECTS (EPA, 2022)	7-49
APPENDIX 7-I CLASSIFICATION OF THE SIGNIFICANCE OF IMPACTS	7-53

INTRODUCTION

Background

- 7.1 This chapter of the EIAR provides a description of the surface water and groundwater conditions within the application area and surrounding area and within the context of the regional setting.
- 7.2 The baseline surface water and groundwater conditions are identified and described, and the potential impacts arising from the proposed development will have on surface water and groundwater are assessed, and if required mitigation measures are proposed.

Proposed Development

- 7.3 The proposed development is described in detail in Chapter 2: Project Description of this EIAR and only those elements which relate to water and water management are presented here. The proposed site layout is shown on **Figure 7-1**.
- 7.4 The planning application area is identical to that of planning permission P. Ref. 12/101 and covers approximately 4.9 hectares (c. 12.1 acres) out of a total landholding interest area of c. 39.7 hectares (c. 98.1 acres). No rock extraction has been carried out within the previously permitted 12/101 extraction area to date and this planning permission is due to expire in early 2023.
- 7.5 As the site is within the landholding of an existing and established operation, there is no requirement for any new site infrastructure or facilities as part of this application.
- 7.6 Extraction will be carried out in the same format as is currently practiced, by way of blasting, crushing and screening of the rock. The quarry will be developed using a conventional benching system (steps), with working faces being progressively advanced in a westerly direction.
- 7.7 The current ground elevations across the proposed development area are between c. 140 – 175 mOD. It is proposed that the extraction area will be worked to a depth of c. 110m AOD, which is the previously permitted depth (P. Ref. 12/101). Groundwater in the existing quarry void to the south of the application area rests at c. 163m AOD and it can be expected that groundwater will be encountered at a similar depth within the current application area once extraction commences. As such dewatering of groundwater will be required during extraction operations.
- 7.8 When extraction operations commence, it is proposed that water inflows to the extraction area will be diverted to a sump within the quarry floor of the extension area and then pumped to the discharge point. This will ensure the quarry area remains dry for the duration of extraction operations.

Existing and Proposed Water Management at the Site

- 7.9 There is extensive water management and processing infrastructure on the site to deal with surface water, groundwater and any process water. This infrastructure will require maintenance and upgrading prior to its re-use at the new proposed extraction area. Additional water management infrastructure will also be required to connect the proposed extraction area to the existing framework and to the discharge point.
- 7.10 Within the existing planning permission area for P. Ref. 07/827, there is an existing quarry void to the south of the landholding (and southeast from the planning application area), as shown on **Figure 2-1** of this EIAR. Extraction operations within the 07/827 quarry void area were paused in c. 2014/2015 and the quarry void is flooded.

- 7.11 No rock extraction has been carried out within the previously permitted P. Ref. 12/101 extraction area to date. Future extraction at depth will breach the water table and there will be a need to provide for discharge of water off-site. This will require:
- Provision of a sump on the quarry floor;
 - Pumping of water from the sump to the discharge point in the adjacent drainage channel; and
 - Quarry water will be discharged to the adjacent drainage channel which flows northwest to the Mullymagowan Stream and eventually into the Erne River downstream.
- 7.12 P&S Civil Works Ltd. currently hold a discharge licence (Ref. **SS/W005/11**), granted by Cavan Co. Co. and approved for both the existing quarry operations (P. Ref. 07/827) and the proposed extension area (previous P. Ref. 12/101).
- 7.13 It is not proposed to increase production at the site within the proposed extension extraction area. Therefore, there will be no change in water requirements at the overall landholding site for the new development compared to the previous quarry area extraction situation.

Site Drainage

Existing Quarry Area – P. Ref. 07/827

- 7.14 Water from the existing quarry void (when operational) is pumped from a sump on the quarry floor which provides retention, by use of an electric 4" pump on float switches. The water is discharged directly to the surface water drainage channel located to the north of the landholding and running along the eastern boundary of the application site for the quarry extension. The drainage channel flows into the Mullymagowan Stream, which flows north to Corfad Lough (c. 600m north of the quarry extension area), and subsequently the Stradone River. On occasion and as required, a limited volume of the discharge water is directed to the existing settlement lagoons for use as a top-up water supply at the washing plant, located to the north of the existing quarry void.
- 7.15 Within the general central aggregate processing / concrete plant / chip washing areas, all surface water is returned via 3 no. ramped settlement sumps at the forementioned areas before being piped to the settlement tank and at sand washing plant before final discharge to the adjacent channel.

Application Area – which was previously covered by planning permission P. Ref. 12/101

- 7.16 There are two minor surface water features within the proposed extension area consisting of:
- A drainage ditch feature that flows along the southern boundary of the extension area in an easterly direction where it joins the stream that flows along the eastern boundary and into the Mullymagowan stream; and
 - A drainage ditch feature that flows adjacent to the northern boundary of the extension area and joins the stream that flows along the eastern boundary at the northern-most corner of the extension area.
- 7.17 When extraction operations commence, it is proposed that water from within the proposed extension area will be diverted to a sump within the quarry floor of the extension area and then pumped to the discharge point.

Existing Discharge Licence

- 7.18 The applicant currently holds a discharge licence (Ref. **SS/W005/11**) from Cavan Co. Co. in relation to discharges from the existing quarry operations (P. Ref. 07/827) and the proposed extension area (P. Ref. 12/101).

Wheelwash

- 7.19 There is currently a wheelwash present at the site, located within the main site entrance gates and adjacent to the weighbridge. The area leading to the wheelwash and beyond towards the site entrance is hard surfaced.
- 7.20 In addition, the existing quarry has a dust suppression system which can be utilised, and all processing equipment has inbuilt dust suppression systems.
- 7.21 The above measures have proven to be effective and acceptable to-date and will be maintained in the future. The applicant will continue to regularly monitor the situation and will notify the Local Authority of any change in circumstances.

Wastewater Systems

- 7.22 Site staff will use existing toilet, hand washing, and welfare facilities provided at the existing site. Wastewater from these facilities is currently managed through a dedicated wastewater treatment system.
- 7.23 The wastewater from the administration building is diverted to an existing septic tank and percolation area which are located near the carpark at the quarry entrance. Details of an assessment were previously submitted to the Planning Authority with the Further Information response (within Appendix D) in relation to the previous planning permission (P. Ref/ 12/101). There continues to be no issues with this system to date.

Potable Water

- 7.24 The potable (drinking water) for the site originates from the Billis-Lavey Group Water Scheme (0200PRI0210) which serves a total population of 1,500 (600 domestic connections) with 950 m³/d drinking water.

Water Supply Wells

- 7.25 There are two existing on-site supply wells, located within the general processing plant area, to the southwest of the main quarry entrance gates and therefore located northeast of the application site itself. Water from one of these wells (Well A) is used for processing activities at the existing quarry, as the other well (Well B) has insufficient yield.

Monitoring Boreholes

- 7.26 Seven boreholes were drilled in 2010 on the existing quarry floor and within the proposed extension area, in order to provide additional information on the hydrogeology of the area. However, these boreholes are no longer accessible on site for more recent groundwater monitoring works to be undertaken.

Process Water

- 7.27 The 6mm dust product requires a washing process to allow for its use as sand for sports pitches / arenas, as well as its use in the manufacture of concrete products at the processing plant in the

existing quarry. The silt produced from the washing process is pumped to the site's settlement lagoon system and dried for its ultimate use in restoration of the overall site.

- 7.28 Water for use in the washing of aggregate will be pumped from either the existing flooded quarry void to the south of the application area or will be sourced from the dewatering of the proposed extraction area.
- 7.29 It is proposed that the same processing methods will be utilised going forward. There is no requirement for any additional processing plant as part of this planning application.

Fuel and Oil Storage

- 7.30 Chemicals that are stored on site include lubricating oil, hydraulic oils and diesel fuel.
- 7.31 Fuel is required on site for plant and machinery. No vehicles will be fuelled on the quarry floor, with the exception of one mobile machine, as a designated fuelling area is located in the central processing area of the quarry. All staff are trained in the use of spill kits which are available at the quarry in the case of an accidental discharge.
- 7.32 Oils and lubricants stored in drums including waste oils will be kept on spill trays inside the existing storage area. Spill kits are to be provided in the unlikely event of a spillage occurring.
- 7.33 Oils and other wastes will not be permitted to accumulate on site in large quantities. The waste oils will be stored for collection and recycling off site by an approved contractor.

Scope of Work

- 7.34 The scope of this chapter includes:
- an assessment of the existing water (hydrology and hydrogeology) within c. 2 km the application area at the site;
 - an assessment of the potential impact of the proposed development on surface water and groundwater; and
 - where necessary, recommendation(s) of mitigation measures to reduce or eliminate any potential impacts.

Project Team

- 7.35 This chapter of the EIAR was prepared by SLR Consulting Ireland. The project team consists of:
- Orlaith Tyrrell Graduate (Hydrogeology) BSc, MIGI, MIAH
 - Dominica Baird Technical Director (Hydrogeology) BSc, MSc, CGeol, EurGeol, MIAH
 - Peter Glanville Technical Director (Hydrology) BA, MSc, PhD, PGeo, EurGeol

REGULATORY BACKGROUND

Legislation

- 7.36 The key European Directives / European Union Legislation which apply to this Chapter of the EIAR, and the hydrology and hydrogeology assessment presented herein are:
- Environmental Impact Assessment Directive (2011/92/EU); and

- Directive of the European Parliament and of the Council amending Directive 2011/92/EU on assessment of effects of certain public and private projects on the environment (2014/52/EU).
- 7.37 Other European Directives to which this EIAR makes reference, or has had regard, are listed in **Appendix 7-A**.
- 7.38 Irish Government Acts, National Legislation and Regulations which apply to this Chapter of the EIAR, and the hydrology and hydrogeology assessment presented herein are also listed in **Appendix 7-A**.

Planning Policy and Development Control

- 7.39 The Planning Policy and Development Control relating to water at the site in this EIAR is set out in the:
- Cavan County Development Plan 2022 - 2028.

Guidelines and Technical Standards

- 7.40 The following key guidelines apply to this hydrology and hydrogeology assessment:
- Institute of Geologists of Ireland. Guidelines for the Preparation of Soils, Geology and Hydrogeology Chapters of Environmental Impact Statements, April 2013; and
 - National Roads Authority, 2008. Guidelines on Procedures for Assessment and Treatment of Geology, Hydrology and Hydrogeology for National Road Schemes.
- 7.41 Additional guidelines and technical standards which apply to this Chapter of the EIAR, and the hydrology and hydrogeology assessment presented herein are listed in **Appendix 7-A**.

RECEIVING ENVIRONMENT

Study Area

- 7.42 For the purposes of this assessment, the study area comprises the application site the surrounding area up to 2 km reflect the sensitivity of the hydrology and hydrogeology; this is in line with the Institute of Geologists of Ireland's (IGI) guidelines (2013).
- 7.43 The IGI guidelines state that the minimum distance of 2 km should be reviewed in the context of the geological / hydrogeological environment as well as the scale of development and increased to reflect the sensitivity of the subsurface. The IGI guidelines also state that maps should be sourced to allow for the review of the geological and hydrogeological conditions that exist within a minimum of 2 km of the site boundary (from the outer limit of the planning and/or licence area) and presented at a scale of 1:25,000. The baseline maps produced in this EIAR are at a scale of 1:25,000 and include an area up to c. 3.5 km from the lands under the control of the applicant, although the actual study area only extends up to 2 km as stated above.

Baseline Study Methodology

- 7.44 Existing information on the geology, hydrology, and hydrogeology of the Stradone area and its surrounds was collated and evaluated.
- 7.45 The methodology involved in the assessment of the hydrology and hydrogeology at the site can be summarised as follows:

- A desk study, in which existing data and relevant regional data sources for the area were examined;
- A site walkover and review of the on-site surface water features and water management infrastructure;
- Surface water quality from the quarry void water and from the discharge point in the adjacent Mullymagowan Stream; and
- Analysis of the information gathered.

Sources of Information

7.46 The desk study involved the examination of several datasets to determine the geological and hydrogeological setting of the area, as detailed in **Table 7-1**.

Table 7-1
Regional Data Consultation

Data	Dataset
Soils	<ul style="list-style-type: none"> • Irish Soils Information System - Teagasc
Subsoil Geology	<ul style="list-style-type: none"> • Teagasc/GSI/EPA Subsoil Mapping
Bedrock Geology	<ul style="list-style-type: none"> • GSI Groundwater Data Viewer - Bedrock Geology
Surface Water	<ul style="list-style-type: none"> • OSi Discovery Series mapping; • Environmental Protection Agency; • Water Framework Directive; • OPW CFRAM; and • Current County Development Plan.
Groundwater	<ul style="list-style-type: none"> • GSI Groundwater Data Viewer - bedrock and gravel aquifers, vulnerability, water supplies, groundwater recharge; • GSI Groundwater body description documents; • Environmental Protection Agency water maps; and • National Federation of Group Water Schemes (NFGWS) Data Viewer.
Climate	<ul style="list-style-type: none"> • Met Eireann
Protected Areas, Environmental Pressures	<ul style="list-style-type: none"> • Environmental Protection Agency, • National Parks and Wildlife Service
Protected Areas, Environmental Pressures	<ul style="list-style-type: none"> • Environmental Protection Agency, • National Parks and Wildlife Service

Rainfall and Climate

7.47 The nearest rainfall gauging station is Ballyhaise, located c. 13.5km to the north-west of the site. The Long-Term Average (LTA) annual rainfall in the area at the Ballyhaise weather station is c. 1006.9 mm/yr for the period 1981-2010 (Met Eireann, 2023). The LTA monthly rainfall for the period 1981-2010 are shown in

7.48 **Table 7-2** below.

Table 7-2
LTA (1981-2010) Monthly Rainfall (mm) for Ballyhaise

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
100.5	72.6	84.8	68.0	67.8	67.9	73.4	90.7	79.4	104.4	95.3	102.1

Soils and Geology

7.49 Soils and geology are discussed in detail in Chapter 6 of this EIAR.

Soils and Subsoils

- 7.50 The Irish Soil Information System project has developed a national association soil map for Ireland, the project is co-funded by Teagasc and the Environmental Protection Agency (EPA).
- 7.51 The soils and subsoils within the overall landholding have already been removed in areas to facilitate bedrock extraction. The soils within the application area are still intact and consist of typical surface water gleys on fine loamy drift with siliceous stones, known as the Kilrush (0700h) Soil Association. Soils are shown on **Figure 6-1**.
- 7.52 The EPA website publishes subsoil maps created by the Spatial Analysis Unit and Teagasc in collaboration with the Geological Survey Ireland (GSI).
- 7.53 The subsoils underlying the application area are predominantly till derived from Lower Palaeozoic sandstones and shales (TLSsS) with minor areas identified as having bedrock at or near the surface. Subsoils are shown in **Figure 6-2**. The soils and subsoils at the application area will be removed to facilitate extraction.

Local Bedrock Geology

- 7.54 The GSI online map viewer (1:100,000 geology map) shows the site at Stradone to be underlain by Silurian age massive sandstone and microconglomerate of the Lough Avaghon Formation. Bedrock is exposed at the existing quarry void to the south of the application area. The local bedrock geology is shown in **Figure 6-3**.

Karst

- 7.55 There are no known karst features within the wider area of the proposed site (GSI online map viewer). The nearest listed karst feature is over 28km away to the east of the site.

Surface Water - Hydrology

Catchments

- 7.56 On a regional scale, the overall landholding area its environs are located in the Erne River Catchment area. Further details on the catchment are provided as part of the Water Framework discussion in Section 7.106.
- 7.57 The Erne Catchment (ID 36) includes the area drained by the River Erne and all streams entering tidal water between Aughrus Point and Kildoney Point, Co. Donegal. This is a cross border catchment with a surface area of 4,415km², 2,512km² of which is located within The Republic.

Surface Water Bodies

- 7.58 The surface water features at the application site are mapped on **Figure 7-1** and consist of the following:
- Mullymagowan Stream: Stream that flows along the north eastern boundary of the extension area;
 - Drainage Ditch A: Feature that flows along the southern boundary of the extension area in an easterly direction where it joins the stream; and
 - Drainage Ditch B: Feature that flows adjacent to the northern boundary of the extension area and joins the stream at the northern-most corner of the extension area to flow towards Corfad Lough.
- 7.59 The closest surface water body to the site is an adjacent stream known locally as the Mullymagowan Stream. The Mullymagowan Stream is referred to on the EPA database as 'STRADONE_010' (EPA code: IE_NW_36S020075). The Mullymagowan Stream is located just downstream of the site discharge point within a drainage channel, and to the north of the area, see **Figure 7-1**. The Mullymagowan Stream which flows north to Corfad Lough (c. 600m north of the quarry extension area), and subsequently the Stradone River (EPA code: IE_NW_36S020200). The Stradone River is a tributary to the Erne River which it meets further downstream and then continues to the north-east. The local surface water bodies are shown in **Figure 7-3**.
- 7.60 The application area is slightly elevated within the wider landholding area, with the discharge point location at the start of the Mullymagowan Stream slightly downgradient at 142.9 m AOD.
- 7.61 There are several surface water bodies in the wider vicinity surrounding the application site, all flowing in a general north/northwest direction and to join as tributaries to the Stradone River and Erne River downstream.

Flooding

- 7.62 The Office of Public Works (OPW) is the government agency with statutory responsibility for flooding in Ireland. Flooding is a natural river channel / floodplain process designed to accommodate larger flows than can be passed by the river channel alone.
- 7.63 The OPW website (www.floodinfo.ie) indicates that there are no recorded flood events at the site.
- 7.64 There are no reported past fluvial or pluvial flood events within a 2km radius of the site.
- 7.65 The GSI Groundwater Flood database does not show any historical groundwater flooding in the area.
- 7.66 The OPW mid-range future scenario flood modelling indicates that the nearest floodplain extents are located c. 2.6 km northeast of the site along the banks of the Laragh River at Cliffrina, and 2.7 km northwest of the site along the banks of the Stradone River at Drumhirk. These flood plains are not extensive and are not expected to have any impact at the site.

Source Protection Area

- 7.67 The EPA Water maps have records of the NFGWS group scheme source protection areas, and the closest scheme on the EPA Water maps is the Billis-Lavey Group Water Scheme which supplies potable (drinking water) for the site. The source for this group water scheme is a large lake waterbody, Nardreegeel Lough. The source protection area is c. 1.1 km southwest from the application area at the closest point. The scheme supplies a local population of 1500 people (600

connections) with a 950m³/d abstraction rate. The other surface water schemes are >5km from the application area.

Surface Water Quality

- 7.68 There are a number of water quality monitoring locations monitored by the EPA at locations downstream of the site. The most recent Biological Water Quality Ratings at stations downstream of the site are outlined in **Table 7-3** only for stations where Q-value data is available. Q rating is Q4 at both stations, which indicates “unpolluted” status. The most recent data for both stations is from 2019.

Table 7-3
EPA Biological Water Quality Ratings

Station ID	Station Name	Watercourse	Distance Downstream of Site	2013	2017	2019
RS36S020075	2nd Br D/S Lough Alion	STRADONE_010	c. 5.5 km	Q4	Q4	Q4
RS36S020200	Br u/s Laragh R confl	STRADONE_020	c. 9 km	Q4	Q4	Q4

- 7.69 There is no available continuous surface water flow data from EPA/OPW hydrometric stations in the immediate environs of the proposed quarry extension.

Site Specific Surface Water Quality Data

- 7.70 Two surface water samples were taken to assess the quality of the surface waters on site, one from the Mullymagowan Stream at the proposed discharge point adjacent to the site (sample SW1), and a second from the flooded quarry void to the south of the application area (sample QV1).
- 7.71 Samples were collected on the 22nd of November 2022 by an SLR Hydrogeologist and tested for the following standard range of surface water quality parameters by ALS Laboratories:
- inorganics;
 - metals (dissolved, filtered);
 - Total Petroleum Hydrocarbons Criteria Working Group (TPH CWG); and
 - Volatile Organic Compounds (VOCs).
- 7.72 The baseline surface water quality results are shown in **Appendix 7-K** screened against the Environmental Quality Standards (EQS) for surface water, as well as the 2016 Groundwater Regulations (S.I. No. 366/2016). The sulphate concentration exceeded the GW Regs criteria for the quarry void sample, with 534mg/l reported compared to the GW Regs criteria of 187.5mg/l. Based on the screened results, the surface water quality in both the Mullymagowan Stream and flooded quarry void are generally of good quality. There are no reported exceedances of the EQS limits and only one exceedance of the Groundwater Regulations for sulphate at the quarry void.

Groundwater - Hydrogeology

Aquifer Characteristics

- 7.73 The application site is underlain by sandstone and microconglomerate bedrock of the Lough Avaghon Formation.
- 7.74 The GSI online map viewer classifies the bedrock at the site as a poor bedrock aquifer which is generally unproductive except for local zone (PI), see **Figure 7-4**. The aquifer extends to a regional scale and is heavily faulted, though the GSI online map viewer does not show any faulting at or in close proximity to the site. The GSI have classified this bedrock aquifer as “PI” based on lithology, dry weather flows, well yields and productivities.

Groundwater Bodies

- 7.75 The landholding at Stradone, including the proposed extension of the extraction area, is located entirely within the Cavan Groundwater Body (GWB). A description of the Cavan GWB is published by the GSI (EU Code IE_NW_G_061).
- 7.76 The Cavan GWB includes the aforementioned poorly productive bedrock aquifer and extends further southwest and north/northeast from the site boundary, covering a total area of c. 1410 km². The GWB description states that the GWB is composed primarily of low transmissivity rocks. Most of the groundwater flux is in the uppermost part of the aquifer: comprising a broken and weathered zone typically less than 3m thick; a zone of interconnected fissuring typically less than 10m; and a zone of isolated fissuring typically less than 150m.
- 7.77 Only one transmissivity value is available for this GWB: 0.23m²/d for a low yielding well. The national transmissivity data for these rocks are also low (<20m²/d in most rocks) or possibly moderate in the Silurian rocks, as present at the site. (20-80m²/d).

Groundwater Supply Wells

GSI Well Database

- 7.78 Geological Survey Ireland (GSI) has an online database of wells and springs in Ireland; however, it should be noted this database is not extensive.
- 7.79 According to the GSI well database, there are no wells within a 2km radius of the site. There are three wells in total within a 5km radius of the site, all located within the Cavan GWB, and these are shown on **Figure 7-6**.
- 7.80 The closest well is an agricultural & domestic well c. 3 km northeast of the site (GSI name 2329NEW009). It is classed as having poor yield of 13 m³/d.
- 7.81 There is a second well for agricultural and domestic use located c. 3.6 km north of the site (GSI name 2329NEW005) which is classed as having a failed yield of 3.3 m³/d.
- 7.82 The remaining well within 5km of the site is an industrial use well located c. 3.3 km north of the site (GSI name 2329NEW007) which has a moderate yield of 92.7 m³/d.
- 7.83 As yield is one of the main concerns in aquifer development projects, yields from existing wells are conceptually linked with the main aquifer categories. Poor aquifers, such as the one underlying the site, would generally have ‘Moderate’ or ‘Poor’ well yields - less than 100 m³/d, and this is consistent with the well data outlined above.
- 7.84 Well productivity data for the area generally confirm the Silurian rocks to be poor aquifers.

Well Survey

7.85 An historical well survey of the area within 500m of the extension area was conducted by Tobin Consulting and P&S Civil Works Ltd. from January to March 2010¹. Wells within this area were identified as:

- Redundant Wells (2);
- Residents on Group Water Scheme (Lavey Billis Water Supply Scheme) (12); and
- Existing Wells (8).

It is noted that the Group Water Scheme is a domestic connection supplied by a surface water source.

7.86 The nearest private well identified in the survey was located at a distance of 415m from the quarry extension boundary. There is no history of any impacts on private wells outside the quarry boundaries.

7.87 It should be noted that this region is in an area that overlies a poor aquifer and, therefore, the zone of contribution to each well will be localised.

On-Site Supply Wells

7.88 Two water supply wells are included within the existing processing area (Well A and Well B) which were drilled in 2003. Details are provided in the 2012 Environmental Considerations Report¹, and it should be noted that Well A has also been referred to as BH1 and similarly Well B as BH2.

7.89 The report states that Well A was drilled to a depth of 115m and the hole has a diameter of 150mm. The yield from this well was approximately 2000 litres per hour (2m³ /hr). Specific capacity within the well is estimated at 0.05 m³/m/d (1.5 m³/d abstraction and 30m drawdown) which is extremely low. Any abstraction above 1.5m³/d caused the well to run dry and recharge is slow.

7.90 Subsequently, Well B was drilled in the corner beside the precast shed about 150m away from Well A. It was drilled to the same depth (115m) and was reamed out from 150mm to 200mm. The yield from this well was approximately 900 litres per hour (0.9m³ /hr) but this well is not in use as the yield was too low. The locations of both wells are included in **Figure 7-2** and borehole details are included in **Table 7-4** below. Borehole logs are not available for the two supply wells.

Table 7-4
Details of existing boreholes Well A and Well B (Environmental Considerations Report 2012)

Well ID	Grid Reference	Location	Well Details	Elevation	Water Inflow	Water Level (2010)
Well A (BH1)	252578, 299946	Near Batching Plant within permitted quarry area	Water Supply Well	167mOD	Not Known	166mOD 30mbgl during pumping (137mOD)

¹ P&S Civil Works Ltd. – Quarry Extension. Environmental Considerations Report (TOBIN, 2012)

Well ID	Grid Reference	Location	Well Details	Elevation	Water Inflow	Water Level (2010)
Well B (BH2)	252664, 300041	In permitted processing area	Un-used Water Supply Well. This area is dug out to 6.1m below natural ground level.	172mOD - 4.5m to top of casing. Casing is 1.6m above excavated ground level.	Not Known	Artesian (167.50 mOD)

- 7.91 During the site walkover in November 2022, groundwater levels could not be obtained from either Well A or Well B and the previous site investigation boreholes across the site were not accessible. Therefore, an estimate of groundwater levels beneath the proposed development area are based on the previous investigative works (discussed in the following section), information obtained from the desktop study and existing reports, and with reference to the water level in the existing quarry void.
- 7.92 It is expected that groundwater will be intercepted close to the current ground surface on the commencement of extraction operations in the new quarry area, at approx. 0.5 – 3 mbgl.

On-Site Monitoring Wells

- 7.93 As part of site investigation works undertaken in 2010¹, seven 110mm diameter boreholes were drilled on the existing quarry floor and within the proposed extension area, in order to provide additional information on the hydrogeology of the area. BH3 – BH6 are located on the footprint of the proposed extension. Groundwater was noted to be close to the surface at BH3 to the east of the proposed extension. BH4 in the northern corner reported a groundwater level of 1.3m bgl. BH5 and BH6 reported groundwater levels of over 2-3m bgl. The water inflow in the proposed extension area varies from 5.5m bgl to 15mbgl. Volumes encountered during the site investigations were not significant (approximately 1-3m³/hr).
- 7.94 Information gathered from these site investigation boreholes are detailed in **Table 7-5** below and locations are mapped on **Figure 7-2**. These boreholes are no longer accessible on site. Borehole logs are also not available for these historical monitoring boreholes.

Table 7-5
Details of existing on-site monitoring boreholes (2010)

BH ID	Grid Reference	Location	Well Details	Elevation	Water Inflow	Water Level (2010)
BH1	252724, 299446	On floor of existing quarry	Borehole Diameter:110mm Depth: 6m total	130mOD	2.2mbgl 27th Jan. 2010 (127.8mOD)	0.42mbgl (129.58mOD)
BH2	252683 299437	On floor of existing quarry	Borehole Diameter:110mm Depth:12m	130mOD	11.89mbgl 27th Jan. 2010 (118.11mOD)	0.45mbgl (129.55mOD)

BH ID	Grid Reference	Location	Well Details	Elevation	Water Inflow	Water Level (2010)
BH3	252434 299839	Eastern extension area	Borehole Diameter:110mm Depth – 6m	164mOD	5.5mbgl 27th Jan. 2010 (158.5mOD)	0.46mbgl (163.54mOD)
BH4	252364 299910	Eastern extension area	Borehole Diameter:110mm Depth: 24m	148mOD (actual g. level at opening of well =146.94mOD due to removal of material for base of rig)	5.5mbgl 27th Jan. 2010 (141.5mOD)	1.3mbth (1st Feb. 2010) 1.21mbth (145.73mOD)
BH5	252303 299652	Southern extension area	Borehole Diameter:110mm Depth: 24m	173 mOD	12.1mbgl 1st Feb. 2010 (160mOD)	2.99mbgl (170.01mOD)
BH6	252315 299615	Southern extension area	Borehole Diameter:110mm Depth: 24m	178 mOD	15.0mbgl 2nd Feb. 2010 (163mOD)	2.78mbgl (175.22mOD)
BH7	25247 299581	Southeast of the proposed extension area	Borehole Diameter:110mm Depth:18m	174 mOD (actual g. level at opening of well =172.9mOD due to removal of material for base of rig)	11.8mbgl 2nd Feb. 2010 (161.1mOD)	1.34mbth (171.56mOD)

7.95 It is noted that the water table was high beneath the extension area as it had not been affected by the extraction works at the existing quarry area, which was operational at the time of the site investigations works. As such, it can be expected that the impact to the water table will be limited to the area underlying the extension area.

Dewatering and Groundwater Inflow

7.96 Quarrying both within the existing and proposed quarry is below the water table. Based on the groundwater inflows measured in 2010, it will be necessary to dewater throughout the operational phase of the proposed development from between c. 5.5 – 15m bgl (163m – 141.5m AOD) to the proposed final floor level of c. 110m AOD. All groundwater removed from the quarry void will be directed to the discharge point in the adjacent Mullmagowan Stream.

7.97 In relation to estimated groundwater inflows to the proposed extension area and required dewatering volumes, the Environmental Considerations Report¹ completed for the site by Tobin Consulting in 2012 concluded the following:

- Overall permeability, storage capacity, recharge acceptance, length of flow path and base flow are low.
- Typically, groundwater flow is limited and there is a poorly-connected network of fractures, fissures and joints in the top 5m to 10m of the bedrock geology. Little groundwater flow is encountered at 10 mbgl;

- Groundwater volumes are minimal based on the findings of site investigation works carried out during the drilling of 2 no. onsite wells in 2003 and a detailed groundwater assessment including site investigations works carried out in 2010.
- The well recharge 'slug tests' and aquifer properties including permeability and specific capacity indicated that groundwater inflow to the quarry is/will be minimal and that less than 10m³/day of groundwater dewatering will be required.

Source Protection Areas

- 7.98 The site is not located within any source protection areas for groundwater supplies. The GSI does not have a record of any source protection areas in the wider area.

Groundwater Quality

- 7.99 Groundwater quality sampling could not be undertaken during the November 2022 site visit as both Well A and Well B were flooded with stagnant water and could not be pumped due to the nature of their headworks/locations. It was determined that it would not be beneficial to attempt to obtain a grab sample as this would not be representative of the groundwater.
- 7.100 It was also determined during this site visit that Well B is blocked close to the top of the headworks as the dip meter would not sink in the well. The well has previously been noted as unproductive and so it is likely that rainwater has built up above this blockage.

Groundwater Vulnerability

- 7.101 Groundwater vulnerability maps published on the GSI website (www.gsi.ie) indicate that the site processing area and the quarry void at the site is classified as an area of Extreme (X) groundwater vulnerability where bedrock is exposed at the surface, see **Figure 7-7**. The areas within the landholding where extraction has previously been undertaken have a groundwater vulnerability which is classed as "Rock at or near surface", showing that the soils and subsoils have been removed from the quarry footprint.
- 7.102 This indicates that rock there is less than 3m of subsoil cover. The GSI's Vulnerability Mapping Guidelines are shown in **Table 7-6**.

Table 7-6
GSI Vulnerability Mapping Guidelines

Vulnerability Rating	Hydrogeological Conditions				
	Subsoil Permeability (Type) and Thickness			Unsaturated Zone	Karst Features
	High permeability (sand/gravel)	Moderate permeability (e.g. Sandy subsoil)	Low permeability (e.g. Clayey subsoil, clay, peat)	(Sand/gravel aquifers only)	(<30 m radius)
Extreme (E)	0 - 3.0m	0 - 3.0m	0 - 3.0m	0 - 3.0m	-
High (H)	> 3.0m	3.0 - 10.0m	3.0 - 5.0m	> 3.0m	N/A
Moderate (M)	N/A	> 10.0m	5.0 - 10.0m	N/A	N/A
Low (L)	N/A	N/A	> 10.0m	N/A	N/A
Notes: (1) N/A = not applicable. (2) Precise permeability values cannot be given at present. (3) Release point of contaminants is assumed to be 1-2 m below ground surface.					

Groundwater Recharge

- 7.103 The GSI online map viewer shows groundwater recharge at the proposed extension of the quarry extraction area is 644.70mm/yr; the effective rainfall (rainfall after evaporation) is 758.50mm/yr and the recharge coefficient is 85%. The groundwater recharge at the quarry area is shown as been subject to a maximum recharge capacity of 100 mm/yr due to the removal of soils and subsoils, see **Figure 7-8**.
- 7.104 The actual annual recharge (i.e. potential recharge less surface water runoff) depends on the relative rates of infiltration and surface runoff, which is, in turn, influenced by subsoil permeability and saturation.
- 7.105 Groundwater movement in sandstone aquifers is primarily along bedding planes, with joints and fractures cutting across bedding and providing avenues for the vertical movement of water between bedding planes.

Water Framework Directive

- 7.106 The EU Water Framework Directive² (WFD) became EU law in December 2000 and provides for a single European framework to assess water quality (Ecological status) and allows for the comparison of results across Europe. The WFD covers rivers, lakes, estuaries or transitional waters, coastal waters as well as groundwaters. Details on the WFD are presented in **Appendix 7-O**.

Surface Water

- 7.107 On a regional scale, the overall landholding area is located in the Erne River Catchment area in Hydrometric area HA36. The site is within the Laragh Sub-Catchment (ID 36_9), which covers an area of 98.7 km². The rivers Laragh and Stradone are in the vicinity of the site.
- 7.108 The section of the Stradone River called 010 is located in the same sub-basin (EU Code IE_NW_36S020075), which covers an area of 15.5 km² extending to the northwest from the site. The application site is located towards the top of the sub-basin.
- 7.109 Under the Water Framework Directive (WFD) 2013-2018 River Water Quality, the rivers within the Laragh Sub-catchment are all good status based on their physio-chemical and biological quality. All are listed by the EPA as being not at risk of not meeting their objectives by 2027 (WFD), however these specific objectives are not outlined by the EPA.
- 7.110 The three remaining surface waterbodies within this sub-catchment are three currently unassigned lakes located in the upper reaches of the sub-catchment. The 2013-2018 WFD report revised the three lakes to Review due to the presence of potential pressures in the sub-basin and the reporting of algal blooms in the lakes by Cavan Co. Co.
- 7.111 The potential significant pressures within this sub-catchment are diffuse agriculture and abstractions. It is important to note the soils in this region are very poorly drained and are wet.
- 7.112 None of the rivers are drinking water protected rivers under the Water Framework Directive (WFD).

² Directive 2000/60/EC of the European Parliament and of the Council of 23 October 2000 establishing a framework for Community action in the field of water policy.

Groundwater

7.113 The Cavan GWB is good status under the WFD 2016-2021 Groundwater Quality. The GWB is listed by the EPA as not being at risk of not meeting its objectives by 2027 (WFD). Furthermore, the GWB has consistently been reported as having good status since the initial WFD assessment in 2007-2012.

WFD Assessment Summary

7.114 In summary, based on the evidence and assessment undertaken herein, it is considered that the proposed development of the quarry will not be contrary to the objectives of the WFD to maintain Good Ecological Status in the surface waterbodies of the Laragh sub-catchment or in the Cavan GWB by 2027.

Protected Areas

7.115 There are no Special Areas of Conservation (SAC), Special Protection Areas (SPA), or Natural Heritage Areas (NHA) in the vicinity of the site.

Water Environment Receptors

7.116 From the baseline study undertaken here, the following water environment sensitive receptors have been identified in the receiving environment:

- Mullymagowan Stream at the north eastern boundary of the extension area;
- Poor bedrock aquifer; and
- Local groundwater supply wells (GSI database and historical well survey).

7.117 For each identified receptor, the significance and sensitivity of the receptor is assessed in **Table 7-7** below and a rating (High/Medium/Low/Negligible) applied, based on the methodology outlined in existing guidance and reproduced in **Appendix 7-P**.

Table 7-7
Existing Environment - Significance and Sensitivity/Importance

No.	Existing Environment	Significance	Sensitivity	Existing Environment Significance/Sensitivity Rating (H/M/L/N)
1	Mullymagowan Stream	Located at north eastern boundary of the site. Good status (WFD 2013-2018)	River may be in hydraulic continuity with the groundwater aquifer underlying the site. Not at risk of not meeting their objectives by 2027 (WFD) Stream flows north to Corfad Lough	Medium - Attribute has a medium quality or value on a local scale

No.	Existing Environment	Significance	Sensitivity	Existing Environment Significance/Sensitivity Rating (H/M/L/N)
2	Poor bedrock aquifer / Cavan GWB	Generally unproductive except for local zones and good status (WFD 2016-2021).	No known local groundwater abstractions for drinking water supplies. Local residences are supplied by the nearby NFGWS, the source of which is a lake waterbody. Two on-site supply wells for process water. Cavan GWB is good status and is not at risk of not meeting its objectives by 2027 (WFD).	Low - Attribute has a low quality or value on a regional scale
3	Groundwater supply wells in surrounding area	There are two on-site supply wells – one is unproductive and the other supplies water to the aggregate screening and washing plant. The well survey identified 8 no. existing wells within a 500m radius of the site, the closest being 415m distance. The GSI records three private water supply wells within a wider 5km radius of the site – one was a failed supply, one is a poor yield, and the third a moderate yield.	Local groundwater abstractions for agricultural/domestic and industrial supplies	Low - Attribute has a medium quality or value on a local scale The site is not located within a source protection area.

Baseline Summary

- 7.118 The soils and subsoils over much of the landholding have already been removed in areas to facilitate bedrock extraction. The soils within the application area are still intact and consist of typical surface water gleys on fine loamy drift with siliceous stones, known as the Kilrush (0700h) Soil Association. The subsoils underlying the application area are predominantly till derived from Lower Palaeozoic sandstones and shales (TLSsS) with minor areas identified as having bedrock at or near the surface. The bedrock underlying the site is identified as Silurian age massive sandstone and microconglomerate of the Lough Avaghon Formation. Bedrock is exposed at the existing quarry void to the south of the application area.
- 7.119 On a regional scale, the overall landholding area its environs are located in the Erne River Catchment area and Laragh Sub-Catchment (ID 36_9). Under the Water Framework Directive (WFD) 2013-2018 River Water Quality, the rivers within the Laragh Sub-catchment are all good status based on their

physio-chemical and biological quality. All are listed by the EPA as being not at risk of not meeting their objectives by 2027 (WFD).

- 7.120 There are no recorded flood events at or near the site, nor is there any potential flooding.
- 7.121 EPA water quality monitoring stations on the Stradone River report Q value ratings of Q4 at both stations, which indicates “unpolluted” status. The surface water samples collected on site in both the Mullymagowan Stream and flooded quarry void produced results showing generally good quality.
- 7.122 The application area is underlain by a poor bedrock aquifer which is generally unproductive except for local zone (PI). The groundwater vulnerability at the application area is classed as “Extreme”.
- 7.123 The Cavan GWB underlies the site and includes the aforementioned poorly productive bedrock aquifer and extends further southwest and north/northeast from the site boundary. The Cavan GWB is good status under the WFD 2016-2021 Groundwater Quality. The GWB is listed by the EPA as *not* being at risk of not meeting its objectives by 2027 (WFD).
- 7.124 The site is not located within a source protection area. The potable (drinking water) for the site originates from the Billis-Lavey Group Water Scheme, which is also the closest group water scheme to the site and is supplied by surface water. The source protection area for this supply is located c. 1.1 km southwest of the application area. There are no other surface water or groundwater source protections areas within a 5km radius of the site.
- 7.125 According to the GSI well database, there are no wells within a 2km radius of the site. There are three wells in total within a 5km radius of the site, all located within the Cavan GWB. Two water supply wells are included within the existing processing area (Well A and Well B). It is expected that groundwater will be breached close to the current ground surface on the commencement of extraction operations in the new quarry area, at approx. 5.5 - 15 mbgl where inflows were noted during drilling.

IMPACT ASSESSMENT

Evaluation Methodology

- 7.126 The potential direct and indirect impacts to surface water and groundwater associated with the proposed development at the site are discussed below.
- 7.127 The methodology applied here is a qualitative risk assessment methodology in which the nature of the potential impacts are described in terms of the character, magnitude, duration, probability and consequence of the impact, see **Appendix 7-Q** and **Appendix 7-R**.
- 7.128 The potential impact is then screened against the sensitivity of the receiving environment to establish the overall significance of the potential impact (without mitigation). Appropriate mitigation measures for the potential impacts identified are discussed, and the identified potential impacts reassessed assuming the identified mitigation measures in place.

Construction Stage Impacts (No Mitigation)

- 7.129 In the context of the proposed development, the Construction Stage is taken to be site preparation which involves the stripping of soil and subsoil using earth moving machinery. The topsoil and any overburden material will be stored in temporary overburden storage berms ready to be used in the restoration of the site to agricultural land use.
- 7.130 The potential direct and indirect impacts to surface waters and groundwater are discussed below.

Direct Impacts

- 7.131 Soil and overburden material will be removed and so surface waterbodies adjacent to the site and the groundwater beneath the extraction area will be more vulnerable to potential pollution.
- 7.132 During soil removal, direct rainfall and the dust suppression of stockpiles could increase the fine sediment which could infiltrate into groundwater. Any fine sediment will pass through the unsaturated zone before reaching the underlying poorly productive bedrock aquifer.
- 7.133 Accidental fuel leakage/spillage at the site is a potential impact during the Construction Stage. Any fuel leakage/spillage will pass through the unsaturated zone before reaching the underlying aquifer.

Indirect Impacts

- 7.134 No indirect impacts associated with the construction stage of the proposed development have been identified.

Operational Stage Impacts (No Mitigation)

- 7.135 During the site operational stage, the direct and indirect impacts described above during the Construction phase will also apply. In addition, the following potential impacts specifically relating to the operational stage could occur.
- 7.136 The proposed extension area will be excavation from current floor level which is up to c. 175m AOD to c. 110m AOD in four benches. The reduction in floor level in the quarry will require dewatering to maintain dry working conditions on the quarry floor.
- 7.137 The dewatering at the quarry will require the provision of a sump on the quarry floor, and the pumping of water from the sump to the discharge point in the adjacent Mullymagowan Stream which flows north to pass through Lough Corfad and join with the Stradone River downstream of the site.
- 7.138 The operational stage will be approximately 15 years in duration, plus 2 years to complete restoration works (total duration sought 17 years).

Direct Impacts

- 7.139 During quarry dewatering, water will be discharged to the adjacent Mullymagowan Stream which flows north to the Stradone River. Without treatment, contaminated water discharge could impact on the surface water quality in the adjacent stream and, in turn, the downstream surface waterbodies.
- 7.140 Surface water runoff across the site will naturally recharge to groundwater and a bund will be constructed around the sump. This will minimise the volume of surface water runoff entering the sump.
- 7.141 The discharge will increase the baseflow in the adjacent Mullymagowan Stream during quarry dewatering. This could be a positive impact during low flow periods in the stream.
- 7.142 During dewatering, a cone of drawdown will occur and could cause the lowering of the water level in local groundwater supply wells. The historical well survey identified 8 no. 'existing' wells within 500m of the application site. The nearest private well is located 415m from the quarry extension boundary. The GSI wells database does not record any offsite groundwater supply wells within 2km of the site. It is noted that this region is in an area that overlies a poor aquifer and, therefore, the zone of contribution associated with the proposed dewatering will be localised and is not likely to extend from beneath the quarry floor.

Indirect Impacts

- 7.143 No indirect impacts associated with the operational stage of the proposed development have been identified.

Post - Operational Stage Impacts (No Mitigation)

Direct Impacts

- 7.144 During this stage the groundwater level in the quarry will be allowed to rebound naturally.

Indirect Impacts

- 7.145 There are no indirect impacts anticipated.

Rating of Identified Potential Impacts

- 7.146 The potential impacts outlined above during the construction and operational stages have been described in terms of the character, magnitude, duration, probability and consequence, and each impact is rated in terms of High (H), Medium (M), Low (L) and Negligible (N) based on the magnitude, extent, duration and consequence of the identified effects.
- 7.147 The description of the effects and rating for each identified impact is shown in **Table 7-8** below.

Significance of Impacts

- 7.148 The significance of impacts is based on the significance and sensitivity of the existing environment (**Table 7-7** above), and the description of identified potential impacts with likely significant effects outlined in **Table 7-8** below. The significance of Impact is determined from the Classification of the Significance of Impacts in **Appendix 7-R**.

Table 7-8
Description of Impacts and Impact Rating

No.	Potential Impacts	Description of Impact (No Mitigation)	Significance of Impact (No Mitigation)
Construction Stage - Direct			
1	Reduction in groundwater quality in bedrock aquifer from increase in suspended solids	Low. Potential to affect groundwater quality in underlying aquifer from vertical migration through unsaturated zone. Impact to groundwater is unlikely due to short term nature of works. Removal of soils and subsoils could result in elevated suspended solids from disturbed ground entering groundwater.	Slight
2	Reduction in groundwater quality in bedrock aquifer from accidental fuel leakage/spillage	Medium to Low. Potential to affect groundwater quality in underlying aquifer from vertical migration through unsaturated zone. Impact to groundwater is unlikely due to short term nature of works. Any leakage / spillage would be accidental only and of limited volume.	Slight
3	Reduction in groundwater quality in the local water supplies from increase in suspended solids and accidental fuel leakage/spillage.	Low. Potential to affect groundwater quality in underlying aquifer through vertical migration followed by lateral migration. Nearest off site water supply well is 415m away. Impact to groundwater is unlikely due to short term nature of works. Any leakage / spillage would be accidental only and of limited volume.	Slight – Not Significant
4	Reduction in surface water quality from increase in suspended solids and accidental fuel leakage/spillage	Low to Negligible. Potential to affect surface water quality through hydraulic continuity with groundwater in underlying aquifer. Groundwater quality could be impacted from vertical migration through unsaturated followed by lateral migration. Impact to groundwater is unlikely due to short term nature of works.	Slight – Not Significant
Operational Stage – Direct			
5	Reduction in surface water quality from untreated discharge of contaminated water pumped from quarry sump	Medium to High. Potential to affect surface water quality through discharge. Without treatment, contaminated water discharge could impact on the surface water quality in the adjacent Mullymagowan Stream.	Moderate

HYDROLOGY AND HYDROGEOLOGY (WATER) 7

No.	Potential Impacts	Description of Impact (No Mitigation)	Significance of Impact (No Mitigation)
6	Reduction in groundwater quality in bedrock aquifer from increase in suspended solids	Low to Medium. Potential to affect groundwater quality in underlying aquifer through vertical migration through unsaturated zone (where present) and direct contact in quarry floor.	Slight
7	Reduction in groundwater quality in bedrock aquifer from accidental fuel leakage/spillage	Medium. Potential to affect groundwater quality in underlying aquifer through vertical migration through unsaturated zone (where present) and direct contact in quarry floor. Any leakage / spillage would be accidental only and of limited volume.	Moderate - Slight
8	Reduction in groundwater quality in the local water supplies from increase in suspended solids and accidental fuel leakage/spillage	Low. Potential to affect groundwater quality in underlying aquifer through vertical migration through unsaturated zone and direct contact in quarry floor followed by horizontal migration of impacted groundwater to water supplies. The nearest offsite groundwater supply well is 415m away. Any leakage / spillage would be accidental only and of limited volume.	Slight – Not Significant
9	Lowering of the water level in local groundwater supply wells due to dewatering and abstraction.	Low. During dewatering when the quarry is deepened, a cone of drawdown will occur and could cause lowering of the water level in local groundwater supply wells. However, the nearest offsite groundwater supply well is 415m away.	Slight – Not Significant
10	Impact of discharge quantity on surface water	Low. Discharge of water from the quarry sump will be required during the proposed excavation of the quarry. The discharge will increase the baseflow in the adjacent Mullymagowan Stream during quarry dewatering.	Slight – Not Significant

Cumulative Impacts

- 7.149 There are no developments within a 5km radius of the site that are considered to have a potential cumulative impact.

Unplanned Events

- 7.150 It is highly unlikely that any unplanned events within the application site would result in a noticeable impact on the hydrology and hydrogeology. Accidents could result in the spillage of fuel, which has been considered in the assessment above.

‘Do-nothing Scenario’

- 7.151 If the proposed extension development is not permitted, the site will remain undeveloped as agricultural land.

MITIGATION MEASURES

- 7.152 Mitigation measures required to reduce the significance of potential impacts associated with the proposed extension area from Slight/Moderate to Not Significant to the water environment receptors are identified in the following sections of this EIAR Chapter.

Existing and Proposed Mitigation Measures

- 7.153 In order to mitigate against the risk of pollution to groundwater and surface water occurring arising during the proposed extension of the quarry, the following water / environmental control measures will be implemented:
- The dewatering at the quarry will require the provision of a sump on the quarry floor, the pumping of water from the sump to the discharge point in the adjacent Mullymagowan Stream which flows north to the Stradone River. A bund will be constructed around the sump. This will minimise the volume of surface water runoff entering the sump.
 - Measures will be taken to ensure that all diesel fuel oil storage will be in a double skinned fuel tank in a secure container to prevent contamination of groundwater;
 - A spill kit including high absorbency mats and pig tails will be available on site to be used in the event of a hydrocarbon spill;
 - A programme of surface quality monitoring will be implemented, with samples taken from the sump and the discharge point on a monthly basis. If there is a deterioration in surface water quality as a result of construction related activities then measures to manage and reduce fines / fuels in any runoff will be implemented;
 - Groundwater monitoring wells will be installed around the site and samples will be taken from the wells on a quarterly basis. If there is a deterioration in groundwater quality as a result of construction related activities then, as above, measure will be implemented; and
 - The Environmental Management System will continue to be implemented at the site.

Assessment of Impacts with Mitigation Measures in Place

7.154 With the above mitigation measures in place at the application site, it is projected that the following reduction in the assessed significance of impacts will result:

Construction Stage:

- Reduction of the potential impact on groundwater quality in the bedrock aquifer from an increase in suspended solids and accidental fuel leakage/spillage from **'slight'** to **'not significant'** (No. 1&2).
- Reduction of the potential impact on local groundwater supplies from accidental fuel leakage/spillage at the site and migration within the groundwater body from **'slight/not significant'** to **'not significant'** (No. 3).
- Reduction of the potential impact on surface water quality from an increase in suspended solids and accidental fuel leakage/spillage from **'slight/not significant'** to **'not significant'** (No. 4).

Operational Stage - Direct:

- Reduction of the potential impact on surface water quality from untreated discharge of contaminated water pumped from the quarry sump from **'moderate'** to **'slight'** (No. 5).
 - Reduction of the potential impact on groundwater quality in the bedrock aquifer from an increase in suspended solids from **'slight'** to **'not significant'** (No. 6).
 - Reduction of the potential impact on groundwater quality in the bedrock aquifer from accidental fuel leakage/spillage from **'moderate-slight'** to **'slight'** (No. 7).
 - Reduction of the potential impact on groundwater quality in the domestic water supplies from increase in suspended solids and accidental fuel leakage/spillage from **'slight/not significant'** to **'not significant'** (No. 8).
- 7.155 For the potential impacts of lowering of the water level in local groundwater supply wells due to dewatering and abstraction (No. 9) and impact of discharge quantity on surface water (No. 10), the potential impact will remain as **'slight/not significant'** for both.

Post-Operation Stage

7.156 It is not considered that there are any direct or indirect impacts on surface water or groundwater during the Post-Operation Stage.

RESIDUAL IMPACT ASSESSMENT

- 7.157 Examination of the identified potential impacts on the receiving environment show that provided appropriate mitigation measures are put in place, there are no significant residual impacts with respect to groundwater and/or surface water during the Construction, Operation, Post-Operation Stages.
- 7.158 It is therefore considered that with the implementation of the mitigation measures outlined above, the proposed development will not cause any significant, or likely significant, impact on groundwater and/or surface water.

MONITORING

- 7.159 The following monitoring activities will be carried out to demonstrate that the development is not having an adverse impact on the surrounding environment:
- Groundwater monitoring wells will be installed around the application area. Groundwater quality and levels will be monitored, with frequency and parameters of sampling to be agreed with Cavan Co. Co. for the duration of the proposed development; and
 - The water quality in the quarry sump and in the adjacent Mullymagowan Stream will be monitored, with frequency and parameters of sampling to be agreed with Cavan Co. Co. for the duration of the proposed development. This will include sampling at the discharge point on the Mullymagowan Stream.

Surface Water Monitoring

- 7.160 It is recommended that the surface water quality in the quarry sump and in the adjacent Mullymagowan Stream is monitored on a monthly basis to ensure the quarry operations do not adversely impact on the local surface water environment.
- 7.161 Samples will be taken from two points along the stream; at the discharge point and further downstream before the stream reaches Lake Corfad. These proposed monitoring points are mapped on **Figure 7-9**.
- 7.162 The three samples will be tested for a standard surface water quality suite at an appropriate laboratory and results will be screened against relevant legislation and guideline concentration limits for all parameters.
- 7.163 In addition, a flow meter will be installed at the point of discharge to control and monitor water volumes being discharged off site during the operational phase of the proposed development.
- 7.164 Any additional surface water monitoring requirements will be agreed with Cavan Co. Co. prior to the commencement of any operations on site. Any conditions set out in the discharge licence will also be considered as part of the surface water monitoring programme.

Groundwater Monitoring

- 7.165 The quarry extension will initially be worked dry above the water table and thereafter through the use of pumps within the quarry void after the groundwater table has been intercepted.
- 7.166 Groundwater level and quality monitoring will be carried out during the construction and operational stages. This will allow for groundwater quality sampling (quarterly) and groundwater level data (continuous or monthly) to be collected from the proposed development site.
- 7.167 Any additional groundwater monitoring requirements will be agreed with Cavan Co. Co. prior to the commencement of any operations on site.

FIGURES

Figure 7-1
Site Layout and Water Management

Figure 7-2
Proposed Site Layout with Borehole Locations

Figure 7-3
Surface Water Bodies Map

Figure 7-4
Bedrock Aquifer Map


Figure 7-5
Groundwater Bodies Map

Figure 7-6
Groundwater Wells Map (GSI database)

Figure 7-7
Groundwater Vulnerability Map

Figure 7-8
Groundwater Recharge Map

Figure 7-9
Proposed Monitoring Locations

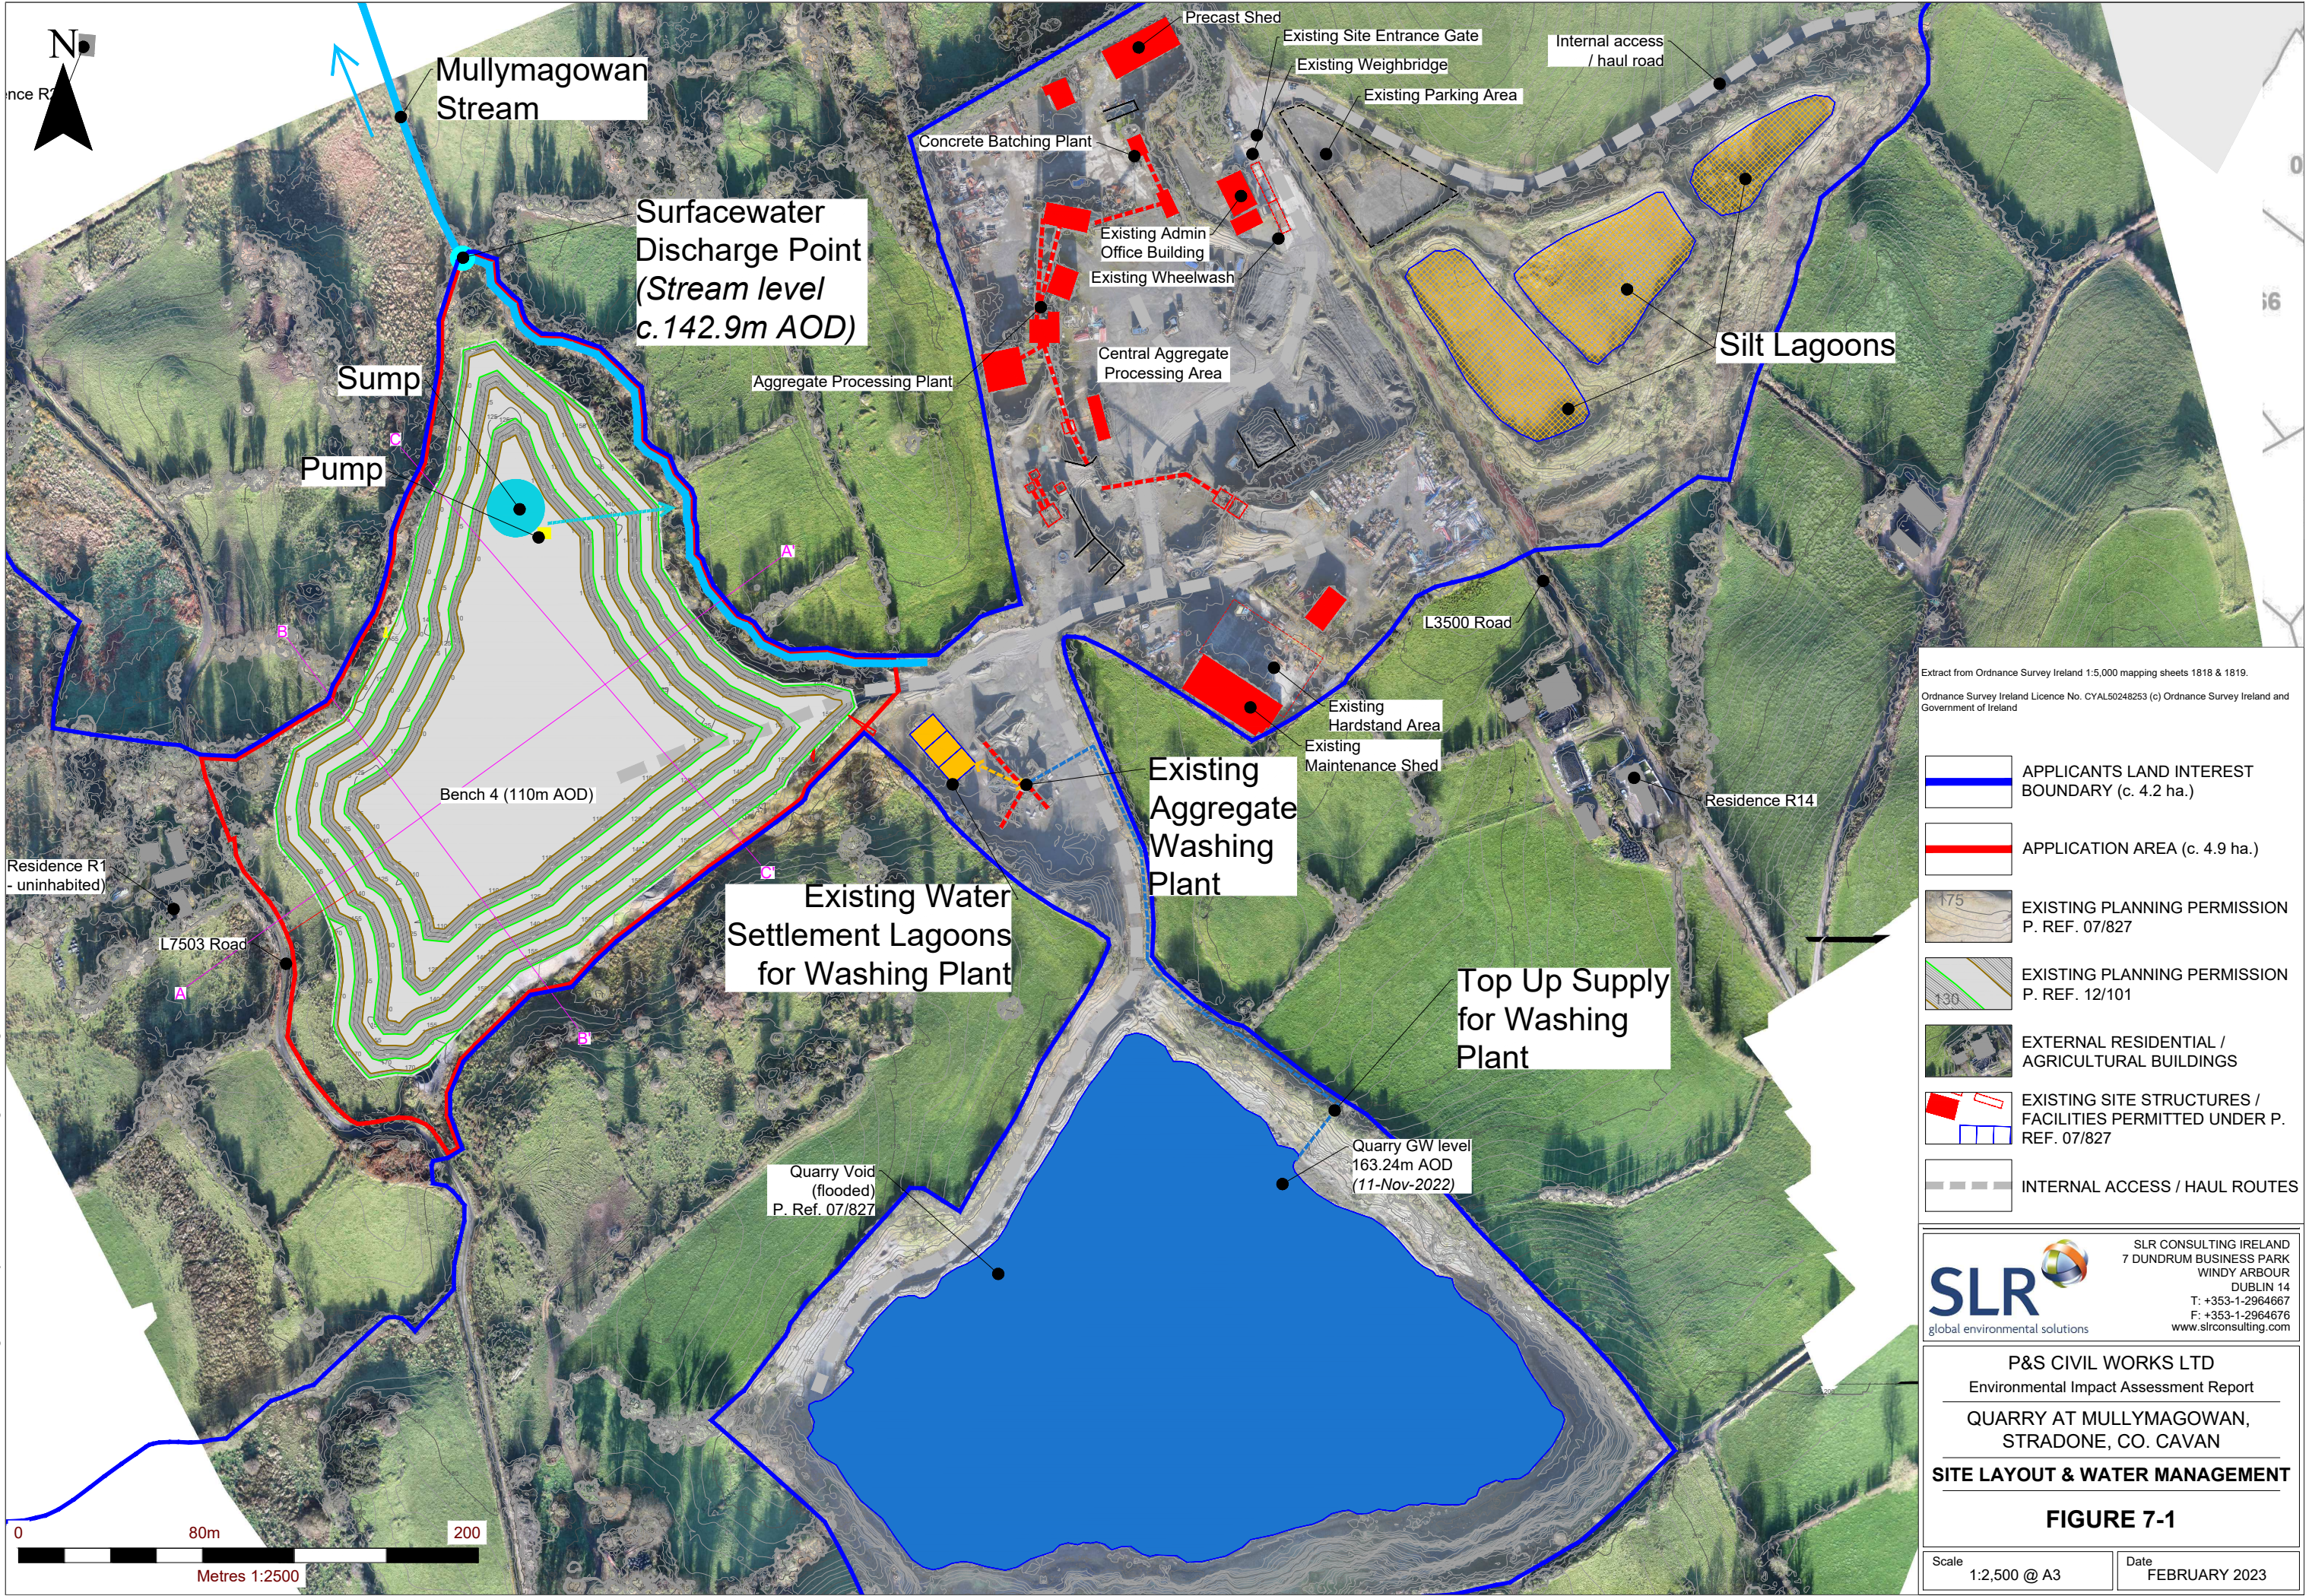

Extract from Ordnance Survey Ireland 1:5,000 mapping sheets 1818 & 1819.
Ordnance Survey Ireland Licence No. CYAL50248253 (c) Ordnance Survey Ireland and Government of Ireland

- APPLICANTS LAND INTEREST BOUNDARY (c. 4.2 ha.)
- APPLICATION AREA (c. 4.9 ha.)
- EXISTING PLANNING PERMISSION P. REF. 07/827
- EXISTING PLANNING PERMISSION P. REF. 12/101
- EXTERNAL RESIDENTIAL / AGRICULTURAL BUILDINGS
- EXISTING SITE STRUCTURES / FACILITIES PERMITTED UNDER P. REF. 07/827
- INTERNAL ACCESS / HAUL ROUTES



SLR
global environmental solutions

SLR CONSULTING IRELAND
7 DUNDUM BUSINESS PARK
WINDY ARBOUR
DUBLIN 14
T: +353-1-2964667
F: +353-1-2964676
www.slrconsulting.com

P&S CIVIL WORKS LTD
Environmental Impact Assessment Report
**QUARRY AT MULLYMAGOWAN,
STRADONE, CO. CAVAN**
SITE LAYOUT & WATER MANAGEMENT

FIGURE 7-1


Scale 1:2,500 @ A3	Date FEBRUARY 2023
-----------------------	-----------------------

SLR Projects\904200 P&S Civils\064821 Stradone EIA\



NOTES 1. Ordnance Survey Ireland Licence no. CYAL50248253 © Ordnance Survey Ireland/Government of Ireland 2. Base Mapping Google Satellite Imagery, Map data ©2023	
LEGEND — APPLICATION BOUNDARY — LANDHOLDING BOUNDARY ● EXISTING BOREHOLE LOCATIONS	
<div><div>SLR CONSULTING 7 DUNDUM BUSINESS PARK WINDY ARBOUR D14 N2Y7 T +353 (0)1296 4667 www.slrconsulting.com</div></div>	
<div>P&S CIVIL WORKS LTD ENVIRONMENTAL IMPACT ASSESSMENT REPORT</div> <div>QUARRY AT MULLYMAGOWAN, STRADONE, CO. CAVAN</div> <div>EXISTING BOREHOLE LOCATIONS</div> <div>FIGURE 7-2</div>	
Scale 1:5,000 @ A3	Date FEBRUARY 2023

SLR Projects\904200 P&S Civils\064821 Stradone EIA\

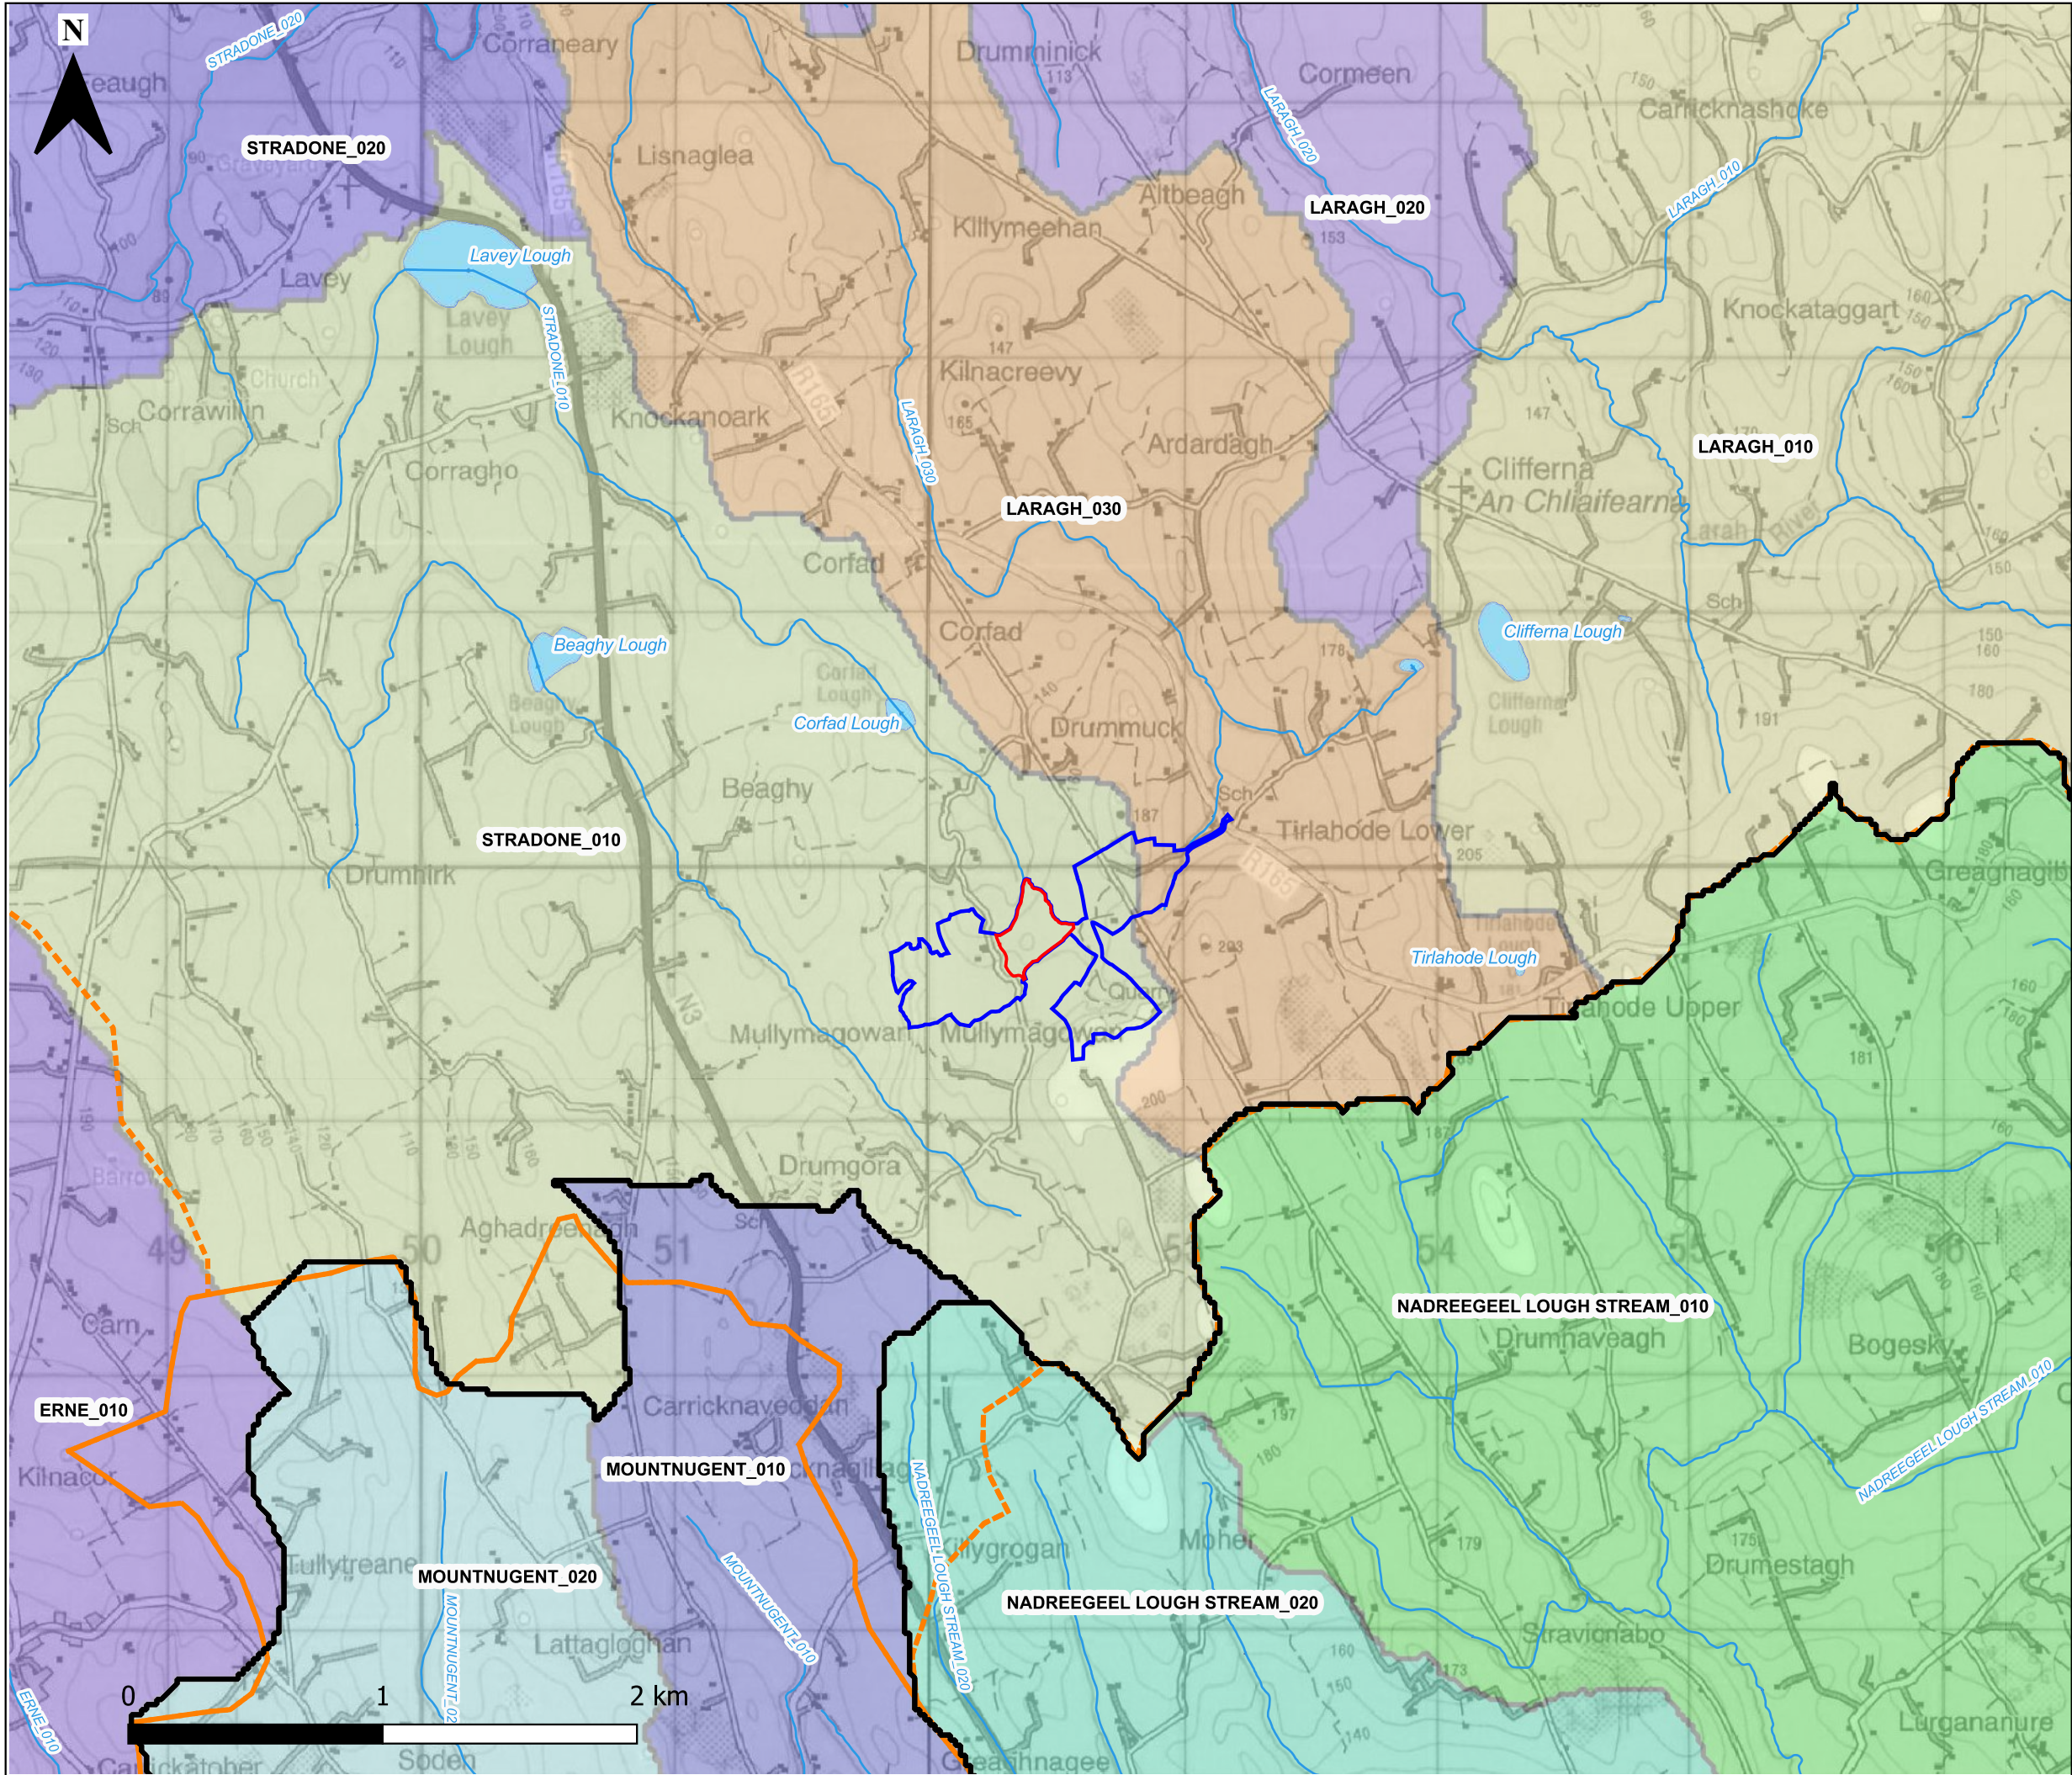

NOTES

1. Ordnance Survey Ireland Licence no. CYAL50248253
2. © Ordnance Survey Ireland/Government of Ireland
3. Water Framework Directive (WFD) / Environmental Protection Agency (EPA) Surface Waterbody Data ©WFD/EPA
4. Base Mapping OSI Discovery Series Sheets: 34, 35

LEGEND

— APPLICATION BOUNDARY

— LANDHOLDING BOUNDARY

□ WFD CATCHMENTS (CYCLE 3)

□ WFD SUB-CATCHMENTS (CYCLE 3)

WFD RIVER SUB BASINS (CYCLE 3)

ERNE_010

LARAGH_010

LARAGH_020

LARAGH_030

MOUNTNUGENT_010

MOUNTNUGENT_020

NADREEGEEL LOUGH STREAM_010

NADREEGEEL LOUGH STREAM_020

STRADONE_010

STRADONE_020

— WFD RIVER WATERBODIES (CYCLE 3)

— WFD LAKE WATERBODIES (CYCLE 3)



SLR CONSULTING
7 DUNDUM BUSINESS PARK
WINDY ARBOUR
D14 N2Y7
T +353 (0)1296 4667
www.slrconsulting.com

P&S CIVIL WORKS LTD
ENVIRONMENTAL IMPACT ASSESSMENT

**QUARRY AT MULLYMAGOWAN,
STRADONE, CO. CAVAN**


SURFACE WATER FEATURES

FIGURE 7-3

Scale
1:25,000 @ A3

Date
FEBRUARY 2023

SLR Projects\904\200 P&S Civils\064821 Stradone EIA\

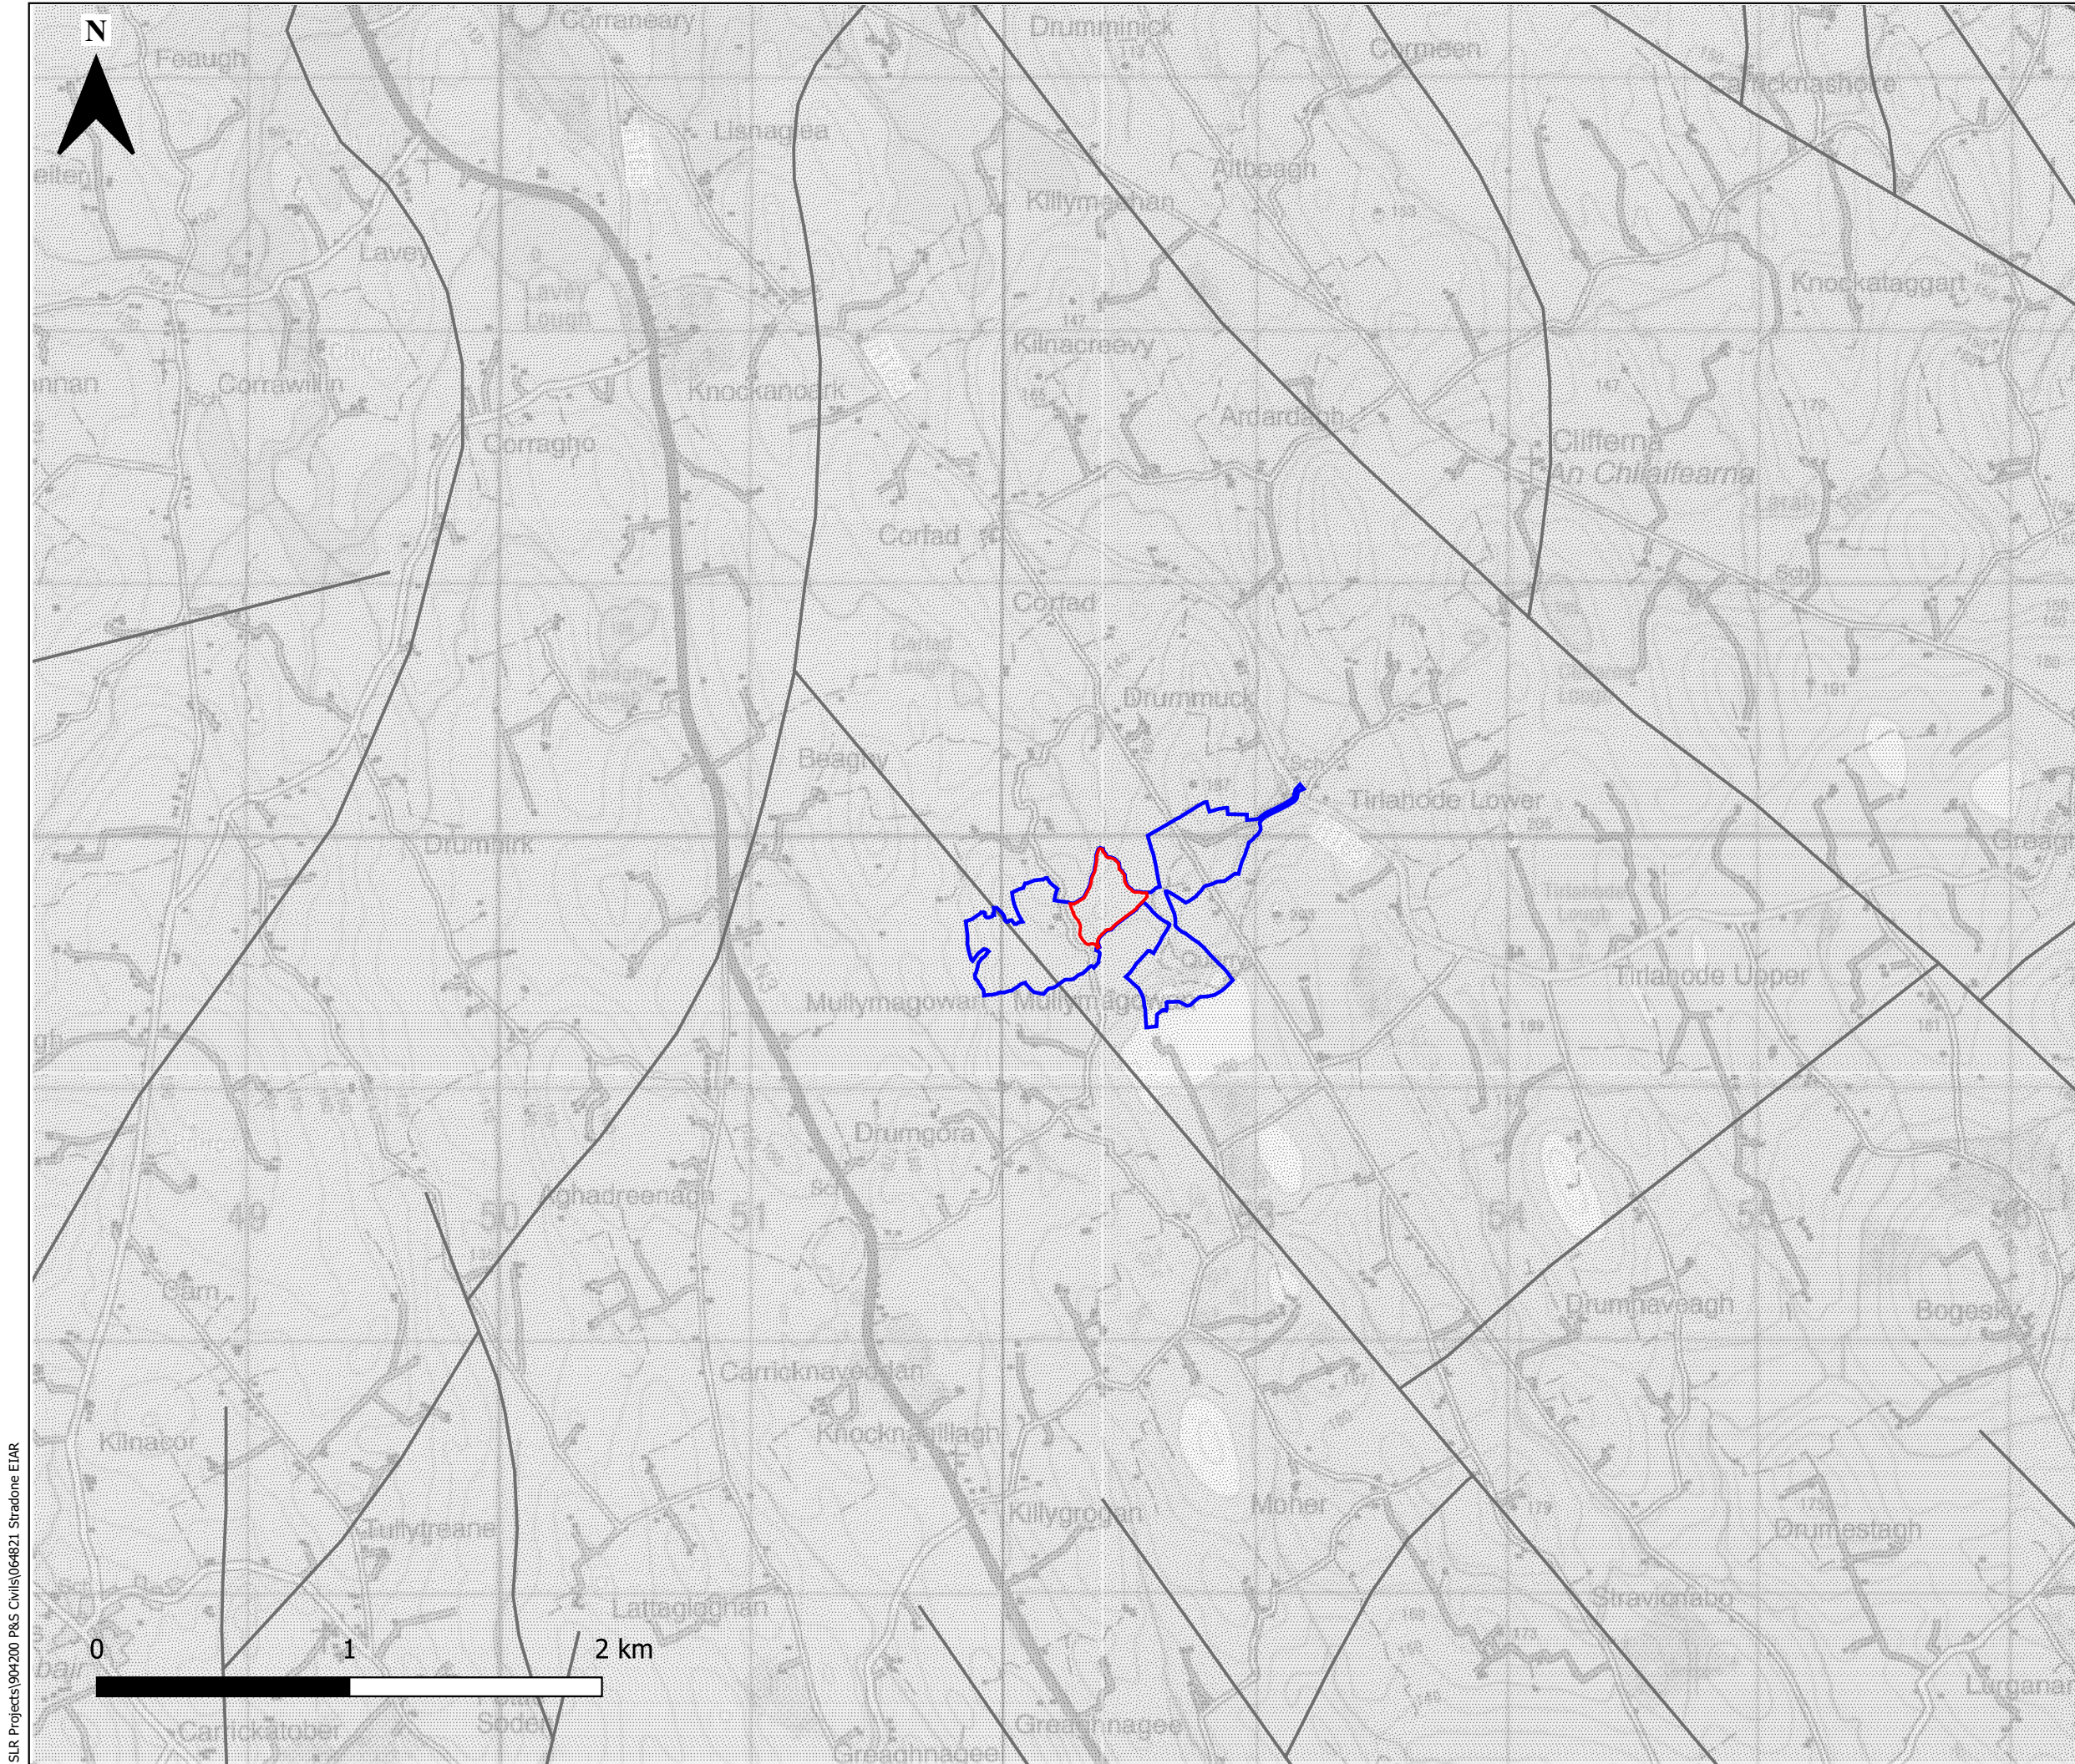

NOTES

1. Ordnance Survey Ireland Licence no. CYAL50248253
© Ordnance Survey Ireland/Government of Ireland
2. Groundwater data ©GSI
3. Base Mapping OSi Discovery Series Sheets: 34, 35

LEGEND

- APPLICATION BOUNDARY
- LANDHOLDING BOUNDARY

BEDROCK AQUIFER CLASSIFICATION

- PI - Poor Aquifer -
Bedrock which is Generally Unproductive
except for Local Zones
- Bedrock Aquifer Faults



SLR CONSULTING
7 DUNDUM BUSINESS PARK
WINDY ARBOUR
D14 N2Y7
T +353 (0)1296 4667
www.slrconsulting.com

P&S CIVIL WORKS LTD
ENVIRONMENTAL IMPACT ASSESSMENT

**QUARRY AT MULLYMAGOWAN,
STRADONE, CO. CAVAN**


BEDROCK AQUIFER MAP

FIGURE 7-4

Scale
1:25,000 @ A3

Date
FEBRUARY 2023

SLR Projects\904200 P&S Civils\064821 Stradone ETAR

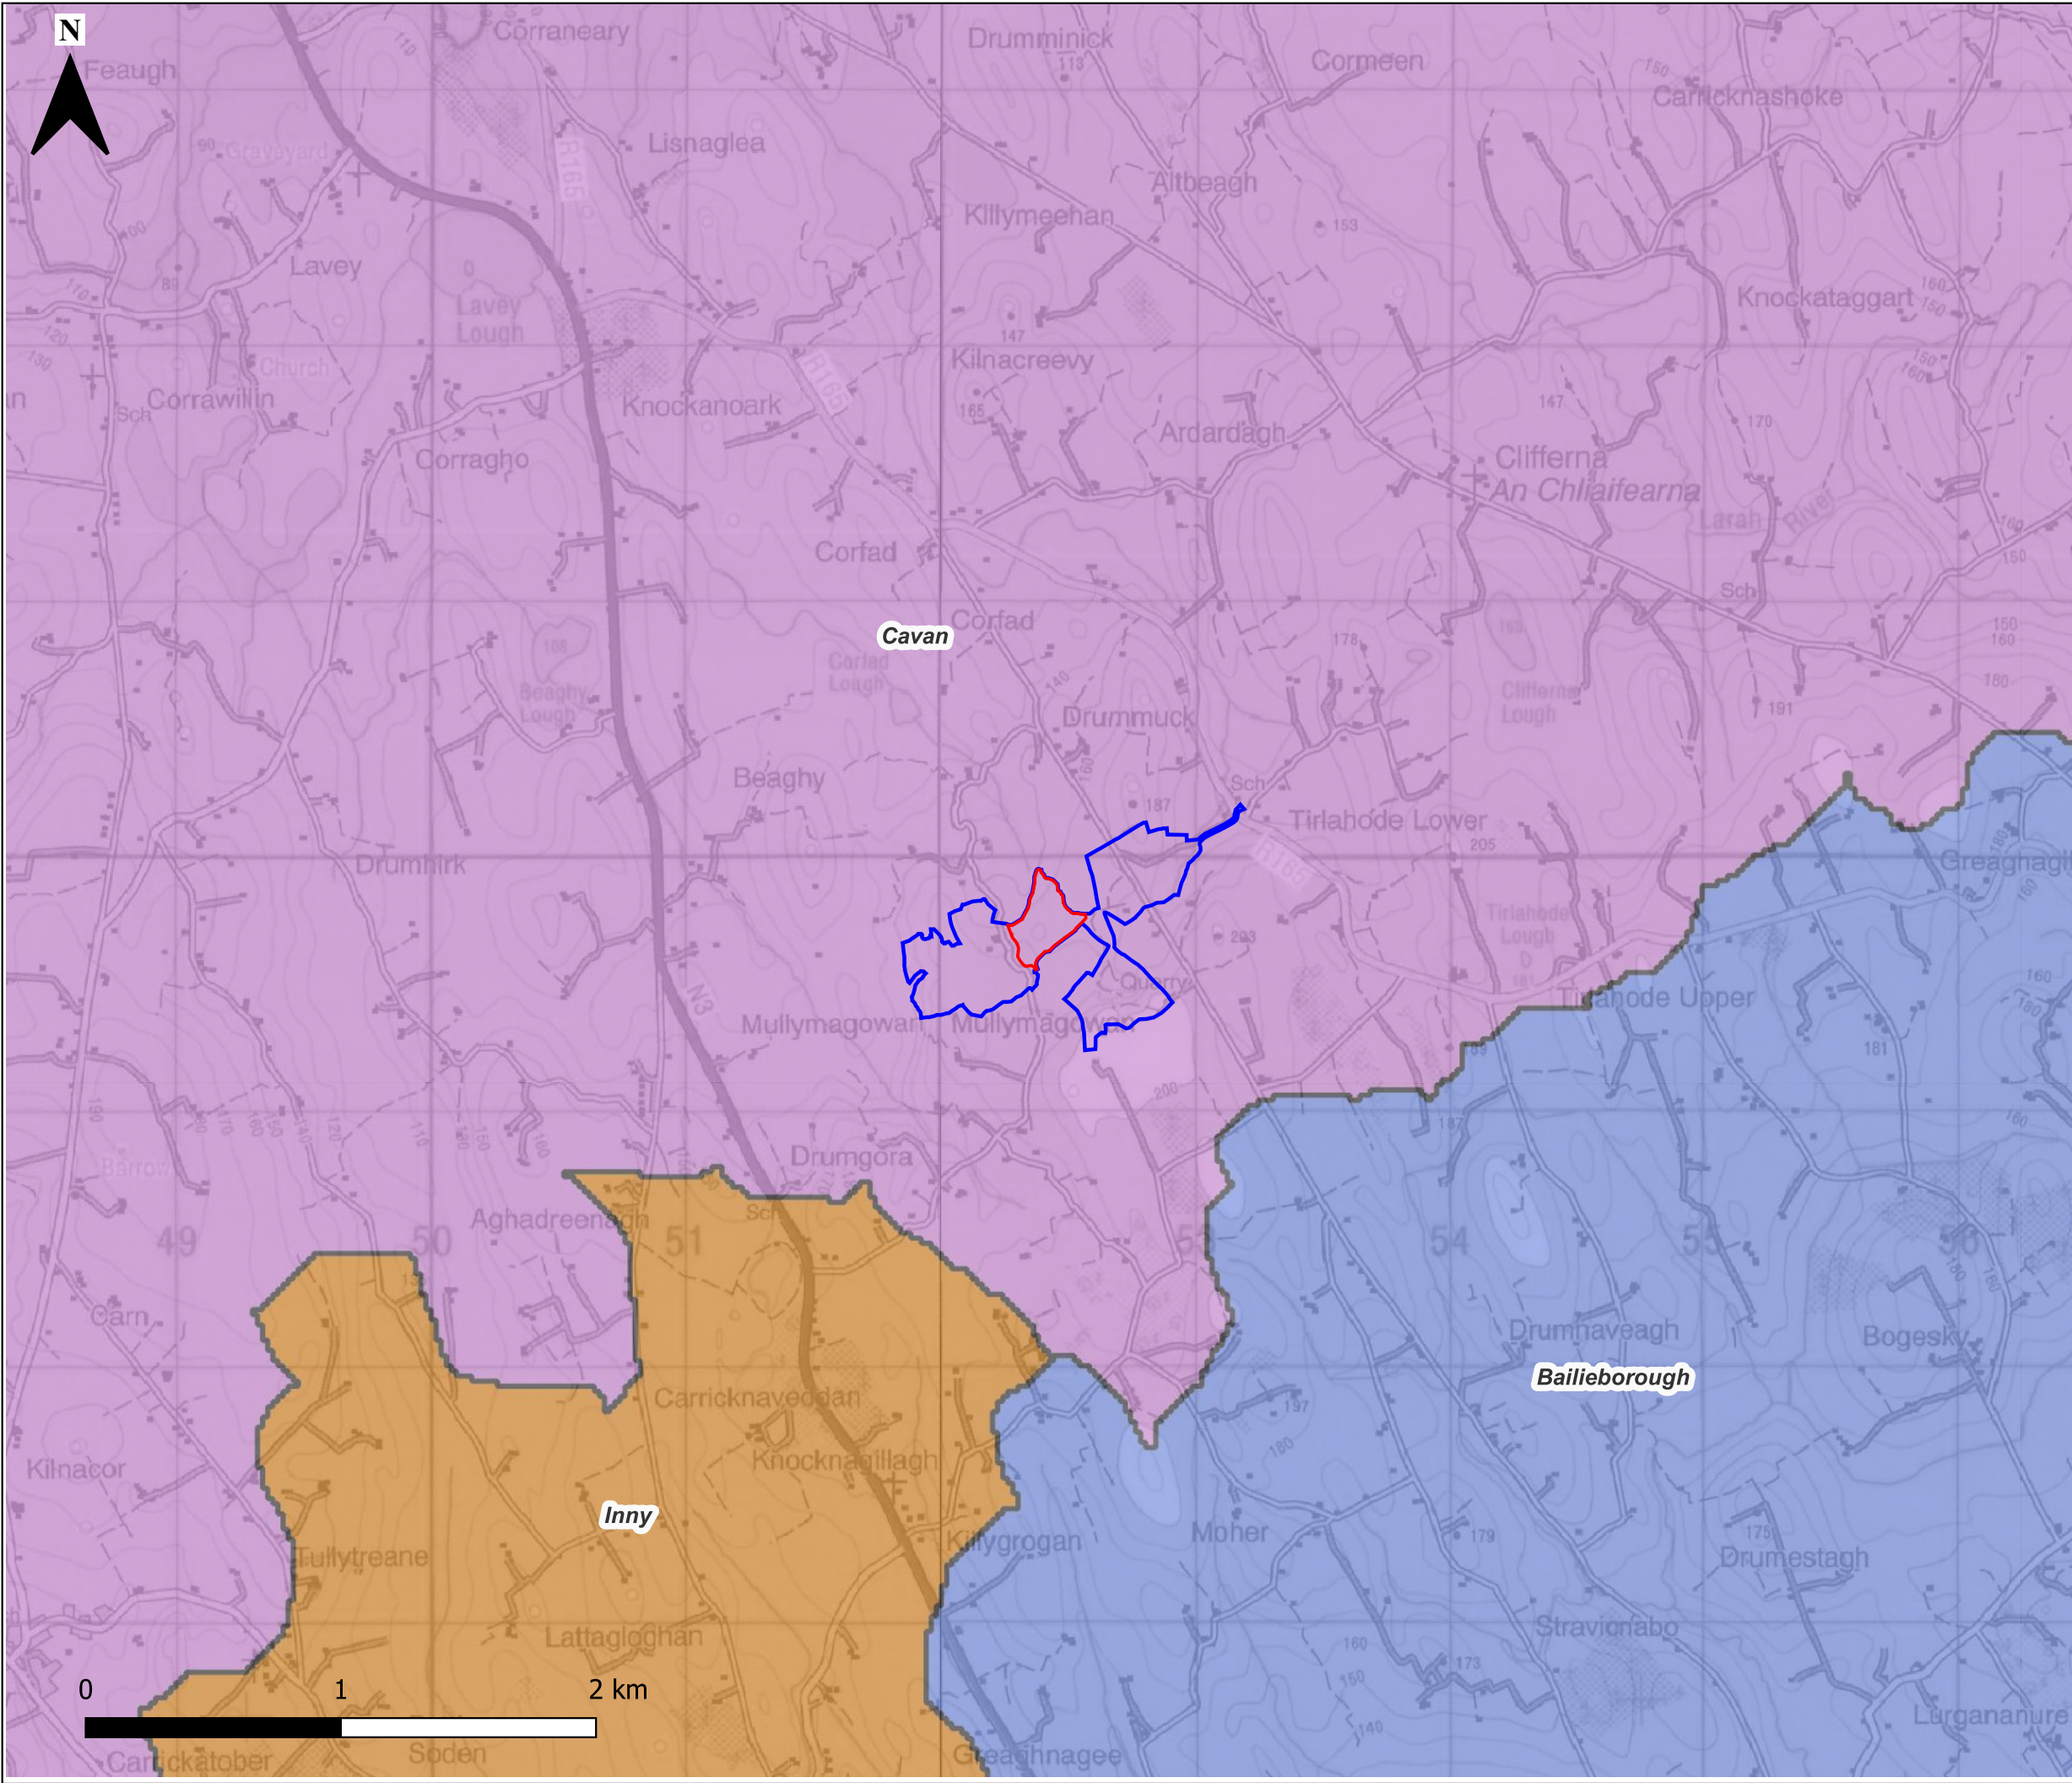

NOTES

- 1. Ordnance Survey Ireland Licence no. CYAL50248253
© Ordnance Survey Ireland/Government of Ireland
- 2. Groundwater data ©EPA/WFD
- 3. Base Mapping OSi Discovery Series Sheets: 34, 35

LEGEND

- APPLICATION BOUNDARY
- LANDHOLDING BOUNDARY

WFD CYCLE 3 GROUNDWATER BODIES

- Bailieborough
- Cavan
- Inny



SLR CONSULTING
7 DUNDUM BUSINESS PARK
WINDY ARBOUR
D14 N2Y7
T +353 (0)1296 4667
www.slrconsulting.com


P&S CIVIL WORKS LTD
ENVIRONMENTAL IMPACT ASSESSMENT REPORT

QUARRY AT MULLYMAGOWAN,
STRADONE, CO. CAVAN

GROUNDWATER BODIES

FIGURE 7-5

Scale 1:25,000 @ A3	Date FEBRUARY 2023
------------------------	-----------------------

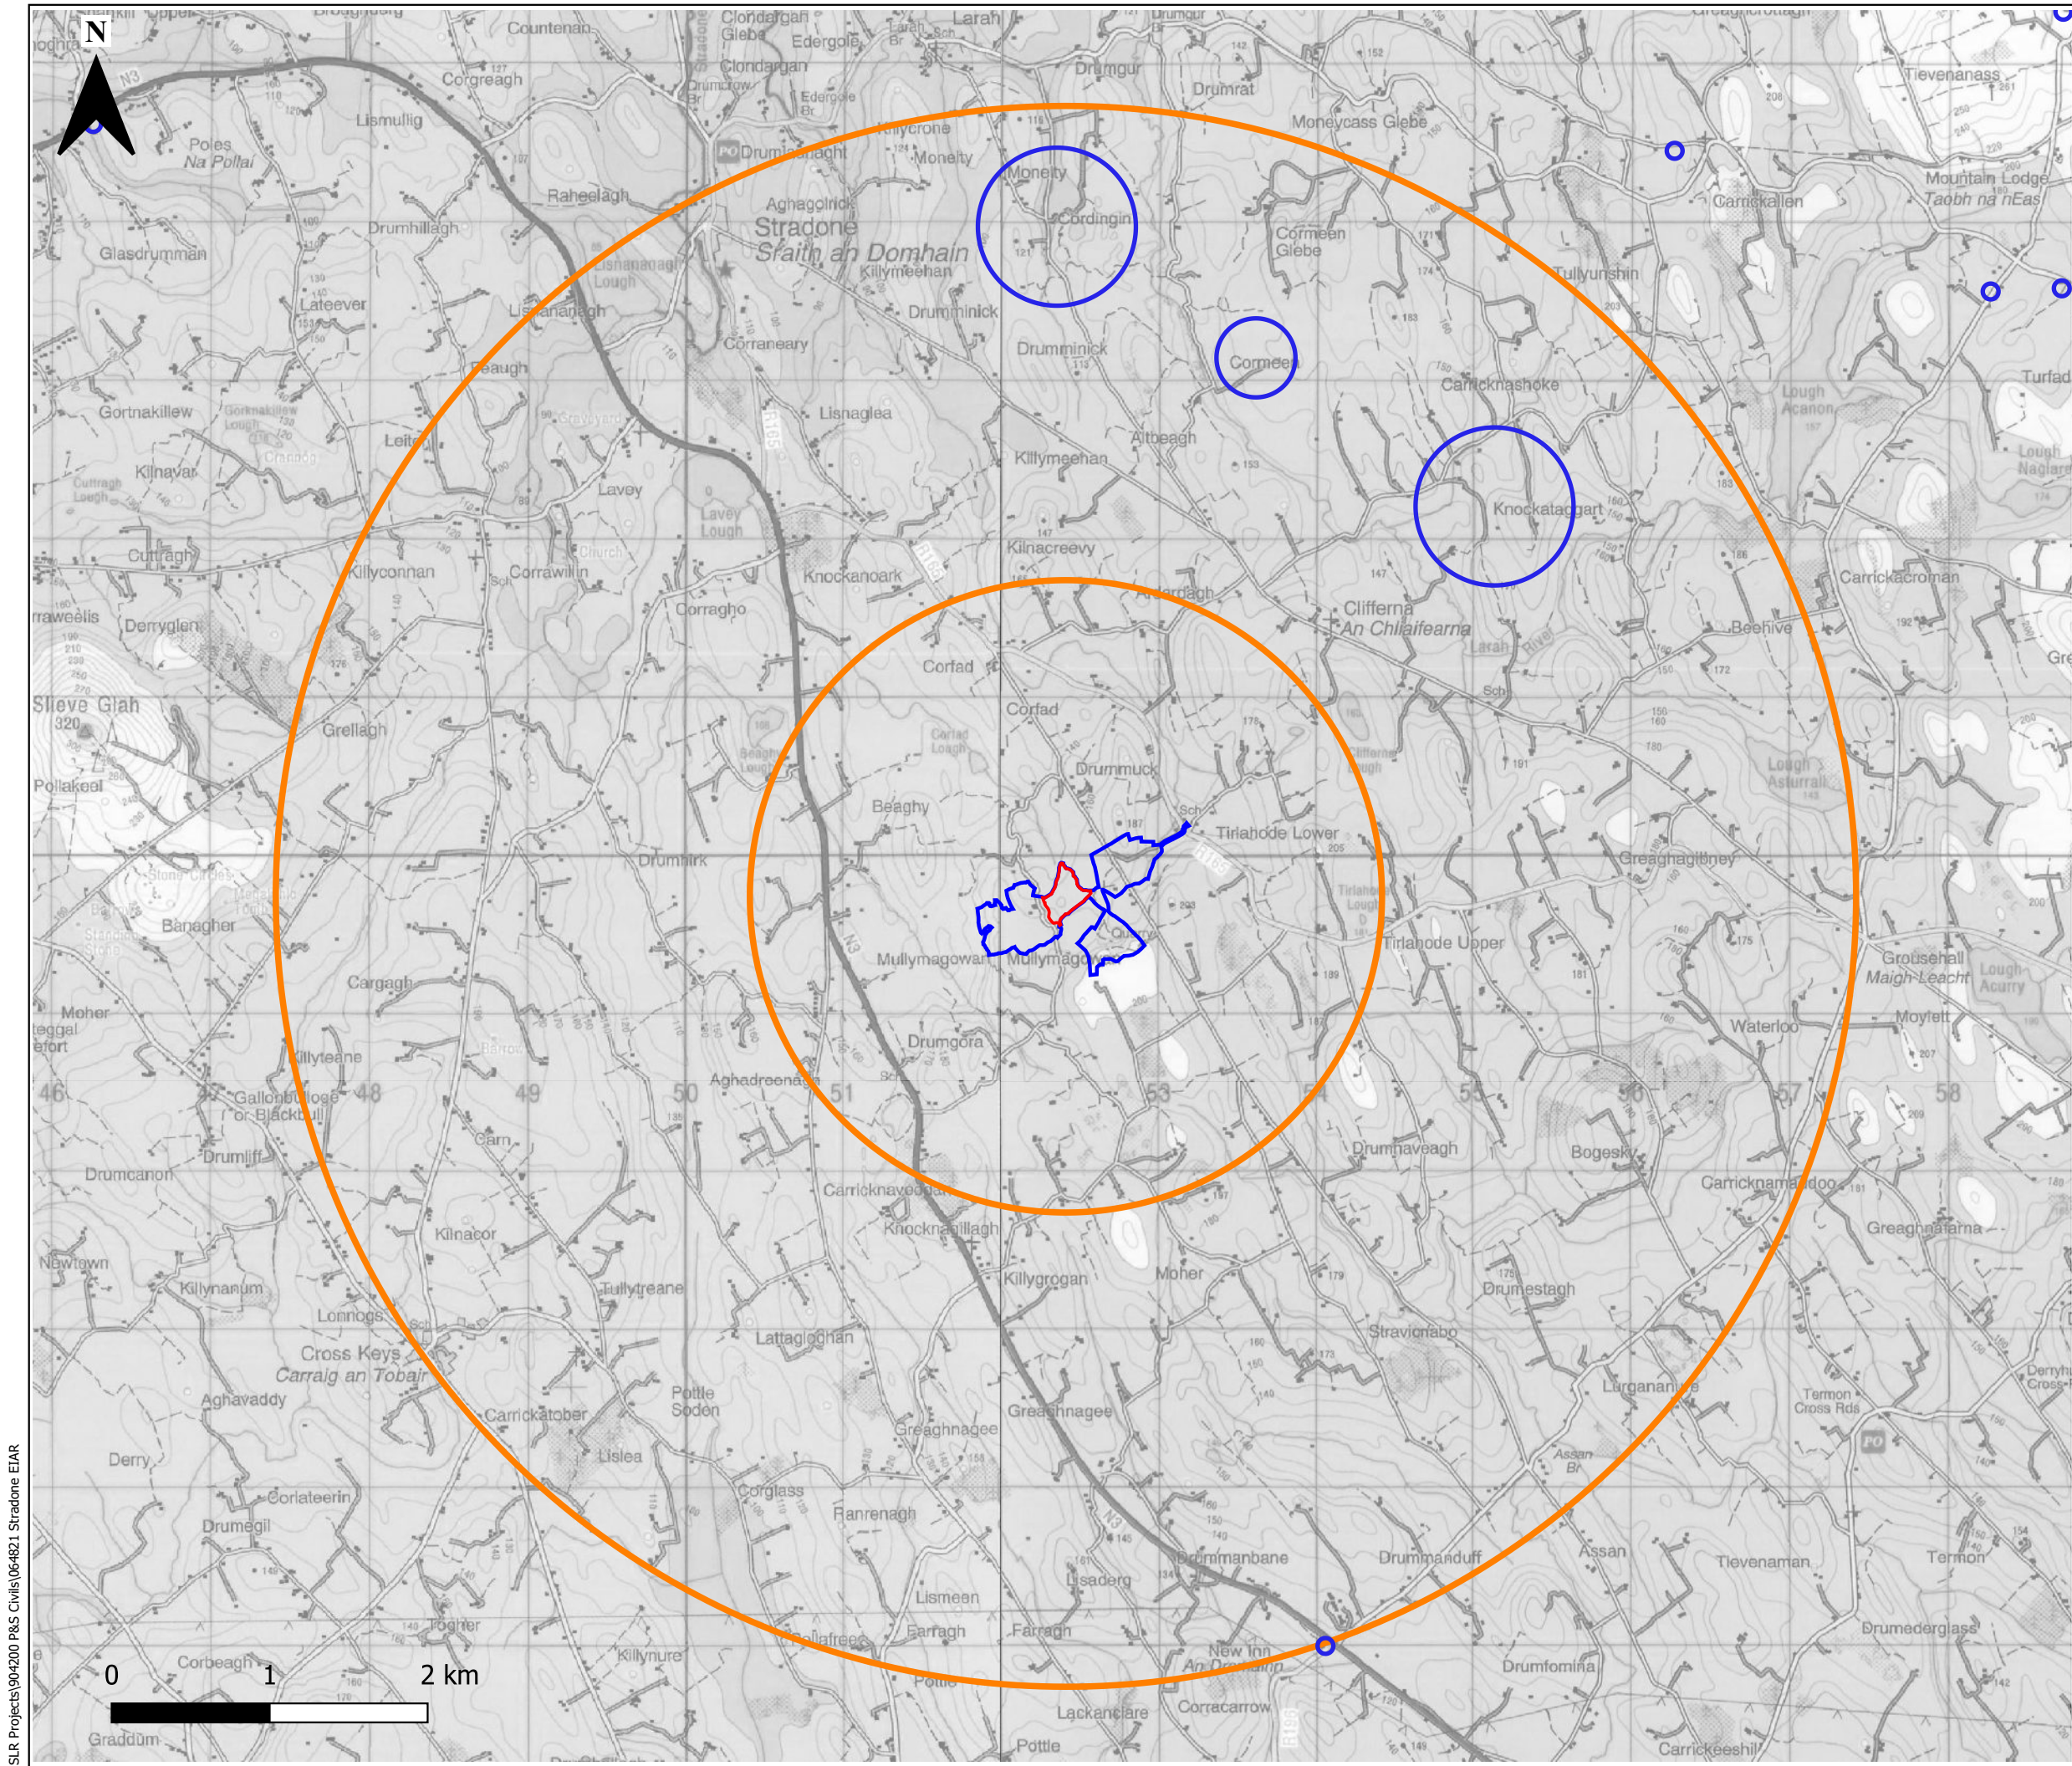

NOTES

1. Ordnance Survey Ireland Licence no. CYAL50248253
© Ordnance Survey Ireland/Government of Ireland
2. Groundwater data ©GSI
3. Base Mapping OSi Discovery Series Sheets: 34, 35

LEGEND

- APPLICATION BOUNDARY
- LANDHOLDING BOUNDARY
- 2KM & 5KM RADIUS FROM SITE
- GSI GROUNDWATER WELLS & SPRINGS



SLR CONSULTING
7 DUNDUM BUSINESS PARK
WINDY ARBOUR
D14 N2Y7
T +353 (0)1296 4667
www.slrconsulting.com

P&S CIVIL WORKS LTD

ENVIRONMENTAL IMPACT ASSESSMENT REPORT

**QUARRY AT MULLYMAGOWAN,
STRADONE, CO. CAVAN**


GSI GROUNDWATER WELLS & SPRINGS

FIGURE 7-6

Scale
1:40,000 @ A3

Date
FEBRUARY 2023

SLR Projects\904200 P&S Civils\064821 Stradone EIA\

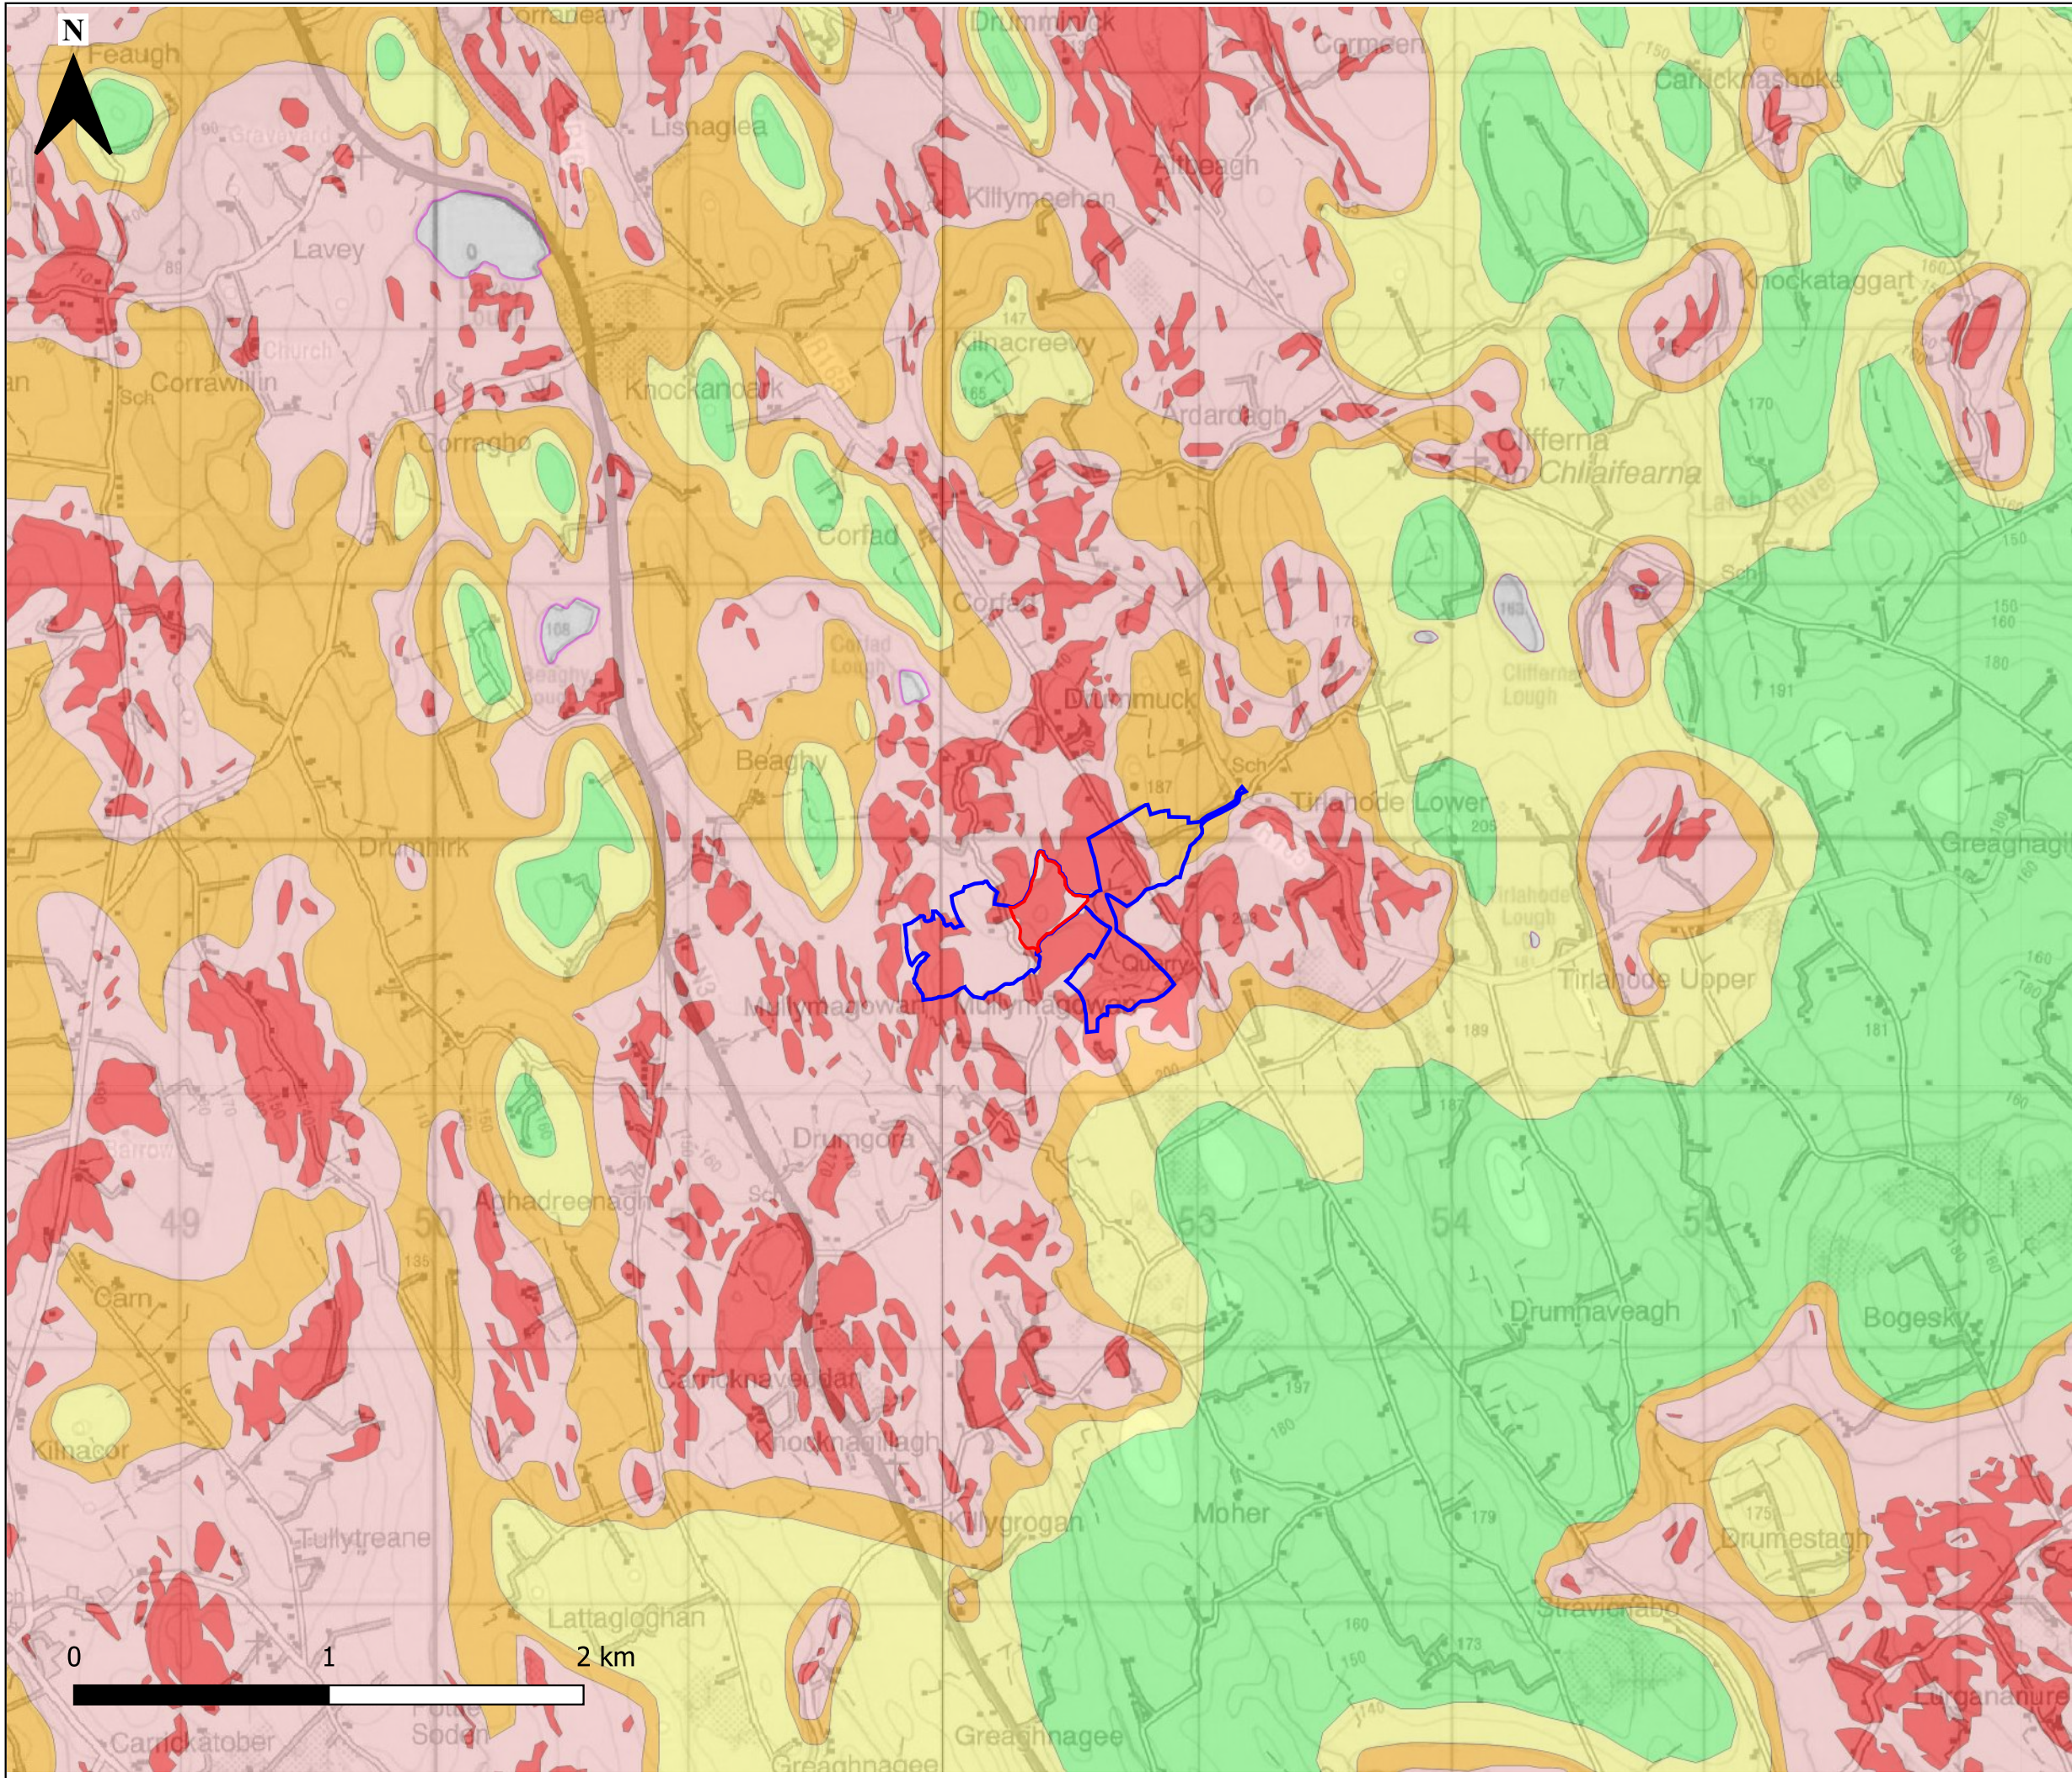

NOTES

1. Ordnance Survey Ireland Licence no. CYAL50248253
© Ordnance Survey Ireland/Government of Ireland
2. Groundwater Data ©GSI
3. Base Mapping OSi Discovery Series Sheets: 34, 35

LEGEND

- APPLICATION BOUNDARY
- LANDHOLDING BOUNDARY

GROUNDWATER VULNERABILITY

- Rock at or near Surface or Karst
- Extreme
- High
- Moderate
- Low
- Water



SLR CONSULTING
7 DUNDUM BUSINESS PARK
WINDY ARBOUR
D14 N2Y7
T +353 (0)1296 4667
www.slrconsulting.com

P&S CIVIL WORKS LTD
ENVIRONMENTAL IMPACT ASSESSMENT REPORT

QUARRY AT MULLYMAGOWAN,
STRADONE, CO. CAVAN


GROUNDWATER VULNERABILITY MAP

FIGURE 7-7

Scale
1:25,000 @ A3

Date
FEBRUARY 2023

SLR Projects\904200 P&S Civils\064821 Stradone EIA\

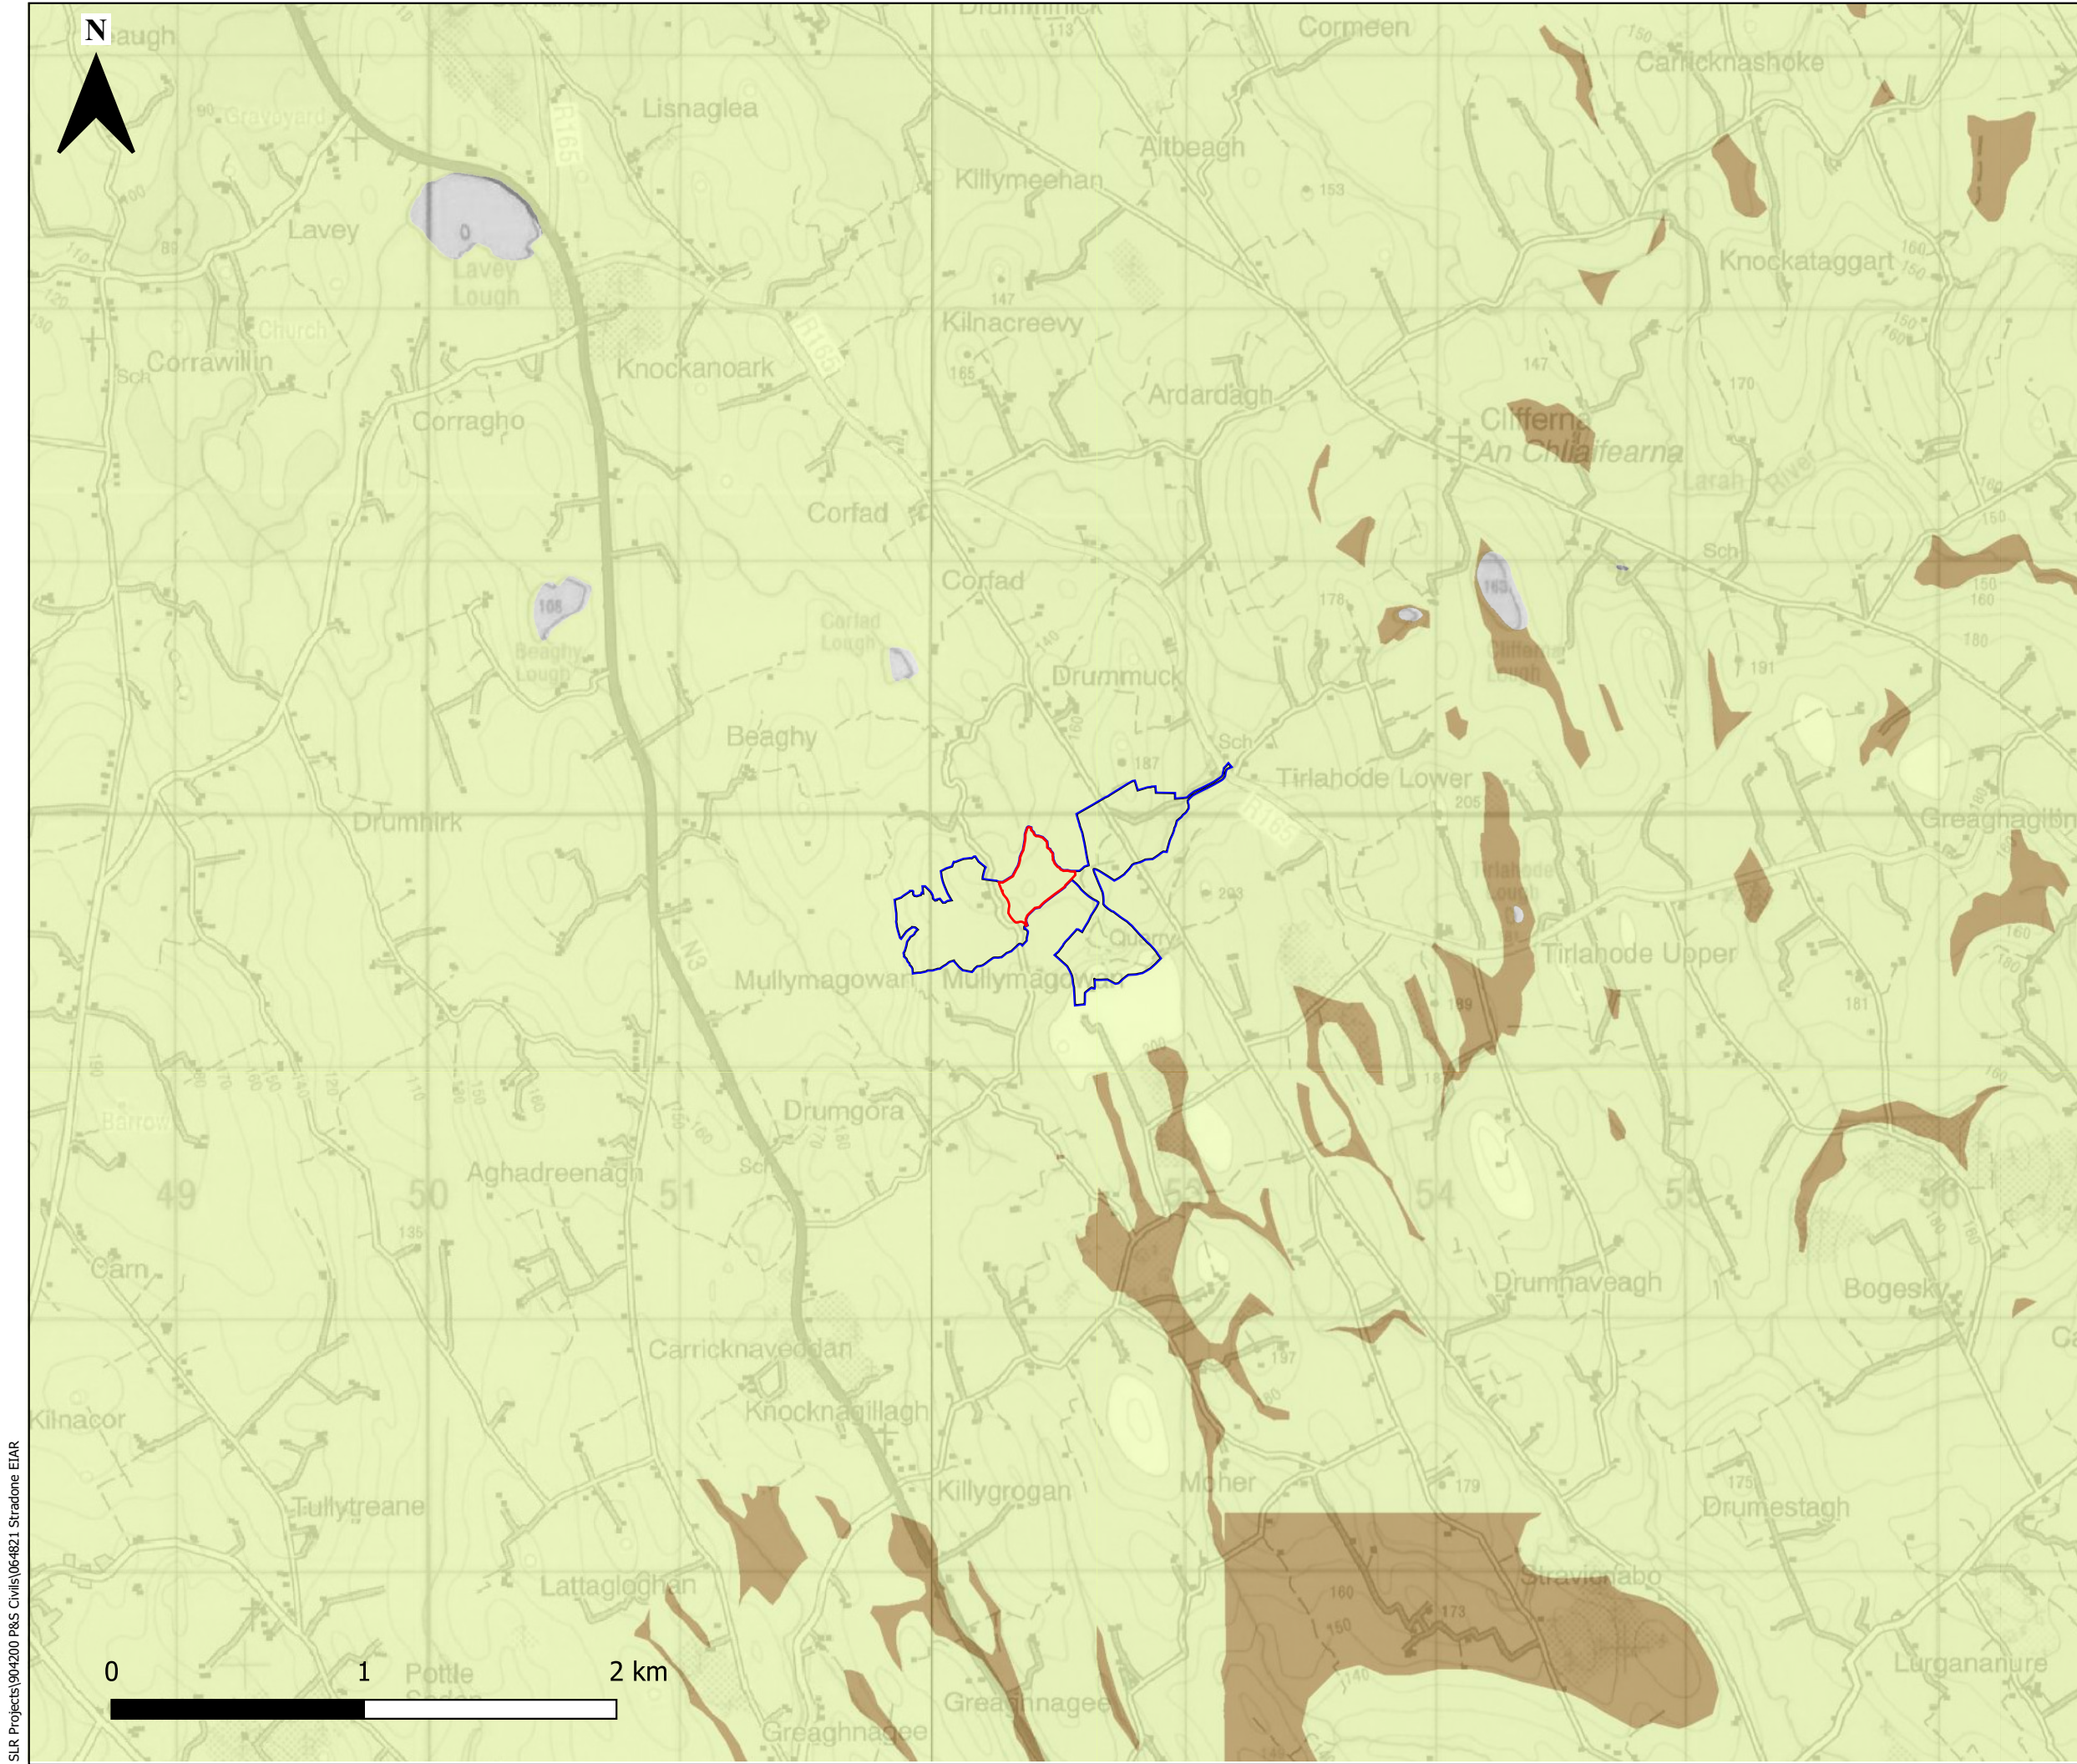

NOTES

1. Ordnance Survey Ireland Licence no. CYAL50248253
© Ordnance Survey Ireland/Government of Ireland
2. Groundwater data ©GSI
3. Base Mapping OSi Discovery Series Sheets: 34, 35

LEGEND

— APPLICATION BOUNDARY

— LANDHOLDING BOUNDARY

ANNUAL GROUNDWATER RECHARGE RATES

- >2000 mm
- 1401-2000 mm
- 1001-1400 mm
- 901-1000 mm
- 801-900 mm
- 701-800 mm
- 601-700 mm
- 551-600 mm
- 501-550 mm
- 451-500 mm
- 401-450 mm
- 351-400 mm
- 301-350 mm
- 251-300 mm
- 201-250 mm
- 151-200 mm
- 101-150 mm
- 51-100 mm
- 1-50 mm
- 0 mm



SLR CONSULTING
7 DUNDUM BUSINESS PARK
WINDY ARBOUR
D14 N2Y7
T +353 (0)1296 4667
www.slrconsulting.com

P&S CIVIL WORKS LTD
ENVIRONMENTAL IMPACT ASSESSMENT REPORT

**QUARRY AT MULLYMAGOWAN,
STRADONE, CO. CAVAN**

GROUNDWATER RECHARGE

FIGURE 7-8

Scale
1:25,000 @ A3

Date
FEBRUARY 2023

APPENDICES

Appendix 7-A

EU Directives / National Legislation and Regulations / Guidelines / Technical Standards

Appendix 7-B

Screened Surface Water Quality Results

Appendix 7-C

Surface Water Quality Results Laboratory Certificates

Appendix 7-D

Surface Water Sampling Field Record Sheets

Appendix 7-E

County Cavan Groundwater Protection Scheme Report

Appendix 7-F

Water Framework Directive

Appendix 7-G

Rating of Existing Environment Significance / Sensitivity

Appendix 7-H

Descriptions of Effects (EPA, 2022)

Appendix 7-I

Classification of the Significance of Impacts

Appendix 7-A

EU Directives / National Legislation and Regulations / Guidelines / Technical Standards

European Directives

- Environmental Impact Assessment. Directive (2011/92/EU) on the assessment of the effects of certain public and private projects on the environment;
- Environmental Impact Assessment Directive (2014/52/EU) on the assessment of the effects of certain public and private projects on the environment;
- Water Framework Directive (2000/60/EC);
- Groundwater Directive (2006/118/EC);
- Flooding Directive (2007/60/EC)
- Integrated Pollution and Prevention Control Directive (2008/1/EC); and
- The management of waste from extractive industries (2006/21/EC).

Irish Government Acts, National Legislation and Regulations

- S.I. No. 349 of 1989, European Communities (Environmental Impact Assessment) Regulations, and subsequent amendments (S.I. No. 84 of 1994, S.I. No. 352 of 1998, S.I. No. 93 of 1999, S.I. No. 450 of 2000 and S.I. No. 538 of 2001);
- The Planning and Development Acts, 2000 to 2009, The Planning and Development (Amendment) Act 2010, S.I. 600 of 2001 Planning and Development Regulations and subsequent amendments including, S.I. No. 364 of 2005 and S.I. 685 of 2006.

National legislation on the protection of the water environment. Since 2000 water management in EU member states has primarily been directed by the Water Framework Directive (2000/60/EC) and the associate 'daughter' Groundwater Directive (2006/118/EC). Irish legislation implementing these, and other relevant directives currently includes:

- S.I. No. 9 of 2010 European Communities Environmental Objectives (Groundwater) Regulations 2010 and amendments (S.I. No. 389 of 2011 and S.I. No. 149 of 2012);
- European Union (Drinking Water) Regulations 2014 (S.I. No. 122 of 2014);
- S.I. No. 278 of 2007 European Communities (Drinking Water) (No. 2) Regulations;
- S.I. No. 272 of 2009 European Communities Environmental Objectives (Surface Waters) Regulations 2009 and amendment (S.I. No. 327 of 2012);
- S.I. No. 684 of 2007 Waste Water Discharge (Authorisation) Regulations, 2007, as amended (S.I. No. 231 of 2010);
- S.I. No. 122 of 2010 European Communities (Assessment and Management of Flood Risks) Regulations 2010;
- S.I. No. 457 of 2008 European Communities (Environmental Liability) Regulations which bring into force the European Liability Directive (2004/35/EC);
- European Union (Planning and Development) (Environmental Impact Assessment) (No. 2) Regulations 2018 (S.I. No. 404 of 2018);
- Local Government (Water Pollution) Acts 1977 to 1998;
- European Communities (Quality of Salmonid Waters) Regulations, 1988 (S.I. No. 293 of 1988);
- European Communities (Quality of Shellfish Waters) Regulations, 2006 (S.I. No. 268 of 2006) and amendments (S.I. No. 55 and 464 of 2009), and;

- Bathing Water Quality Regulations, 2008 (S.I. No. 79 of 2008) and amendments (S.I. No. 351 of 2011 and S.I. No. 163 of 2016);

Guidelines

- CIS (2007). Common Implementation Strategy (CIS) for the Water Framework Directive (2000/60/EC) Guidance on preventing or limiting direct and indirect inputs in the context of the Groundwater Directive 2006/118/EC. Guidance Document No. 17.
- CIS (2010). Common Implementation Strategy (CIS) for the Water Framework Directive (2000/60/EC). Guidance on risk assessment and the use of conceptual models for groundwater. Guidance document No. 26.
- DEHLG (2004). National Urban Waste Water Study. National Report.
- DEHLG (2009). Appropriate Assessment of Plans and Projects in Ireland. Guidance for Planning Authorities.
- DELG/EPA/GSI (1999). Groundwater Protection Schemes. Document prepared jointly by the Geological Survey of Ireland (GSI), the Environmental Protection Agency, and the Department of Environment, Heritage and Local Government.
- EPA (Draft May 2017) Guidelines on the Information to be Contained in Environmental Impact Assessment Reports.
- EPA (2010b). Methodology for Establishing Groundwater Threshold Values and the Assessment of Chemical and Quantitative Status of Groundwater, Including and Assessment of Pollution Trends and Trend Reversal.
- EPA (2011). Guidance on the Authorisation of Discharges to Groundwater. Version 1, December 2011.
- EPA (2003). Towards Setting Guideline Values for the Protection of groundwater in Ireland. Interim Report.
- EPA (2006). Ireland Water Framework Directive Monitoring Programme.
- Fitzsimons, V., Daly, D. and Deakin, J. (2003). Draft GSI guidelines for assessment and mapping of groundwater vulnerability to contamination. Groundwater Chapter, Geological Survey of Ireland.
- GSI (2006). Criteria used in aquifer classification. 1Available from <http://www.gsi.ie/Programmes/Groundwater/Aquifer+Classification.htm>
- IGI (2007). Guidelines on Water Well Construction. Available from <http://www.igi.ie/assets/files/Water%20Well%20Guidelines/Guidelines.pdf>
- Kilroy, G., Dunne, F., Ryan, J., O'Connor, A., Daly, D., Craig, M., Coxon, C., Johnston, P. and Moe, H. (2008). A Framework for the Assessment of Groundwater – Dependent Terrestrial Ecosystems under the Water Framework Directive. Environmental Research Centre Report Series No. 12.
- Institute of Geologists of Ireland, 2007. Recommended collection, presentation and interpretation of geological and hydrogeological information for quarry developments.

Technical Standards

- British Standards (2015). Code of Practice for Ground Investigations BS5930:2015;.
- CIRIA (2007). The SuDS Manual. (C697). CIRIA publication, February 2007.

Appendix 7-B Screened Surface Water Quality Results

		SI No. 277 of 2009 and SI No. 77 of 2019	22/11/2022	
		EQS Inland Surface Waters (MACs)	QV1	SW1
Parameter	Units			
Inorganics				
Ammoniacal Nitrogen as N (low level)	mg/l	-	0.041	<0.01
Ammoniacal Nitrogen Low as NH3	mg/l	-	0.0498	<0.01
Ammoniacal Nitrogen Low as NH4	mg/l	-	0.0527	<0.01
BOD, unfiltered	mg/l	High status ≤1.3 (mean) or ≤2.2 (95%ile) Good status ≤1.5 (mean) or ≤2.6 (95%ile)	<1	<1
Chloride	mg/l	-	11.1	9
Conductivity @ 20 deg.C	mS/cm	-	1.06	0.408
Cyanide, Free (low level)	µg/l	-	<2.5	<2.5
Cyanide, Total (low level)	µg/l	-	<5	<5
Fluoride	mg/l	-	<0.5	<0.5
Nitrate as NO3	mg/l	-	0.48	3.23
Nitrite as NO2	mg/l	-	<0.05	<0.05
pH	pH Units	Soft water (<100mg/l CaCO3): 4.5-9.0. Hard water (>100mg/l CaCO3): 6.0-9.0	8.01	7.9
Phosphate (Ortho as P)	mg/l	-	<0.02	<0.02
Sulphate	mg/l	-	534	130
Sulphide	mg/l	-	<0.01	<0.01
Suspended solids, Total	mg/l	-	<2	13.8
Total Oxidised Nitrogen as N	mg/l	-	0.108	0.729
Filtered (Dissolved) Metals				
Aluminium (diss.filt)	µg/l	-	<10	30.1
Antimony (diss.filt)	µg/l	-	<1	<1
Arsenic (diss.filt)	µg/l	-	<0.5	<0.5
Barium (diss.filt)	µg/l	-	20.9	28.8
Boron (diss.filt)	µg/l	-	16	<10
Cadmium (diss.filt)	µg/l	0.45 - 1.5	<0.08	<0.08
Calcium (diss.filt)	mg/l	-	225	71.3
Chromium (diss.filt)	µg/l	-	3.52	<1
Copper (diss.filt)	µg/l	-	0.888	3.44
Iron (Dis.Filt)	mg/l	-	<0.019	0.11
Lead (diss.filt)	µg/l	-	<0.2	<0.2
Magnesium (Dis.Filt)	mg/l	-	29.1	9.24
Manganese (diss.filt)	µg/l	-	18.7	145
Mercury (diss.filt)	µg/l	0.07	<0.01	<0.01
Nickel (diss.filt)	µg/l	-	4.25	4.73
Phosphorus (diss.filt)	µg/l	-	<10	<10
Potassium (Dis.Filt)	mg/l	-	4.48	3.3
Selenium (diss.filt)	µg/l	-	<1	<1
Sodium (Dis.Filt)	mg/l	-	7.4	5.06
Vanadium (diss.filt)	µg/l	-	<1	<1
Zinc (diss.filt)	µg/l	-	3.56	5.76
TPH Criteria Working Group (TPH CWG)				
Aliphatics >C10-C12	µg/l	-	<10	<10
Aliphatics >C12-C16 (aq)	µg/l	-	<10	<10
Aliphatics >C16-C21 (aq)	µg/l	-	<10	<10
Aliphatics >C21-C35 (aq)	µg/l	-	<10	<10
Aliphatics >C5-C6	µg/l	-	<10	<10
Aliphatics >C6-C8	µg/l	-	<10	<10
Aliphatics >C8-C10	µg/l	-	<10	<10
Aromatics >EC10-EC12	µg/l	-	<10	<10
Aromatics >EC12-EC16 (aq)	µg/l	-	<10	<10
Aromatics >EC16-EC21 (aq)	µg/l	-	<10	<10
Aromatics >EC21-EC35 (aq)	µg/l	-	<10	<10
Aromatics >EC5-EC7	µg/l	-	<10	<10
Aromatics >EC7-EC8	µg/l	-	<10	<10
Aromatics >EC8-EC10	µg/l	-	<10	<10
GRO >C5-C12	µg/l	-	<50	<50
Total Aliphatics & Aromatics >C5-35 (aq)	µg/l	-	<10	<10
Total Aliphatics >C12-C35 (aq)	µg/l	-	<10	<10
Total Aromatics >EC12-EC35 (aq)	µg/l	-	<10	<10
Volatile Organic Compounds (VOCs)				
Benzene	µg/l	-	<1	<1
Ethylbenzene	µg/l	-	<1	<1
m,p-Xylene	µg/l	-	<1	<1
Methyl tertiary butyl ether (MTBE)	µg/l	-	<1	<1
o-Xylene	µg/l	-	<1	<1
Sum of BTEX	µg/l	-	<5	<5
Sum of detected Xylenes	µg/l	-	<2	<2
Toluene	µg/l	-	<1	<1
EPH CWG (Speciated)				
Aliphatics >C16-C35 Aqueous	µg/l	-	<10	<10

Appendix 7-C Surface Water Quality Results Laboratory Certificates



Unit 7-8 Hawarden Business Park

Manor Road (off Manor Lane)

Hawarden

Deeside

CH5 3US

Tel: (01244) 528777

email: hawardencustomerservices@alsglobal.com

Website: www.alsenvironmental.co.uk

SLR Consulting Ireland
CSA House
Unit 7
Dundrum Business Park
Windy Harbour
Dublin
Dublin14

Attention: Orlaith Tyrrell

CERTIFICATE OF ANALYSIS

Date of report Generation:	01 December 2022
Customer:	SLR Consulting Ireland
Sample Delivery Group (SDG):	221124-74
Your Reference:	501.064821.00001
Location:	Stradone Quarry, Co. Cavan
Report No:	670597
Order Number:	8320

We received 2 samples on Thursday November 24, 2022 and 2 of these samples were scheduled for analysis which was completed on Thursday December 01, 2022. Accredited laboratory tests are defined within the report, but opinions, interpretations and on-site data expressed herein are outside the scope of ISO 17025 accreditation.

Should this report require incorporation into client reports, it must be used in its entirety and not simply with the data sections alone.

Chemical testing (unless subcontracted) performed at ALS Laboratories (UK) Limited Hawarden.

All sample data is provided by the customer. The reported results relate to the sample supplied, and on the basis that this data is correct.

Incorrect sampling dates and/or sample information will affect the validity of results.

The customer is not permitted to reproduce this report except in full without the approval of the laboratory.

Approved By:

Sonia McWhan

Operations Manager





CERTIFICATE OF ANALYSIS

Validated

SDG: 221124-74
Client Ref.: 501.064821.00001

Report Number: 670597
Location: Stradone Quarry, Co. Cavan

Superseded Report:

Received Sample Overview

Lab Sample No(s)	Customer Sample Ref.	AGS Ref.	Depth (m)	Sampled Date
27211948	QV1		0.00 - 0.00	22/11/2022
27211960	SW1		0.00 - 0.00	22/11/2022

Only received samples which have had analysis scheduled will be shown on the following pages.



CERTIFICATE OF ANALYSIS

Validated

SDG: 221124-74
Client Ref.: 501.064821.00001

Report Number: 670597
Location: Stradone Quarry, Co. Cavan

Superseded Report:

Results Legend



Test



No Determination Possible

Sample Types -

S - Soil/Solid
UNS - Unspecified Solid
GW - Ground Water
SW - Surface Water
LE - Land Leachate
PL - Prepared Leachate
PR - Process Water
SA - Saline Water
TE - Trade Effluent
TS - Treated Sewage
US - Untreated Sewage
RE - Recreational Water
DW - Drinking Water Non-regulatory
UNL - Unspecified Liquid
SL - Sludge
G - Gas
OTH - Other

<div>Results Legend</div> <div><div>X</div>Test</div> <div><div>N</div>No Determination Possible</div> <div>Sample Types -</div> <div>S - Soil/Solid</div> <div>UNS - Unspecified Solid</div> <div>GW - Ground Water</div> <div>SW - Surface Water</div> <div>LE - Land Leachate</div> <div>PL - Prepared Leachate</div> <div>PR - Process Water</div> <div>SA - Saline Water</div> <div>TE - Trade Effluent</div> <div>TS - Treated Sewage</div> <div>US - Untreated Sewage</div> <div>RE - Recreational Water</div> <div>DW - Drinking Water Non-regulatory</div> <div>UNL - Unspecified Liquid</div> <div>SL - Sludge</div> <div>G - Gas</div> <div>OTH - Other</div>	Lab Sample No(s)		27211948										27211960									
	Customer Sample Reference		QV1										SW1									
	AGS Reference																					
	Depth (m)		0.00 - 0.00										0.00 - 0.00									
	Container		0.5l glass bottle (ALE227)	250ml BOD (ALE212)	500ml Plastic (ALE208)	H2SO4 (ALE244)	HNO3 Filtered (ALE204)	NaOH (ALE245)	Vial (ALE297)	ZnAc (ALE246)	0.5l glass bottle (ALE227)	250ml BOD (ALE212)	500ml Plastic (ALE208)	H2SO4 (ALE244)	HNO3 Filtered (ALE204)	NaOH (ALE245)	Vial (ALE297)	ZnAc (ALE246)				
	Sample Type		SW	SW	SW	SW	SW	SW	SW	SW	SW	SW	SW	SW	SW	SW	SW	SW				
TPH CWG (W)	All	NDPs: 0 Tests: 2	X							X												
VOC MS (W)	All	NDPs: 0 Tests: 2						X								X						



CERTIFICATE OF ANALYSIS

Validated

SDG: 221124-74
Client Ref.: 501.064821.00001

Report Number: 670597
Location: Stradone Quarry, Co. Cavan

Superseded Report:

Results Legend		Customer Sample Ref.	QV1	SW1			
# ISO17025 accredited. M mCERTS accredited. aq Aqueous / settled sample. diss.filt Dissolved / filtered sample. tot.unfilt Total / unfiltered sample. * Subcontracted - refer to subcontractor report for accreditation status. ** % recovery of the surrogate standard to check the efficiency of the method. The results of individual compounds within samples aren't corrected for the recovery (F) Trigger breach confirmed 1-4*5@ Sample deviation (see appendix)		Depth (m) Sample Type Date Sampled Sample Time Date Received SDG Ref Lab Sample No.(s) AGS Reference	0.00 - 0.00 Surface Water (SW) 22/11/2022	0.00 - 0.00 Surface Water (SW) 22/11/2022			
Component	LOD/Units	Method					
Suspended solids, Total	<2 mg/l	TM022	<2	13.8			
			#	#			
BOD, unfiltered	<1 mg/l	TM045	<1	<1			
			#	#			
Ammoniacal Nitrogen as N (low level)	<0.01 mg/l	TM099	0.041	<0.01			
			#	#			
Ammoniacal Nitrogen Low as NH3	<0.01 mg/l	TM099	0.0498	<0.01			
			#	#			
Ammoniacal Nitrogen Low as NH4	<0.01 mg/l	TM099	0.0527	<0.01			
			#	#			
Sulphide	<0.01 mg/l	TM101	<0.01	<0.01			
Fluoride	<0.5 mg/l	TM104	<0.5	<0.5			
Aluminium (diss.filt)	<10 µg/l	TM152	<10	30.1			
			#	#			
Antimony (diss.filt)	<1 µg/l	TM152	<1	<1			
			#	#			
Arsenic (diss.filt)	<0.5 µg/l	TM152	<0.5	<0.5			
			#	#			
Barium (diss.filt)	<0.2 µg/l	TM152	20.9	28.8			
			#	#			
Boron (diss.filt)	<10 µg/l	TM152	16	<10			
			#	#			
Cadmium (diss.filt)	<0.08 µg/l	TM152	<0.08	<0.08			
			#	#			
Chromium (diss.filt)	<1 µg/l	TM152	3.52	<1			
			#	#			
Copper (diss.filt)	<0.3 µg/l	TM152	0.888	3.44			
			#	#			
Lead (diss.filt)	<0.2 µg/l	TM152	<0.2	<0.2			
			#	#			
Manganese (diss.filt)	<3 µg/l	TM152	18.7	145			
			#	#			
Nickel (diss.filt)	<0.4 µg/l	TM152	4.25	4.73			
			#	#			
Phosphorus (diss.filt)	<10 µg/l	TM152	<10	<10			
			#	#			
Selenium (diss.filt)	<1 µg/l	TM152	<1	<1			
			#	#			
Vanadium (diss.filt)	<1 µg/l	TM152	<1	<1			
			#	#			
Zinc (diss.filt)	<1 µg/l	TM152	3.56	5.76			
			#	#			
Sodium (Dis.Filt)	<0.076 mg/l	TM152	7.4	5.06			
			#	#			
Magnesium (Dis.Filt)	<0.036 mg/l	TM152	29.1	9.24			
			#	#			
Potassium (Dis.Filt)	<0.2 mg/l	TM152	4.48	3.3			
			#	#			
Calcium (Dis.Filt)	<0.2 mg/l	TM152	225	71.3			
			#	#			
Iron (Dis.Filt)	<0.019 mg/l	TM152	<0.019	0.11			
			#	#			
Mercury (diss.filt)	<0.01 µg/l	TM183	<0.01	<0.01			
Nitrite as NO2	<0.05 mg/l	TM184	<0.05	<0.05			
			#	#			
Sulphate	<2 mg/l	TM184	534	130			
			#	#			
Chloride	<2 mg/l	TM184	11.1	9			
			#	#			
Phosphate (Ortho as P)	<0.02 mg/l	TM184	<0.02	<0.02			
			#	#			
Nitrate as NO3	<0.3 mg/l	TM184	0.48	3.23			
			#	#			



CERTIFICATE OF ANALYSIS

Validated

SDG: 221124-74
Client Ref.: 501.064821.00001

Report Number: 670597
Location: Stradone Quarry, Co. Cavan

Superseded Report:

Table of Results - Appendix

Method No	Reference	Description
TM022	Method 2540D, AWWA/APHA, 20th Ed., 1999 / BS 2690: Part120 1981;BS EN 872	Determination of total suspended solids in waters
TM045	MEWAM BOD5 2nd Ed.HMSO 1988 / Method 5210B, AWWA/APHA, 20th Ed., 1999; SCA Blue Book 130	Determination of BOD5 (ATU) Filtered by Oxygen Meter on liquids
TM099	BS 2690: Part 7:1968 / BS 6068: Part2.11:1984	Determination of Ammonium in Water Samples using the Kone Analyser
TM101	Method 4500B & C, AWWA/APHA, 20th Ed., 1999	Determination of Sulphide in soil and water samples using the Kone Analyser
TM104	Method 4500F, AWWA/APHA, 20th Ed., 1999	Determination of Fluoride using the Kone Analyser
TM152	ISO 17294-2:2016 Water quality - Application of inductively coupled plasma mass spectrometry (ICP-MS)	Analysis of Aqueous Samples by ICP-MS
TM174	Analysis of Petroleum Hydrocarbons in Environmental Media – Total Petroleum Hydrocarbon Criteria	Determination of Speciated Extractable Petroleum Hydrocarbons in Waters by GC-FID
TM183	BS EN 23506:2002, (BS 6068-2.74:2002) ISBN 0 580 38924 3	Determination of Trace Level Mercury in Waters and Leachates by PSA Cold Vapour Atomic Fluorescence Spectrometry
TM184	EPA Methods 325.1 & 325.2,	The Determination of Anions in Aqueous Matrices using the Kone Spectrophotometric Analysers
TM208	Modified: US EPA Method 8260b & 624	Determination of Volatile Organic Compounds by Headspace / GC-MS in Waters
TM245	By GC-FID	Determination of GRO by Headspace in waters
TM256	The measurement of Electrical Conductivity and the Laboratory determination of pH Value of Natural, Treated and Wastewaters. HMSO, 1978. ISBN 011 751428 4, Standard Methods for the examination of waters and wastewaters 20th Edition, PHA, Washington DC, USA. ISBN 0-87553-235-7 and The Determination of Alkalinity and Acidity in water HMSO, 1981, ISBN 0 11 751601 5.	Determination of pH, EC, TDS and Alkalinity in Aqueous samples
TM279		Determination of Low Level Easily Liberatable (Free) Cyanides and Total Cyanides in Waters using the Skalar SANS+ System Segmented Flow Analyser

NA = not applicable.

Chemical testing (unless subcontracted) performed at ALS Laboratories (UK) Limited Hawarden (Method codes TM).



CERTIFICATE OF ANALYSIS

Validated

SDG: 221124-74
Client Ref.: 501.064821.00001

Report Number: 670597
Location: Stradone Quarry, Co. Cavan

Superseded Report:

Test Completion Dates

Lab Sample No(s)	27211948	27211960
Customer Sample Ref.	QV1	SW1
AGS Ref.		
Depth	0.00 - 0.00	0.00 - 0.00
Type	Surface Water	Surface Water

Ammonium Low	01-Dec-2022	01-Dec-2022
Anions by Kone (w)	28-Nov-2022	28-Nov-2022
BOD True Total	30-Nov-2022	30-Nov-2022
Dissolved Metals by ICP-MS	28-Nov-2022	28-Nov-2022
EPH CWG (Aliphatic) Aqueous GC (W)	01-Dec-2022	01-Dec-2022
EPH CWG (Aromatic) Aqueous GC (W)	01-Dec-2022	01-Dec-2022
Fluoride	28-Nov-2022	28-Nov-2022
GRO by GC-FID (W)	28-Nov-2022	28-Nov-2022
Low Level Cyanide (W)	01-Dec-2022	01-Dec-2022
Mercury Dissolved	28-Nov-2022	28-Nov-2022
Nitrite by Kone (w)	25-Nov-2022	25-Nov-2022
pH Value	25-Nov-2022	28-Nov-2022
Phosphate by Kone (w)	25-Nov-2022	25-Nov-2022
Sulphide	30-Nov-2022	01-Dec-2022
Suspended Solids	29-Nov-2022	29-Nov-2022
TPH CWG (W)	01-Dec-2022	01-Dec-2022
VOC MS (W)	28-Nov-2022	28-Nov-2022



CERTIFICATE OF ANALYSIS

SDG: 221124-74
Client Ref: 501.064821.00001

Report Number: 670597
Location: Stradone Quarry, Co. Cavan

Superseded Report:

Appendix

1. Results are expressed on a dry weight basis (dried at 35°C) for all soil analyses except for the following: NRA and CEN Leach tests, flash point LOI, pH, ammonium as NH₄ by the BRE method, VOC TICs and SVOC TICs.

2. If sufficient sample is received a sub sample will be retained free of charge for 30 days after analysis is completed (e-mailed) for all sample types unless the sample is destroyed on testing. The prepared soil sub sample that is analysed for asbestos will be retained for a period of 6 months after the analysis date. All bulk samples will be retained for a period of 6 months after the analysis date. All samples received and not scheduled will be disposed of one month after the date of receipt unless we are instructed to the contrary. Once the initial period has expired, a storage charge will be applied for each month or part thereof until the client cancels the request for sample storage. ALS reserve the right to charge for samples received and stored but not analysed.

3. With respect to turnaround, we will always endeavour to meet client requirements wherever possible, but turnaround times cannot be absolutely guaranteed due to so many variables beyond our control.

4. We take responsibility for any test performed by sub-contractors (marked with an asterisk). We endeavour to use UKAS/MCERTS Accredited Laboratories, who either complete a quality questionnaire or are audited by ourselves. For some determinands there are no UKAS/MCERTS Accredited Laboratories, in this instance a laboratory with a known track record will be utilised.

5. If no separate volatile sample is supplied by the client, or if a headspace or sediment is present in the volatile sample, the integrity of the data may be compromised. This will be flagged up as an invalid VOC on the test schedule and the result marked as deviating on the test certificate.

6. NDP - No determination possible due to insufficient/unsuitable sample.

7. Results relate only to the items tested.

8. LoDs (Limit of Detection) for wet tests reported on a dry weight basis are not corrected for moisture content.

9. **Surrogate recoveries** - Surrogates are added to your sample to monitor recovery of the test requested. A % recovery is reported, results are not corrected for the recovery measured. Typical recoveries for organics tests are 70-130%. Recoveries in soils are affected by organic rich or clay rich matrices. Waters can be affected by remediation fluids or high amounts of sediment. Test results are only ever reported if all of the associated quality checks pass; it is assumed that all recoveries outside of the values above are due to matrix affect.

10. Stones/debris are not routinely removed. We always endeavour to take a representative sub sample from the received sample.

11. In certain circumstances the method detection limit may be elevated due to the sample being outside the calibration range. Other factors that may contribute to this include possible interferences. In both cases the sample would be diluted which would cause the method detection limit to be raised.

12. For dried and crushed preparations of soils volatile loss may occur e.g volatile mercury.

13. For leachate preparations other than Zero Headspace Extraction (ZHE) volatile loss may occur.

14. For the BSEN 12457-3 two batch process to allow the cumulative release to be calculated, the volume of the leachate produced is measured and filtered for all tests. We therefore cannot carry out any unfiltered analysis. The tests affected include volatiles GCFID/GCMS and all subcontracted analysis.

15. Analysis and identification of specific compounds using GCFID is by retention time only, and we routinely calibrate and quantify for benzene, toluene, ethylbenzenes and xylenes (BTEX). For total volatiles in the C5-C12 range, the total area of the chromatogram is integrated and expressed as ug/kg or ug/l. Although this analysis is commonly used for the quantification of gasoline range organics (GRO), the system will also detect other compounds such as chlorinated solvents, and this may lead to a falsely high result with respect to hydrocarbons only. It is not possible to specifically identify these non-hydrocarbons, as standards are not routinely run for any other compounds, and for more definitive identification, volatiles by GCMS should be utilised.

16. We are accredited to MCERTS for sand, clay and loam/topsoil, or any of these materials - whether these are derived from naturally occurring soil profiles, or from fill/made ground, as long as these materials constitute the major part of the sample. Other coarse granular material such as concrete, gravel and brick are not accredited if they comprise the major part of the sample.

17 Data retention. All records, communications and reports pertaining to the analysis are archived for seven years from the date of issue of the final report.

General

18. **Tentatively Identified Compounds (TICs)** are non-target peaks in VOC and SVOC analysis. All non-target peaks detected with a concentration above the LoD are subjected to a mass spectral library search. Non-target peaks with a library search confidence of >75% are reported based on the best mass spectral library match. When a non-target peak with a library search confidence of <75% is detected it is reported as "mixed hydrocarbons". Non-target compounds identified from the scan data are semi-quantified relative to one of the deuterated internal standards, under the same chromatographic conditions as the target compounds. This result is reported as a semi-quantitative value and reported as Tentatively Identified Compounds (TICs). TICs are outside the scope of UKAS accreditation and are not moisture corrected.

19. Sample Deviations

If a sample is classed as deviated then the associated results may be compromised.

1	Container with Headspace provided for volatiles analysis
2	Incorrect container received
3	Deviation from method
4	Matrix interference
♦	Sample holding time exceeded in laboratory
@	Sample holding time exceeded due to late arrival of instructions or samples
§	Sampled on date not provided

20. Asbestos

When requested, the individual sub sample scheduled will be analysed in house for the presence of asbestos fibres and asbestos containing material by our documented in house method TM048 based on HSG 248 (2021), which is accredited to ISO17025. If a specific asbestos fibre type is not found this will be reported as "Not detected". If no asbestos fibre types are found all will be reported as "Not detected" and the sub sample analysed deemed to be clear of asbestos. If an asbestos fibre type is found it will be reported as detected (for each fibre type found). Testing can be carried out on asbestos positive samples, but, due to Health and Safety considerations, may be replaced by alternative tests or reported as No Determination Possible (NDP). The quantity of asbestos present is not determined unless specifically requested.

Identification of Asbestos in Bulk Materials & Soils

The results for identification of asbestos in bulk materials and soils are obtained from supplied bulk materials and soils which have been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining, based on HSG 248 (2021).

The results for identification of asbestos in soils are obtained from a homogenised sub sample which has been examined to determine the presence of asbestos fibres using ALS (Hawarden) in-house method of transmitted/polarised light microscopy and central stop dispersion staining.

Asbestos Type	Common Name
Chrysotile	White Asbestos
Amosite	Brown Asbestos
Crocidolite	Blue Asbestos
Fibrous Actinolite	-
Fibrous Anthophyllite	-
Fibrous Tremolite	-

Visual Estimation Of Fibre Content

Estimation of fibre content is not permitted as part of our UKAS accredited test other than: - Trace - Where only one or two asbestos fibres were identified.

Respirable Fibres

Respirable fibres are defined as fibres of <3 µm diameter, longer than 5 µm and with aspect ratios of at least 3:1 that can be inhaled into the lower regions of the lung and are generally acknowledged to be most important predictor of hazard and risk for cancers of the lung.

Further guidance on typical asbestos fibre content of manufactured products can be found in HSG 264.

The identification of asbestos containing materials and soils falls within our schedule of tests for which we hold UKAS accreditation, however opinions, interpretations and all other information contained in the report are outside the scope of UKAS accreditation.

Appendix 7-D Surface Water Sampling Field Record Sheets

SURFACE WATER SAMPLING FIELD RECORD SHEET

Site location: Stradone, Co. Cavan

SLR job number: 501.064821.00001

Date: 22/11/2022

Time: 09:30am – 2pm

Staff: Orlaith Tyrrell

Equipment: Aquatroll probe, Scoop

	QV1 (Quarry Void)	SW1 (Discharge Point)
Temperature (°C)	9.70	7.62
Dissolved oxygen (%)	94.39	100.90
Dissolved oxygen (mg/l)	10.27	11.59
Specific conductivity (µS/cm)	1237.6	466.4381
Conductivity (µS/cm)	875.96	311.626
pH	8.25	7.94
pHmv	-65.706	-49.05

Odour	No	No
Sheen	No	No
Silt	No	No
Colour	Clear	Clear/slight yellow

	QV1 (Quarry Void)	SW1 (Discharge Point)
Free product	No	No

Any other field observations:

SW1: Sample taken slightly upstream of mapped discharge point (c. 20m) due to accessibility issues at location (oversaturated and sloped ground). No odour from the sample/stream itself, but mild smell of manure from cattle fields with run-off from fields going to the stream.

Appendix 7-E County Cavan Groundwater Protection Scheme Report

County Cavan Groundwater Protection Scheme

Volume I: Main Report

**Final
December 2008**

**Jack Keyes,
County Manager
Cavan County Council
Courthouse
Farnham Street
Cavan**

**Sonja Masterson
Groundwater Section
Geological Survey of Ireland
Beggars Bush
Haddington Road, Dublin 4**



Authors

Sonja Masterson, Coran Kelly and Monica Lee, Groundwater Section,
Geological Survey of Ireland

with Fieldwork Assistance from:

Eamon O'Loughlin, Groundwater Section, Geological Survey of Ireland

and Reporting Assistance from:

Caoimhe Hickey, Taly Hunter Williams, Groundwater Section,
Geological Survey of Ireland

in partnership with:

Cavan County Council

Executive Summary

The Groundwater Protection Scheme for Cavan County Council provides a preliminary assessment of the relative risk to groundwater quality across the county. The main elements of the risk assessment are groundwater vulnerability (primarily subsoil thickness, subsoil permeability and karst features), aquifer potential, and source protection. The source protection element involves the delineation of protection areas around the recharge areas for selected public and group scheme groundwater supplies.

The results can not be used as a substitute for site investigation for particular developments, but have proved very useful in providing County Councils with an independent, defensible, planning tool for a wide range of new developments:

- Major developments (e.g. for landfill site selection, developments requiring waste management and integrated pollution licensing): helping to short-list suitable sites for detailed site investigation.
- Minor developments (e.g. domestic wastewater treatment systems): helping to prioritise the allocation of Local Authority planning staff resources.

The main output of the Protection Scheme is a digital Geographic Information System which is designed to be compatible with existing Cavan County Council planning tools. It provides 'Groundwater Protection Responses' for all areas of the county. These responses incorporate the potential hazard posed by selected activities with the vulnerability, aquifer and source protection assessments to provide site suitability guidance for all areas of the county. The activities in question currently include landfill, IPC landspreading of piggery/poultry wastes, and domestic wastewater treatment systems. Responses for fuel service stations and earth lined stores are currently being developed. The responses are developed through a collaboration of the Geological Survey of Ireland, the EPA and the Department of the Environment, Heritage and Local Government.

An additional output comprises paper maps of the protection scheme, and two report volumes. Volume I outlines the basis for the vulnerability and aquifer zones delineated in the paper maps and GIS. Explanations include assumptions made, calculations/data sources used, and limitations. Volume II examines the groundwater chemistry in County Cavan and outlines the basis for the source protection zones delineated in the maps and GIS. Again, the text includes assumptions made, calculations and data sources used, and limitations.

Table of Contents

EXECUTIVE SUMMARY	I
1. INTRODUCTION.....	1
1.1 GROUNDWATER PROTECTION – A PRIORITY ISSUE FOR LOCAL AUTHORITIES	1
1.2 GROUNDWATER – A RESOURCE AT RISK.....	1
1.3 GROUNDWATER PROTECTION THROUGH LAND-USE PLANNING: A MEANS OF PREVENTING CONTAMINATION	2
1.4 ‘GROUNDWATER PROTECTION SCHEMES’ – A NATIONAL METHODOLOGY FOR PREVENTING GROUNDWATER POLLUTION.....	2
1.5 OBJECTIVES OF THE COUNTY CAVAN GROUNDWATER PROTECTION SCHEME	3
1.6 SCOPE OF COUNTY CAVAN GROUNDWATER PROTECTION SCHEME	4
1.7 CAVAN COUNTY DEVELOPMENT PLAN	5
1.8 STRUCTURE OF REPORT.....	5
1.9 ACKNOWLEDGEMENTS.....	5
2 BEDROCK GEOLOGY	8
2.1 INTRODUCTION.....	8
2.2 LOWER PALAEOZOIC ROCKS	8
2.3 THE CARBONIFEROUS SUCCESSION.....	11
2.4 KINGSCOURT CARBONIFEROUS TO TRIASSIC SUCCESSION	15
2.5 STRUCTURE AND GEOLOGICAL HISTORY	16
3 SUBSOIL (QUATERNARY) GEOLOGY.....	17
3.1 INTRODUCTION.....	17
3.2 SUBSOIL TYPES	17
3.3 DEPTH TO BEDROCK.....	19
3.4 ICE FLOW DIRECTION	19
4 HYDROGEOLOGY AND AQUIFER CLASSIFICATION	20
4.1 INTRODUCTION.....	20
4.2 DATA AVAILABILITY.....	20
4.3 RAINFALL, EVAPOTRANSPIRATION AND RECHARGE.....	20
4.4 BACKGROUND TO AQUIFER CLASSIFICATION	20
4.5 CLASSIFICATION OF THE ORDOVICIAN METASEDIMENTS, ORDOVICIAN VOLCANICS, AND SILURIAN METASEDIMENTS AND VOLCANIC AQUIFERS	27
4.6 CLASSIFICATION OF GRANITES AND OTHER IGNEOUS INTRUSIVE ROCK AQUIFERS	29
4.7 CLASSIFICATION OF THE DINANTIAN (EARLY) SANDSTONE, SHALE AND LIMESTONE AQUIFERS	31
4.8 CLASSIFICATION OF THE DINANTIAN LOWER IMPURE LIMESTONE AQUIFERS.....	34
4.9 CLASSIFICATION OF THE DINANTIAN SANDSTONE AQUIFERS.....	37
4.10 CLASSIFICATION OF THE DINANTIAN SHALE AND LIMESTONE AQUIFERS	38
4.11 CLASSIFICATION OF THE DINANTIAN MIXED SANDSTONE, SHALE AND LIMESTONE AQUIFERS	40
4.12 CLASSIFICATION OF THE DINANTIAN PURE BEDDED LIMESTONE AND DINANTIAN PURE UNBEDDED LIMESTONE AQUIFERS.....	42
4.13 CLASSIFICATION OF THE DINANTIAN UPPER IMPURE LIMESTONE AQUIFERS	46
4.14 CLASSIFICATION OF THE NAMURIAN AQUIFERS	48
4.15 CLASSIFICATION OF THE PERMO-TRIASSIC SANDSTONE, MUDSTONE AND GYPSUM AQUIFERS	49
5 GROUNDWATER VULNERABILITY.....	51
5.1 INTRODUCTION.....	51
5.2 SOURCES OF DATA	52
5.3 PERMEABILITY ASSESSMENT METHODOLOGY	52
5.4 PERMEABILITY REGIONS	54
5.5 DEPTH TO BEDROCK.....	61
5.6 RECHARGE AT KARST FEATURES	61
5.7 GROUNDWATER VULNERABILITY DISTRIBUTION	61
6 GROUNDWATER PROTECTION ZONES AND RESPONSES	63

6.1	INTRODUCTION.....	63
6.2	GROUNDWATER PROTECTION MAPS	63
6.3	GROUNDWATER SOURCE PROTECTION REPORTS AND MAPS.....	63
6.4	INTEGRATION OF GROUNDWATER PROTECTION ZONES AND RESPONSES.	63
6.5	CONCLUSIONS	64
7	REFERENCES	67

FIGURES:

FIGURE 1.1	SUMMARY OF THE MAIN COMPONENTS OF A GROUNDWATER PROTECTION SCHEME	3
FIGURE 1.2	CONCEPTUAL FRAMEWORK FOR PRODUCTION OF GROUNDWATER RESOURCE PROTECTION ZONES, INDICATING INFORMATION NEEDS AND LINKS.....	6
FIGURE 1.3	CONCEPTUAL FRAMEWORK FOR PRODUCTION OF GROUNDWATER SOURCE PROTECTION ZONES, INDICATING INFORMATION NEEDS AND LINKS.....	6
FIGURE 4.1	WELL PRODUCTIVITIES IN THE ORDOVICIAN AQUIFERS OF THE LONGFORD-DOWN INLIER	28
FIGURE 4.2	WELL PRODUCTIVITIES IN IRISH GRANITE AND OTHER IGNEOUS INTRUSIVE ROCK AQUIFERS (EXCLUDING TULLOW).....	30
FIGURE 4.3	WELL PRODUCTIVITIES IN THE DINANTIAN (EARLY) SANDSTONES, SHALES AND LIMESTONES IN THE NORTH MIDLANDS REGION (INCLUDING SOUTH CAVAN).....	33
FIGURE 4.4	WELL PRODUCTIVITIES IN THE DINANTIAN LOWER IMPURE LIMESTONES IN THE NORTHEAST CAVAN-MONAGHAN REGION	34
FIGURE 4.5	BOREHOLE HYDROGRAPH IN THE KILLASHANDRA AREA, CO. CAVAN (AFF AND GSI, 1981)	35
FIGURE 4.6	WELL PRODUCTIVITIES IN THE DINANTIAN LOWER IMPURE LIMESTONES IN THE CENTRAL CAVAN-LEITRIM AND SOUTH CAVAN-NORTH MIDLANDS REGIONS.....	36
FIGURE 4.7	KNOWN KARST FEATURES IN THE DINANTIAN PURE BEDDED AND UNBEDDED LIMESTONE AQUIFERS IN COUNTY CAVAN.	43
FIGURE 4.8	WELL PRODUCTIVITIES IN THE DINANTIAN PURE BEDDED LIMESTONE AQUIFERS IN NORTHWEST AND WEST	44
FIGURE 4.9	RECORDED KARST FEATURES IN THE MILVERTON GROUP LIMESTONES IN COUNTY MONAGHAN (FROM SWARTZ AND DALY, 2002)	45
FIGURE 4.10	WELL PRODUCTIVITIES IN THE DINANTIAN UPPER IMPURE LIMESTONES IN THE LIMERICK, SOUTH AND NORTH MIDLANDS REGIONS.....	47
FIGURE 5.1	DISTRIBUTION OF LOW PERMEABILITY SUBSOILS IN CAVAN (>3M THICK)	55
FIGURE 5.2	DISTRIBUTION OF MODERATE PERMEABILITY SUBSOILS IN CAVAN (>3M THICK).....	58
FIGURE 5.3	DISTRIBUTION OF HIGH PERMEABILITY SUBSOILS IN CAVAN (>3M THICK).....	60

TABLES:

TABLE 2.1:	OUTLINE OF THE GEOLOGICAL SUCCESSION IN CO. CAVAN (YOUNGEST ON TOP).....	9
TABLE 4.1	SAND/GRAVEL AQUIFER CLASSIFICATION	22
TABLE 4.2	SUMMARY OF AQUIFER CLASSIFICATION IN COUNTY CAVAN	24
TABLE 4.3	DRY WEATHER FLOW VALUES FOR GAUGES WITHIN THE LOWER PALAEOZOIC (ORDOVICIAN AND SILURIAN) AQUIFERS OF THE LONGFORD-DOWN-LOUTH-MEATH INLIER	27
TABLE 4.4	SUMMARY OF FACTORS USED TO CLASSIFY THE LOWER PALAEOZOIC (ORDOVICIAN AND SILURIAN) AQUIFERS OF THE LONGFORD-DOWN INLIER.....	29
TABLE 4.5	DRY WEATHER FLOW VALUES FOR RIVER GAUGES ON NEARBY GRANITE AQUIFERS, CO. LOUTH.....	30
TABLE 4.6	SUMMARY OF FACTORS USED TO CLASSIFY THE GRANITES AND OTHER IGNEOUS INTRUSIVE ROCK AQUIFERS	31
TABLE 4.7	SUMMARY OF FACTORS USED TO CLASSIFY THE DINANTIAN (EARLY) SANDSTONE, SHALE AND LIMESTONE AQUIFERS	33
TABLE 4.8	SUMMARY OF FACTORS USED TO CLASSIFY THE DINANTIAN LOWER IMPURE LIMESTONE AQUIFER	37
TABLE 4.9	SUMMARY OF FACTORS USED TO CLASSIFY THE DINANTIAN SANDSTONE AQUIFERS	38
TABLE 4.10	SUMMARY OF FACTORS USED TO CLASSIFY THE DINANTIAN SHALE AND LIMESTONE AQUIFERS	40
TABLE 4.11	SUMMARY OF FACTORS USED TO CLASSIFY THE DINANTIAN MIXED SANDSTONE, SHALE AND LIMESTONE AQUIFERS	42
TABLE 4.12	SUMMARY OF FACTORS USED TO CLASSIFY THE DINANTIAN PURE BEDDED LIMESTONES AND PURE UNBEDDED LIMESTONES.....	46
TABLE 4.13	SUMMARY OF FACTORS USED TO CLASSIFY THE DINANTIAN UPPER IMPURE LIMESTONE AQUIFERS..	47
TABLE 4.14	SUMMARY OF FACTORS USED TO CLASSIFY THE NAMURIAN AQUIFERS.....	49
TABLE 4.15	SUMMARY OF FACTORS USED TO CLASSIFY THE PERMO-TRIASSIC SANDSTONE, MUDSTONE AND GYPSUM AQUIFERS	50

TABLE 4.15 SUMMARY OF FACTORS USED TO CLASSIFY THE PERMO-TRIASSIC SANDSTONE, MUDSTONE AND GYPSUM AQUIFERS	50
TABLE 5.1 VULNERABILITY MAPPING GUIDELINES (ADAPTED FROM DELG ET AL., 1999).	52
TABLE 5.2 PERCENTAGE OF DIFFERENT VULNERABILITY CLASSES IN COUNTY CAVAN	62
TABLE 6.1 MATRIX OF GROUNDWATER PROTECTION ZONES	63
TABLE 6.2 SITE SUITABILITY RESPONSE LEVELS IN CAVAN	64

APPENDICES:

Appendix I: Extract taken from Groundwater Protection Schemes (DELG, EPA, GSI, 1999)

Appendix II: Explanation of Borehole Productivity concept. Paper by Wright, 2000.

Appendix III: Permeability Regions in County Cavan.

1. Introduction

1.1 Groundwater Protection – A Priority Issue for Local Authorities

The protection of groundwater quality from the impact of human activities is a high priority for land-use planners and water resources managers. This situation has arisen because:

- Groundwater is an important source of water supply.
- Human activities pose increasing risks to groundwater quality: there is widespread disposal of domestic, agricultural and industrial effluents to the ground, and volumes of waste are increasing.
- Groundwater provides the baseflow to surface water systems, many of which are used for water supply and recreational purposes. In many rivers, more than 50% of the annual flow is derived from groundwater and more significantly, more than 90% can comprise groundwater in summer. If groundwater becomes contaminated, the rivers can also be affected and so the protection of groundwater resources is an important aspect of sustaining surface water quality.
- Groundwater generally moves slowly through the ground and so the impact of human activities can last for a relatively long time.
- Polluted drinking water is a health hazard and once contamination has occurred, drilling of new wells is expensive and in some cases not practical. Consequently ‘prevention is better than cure’.
- Groundwater may be difficult to clean up, even when the source of pollution is removed.
- Unlike surface water where flow is in defined channels, groundwater is present everywhere.
- EU policies and national regulations are requiring that polluting discharges to groundwater must be prevented as part of sustainable groundwater quality management.

1.2 Groundwater – A Resource at Risk

Groundwater as a resource is under increasing risk from human activities, for the following reasons:

- Lack of awareness of the risks of groundwater contamination, because groundwater flow and contaminant transport are generally slow and neither readily observed nor easily measured.
- Contamination of wells and springs.
- Widespread application of domestic, agricultural and industrial effluents to the ground.
- Generation of increasing quantities of domestic, agricultural and industrial wastes.
- Increased application of inorganic fertilisers to agricultural land, and usage of pesticides.
- Greater volumes of road traffic and more storage of fuels/chemicals.
- Manufacture & distribution of chemicals of increasing diversity and often high toxicity, used for a wide range of purposes.

The main threats to groundwater are posed by:

- a) Point contamination sources: waste water treatment sites discharging to streams and groundwater, farmyard wastes (silage effluent, soiled water), effluent from on-site systems (septic tanks), leakages, spillages, non-agricultural pesticides, landfill leachate, contaminated sinking streams;
- b) Diffuse sources – spreading of organic wastes, fertilisers (organic and inorganic) and pesticides.

While point sources have caused most of the contamination problems identified to date, there is evidence that diffuse sources are increasingly impacting on groundwater.

1.3 Groundwater Protection through Land-use Planning: A Means of Preventing Contamination

There are a number of ways of preventing groundwater contamination, such as improved well siting, design and construction, and better design and management of potential contamination sources. However, one of the most effective ways is integrating hydrogeological factors into land-use policy and planning by means of Groundwater Protection Schemes.

Land-use planning (including environmental impact assessment), integrated pollution control licensing, waste licensing, water quality management planning, water pollution legislation, etc., are the main methods used in Ireland for balancing the need to protect the environment with the need for development. However, land-use planning is a dynamic process with social, economic and environmental interests and impacts influencing to varying degrees the use of land and water. In a rural area, farming, housing, industry, tourism, conservation, waste disposal, water supply, etc., are potentially interactive and conflicting and may compete for priority. How does groundwater and groundwater pollution prevention fit into this complex and difficult situation, particularly as it is a resource that is underground and for many people is 'out of sight, out of mind'? Groundwater Protection Schemes enable planning and other regulatory authorities to take account of both geological and hydrogeological factors in locating developments; consequently they are an essential means of preventing groundwater pollution.

1.4 'Groundwater Protection Schemes' – A National Methodology for Preventing Groundwater Pollution

The Geological Survey of Ireland (GSI), the Department of Environment and Local Government (DELG) and the Environmental Protection Agency (EPA) have jointly developed a methodology for the preparation of Groundwater Protection Schemes (DELG/EPA/GSI, 1999). The publication **Groundwater Protection Schemes** was launched in May 1999, by Mr. Joe Jacob TD, Minister of State at the Department of Public Enterprise. Three supplementary publications are currently available: **Groundwater Protection Responses for On-Site Wastewater Systems for Single Houses ('septic tanks')**, **Groundwater Protection Responses for Landfills** and **Groundwater Protection Responses for Landspreading of Organic Wastes**. Similar 'responses' publications will be prepared in the future for other potentially polluting activities, such as underground storage tanks and farmyards.


There are two main components of a Groundwater Protection Scheme shown schematically in Figure 1.1:

1. Land surface zoning and
2. Groundwater protection responses for potentially polluting activities.

Land surface zoning provides the general framework for a Groundwater Protection Scheme. The outcome is a map, which divides any chosen area into a number of groundwater protection zones according to the degree of protection required. There are three main hydrogeological elements to land surface zoning:

- Division of the entire land surface according to the vulnerability of the underlying groundwater to contamination. This requires production of a vulnerability map showing four vulnerability categories – extreme, high, moderate and low.
- Delineation of areas contributing to groundwater sources (usually public and group supply sources); these are termed source protection areas.
- Delineation of areas according to the value of the groundwater resources or aquifer category: these are termed resource protection areas.

Figure 1.1 Summary of the main components of a Groundwater Protection Scheme

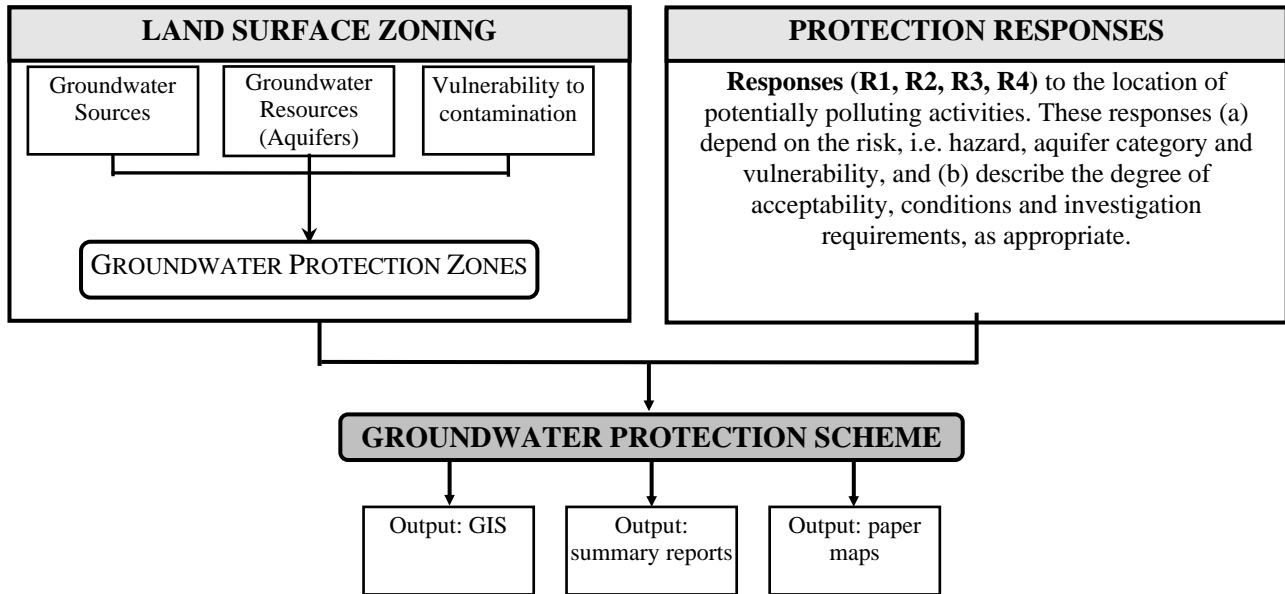

The vulnerability maps are integrated with each of the other two to give maps showing **groundwater protection zones**. These include source protection zones and resource protection zones.

The location and management of potentially polluting activities in each groundwater protection zone is by means of a **groundwater protection response matrix** for each activity or group of activities, which describes: (i) the degree of acceptability of each activity; (ii) the conditions to be applied; and, in some instances (iii) the investigations that may be necessary prior to decision-making.

While the two components (the protection zone maps and the groundwater protection responses) are separate, they are incorporated together and closely inter-linked in a protection scheme.

Two of the main sections in **Groundwater Protection Schemes** are reproduced in Appendix I. While these describe the two main components of the national Groundwater Protection Scheme, it is recommended that, for a full overview of the groundwater protection methodology, the **Groundwater Protection Schemes** publication (DELG/EPA/GSI, 1999) should be consulted.

1.5 Objectives of the County Cavan Groundwater Protection Scheme

The overall aim of the Groundwater Protection Scheme is to preserve the quality of groundwater in County Cavan for drinking purposes and other beneficial uses, for the benefit of present and future generations.

The objectives, which are interrelated, are as follows:

- to assist the statutory authorities in meeting their responsibilities for the protection and conservation of groundwater resources;
- to provide geological and hydrogeological information for the planning process, so that potentially polluting developments can be located and controlled in an environmentally acceptable way;
- to integrate the factors associated with groundwater contamination risk, to focus attention on the higher risk areas and activities, and to provide a logical structure within which contamination control measures can be selected.

The scheme is not intended to have any statutory authority now or in the future, but to provide a framework for decision-making and guidelines for the statutory authorities in carrying out their

functions. As groundwater protection decisions are often complex, sometimes requiring detailed geological and hydrogeological information, the scheme is not prescriptive and should be qualified by site-specific considerations.

1.6 Scope of County Cavan Groundwater Protection Scheme

The Groundwater Protection Scheme is the result of co-operation between Cavan County Council and the Geological Survey of Ireland.

The geological and hydrogeological data for County Cavan are interpreted to enable:

- I. delineation of aquifers
- II. assessment of the groundwater vulnerability to contamination
- III. delineation of protection areas around five public (PWS) and group scheme (GWS) supplies, identified by Cavan County Council (Bawnboy GWS; Ballyconnell PWS; Annagh Lough GWS; Ballymachugh GWS; Kingscourt PWS)
- IV. production of a Groundwater Protection Scheme which provides geological and hydrogeological information for the planning process, so that potentially polluting developments can be located and managed in an environmentally acceptable way.

By providing information on the geology and groundwater, this report should enable the balancing of interests between development and environmental protection.

This study compiles, for the first time, all readily available geological and groundwater data for the county and sets in place a database within the Geological Survey of Ireland (GSI), which can be accessed by the local authority and others, and which can be up-dated as new information becomes available.

A suite of environmental geology maps accompany the report. These are as follows:

(i) **Primary Data or Basic Maps**

- Bedrock geology map: Map 1
- Subsoils (Quaternary) geology map: Map 2
- Outcrop and depth to bedrock map: Map 3
- Hydrogeological data map: Map 4

(ii) **Derived or Interpretative Maps**

- Aquifer map: Map 5
- Groundwater vulnerability map: Map 6
- Source protection areas: Map 8

(iii) **Land-use Planning Map**

- Groundwater Protection Scheme maps: Map 7 (resource protection zones) and Map 8 (source protection zones).

The protection scheme deliverable outputs are in the format of a digital Geographical Information System (GIS) dataset, registered to the standard Ordnance Survey map base. This GIS dataset is designed to be compatible with planning department GIS systems in the Local Authorities. As well as the interpretative maps described above, the GIS incorporates site suitability guidance (groundwater protection responses), for each protection zone, for **landfill**, EPA-licensable **landspreading** of organic wastes, and **on-site wastewater treatment systems for single houses** ('septic tanks'). It is envisaged that the protection responses will be the feature most of interest to the Local Authorities because they are relevant to the planning process.

The GIS and paper maps can be used not only to assist in groundwater development and protection, but also in decision-making on major construction projects such as pipelines and roadways. However, they are not a substitute for site investigation.

It is important to recognise that detailed regional hydrogeological investigations in County Cavan are limited to the Groundwater Resources study of the northeast region (N.E. (R.D.O.), 1981) Environmental Impact Statements and feasibility studies for the development of supply sources. The NERDO report summarises the general aquifer characteristics of the area, including water quality information, and provides a good starting point for assessing the hydrogeology of County Cavan. Despite this information, the available data are somewhat limited and it is not possible to provide a fully comprehensive scientific assessment of the hydrogeology of County Cavan. However, this report provides a good basis for strategic decision-making and for site specific planning.

1.7 Cavan County Development Plan

The County Development Plan states that it is a policy of the Council to:

“provide an adequate and safe supply of piped water” and “....enhance and improve the quality of life in the county by providing a high level of Environmental Protection.”

1.8 Structure of Report

The structure of this report is based on the information and mapping requirements for land surface zoning. The Groundwater Protection Zone Map (Map 7) is obtained by combining the Aquifer (Map 5) and Groundwater Vulnerability maps (Map 6). The Aquifer Map, in turn, is based on the Bedrock Map (Map 1) boundaries and the aquifer categories as derived from an assessment of the available hydrogeological data (Map 4). The Groundwater Vulnerability Map is based on the Subsoils Map (Map 2), the Depth to Bedrock Map (Map 3), and an assessment of specifically relevant permeability and karstification information. This is illustrated in Fig. 1.2.

Similarly, the Source Protection Zone Map (Map 8) results from combining vulnerability (Map 6) and source protection areas (Map 8). The source protection areas are based largely on assessments of hydrogeological data. This is illustrated in Fig. 1.3. The Cavan Groundwater Protection Scheme has been divided into two volumes, with Sections 1 to 6 in Volume I, and Sections 7 to 16 in Volume II.

Volume I: Sections 2 and 3 provide brief summaries of the bedrock and subsoils geology, respectively. Section 4 summarises and assesses the hydrogeological data for the different rock units, explains the basis for each of the aquifer categories, and describes the potential for future groundwater development. Section 5 describes the subsoil permeability distribution and the derivation of the groundwater vulnerability categories. Section 6 draws the report together and summarises the final groundwater protection zones delineated for Co. Cavan.

Volume II: Section 7 outlines the available information on regional-scale groundwater quality patterns in the county. Sections 8 to 14 provide an assessment of seven of the larger public groundwater supply sources currently in use in the county.

1.9 Acknowledgements

The preparation of this Groundwater Protection Scheme involved contributions and assistance from many people:

- Cavan County Council staff, particularly Peter Cork, Colm O’Callaghan, Jim McQuaid, and others.
- All the farmers and landowners throughout County Cavan who allowed GSI staff access to take samples of the subsoils.
- EPA Clonskeagh staff and Regional Inspectorate Monaghan staff, particularly Matthew Craig, Maeve Quinn and Brendan Magennis
- Kieran O’Dwyer and Karen-Lee Ibbotson from White Young Green.
- GSI Groundwater Section: Coran Kelly, Taly Hunter-Williams, Monica Lee, and Caoimhe Hickey.
- Robbie Meehan, consultant.

- GSI Cartography Section: Preparation of specialist diagrams and maps.
- Kevin Crilly, Chris McDonnell, Tom McIntyre, Clive Murray, and Dick O'Brien, Central Technical Services Section, GSI, for drilling and other services.
- GSI Bedrock Section: Andy Sleeman and many others.
- Donal Daly, formerly of the Groundwater Section, Geological Survey of Ireland

Figure 1.2 Conceptual Framework for Production of Groundwater Resource Protection Zones, Indicating Information Needs and Links


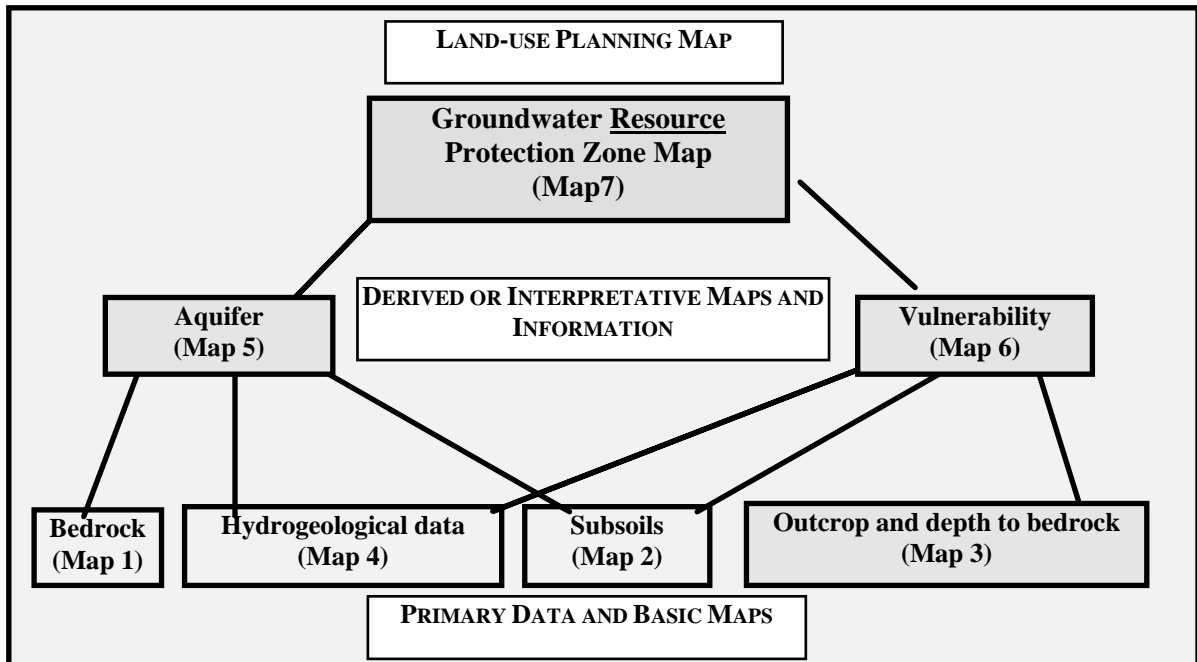


Figure 1.3 Conceptual Framework for Production of Groundwater Source Protection Zones, Indicating Information Needs and Links

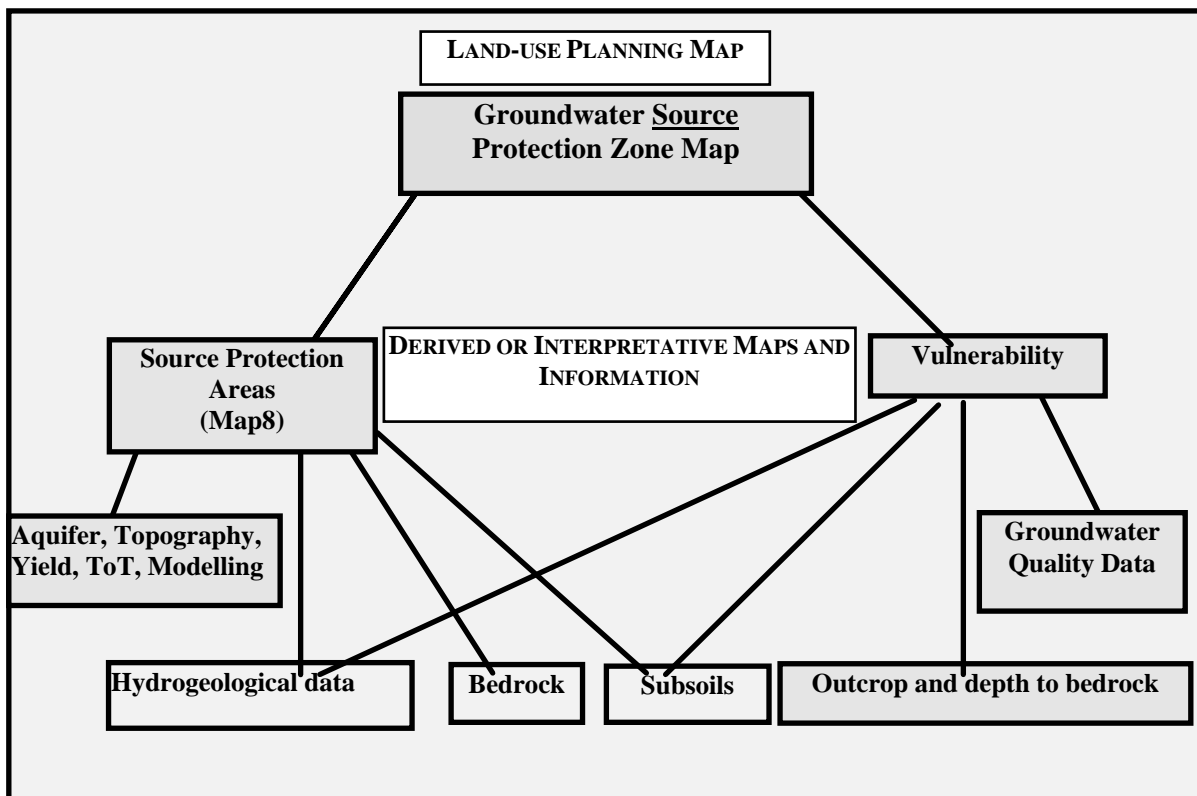

2 Bedrock Geology

2.1 Introduction

This Section presents a brief description of the elements of the bedrock geology of Co. Cavan that are relevant to the hydrogeology, namely the rock composition (lithology) and the rock deformation that occurred during the long geological history of the county. A brief outline of the geological succession is presented in Table 2.1. The distribution of the bedrock geology is given in Map 1. The rocks range in age from Ordovician (c. 500 million years old) to the Triassic (c. 200 million years old) and are mainly sedimentary in origin, consisting of limestones, sandstones and shales. Dykes (linear intrusions) of igneous rocks from the Tertiary (c. 60 million years old) are found in the Cuilcagh Mountains, between Swalinbar and Bawnboy, and in the Ordovician and Silurian rocks in central Cavan.

Geological information was taken from a desk-based survey of available data, which comprised the following:

- Bedrock Geology 1:100,000 Map Series, Sheet 7, Sligo-Leitrim; Geological Survey of Ireland (MacDermot, C.V., Long, C.B., and Harney, S.J.; 1996).
- Bedrock Geology 1:100,000 Map Series, Sheet 8 & part of Sheet 9, Monaghan-Carlingford; Geological Survey of Ireland (Geraghty, M.; 1997).
- Bedrock Geology 1:100,000 Map Series, Sheet 12, Longford-Roscommon; Geological Survey of Ireland (Morris, J.H., Somerville, I.D. and MacDermot, C.V.; 2003).
- Bedrock Geology 1:100,000 Map Series, Sheet 13, Meath; Geological Survey of Ireland (McConnell, B., Philcox, M. and Geraghty, M.; 2001).
- Information from geological mapping in the nineteenth century (on record at the GSI).
- Information from Exploration & Mining Division Public Files.

The landscape of County Cavan reflects the varied underlying geology. The majority of the county is composed of resistant Ordovician and Silurian sandstones, siltstones, shales and minor amounts of volcanics, which create a topographic high in the east “pan” part of the county. These rocks are unconformably overlain by softer and more soluble lower and middle Carboniferous limestones, shales and sandstones which comprise the central to northwest of the county. Upper Carboniferous (Namurian) sandstones and shales form the bedrock which caps the mountains in the northwest of the county enclosing the Glenade valley. A small pocket of Permian and Triassic sandstones east of Kingscourt are fault-bound by Carboniferous units, which are in turn faulted against Silurian bedrock. Each of the main rock types are described in Sections 2.2 to 2.5 in the context of composition, distribution and structures.

2.2 Lower Palaeozoic Rocks

The geologic history of County Cavan begins in the ocean. During the Ordovician and part of the Silurian periods (410-510 million years ago, mya), the central to northwest part of Cavan was being formed in a deep sea. By the end of the Silurian, this ocean slowly disappeared as the continents on either side gradually inched towards each other and collided. The zone of this collision, or suture, in Ireland runs from County Louth to the Shannon Estuary, and the associated Ordovician to Silurian aged rocks are referred to as the "Longford-Down Inlier". These rocks, made of deep sea sediments, were formed and subsequently deformed during the collision. Today, this mass of rock forms a topographic high across the middle of the county. A brief description of each rock unit is given below for both the Ordovician and Silurian periods, starting with the oldest rocks.

Table 2.1: Outline of The Geological Succession in Co. Cavan (youngest on top)

EAST & CENTRAL CAVAN								
STRATIGRAPHIC DIVISIONS		SUCCESSION		DESCRIPTION				
Permian & Triassic		Kingscourt Sandstone Formation		Red sandstone				
		Kingscourt Gypsum Formation		Mudstone with gypsum & anhydrite units				
Upper Carboniferous (325 Ma)	Namurian	Cabra Formation		Interbedded sandstone & shale				
		Conatober Bridge Formation		Interbedded sandstone & shale				
Lower Carboniferous (342 Ma)	Viséan	Undifferentiated Dinurian Limestones	Undifferentiated Viséan Limestones					
			Croghan Limestone	Milverton Limestone	Lucan Formation	Croghan Lst: Dark cherty limestone & shale		
						Milverton Lst: Micrite, crinoidal grainstone / packstone		
						Lucan Fmtn.: dark limestone & shale		
			Argillaceous Limestone			Dark limestone and shale with chert		
			Courcayan Limestones			Moathill Formation		Limestone, calcareous sandstone & shale
				Meath Formation		Limestone & calcareous sandstone (Stackallan Member: micrite & mudstone)		
Lower Palaeozoic (510 Ma)	Silurian	Tashart Mountain Formation		Turbidite, massive sandstone & siltstone				
		Shercock Formation		Fine to coarse grained turbidite				
		Oghill Formation		Massive sandstone & microconglomerate*				
		Lough Avaghon Formation		Massive sandstone & microconglomerate*				
		Slieve Glah Formation		Siltstone, mudstone & thin turbidite				
		Kilnaleck Shale Formation		Dark grey laminated shale & mudrock				
		Clontail Formation		Calcareous red-mica greywacke**				
		Castlerahan Formation		Dark quartz greywacke & conglomerate*				
	Ordovician	Laragh Formation		Pyritic, graptolitic black shale				
		Canickatee Formation		Black shale, mafic volcanics & tuffs				
		Canickateane Formation		Greywacke** with argillite & black shale				
		Kehemaghkilly Formation		Black shale & minor rhyolitic tuff				
		Red Island Formation		Greywacke**, microconglomerate & argillite				
		Finnalaghta Formation		Blue-grey greywacke** & black argillite				
		Coronea Formation		Turbidite, red shale & minor volcanic				
		Com Hill Formation		Shale, greywacke** & volcaniclastics				

NORTHWEST CAVAN			
SUCCESSION		DESCRIPTION	
Lackagh Sandstone Formation		Cyclothemc sandstone, siltstone and coal	
Gowlaun Shale Formation		Dark grey, silty, sideritic shale	
Briscloonagh Sandstone Formation		Fine grained sandstone with minor shales	
Dergvone Shale Formation		Shale & minor turbiditic sandstone	
Carraun Shale Formation		Grey/black shale with minor limestone	
Bellavally Shale Formation		Grey micrite, shale, & laminated evaporate (Doobally Sandstone Member : medium grained	
Glenade Sandstone Formation		Pale orthoquartzitic sandstone	
Meenymore Formation		Shale, laminated carbonate & evaporite	
Dartry Limestone Formation		Dark fine grained cherty limestone (with coarse crinoidal member and mudbank limestone)	
Glencar Limestone Formation		Dark fine limestones & calcareous shale	Drumgesh Shale Fmtn. Dark shale, fine-grained limestone
Benbulbin Shale Formation		Calcareous shale with minor calcarenite	
Bundoran Shale Formation		Dark shale, minor fine grained limestones	Calp Limestone Dark grey to black limestone & shale
Ballyshannon Limestone Formation		Pale grey calcarenite limestone	
Ballysteen Formation		dark muddy limestone & shale	
Ulster Canal Formation		Calcareous sandstone, shale & micrite	
Cooldaragh Formation		Pale brown-grey flaggy, silty mudstone	
Fearmaght Formation		pale conglomerate* & red sandstone	

2.2.1 Ordovician Rocks

2.2.1.1 Corn Hill Formation

Rocks from the Corn Hill Formation underlie a tiny area of southwest of Cavan, south of Garty Louth. The Formation consists of grey to brown-green and locally red shales, with minor greywacke, rare metabentonites and a single horizon of mafic volcanoclastic conglomerate.

2.2.1.2 Coronea Formation

Green muddy sandstones (greywackes), red shales and minor lavas. Red shales are abundant in the lower part of the formation.

2.2.1.3 Finnlaghta Formation

Bluish-grey, fine to medium grained, non-calcareous greywacke and pelite, with occasional, thin, dark grey shale horizons and thin black chert beds.

2.2.1.4 Red Island Formation

Medium to coarse grained, muddy sandstones derived from volcanic debris with local conglomerates. Minor grey to grey black shales.

2.2.1.5 Kehernaghkilly Formation

Typically, it is a pale green to dark grey shale-mudstone with pyrite. It also contains some minor pale grey siliceous tuffs (rocks derived from airborne volcanic debris).

2.2.1.6 Carrickateane Formation

Muddy sandstones with minor amounts of black shales and carbonate nodules.

2.2.1.7 Carrickatee Formation

This unit is similar to the Kehernaghkilly Formation; a dark grey to black shale/mudstone and occasional pale grey-green mudstone with pyrite. The formation also contains minor pillow basalts, cobble conglomerates, tuffs (rocks of air-born volcanic debris), and thin-bedded muddy sandstones

2.2.1.8 Laragh Formation

Green, grey and black shale-mudstone-slate containing pyrite and chert.

2.2.2 Silurian Rocks

2.2.2.1 Castlerahan Formation

Dark grey to black, usually massive quartzo-greywacke, with subordinate, grey-green quartzo-greywacke sometimes with microconglomeratic clasts

2.2.2.2 Clontail Formation

Red, mica-rich, muddy sandstone.

2.2.2.3 Kilnaleck Shale Formation

Dark grey and black laminated shales and mudrocks. The Kilnaleck Fault defines the southeastern boundary of the formation.

2.2.2.4 Slieve Glah Formation

Grey to dark grey slaty siltstones and mudstones. This unit also contains occasional thicker bedded, fine to coarse grained (or microconglomeratic) muddy sandstones.

2.2.2.5 Lough Avaghon Formation (& Cootehill Member)

Grey, fine to coarse grained massive muddy sandstones, microconglomerates and amalgamated beds, with interbedded sandstones and mudstones becoming prevalent towards the northwestern part of the unit. A volcanic horizon has been described in this bedrock unit; it also contains minor amounts of dark shales. There are two principal lithotypes in the Cootehill Member: (a) Thin-bedded, calcareous shales, mudstones and muddy sandstones, and (b) Very finely-laminated clayey muds with some laminated siltstones. In addition, horizons of both muddy and clean sandstones are found within this member.

2.2.2.6 Oghill Formation

Grey to grey-green massive muddy sandstones and microconglomerates. It also contains subordinate thin to thick-bedded muddy sandstones and local pyritic shale-mudstones.

2.2.2.7 Shercock Formation

Grey to green-grey, fine to coarse grained marine deposits that range from mudstones to sandstones. This formation also contains massive sandstones.

2.2.2.8 Taghart Mountain Formation

Pale to dark grey, quartz and mica rich marine deposits that range from coarse sandstones to fine mudstones, sandstones and amalgamated beds. It is interspersed with very distinctive, laminated siltstone-dominant horizons.

2.2.2.9 Crossdoney Granite

The Crossdoney Granite and an enclosed area of Monzogranite occur across approximately 15km² around the village of Crossdoney. It is a porphyritic granite (large crystals contained within a finer crystal matrix) with ferromagnesian minerals in the north, and is dominated by hornblende-biotite minerals in the southern area of the granite. Sulphide mineralisation is locally common.

2.2.2.10 Other Minor Intrusive Igneous Rocks

A small area of diorite is mapped in the Lower Palaeozoic rocks, northeast of Stradone, and mafic and felsic volcanic tuff is found east of this. A tiny area of felsite is found north of Killnaleck. The ages of these igneous intrusions are unknown, but as they are mapped within the Lower Palaeozoic rocks, they are included in this section.

2.3 The Carboniferous Succession

The Carboniferous succession comprises approximately 29 identified and mapped individual formations which are split over two sub-basins; the Lough-Allen basin and the Carrick-on-Shannon syncline, (Ní Bhroin, 2001). Limestones dominate the succession, which essentially is comprised of basal clastics (transitional marine sandstones, conglomerates, siltstones and mudstones), "shelf" limestones (generally shallow water limestones), "basinal" limestones (generally deep water limestones) and transitional deposits (marginal marine limestones and fluvially deposited conglomerates, sandstones, mudstones and evaporites).

2.3.1 Introduction

Shelf limestones tend to be "cleaner", lighter coloured limestones than basinal limestones because of the smaller proportions of clay in shallow water environments. This has implications for the development of karst and aquifer potential. Shelf limestones found in the low lying areas of northwest Cavan are faulted against deeper and younger basinal deposits. Erosion of the overlying sandstone and shale layers has then exposed the shelf limestones. Basinal deposits are found in the adjacent Carrick basin to the southeast and are conformably overlain by the shales, (with an absence of the shelf limestones). The composition of rocks in the succession is provided in Sections 2.3.2 to 2.4.1.3 and in Table 2.1.

2.3.1.1 Dinantian Limestones (undifferentiated)

A small (ca. 8km²) outlier of undifferentiated Lower Carboniferous Limestones (Dinantian) has been identified in the Stradone area of Cavan. This group of rocks is described as undifferentiated due to insufficient information, but is mainly composed of a variety of limestones, shales and dolomites.

2.3.2 Basal Formations

The three basal formations can be traced as a thin band stretching northwest from the Redhills area to southeast past Killashandra; their lithologies are described below. All units are conformably deposited.

2.3.2.1 Fearnaght Formation

The Fearnaght Formation subcrop marks the base of the Carboniferous which lies unconformably on the older Ordovician-Silurian metasediments. The formation is described as a mixture of cream coloured quartz conglomerate, red and purple sandstones, and purple and brown quartzites. Deposition occurred in a mixture of freshwater and aerial conditions. The formation is estimated to be a maximum of 20m thick.

2.3.2.2 Cooldaragh Formation

The formation mainly consists of pale brown-grey calcareous siltstones, micrites, mudstones and evaporites. It is estimated to be up to 125m thick.

2.3.2.3 Ulster Canal Formation

The Ulster Canal Formation consists of alternating units, 1m to 4m thick, of light grey and yellow grey sandstone, and some fine grained limestones. The formation is 30m thick on average.

2.3.3 Basin Shelf Deposits

2.3.3.1 Ballysteen Limestone Formation (also known as the Argillaceous Bioclastic Limestone, ABL)

This formation extends as a strip where it is conformably overlying the Ulster Canal Formation, and across a wide area over the Lough Oughter waterways northwest of Cavan town. It is also found around Lough Sheelin in South Cavan. The sequence generally shows a change from relatively clean sandy/silty shallow water limestones to deeper fine grained muddy limestones. The unit is 104m thick, with a 20m thick dolerite intrusion in the uppermost part of the sequence.

2.3.3.2 Ballyshannon Limestone Formation

The Ballyshannon Limestones occurs across a very small area in Cavan, to the east of Ballyconnell. The limestone is generally a light grey, massively bedded grainstone. Stylolites are common, though fossils are scarce. The formation is estimated to be up to 560m thick.

2.3.3.3 Bundoran Shale Formation, Benbulbin Shale Formation

These formations are considered together as they have similar lithologies, are conformably overlying and occur to a very limited extent in along the northern border of northwest Cavan. The Bundoran Shale occurs in a very small area along the northern border of the county east of Ballyconnell. The formation is a dark grey calcareous mudstone with thin limestones. The Benbulbin Shale is similar to the Bundoran shale, though generally more calcareous and fossiliferous.

The onset of shale deposition marks the transition in depositional environment from shallow sea to pro-deltaic.

2.3.4 Deep Basinal Deposits

2.3.4.1 Drumgesh Shale

This formation covers a significant area of the county, stretching northeast to southwest from Ballyconnell towards Doogary. It consists of a variation of calcareous grey to dark grey muddy limestone to fossiliferous shales, previously referred to as the upper two divisions of the Calp Shales. The lower part of the formation is described as fossiliferous shales and unfossiliferous mudstones with minor calcarenites. The upper division is described as dark fine grained calcarenites. The contact with the overlying Dartry Limestone is gradational. It is estimated to be between 50m and 180m thick in Cavan.

The Drumgesh shale directly overlies the Ballysteen Limestone where it occurs in Cavan, with an absence of the intervening Ballyshannon to Glenade Sandstone Formations. Therefore, deposition of the Drumgesh Shale occurred chronologically later than the Dartry Limestone, although this was within an adjacent sub-basin succession which has since been faulted against the Dartry Limestone.

2.3.5 Basin Shelf Deposits

2.3.5.1 Glencar Limestone Formation

The Glencar Limestone formation is generally composed of fine limestones interbedded with dark calcareous shales. It occurs after the Benbulbin shales were laid down, and represent a gradual upward transition from the Shale beds to alternating layers of shale and limestone, with an increasing thickness of impure limestone beds.

2.3.5.2 Dartry Limestone Formation

Extensive exposure of the Dartry Limestone occurs south of Slieve Rushen (northwest Cavan) and almost as far east as Belturbet. The formation is also found in the succession on the east of the Cuilcagh Mountains and in the very northwest of Cavan around Lough MacNea¹. The unit consists of a clean, massive, thick bedded limestone. The limestone is a biomicrite¹ or calcarenite, i.e. a fine grained concretion formed by deposition of organisms in a calcium carbonate rich solution. The Dartry Limestone contains carbonate mud mounds representing shallow reef areas (Knockmore Limestone member, which is found in the very northeast of Cavan) which are likely to be related to structural highs, and in County Cavan it also contains coarse grained crinoidal silica rich areas representing the areas between reefs. A formation thickness of 400m has been recorded at Swanlinbar.

2.3.6 Transitional Deposits

2.3.6.1 Meenymore Formation

The Meenymore subcrops around the side of Slieve Rushen, on the east side of the Cuilcagh Mountains, and in Glangevlin. The formation represents a depositional environment of coastal to aerial transition known as a supratidal coastal sabkha². It consists of shale and evaporite laminated limestones, mudstones, dolomites, and occasional sandstones. Shales dominate the formation in the Slieve Rushen area. Thickness of the formation is variable.

2.3.6.2 Glenade Sandstone Formation

The Glenade Sandstone is found in the same locations as the Meenymore formation, directly overlying it. It occupies much of the Glangevlin valley. The formation is typically a thick-bedded, homogenous, medium grained, orthoquartzitic sandstone, which is pale brown in colour. It contains coarse grained impersistent sandstones and horizons of resistate pebbles near the base. Formation thickness is

¹ Limestone composed of fossil skeletal remains and carbonate mud in varying proportions.

² A flat salt-encrusted coastal plain.

believed to be up to 300m thick, thinning southwards where it occurs in Cavan to a minimum of 80m thick at Slieve Rushen.

2.3.6.3 Bellavally Shale Formation

Four depositional environments formed this formation, resulting in a calcareous shale, a fine grained cemented fossiliferous limestone, thin sandstone beds and siltstones in repeating cycles. The Doobally Sandstone Member is a massive, medium-grained, sandstone which forms a distinctive marker in the formation.

2.3.6.4 Carraun Shale Formation

The Carraun formation is a grey to black fossiliferous shale with mudstones and minor limestones and dolomites.

2.3.7 Namurian Rocks

During the Namurian (310-325 mya) the sea continued to retreat, with rivers becoming more dominant. The majority of sediments deposited in Cavan at this time were laid down in a delta environment, where rivers met the sea. In the Westphalian (300-310 mya), the land became dominated by densely vegetated marshes. Fluctuations of sea levels resulted in the swamping of the vegetation that rotted to form organic rich layers, which eventually became coal. These Upper Carboniferous rocks form the mountains of Cuilcagh, Boleybrack and The Playbank.

2.3.7.1 Dergvone Shale Formation

This shale formation is 150m thick, and consists of four shale subdivisions which occur cyclically through the formation, including fossiliferous shale, non-fossiliferous shale, shale with ironstone bands, and a micaceous silty shale.

2.3.7.2 Briscloonagh Sandstone Formation

This formation was deposited in a delta environment and is 59m in thickness. It consists of silty shale with interbedded sandstones at the base, progressing into coarse grained sandstone

2.3.7.3 Gowlaun Shale Formation

The Gowlaun shale is 78m thick where the thickest exposure is seen, and is similar to the Dergvone Shale but with two dark fossiliferous marine shale bands.

2.3.7.4 Lackagh Sandstone Formation

The formation is over 90m thick, and has a cyclothemic succession of dark mudstones followed by silty mudstones which pass up into interbedded fine sandstones, siltstones and mudstones, and finally into a thick horizon of sandstones which are proportionally dominant in the formation.

2.3.8 Lough Sheelin Area Carboniferous Succession

The Carboniferous basin of which Lough Sheelin is a part has some bedrock formations which are comparable to those in northwest Cavan, with the oldest Fearnaght Formation present in a small area. The Stackallan Member, the Meath Formation and the Moathill Formation are found between this and the Ballysteen Formation, which is in turn overlaid by the Lucan Formation.

Refer to section 2.3.2.1 for a description of the Fearnaght Formation

2.3.8.1 Meath Formation (& Stackallan Member)

The Meath formation occurs as a small fault bound blocks around the north of Lough Sheelin. The formation consists of interbedded muddy limestones, siltstones, sandstones, black shales and evaporates in this area, with a basal concreted limestone unit. Mineral replacement and the creation of vugs have occurred in the formation in the Cavan area. The Stackallan Member consists mostly of concreted limestone and occurs in the lower part of the Meath Formation.

2.3.8.2 Moathill Formation

The Moathill formation consists of calcareous siltstones, fossiliferous limestones, sandstones and shales. It is subdivided into three units, the lower (formerly known as the “Shaly Pale Beds”) of which is found in the Lough Sheelin area. The formation is at its thinnest in the north of its occurrence (such as at Lough Sheelin) where it is described as a pale calcareous cemented sandstone.

For a description of the Ballysteen Formation, refer to section 2.3.3.1.

2.3.8.3 Croghan Limestone Formation

The Croghan Limestones are predominantly muddy limestones with some shale partings. There is evidence of less muddy, oolitic, massive middle unit. The upper layers are dark, chert-rich and ‘cleaner’ as shale partings are less common up through the formation.

2.3.8.4 Lucan Formation

The Lucan formation extends from Dublin west to Lough Ree and just up into the south of Cavan, around Lough Sheelin. It is characterised by fossiliferous limestones interbedded with shales, calcareous silts and muddy concreted limestones. It is typically a very thick formation (over 184m at the centre of the depositional basin, but probably considerably thinner in the Lough Sheelin area.

2.3.8.5 Visean Limestones (undifferentiated)

Large areas of pale grey limestone are undifferentiated due to their massive structure and similarity in composition. These rocks constitute a small area to the southeast of Lough Sheelin.

2.4 Kingscourt Carboniferous to Triassic Succession

2.4.1 Carboniferous

2.4.1.1 Milverton Group

The Milverton Limestone consists of five formations, although the very small area found in Cavan (faulted against Permian-Triassic rocks) is mapped as undifferentiated in this area. The five subdivisions (McGuinness Formation, Lane Formation, Smugglers Cave Formation, Holmepatrick Formation, and Mullaghfin Formation) are generally clean pale well bedded limestones with occasional sandier and shalier horizons.

2.4.1.2 Corratober Bridge Formation

This formation is the easternmost formation to occur in the county. It consists of cycles of grits (loosely consolidated coarse sandstone) and shales, with grits at the base.

2.4.1.3 Cabra Formation

This formation is predominantly composed of sandstone and shales and is similar to the Corratober Bridge Formation. A sandstone unit, up to 15m thick, occurs in the mid part of the formation. The formation is estimated to be 123m thick in total.

2.4.2 Permian to Triassic

The Permian (250-290 mya) had a severe environment - a harsh, irregular desert bounded by steep fault scarp margins. As the Permian ended and the Triassic (205-250 mya) began, the land was again flooded by a shallow sea, this time from the northeast. Permian and Triassic rocks in Cavan are found in a small area just east of Kingscourt.

2.4.2.1 Kingscourt Gypsum Formation

The base of this formation consists of a conglomerate, which is overlain by a mud-dominant sequence that contains two major evaporite deposits. These evaporites are gypsum and anhydrite, which are currently being mined at Knocknacran.

2.4.2.2 Kingscourt Sandstone Formation

This unit lies directly on top of the Kingscourt Gypsum Formation. It is comprised of siltstones with minor sandstones at the base, with a 200 m thick red sandstone member at the top of the formation.

2.5 Structure and Geological History

The regional structure of the area is influenced by two major structural events known as the Caledonian and Variscan Orogenies.

The earlier Caledonian (late Lower Palaeozoic, c.410 mya) orogeny marked the collision of two continents, Gondwana and Laurentia, which were once separated by an ancient ocean (The Iapetus Ocean). The boundary between the continents is a suture line running from the present-day Shannon Estuary to Clogher Head. The Carboniferous basinal deposits found in northwest Cavan were deposited in this ocean. The collision of the continents resulted in sub-aerial deposits being thrust up and over one another, creating a chain of mountains. In the course of this mountain building, the rocks were faulted and folded, now forming the Silurian rocks and Ordovician rocks in central to east Cavan. The Ordovician and Silurian beds are dipping at a large range of angles and completely overturned in places as a result. The Carboniferous rocks northwest of these, up to Slieve Rushen are dipping gently in a north and northwest direction. Dip directions are variable northwest of this due to basin faulting with the blocks between dipping in different directions. A very gentle anticline occurs in the centre of Glangevlin valley, from where the succession of Upper Carboniferous deposits is exposed moving up the valley into the surrounding mountains.

The Variscan Orogeny (late Carboniferous, c.290 mya) was a north-south compression event with the deformation front located in the south of the country. As a result there are only weak effects of the strain seen in northwest County Cavan.

There is one other feature in the extreme east of Cavan - an area called the "Kingscourt Outlier". This small, faulted wedge of different rocks is located east of Kingscourt, where a block of Lower Carboniferous Limestones, Upper Carboniferous Sandstones, Permian and Triassic rocks are juxtaposed against the Lower Palaeozoic rocks. The Kingscourt Outlier is bounded on the west by the Kingscourt Fault. Though most movement at this fault occurred in the post-Triassic, some movement occurred during the Variscan. This fault defines a topographic high, which can be seen from west of Carrickmacross to Nobber, in County Meath.

3 Subsoil (Quaternary) Geology

3.1 Introduction

This Section briefly deals with the geological materials which lie above the bedrock and beneath the topsoil. The subsoils were deposited during the Quaternary period of glacial history. The Quaternary period encompasses the last 1.6 million years and is sub-divided into the Pleistocene (1,600,000-10,000 years ago); and the more recent Holocene (10,000 years ago to the present day). The Pleistocene, more commonly known as the ‘Ice Age’, was a period of intense glaciation separated by warmer interglacial periods. The Holocene, or post-glacial, saw the onset of a warmer and wetter climate approaching that which we have today.

During the Pleistocene the glaciers and ice sheets laid down a wide range of deposits, which differ in thickness, extent and lithology. County Cavan was completely covered by an ice sheet, which moved in a general southeasterly direction (Clark & Meehan, 2001). Material for the deposits left behind originated from bedrock and was subjected to different processes within, beneath and around the ice. Some were deposited randomly and so are unsorted and have varying grain sizes, while others were deposited by water in and around the ice sheets and are relatively well sorted and coarse grained. The bedrock subsoil interface in Cavan is indistinct in places due to the degree to which the surface of the bedrock has been crushed and entrained into the base of the till, indicating a significant weight of ice on it.

Mapping of subsoils and compilation of subsoil information in Cavan was undertaken as part of the FIPS Subsoil Mapping Project (Meehan, 2004). This mapping formed the foundation of subsequent subsoil permeability assessments (described in Section 5). Subsoil distribution is presented in Maps 2N and 2S, and discussed briefly in Section 3.2.

3.2 Subsoil Types

There are five main subsoil types identified in Co. Cavan and shown on Map 2:

- ◆ tills
- ◆ sands and gravels
- ◆ alluvium
- ◆ peat
- ◆ lacustrine sediments

Areas where bedrock comes close to the ground surface are shown on the maps as “rock close”.

3.2.1 Tills

Tills (often referred to as boulder clay or drift) are the most widespread subsoil type found in County Cavan as can be seen on Map 2. It is a diverse material which is deposited sub-glacially and it has a wide range of characteristics due to the variety of parent materials and different processes of deposition. Tills are often tightly packed, unsorted, unbedded, and have many different particle and stone sizes and types, which are often angular or subangular. Many of the tills in Cavan have been formed into elongated hills, or drumlins, which are thought to be bedforms of the glacier and give an indication of ice flow direction, as discussed in Section 3.4.

Boundaries based on till texture are not shown on the subsoil Map 2, but symbols indicate the texture at specific locations. Instead, the tills are categorised according to their dominant lithological component, e.g. Lower Palaeozoic sandstone and shale till (TLPSsS).

Gravel tills encompass those areas where isolated areas of gravels with a clay rich matrix have been deposited within the Lower Palaeozoic sandstone and shale till. It includes the rib moraines seen in the very southeast of the county, which could be mistaken for gravel hills as the moraines are discontinuous in places.

The degree of variability in the composition of the tills is such that in the south-east of Cavan, the till type mapped here has been subdivided into different permeability categories. This is further discussed in section 5.4.2. A number of particle size analyses were carried out during the permeability mapping; these results are discussed in the context of subsoil permeability and groundwater vulnerability, in Chapter 5.

3.2.2 Sands and Gravels

Deposition of sand/gravel takes place mainly when the glaciers are melting. This gives rise to large volumes of meltwater with great erosive and transporting power. The subsoils deposited in this environment are primarily well rounded gravels with sand, with the finer fractions of clay and silt washed out. Outwash deposits take the form of fans of stream debris dropped at the glacier front via drainage channels. Deltaic deposits are similar but are formed where drainage channels discharge into a standing body of water. Deposits remaining in the drainage channels form eskers, similar to a river drainage system in arrangement, with tributaries converging downstream.

Cavan does not have extensive deposits of sand and gravel. The majority of sand and gravel deposits are small and discontinuous, with only two sizeable and continuous deposits located northwest Lough Sheelin and to the south and southeast of Lough Ramor. Neither of these deposits has been quarried as they are slightly less clean (i.e. higher clay content) than gravel deposits in counties to the south. The sand and gravel deposits in County Cavan do not reflect the typical ridge (eskers), hummock and hollow (kames and kettle holes) topography found elsewhere in Ireland, with the exception of a very small esker along the county border near Granard. However, fan shaped deposits of outwash deltas are seen around the edge of Lough Sheelin and Lough Ramor.

3.2.3 Alluvial deposits

Alluvial sediments are deposited by rivers and include unconsolidated materials of all grain sizes, ranging from coarse gravels down to finer silts and clays, and they may also contain organic detritus. Alluvial deposits in Cavan are associated with the main rivers including the Erne, Woodford, Annalee and Blackwater Rivers.

3.2.4 Peat

Deposition of peat occurred in post-glacial times with the onset of warmer and wetter climatic conditions. Peat is an unconsolidated brown to black organic material comprising a mixture of decomposed and un-decomposed plant matter, which has accumulated in a waterlogged environment. Peat has an extremely high water content averaging over 90% by volume. Two main types of peat bog are distinguished in Ireland: blanket bog, which is characteristic of upland areas with excessive rainfall, and raised bog, which is characteristic of lowland areas with impeded drainage. Blanket peat is the principal peat type represented in Cavan, covering much of the Cuilcagh Mountains and Slieve Rushen in the northwest and small patches between drumlins in the main area of Cavan to the southeast. Much of the small low-lying interdrumlin areas of peat have been partially excavated and the peat here is referred to as 'cutover peat'. Fen Peat (which is the early formation stage of a raised bog complex) is also found in two locations in Cavan where the habitats are protected due to the rarity of the fen environment; at Annagh Lough to the south of Belturbet, and also surrounding another lake called Annagh Lough to the east of Ballyconnell.

3.2.5 Lacustrine Clays

Lacustrine clays are deposited sub-aqueously in a quiet environment, so the material is generally fine grained and very homogenous. Lake clays are frequently found around the edges of the many lakes in Cavan, but are usually small in expanse. Two large areas of "clayey lacustrine sediments" are found in the southeast of the county along tributaries of the River Blackwater, and are related to the glacial lakes which existed in the area of Lough Ramor and Lough Sheelin.

3.3 Depth to Bedrock

The depth-to-bedrock (i.e. subsoil thickness) is a critical factor in determining groundwater vulnerability. Subsoil thicknesses vary considerably over the county, from no subsoil (rock at surface) to depths of over 30 metres and even up to 60m in one borehole. The direction of ice movement has spatially influenced the subsoil thicknesses.

Broad, regional-scale variations in depth to bedrock have been interpreted across the county by the Groundwater Section of the GSI, using information from the GSI databases, from field mapping, air photograph and digital elevation model (DEM) interpretation. Depth-to-rock data maps (Map 3) show areas where rock crops out at surface and depth-to-rock data from borehole records where the location accuracy is to within 50m.

The thickest deposits in Cavan are tills which are found throughout the county. Tills in the Cavan “Pan” area, which is generally topographically elevated above the area around the Erne Waterway, can be subdivided into two broad depth-to-bedrock patterns. The area from Lough Sheelin to Drung consists of small patches of rock close, i.e. less than <1m thick, with areas in between of subsoil thickness of up to 10m. In the area from the Erne waterway, east to Stradone, and south to Lough Sheelin, there is a greater density of rock close areas, which have a mixture of subsoils less than 3m thick (typical around the shores of Lough Sheelin) and subsoils of up to 5m thick in between shallow subsoils. Drumlins are generally till cored, and increase in height in a westwards direction from 3m thick to over 10m thick.

A large topographically low-lying area from the Erne Waterway to Slieve Rushen is underlain by subsoils generally greater than 10m thick, although inter-drumlin areas within the Erne waterway area are generally between 3m and 5m thick.

The mountainous areas of Slieve Rushen and Cuilcagh constitute rock and shallow rock with subsoils of less than 3m thick above 200m on Slieve Rushen and above 300m elsewhere in the northeast of the county, although peat in these areas is up to 5m thick. Low lying valley areas around Swanlinbar and Slieve Rushen are between 3m and 10m in thickness. Subsoils in the Glangevlin valley area are generally between 5m and 10m thick, with drumlins representing areas of subsoils over 10m in thickness.

3.4 Ice Flow Direction

Drumlins can be used as directional indicators of ice flow, since the steeper side of drumlins faces up-ice, with the down-ice portion of the drumlin being longer and more sloped (Bennett and Glasser, 1996). A study of landform and bedform ice flow indicators in the southeast of County Cavan has been carried out by Meehan (1999), showing ice flow directions being from the northwest to the southeast. It is likely that the ice dome originated in the mountainous area of northwest Cavan.

4 Hydrogeology and Aquifer Classification

4.1 Introduction

This Section summarises the relevant and available hydrogeological and groundwater information for County Cavan. A brief description of the hydrogeology of each aquifer grouping is given, followed by its aquifer category based on the GSI aquifer classification scheme. The hydrogeological data for the county are summarised on Map 4 and the aquifers are shown on Map 5.

4.2 Data Availability

The assessment of the hydrogeology of County Cavan is based primarily on analyses and conclusions given in the National Aquifer Report (GSI, in preparation). Additional available drilling, abstraction and pump testing data from Geological Survey, Cavan County Council, and consultants' files were also compiled and entered into a computer database at the Geological Survey. In summary, the following data and reports were assessed:

- National Aquifer Report (GSI, in preparation).
- Groundwater abstraction rates for local authority sources, group scheme sources, and for a limited number of other high yielding private wells and springs.
- Specific capacity³ and discharge data in County Cavan and surrounding counties.
- Information on large springs.
- Reports by engineering and hydrogeological consultants.

4.3 Rainfall, Evapotranspiration and Recharge

According to Met Éireann information, mean annual rainfall in County Cavan during 1961–1990 varied from 895 mm in the lowlands to more than 1900 mm over the Cuilcagh Mountains (Fitzgerald and Forrester, 1996).

Potential recharge has been estimated for more localised areas around public supply sources using Met Éireann rainfall and potential evapotranspiration data (see Volume II). The actual annual recharge (i.e. potential recharge less surface water runoff) depends on the relative rates of infiltration and surface runoff, which is, in turn, influenced by subsoil permeability and saturation. In low permeability or waterlogged areas, actual recharge may be less than 5% of the potential recharge.

4.4 Background to Aquifer Classification

4.4.1 Introduction

The factors used in aquifer classification are outlined in Section 4.4.4. The classifications of each rock unit in Cavan are provided in Sections 4.5 to 4.15. According to the aquifer classification used by the GSI (DELG/EPA/GSI, 1999), there are three main aquifer categories, with each category sub-divided into two, three or four classes:

Regionally Important (R) Aquifers

- (i) Karstified bedrock aquifers (**Rk**)
- (ii) Fissured bedrock aquifers (**Rf**)
- (iii) Extensive sand/gravel aquifers (**Rg**)

Locally Important (L) Aquifers

- (i) Sand/gravel (**Lg**)
- (ii) Bedrock which is Generally Moderately Productive (**Lm**)
- (iii) Bedrock which is Moderately Productive only in Local Zones (**LI**)

³ Specific capacity is the rate of abstraction per unit drawdown: units are $\text{m}^3 \text{d}^{-1} \text{m}^{-1}$

(iv) Karstified bedrock aquifers (**Lk**)

Poor (P) Aquifers

- (i) Bedrock which is Generally Unproductive except for Local Zones (**Pl**)
- (ii) Bedrock which is Generally Unproductive (**Pu**)

4.4.2 Bedrock Aquifers

Irish bedrock aquifers are not generally thought to have significant pore-space permeability. Consequently, flow is thought to depend on the development of a network of secondary permeability within fractures and bedrock aquifer categories have been designed to take account of the following factors:

- the overall potential for groundwater development in each rock unit;
- the localised nature of higher permeability zones (e.g. fractures) in many of the bedrock units;
- the highly karstic nature of some of the limestones;
- all bedrock types will generally give enough water for domestic supplies and therefore all are called ‘aquifers’.

Karstification and dolomitisation are two processes which strongly influence the development of secondary permeability and aquifer potential in Irish bedrock units. Each is explained briefly below. The terms will occur in several of the classifications provided in Sections 4.5 to 4.15.

Karstification

Karstification is the process whereby limestones are slowly dissolved away by acidic waters moving through them. This process occurs most often in the upper bedrock layers and along some of the pre-existing fissures and fractures in the rocks, which become slowly enlarged. This results in the progressive development of distinctive karst landforms such as collapses, caves, swallow holes, sinking streams, turloughs and dry valleys, and a distinctive groundwater flow regime where drainage is largely underground in solutionally-enlarged fissures and conduits. The solution is influenced by factors such as: the type and solubility of the limestone; the degree of jointing, faulting and bedding; the chemical and physical character of the groundwater; the rate of water circulation; the geomorphic history (upland/lowland, sea level changes, etc.); and the subsoil cover. One of the consequences of karstification is the development of an uneven distribution of permeability, which results from the enlargement of certain fissures at the expense of others, and the concentration of water flow into these high permeability zones.

There are gradations in the degree of karstification from slight to intensive. All pure bedded limestones are known or assumed to be karstified to some degree. In contrast, pure unbedded limestones (e.g. Waulsortian Limestones) are only susceptible to significant karstification when very fractured, as in the southwest of Ireland. Where fracturing and faulting in such rocks is minimal (e.g. in the Midlands), karstification is limited to such a degree that it does not contribute in any significant way to groundwater flow in the bedrock aquifer.

In order to assist in the understanding and groundwater development of pure limestone aquifers, the GSI has compartmentalised the broad range of karst regimes into three categories. Regionally important limestone aquifers in which karst features are more significant are classed as **Rk**. Within the range represented by **Rk**, two sub-types are distinguished, termed **Rk^c** and **Rk^d**:

- **Rk^c** are those aquifers in which the degree of karstification limits the potential to develop groundwater. They have a high ‘flashy’ groundwater throughput, a large proportion of flow is concentrated in conduits, numerical modelling using conventional programs is not usually applicable, well yields are variable with a high proportion having low or minimal yields, large springs are present, storage is low, locating areas of high permeability is difficult and therefore groundwater development using bored wells can be problematical.

- **Rk^d** aquifers are those in which flow is more diffuse, storage is higher, there are many high yielding wells, and development of bored wells is less difficult. These areas also have caves and large springs, but the springs have a more regular flow. In general, these aquifers can be modelled (at an appropriate scale) using conventional programs.

Limestone aquifers in which karstification is present, but which are not large enough, or do not have enough groundwater throughput, to be classified as 'Regionally important', are classified as Locally important karstified aquifers (**Lk**). No distinction is made between the different sub-types of karstification.

Dolomitisation

Dolomitisation is a weathering process that often occurs in limestone where calcium ions are replaced by magnesium ions in the crystal lattice of dolomite ($\text{Ca Mg}(\text{CO}_3)_2$). Hydrogeologically, the most important consequence of dolomitisation is that it results in an increase in the porosity and permeability of the carbonate rock. Dolomitised rocks are a highly weathered, yellow/orange/brown colour and are usually evident in boreholes as loose yellow-brown sand with significant void space and poor core recovery. Dolomitisation often occurs along fault zones, can cross bedrock lithology boundaries and results in unpredictable very high permeability zones. In general, the cleaner the original limestone, the greater the degree of dolomitisation occurring.

4.4.3 Sand/Gravel Aquifers

Sand/gravel deposits have a dual role in groundwater development and supply. Firstly, in some cases they can supply significant quantities of water for supply and are therefore classed as aquifers, and secondly, they provide storage for underlying bedrock aquifers. A sand/gravel deposit is classed as an aquifer if the deposit is highly permeable, more than 10 m thick and greater than one square kilometre in aerial extent. The thickness of the deposit is often used rather than the more relevant saturated zone thickness as the information on the latter is rarely available. In many instances it may be assumed that a deposit with a thickness of 10 m will have a saturated zone of at least 5 m. This is not the case where deposits have a high relief (for example eskers or deposits in high topographic areas) as these gravels are often dry.

Table 4.1 Sand/gravel Aquifer Classification

	Regionally important	Locally important
Aerial extent	> 10 km ²	1-10 km ²
Saturated thickness	> 5 m	> 5 m
Permeability	High	High

Sand/gravel aquifers are therefore classified based on the permeability, aerial extent, and the thickness of the unsaturated zone (see Table 4.1). In the absence of permeability test data, gravels with a fines content of less than approximately 8% are generally considered to have sufficient permeability for aquifer development (O'Suilleabhain, 2000).

A regionally important gravel aquifer should have an aerial extent of at least 10 km². This is to ensure that, assuming an average annual recharge of 400 mm, there will be enough recharge to provide a supply of one million cubic metres per year from the whole aquifer.

4.4.4 Aquifer Classification Criteria

As yield is one of the main concerns in aquifer development projects, yields from existing wells are conceptually linked with the main aquifer categories outlined in Section 4.4.1:

- Regionally important (**R**) aquifers should have (or be capable of having) a large number of 'Excellent' yields: in excess of approximately 400 m³/d (4000 gph).
- Locally important (**L**) aquifers are capable of 'Good' well yields 100-400 m³/d (1000-4000 gph).
- Poor (**P**) aquifers would generally have 'Moderate' or 'Poor' well yields - less than 100 m³/d.

However, in practice, existing well yield information is often difficult to use because reliable, long-term yield test data are quite rare (particularly for the less productive aquifers). In practice, then, the following criteria are used in aquifer classification:

- Permeability and transmissivity⁴ data from formal pumping tests, where discharge and water level readings have been taken over a period of many hours or days.
- Productivity data from wells where either formal pumping tests have been undertaken or where at least one combined reading of discharge and drawdown data are available. The GSI has developed the concept of 'productivity' as a semi-quantitative method of utilising limited well test data (Wright, 2000; see Appendix II). A 'productivity index' is assigned to a well from one of five classes: I (highest), II, III, IV, and V (lowest), using a graphical comparison of well discharge with specific capacity.
- Occurrence of springs with 'high' flows (greater than 2,160 m³/day total flow).
- Occurrence of wells with 'excellent' yields (greater than 400 m³/day discharge).
- Hydrological information such as drainage density (where overlying subsoils are thin), and baseflows or flows in rivers (better aquifers will support higher baseflows and summer flows). Dry Weather Flow (DWF) is the annual minimum daily mean flow with a probability of exceedance of 0.98 (i.e. with a return period of 50 years). An area-specific dry weather flow (ASDWF) of 2 l/s/km² is considered to indicate the presence of a good aquifer.
- Lithological and/or structural characteristics of geological formations which indicate an ability to store and transmit water. Clean washed and sorted sands and gravels, for example, are more permeable than poorly sorted glacial tills. Pure limestones are also more permeable than impure (clayey/shaly) limestones. Areas where folding and faulting has produced extensive joint systems tend to have higher permeabilities than areas where this has not occurred.

All factors are considered together; productivity and permeability data are only given 'precedence' over lithological and structural inferences where sufficient data are available. The classification of all rock units in Cavan is presented in Sections 4.5 to 4.15. A summary can be found in Section 4.2, and on Map 5.

Some bedrock units have been grouped if they are of similar geological age and have similar lithological/structural characteristics. In considering the classifications provided, it is important to note that:

- The bedrock aquifer classifications are based on the bedrock units described in Sections 2.2 to 2.5 and depicted on Map 1.
- Irish hydrogeology is unusually complex and variable. As a consequence, there will often be exceptionally low or high yields which do not conform to the aquifer category given.
- The top few metres of all bedrock types are likely to be relatively permeable, even in the poor aquifers.
- There may be localised areas where recharge is restricted. This could occur, for example, where the vulnerability is low, or where a small portion of the rock unit has been faulted away from the main body of the unit. In these situations, the development potential even of regionally important aquifers may be limited. In considering major groundwater development schemes at particular sites, it will be important to consider the long term balance between recharge and abstraction, as well as the aquifer potential.

⁴ Transmissivity is the product of permeability and the effective saturated thickness of the aquifer

Table 4.2 Summary of Aquifer Classification in County Cavan

Aquifer Grouping	Geological Units	Occurrence in Cavan	Aquifer Class*	Main basis for Classification	Section #
<i>Permo-Triassic Sandstones, Mudstones and Gypsum</i>					
Kingscourt Sandstone (KS)		East Cavan	Lm	Well yields and productivities, lithology.	4.15
Kingscourt Gypsum (KG)		East Cavan	Pl	Lithology, water level variation.	4.15
<i>Namurian Sandstones and Shales</i>					
Lackagh Sandstone (LH), Briscloonagh Sandstone (BR)		Northwest Cavan	Pl	Lithology, limited yield data.	4.14
Gowlaun Shale (GO), Dergvone Shale (DE)		Northwest Cavan	Pu	Lithology	4.14
Cabra (CB), Corratober Bridge (CO)		East Cavan	Lm	Well yields and productivities, lithology.	4.14
<i>Dinantian Upper Impure Limestones</i>					
Calp & Kilmore Slump Member, Glencar Limestone		Central Cavan, near Lough Oughter	LI	Well productivities and yields, lithology.	4.13
Lucan		South Cavan, near Lough Sheelin	LI	Well productivities and yields, lithology.	4.13
<i>Dinantian Pure Bedded Limestones and Dinantian Pure Unbedded Limestones</i>					
Dartry Limestone (and Members) (DA, crDA, DAcr, DAcrw, DAmk, DAKn)		Northwest Cavan	Rkc/Rk/Lk	Karst features, tracing, lithology.	4.12
Ballyshannon Limestone (BS)		North Cavan	Rk	Karst features, productivity, yields and lithology.	4.12
Croghan Limestone (CL)		Central Cavan SW of Crossdoney	Lk	Lithology.	4.12
Milverton Limestone (MLV)		East Cavan	Rkd	Karst features, productivity, yields and lithology.	4.12
Undifferentiated Visean Limestones (VIS)		South Cavan, near Lough Sheelin	Rkd	Lithology.	4.12
Stackallan Member of Meath Formation (MEst)		South Cavan, near Lough Sheelin	Lm	Structure, Lithology.	4.12
<i>Dinantian Mixed Sandstones, Shales and Limestones</i>					
Undifferentiated Dinantian Limestones (DIN)		Central Cavan, near Tullyvin	Lm	Lithology.	4.11
Meenymore (ME), Bellavally Shale (BE) & Doobally Sandstone Member (BEdo)		Northwest Cavan	LI	Lithology, yield and productivity in similar rock units elsewhere.	4.11
<i>Dinantian Shales and Limestones</i>					
Carraun Shale (CN)		Northwest Cavan	Pl	Lithology	4.10
Benbulbin Shale (BB), Bundoran Shale (BN)		Northwest Cavan	LI	Lithology	4.10
Drumgesh Shale (DH)		Central Cavan	LI	Lithology, limited yield and productivity data.	4.10
Drumgesh Shale (DH)		Northeast Cavan	Lm	Structure, lithology, juxtaposition with productive aquifers.	4.10

Aquifer Grouping	Geological Units	Occurrence in Cavan	Aquifer Class*	Main basis for Classification	Section #
<i>Dinantian Sandstones</i>					
Glenade Sandstone (GD)		Northwest Cavan	Lm	Lithology, yields in similar rock units nearby, limited yield and productivity data.	4.9
Fearnaght (FT)		Northeast Cavan	Rf	Structure, lithology, juxtaposition with productive aquifers.	4.9
Fearnaght (FT)		Central Cavan, near Lough Oughter	Lm	Lithology, structure.	4.9
<i>Dinantian Lower Impure Limestones</i>					
Ballysteen Limestone (BA)		Northeast Cavan	Rf	Structure, well yields and productivities, juxtaposition with productive aquifers.	4.8
Ballysteen Limestone (BA)		Central Cavan, near Lough Oughter	LI	Lithology, well yields and productivities.	4.8
Argillaceous Limestones		South Cavan, near Lough Sheelin	LI	Lithology, well yields and productivities.	4.8
<i>Dinantian (early) Sandstones, Shales and Limestones</i>					
Ulster Canal (UC), Cooldaragh (CH)		Northeast Cavan	Rf	Well yields and productivities, structure, juxtaposition with productive aquifers.	4.7
Ulster Canal (UC), Cooldaragh (CH)		Central Cavan, near Lough Oughter	LI	Lithology.	4.7
Moathill (MH), Meath (ME)		South Cavan, near Lough Sheelin	LI	Well yields and productivities, lithology.	4.7
<i>Silurian Metasediments and Volcanics</i>					
Clontail (CL), Kilnaleck Shale (KK), Lough Avaghon (LA), Cootehill Member (LAcl), Oghill (OL), Castlerahan (RA), Slieve Glah (SG), Pollareagh Member (SGph), Shercock (SK), Taghart Mountain (TM)		Southeast/Central Cavan – from Kilnaleck to Cootehill to Mullagh	PI	Lithology, dry weather flows, well yields and productivities.	4.5
<i>Ordovician Metasediments, Ordovician Volcanics</i>					
Coronea (CA), Corn Hill (CH), Carrickatee (CK), Carrickateane (CT), Finnalaghta (FA), Kehernaghkilly (KY), Laragh (LH), Red Island (RI), Volcanics (mv)		Mainly south-Central Cavan – from Lough Gowna to Redhills	PI	Lithology, dry weather flows, well yields and productivities.	4.5
<i>Granites and other Igneous Intrusive rocks</i>					
Monzogranite (Ad), Crossdoney Granite (Cg), Diorite (Di), Felsite (F)		Central Cavan - at Crossdoney and near Tullyvin	PI	Lithology. Dry weather flows in nearby similar rock unit.	4.6

*Rk: Regionally important karstic. Rf: Regionally important fissured. Lm: Locally important moderately productive. LI: Locally important only in local zones. Lk: Locally important karstic. PI: Poor generally unproductive except for local zones. Pu: Poor Aquifers which are generally unproductive.

4.5 Classification of the Ordovician Metasediments, Ordovician Volcanics, and Silurian Metasediments and Volcanic Aquifers

The Lower Palaeozoic (Ordovician and Silurian age) rocks in Cavan generally comprise sandstones and shales; Ordovician rocks tend to be shalier and also contain rocks of a volcanic origin. The Ordovician and Silurian age rocks in Co. Cavan are part of a larger area of these types of rocks, which is known as the Longford-Down Inlier (McConnell *et al.*, 2001). The distribution of the rock types is presented on Map 1, while the aquifers are depicted on Map 5. The different formations that comprise this aquifer group are listed in Table 4.2.

In general, the rocks are characterised by low fissure permeability. Shaly layers within these rocks prevent clean fractures from opening up under tectonic pressure. Fractures can become filled with fault gouge, a clay material created by the disintegration of the rock material under tectonic forces. This material seals up fractures, restricting the flow of groundwater. The coarser, thicker sandstone units are likely to have a greater degree of fracturing than the more plastic interbedded shales. Brittle volcanic layers may also have a greater degree of fracturing. Permeabilities in the upper few metres of the surface weathered zone are often high although they decrease rapidly with depth. Results mainly from the drilling of private domestic wells or for small industrial companies have shown that local zones of higher permeability are present, indicated by the ‘high’ yields encountered. These yields are often associated with fractures and faults. It is not possible, given the present data, to delineate the areas of higher permeability within such formations.

Many small springs can be observed on, and at the base of slopes. There are no known high yielding springs within the Ordovician or Silurian aquifers. In areas where the rock is exposed at the surface, the land is often poorly drained, and the stream density is relatively high. A number of Dry Weather Flow values are available from gauges located within these aquifers (Table 4.3). The values in the Ordovician and Silurian aquifers in the northeast are low (from 0.04 to 0.54 l/s/km²), indicating a poor aquifer.

Table 4.3 Dry Weather Flow values for gauges within the Lower Palaeozoic (Ordovician and Silurian) aquifers of the Longford-Down-Louth-Meath Inlier

River	Gauging station	Location	Underlying rock unit	Rock age	ASDWF (l/s/km²)
Annalee	36016	Rathkenny, Co. Cavan	Red Island Formation (RI)	Ordovician	0.17
Annalee	36010	Butlers Br., Co. Cavan	Coronea Formation (CA)	Ordovician	0.04
Blackwater (Kells)	07011	O’Dalys Br. Co. Meath	Clontail Formation (CL)	Silurian	0.34
Moynalty	07017	Rosehill, Co. Meath	Clontail Formation (CL)	Silurian	0.54
Glyde	06014	Tallanstown, Co. Louth	Clontail Formation (CL)	Silurian	0.55
White (Dee)	06033	Coneyburrow Br. Co. Louth	Salterstown Formation (SA)	Silurian	0.10
Dee	06023	Dromgoolestown, Co. Louth	Salterstown Formation (SA)	Silurian	0.32
Kildorrough	26149	Kildorrough, Co. Cavan	Castlerahan Formation (RA)	Silurian	0.344


Notes: Dry Weather Flows From EPA data. Adjusted areas and flows are derived by subtracting contributing areas and dry weather flows from upstream gauges. An Area Specific Dry Weather Flow (ASDWF) of 2 l/s/km² is considered to indicate the presence of a good aquifer.

Productivity (see Appendix II) and yield data were compiled and analysed within the counties the Ordovician aquifer occurs in. Twenty-eight wells in the Ordovician aquifers of the Longford-Down

Inlier (Figure 4.1) had either Excellent or Good yields. Seventeen wells had productivity values. There are no records of wells with class I, II or III productivities.

Well productivity data for the same area generally confirm the Silurian rocks to be poor aquifers. However, of the few data points (ten productivity values), five are class III. Excellent yielding wells exist in the Silurian aquifer of the Longford-Down Inlier. There are three Excellent well yields and 19 Good well yields. It is therefore possible that there are areas of higher permeability within this otherwise poor aquifer.

Figure 4.1 Well Productivities in the Ordovician aquifers of the Longford-Down inlier

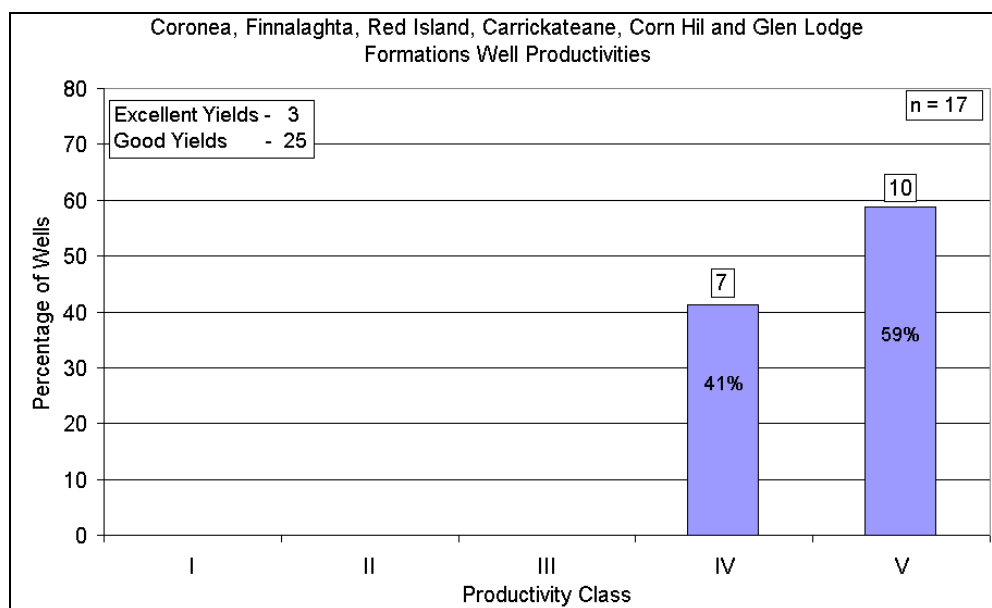

Woods & Wright (2001) suggest that the groundwater levels in Ordovician rock units are variable, but are usually less than 10 m below ground surface, and that the aquifers are generally unconfined. Water level data collected over a ten year period for a 26 m deep well in Co. Kildare show that water levels fluctuate by up to 8 m annually. The large annual fluctuation in the hydrograph indicates the low storage potential and/or bulk permeability in these rock units. Examination of GSI's well records indicates that groundwater levels are usually less than 15 m below surface in Silurian rock units.

Although fractured, Ordovician and Silurian rocks generally have a low permeability and are mostly regarded as a poor aquifer. Such rocks will often yield enough water to a well to supply a house or small farm (0.2-0.5 l/s), and occasionally in major fracture zones, may yield a good deal more. However, since the yields often depend on the permeability developed in the uppermost few meters of broken and weathered rock, the yields will often decrease markedly in dry spells as the water table falls, and these supplies may therefore be unreliable (Geraghty *et al.* 1997). Groundwater in the Silurian sandstones and shales can be confined by either the clayey till and peat deposits which usually overlie the rocks, or by lower permeability bedrock layers within the sequence. Low lying areas have better groundwater development potential as artesian (flowing) conditions can be encountered and there is good natural protection afforded in the immediate vicinity of the sources by the low permeability materials. Sustainable supplies will be only be accessible from the fault zones.

On the basis of the factors discussed above and summarised in Table 4.4, Ordovician and Silurian Metasediments and Volcanics are classed as a **Poor Aquifer which is generally unproductive except for local zones (PI)**.

Table 4.4 Summary of factors used to classify the Lower Palaeozoic (Ordovician and Silurian) aquifers of the Longford-Down Inlier

Factor	Ordovician rocks in the Longford-Down Inlier	Silurian rocks in the Longford-Down Inlier
Lithology	Shale, greywackes, volcanics	Greywackes, Sandstones, siltstone, shales & mudstones
Structure	Fault intensity low	Localised permeable areas formed from structural deformation of the rocks.
Hydrology	Low DWF values	Low to moderate DWF values
Well Hydrographs	None available	None available
Well Productivity	Graph peaks at V, no values above IV	Values are skewed to the lower end of the productivity classes.
Borehole Yields	25 Good Yields 3 Excellent Yields	19 Good Yields 3 Excellent Yields
Aquifer Properties	None available	None available
Classification	PI	PI

4.6 Classification of Granites and Other Igneous Intrusive Rock Aquifers

This aquifer group consists of igneous intrusive rocks, the most widespread rock type being granites. Other rock types within this aquifer group are mainly fine-grained igneous dykes (linear ‘wall-like’ features). The distribution of this rock type is presented on Map 1, while the aquifer is depicted on Map 5. The different formations that comprise this aquifer group are listed in Table 4.2.

In general, Irish granites do not provide large groundwater supplies but can generally provide reliable water supplies for domestic and farm supplies. Fresh granite has no primary permeability, a porosity normally less than 1%, and any pores present are generally small and unconnected (Davis and De Wiest, 1966). Permeability in the granites has developed through fracturing and weathering, which is generally restricted to the top 100 m below ground (Daly, E.P., 1994). Granites are competent rocks and therefore respond to strain by brittle fracture. The degree of fracturing varies laterally and with depth. Tension joints, which are common in granites, are only found close to the surface. Regional joints become tight and impermeable at depth. The fractures do not become in-filled because the granites have a low clay content.

Granite is a relatively coarse-grained rock, which is massive and unbedded. This means that development of groundwater flow will be restricted to the upper weathered portion, and to areas of faulting and fracturing, as contrasted with sedimentary rocks, where preferential flowpaths can occur along lithological differences. Because of its coarse grained nature, granite can weather to a coarse sand, thus locally enhancing its water storage capacity. Finer grained volcanics are typically hard rocks which like granites, fracture cleanly, which may enhance the groundwater flow along faults and fractures.

Area Specific Dry Weather Flows (ASDWF) from rivers flowing over granites in nearby Co. Louth show moderately low values (Table 4.5). These may be associated with the weathered granites overlying the poor fractured granite bedrock aquifers.


Table 4.5 Dry Weather Flow values for river gauges on nearby Granite aquifers, Co. Louth

County	Gauge	River	Rock	ASDWF (l/s/km ²)
Curralhir, Co. Louth	06031	Flurry	Granophyre (Gr)	0.51
Ballygoly, Co. Louth	06030	Big	Granophyre (Gr)	0.69

Notes: Dry Weather Flows from EPA data. Adjusted areas and flows are derived by subtracting contributing areas and dry weather flows from upstream gauges. An Area Specific Dry Weather Flow (ASDWF) of 2 l/s/km² is considered to indicate the presence of a good aquifer.

In Co. Cavan, hydrogeological data are sparse: there are only two wells recorded in the aquifer, both of which have ‘Poor’ yields. Across Ireland, available productivity and yield data were assessed for the granites as part of the National Aquifer Report (GSI, in preparation). Most well data come from the Leinster granite. These are extrapolated to data-poor granite areas of Ireland. For the area outside the Tullow granite, 49 productivity data are available: these are skewed to the lower end of the range. Six Good yields are recorded, but no Excellent yields.

Figure 4.2 Well Productivities in Irish Granite and other igneous intrusive rock aquifers (excluding Tullow)

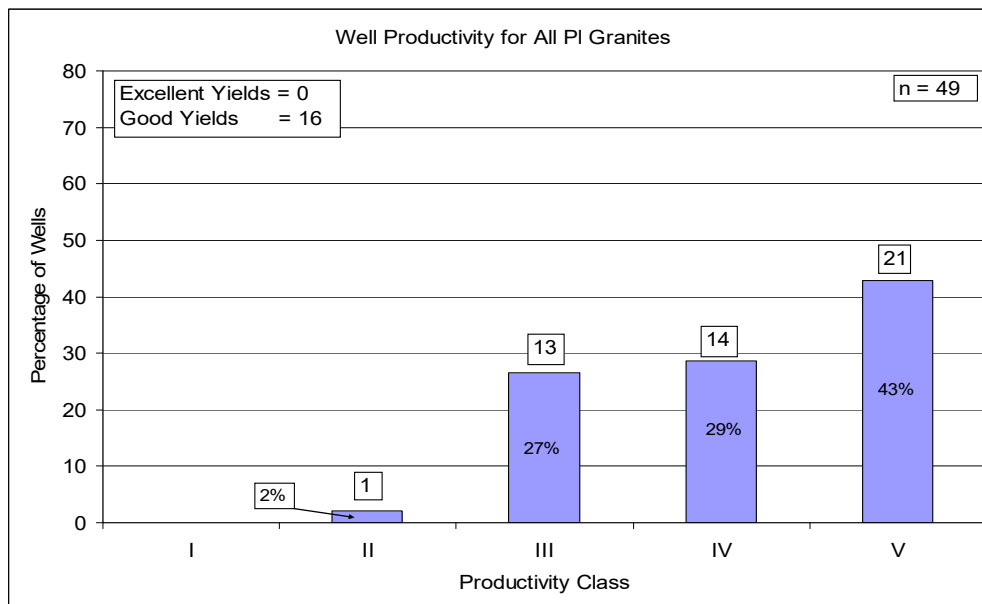

On the basis of the factors discussed above and summarised in Table 4.6, Granites and other igneous intrusive rocks are classed as a **Poor Aquifer** which is generally unproductive except for local zones (PI).

Table 4.6 Summary of factors used to classify the Granites and other igneous intrusive rock aquifers

Factor	Central Cavan, northwest Cavan
Lithology	Granites, fine-grained sills, dykes, other intrusions
Structure	Fault intensity low. Jointing in upper part.
Hydrology*	Low to moderate DWF values
Well Hydrographs	None available
Well Productivity*	Productivities skewed to lower values.
Borehole Yields*	6 Good Yields 0 Excellent Yields
Aquifer Properties*	None available
Classification	PI

**Notes: Values derived from all Irish granites except the Tullow pluton.*

4.7 Classification of the Dinantian (early) Sandstone, Shale and Limestone Aquifers

The distribution of the rock type is presented in Map 1, while the aquifer is depicted in Map 5. The different rock units that comprise this aquifer group are listed in Table 4.2. Two different successions are recorded: in south Cavan, the Moathill and Meath Formations bend around the north of Lough Sheelin; the Ulster Canal and Cooldaragh Formations occur in a NE-SW trending strip across Monaghan, central Cavan (bending around the south of Lough Oughter), and into Leitrim.

This rock unit group comprises a mixture of siltstones, sandstones, mudstones, shales and limestones. As the rock units are often less than 100 m thick, the surface occurrence of many of the rock units in this group is quite limited, and boreholes often penetrate these units into the underlying sandstones. The narrow outcrop/subcrop of this aquifer means it is difficult using the current river gauge network to calculate river low flows specific to the rock units in this group. Overall, there are few data available on the aquifer properties of the Dinantian (early) Sandstones, Shales and Limestones. There are no high yielding springs recorded in these rock units at any location. Different aquifer classifications are assigned for different areas in this rock unit group. The factors used in the classification are discussed below, and summarised in Table 4.7.

4.7.1 Northeast Cavan-Monaghan region

In the part of the aquifer that occurs in County Monaghan and northeast County Cavan, there is a strong structural influence on the productivity of these rock units. Fracturing and faulting cuts across the aquifer in a largely north-south direction. The fracturing and faulting limits the influence on groundwater flow of the low permeability fine-grained shaly beds which occur in these units.

There are two public supply wells (at Scotshouse-Clones) at which rigorous pumping tests were undertaken. Transmissivities were estimated as 80 m²/d and 420 m²/d, with corresponding bulk permeability estimates of 2.4 m/d and 7.5 m/d. Available productivity and yield data for these rock units indicate a relatively productive aquifer. Eight wells with Excellent yields and 11 wells with Good yields are recorded. Productivity data are spread across classes II, III and IV, concentrated in class II.

In this area, the Cooldaragh Limestone and the Ulster Canal rock units are part of a regional flow system which includes the neighbouring rock units of the Ballysteen Limestone, Ballyshannon Limestone and Dartry Limestone. On the basis of aquifer properties, well yields and productivities, and structure, the rock units of the Dinantian (early) Sandstones, Shales and Limestones in the Monaghan and northeast Cavan region are classified as a **regionally important fissured aquifer (Rf)**. Note that this aquifer is not large enough on its own to qualify for Regionally Important aquifer status; however, it is juxtaposed with other productive rock units (see Sections 4.8.1 and 4.12).

4.7.2 Central Cavan-Leitrim region

West of Milltown, well yield and productivity data indicate that the same bedrock aquifer is less productive than in northeast Cavan-Monaghan. The location of the dividing line was made on the basis of large-scale geological structure. However, the exact location of the change in aquifer characteristics is difficult to define due to lack of data and the probable gradational nature of the change.

In these shaly rocks, although fractured, generally low permeabilities occur. These aquifers often yield enough water to a well for a house or small farm (0.2-0.5 litres/second), and in major fracture zones may occasionally yield much more. However, yield often depends on the permeability in the uppermost few metres of broken and weathered rock, and may decrease in dry spells as the water table falls. Six Poor yielding wells and three wells with Moderate yields are known in this aquifer; there are no productivity data available to assess.

On the basis of lithology, well yields and productivities, the rock units of the Dinantian (early) Sandstones, Shales and Limestones in the central Cavan-Leitrim region are classified as a **locally important aquifer** which is **moderately productive only in local zones (LI)**.


4.7.3 South Cavan and North Midlands region

The rock units in the North Midlands region are part of the Navan Group. In south Cavan, these comprise the Meath and Moathill rock units. The Navan Group consists of a complex mixture of siltstones, mudstones, shales, sandstones and shaly limestones. The Meath rock unit is described as a sandy limestone with limited amounts of shale. The Stackallan Member (assessed for aquifer classification purposes with the pure bedded limestones, Section 4.12) is a pure limestone which can be dolomitised. Some karstification has been recorded for both these units (McConnell *et al.*, 2001). The Moathill rock unit has a higher shale content than the purer Meath Formation and Stackallan Member, and would therefore be expected to have a lower permeability.

Productivity and yield data were examined for all rock units in the Navan Group. Well data for the Meath Formation was not noticeably better than the other rock units. Therefore, all the rock units of the Navan Group (excepting the Stackallan member) are considered together for the purposes of aquifer classification.

Five Excellent yielding wells and 16 wells with Good yields have been recorded in this rock unit group in the North Midlands area. Most of the data are concentrated in Classes IV and V, but there are also some wells with productivity data in classes I, II and III (Figure 4.3).

Figure 4.3 Well Productivities in the Dinantian (early) Sandstones, Shales and Limestones in the North Midlands region (including South Cavan)

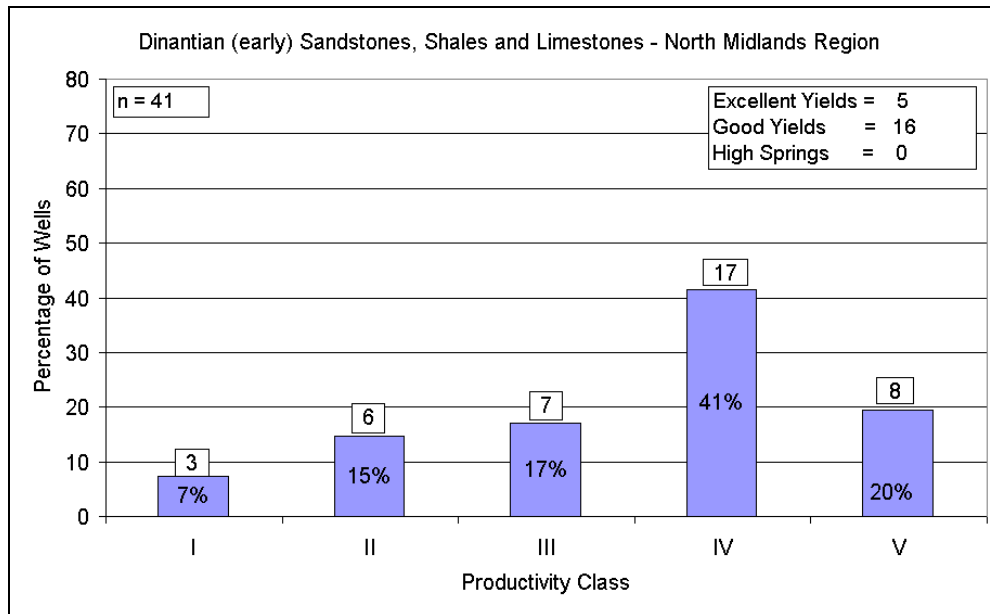

On the basis of the lithology, the productivity and yield data and the absence of High yielding springs the rock units of the Dinantian (early) Sandstones, Shales and Limestones in the North Midlands region are classified as a **locally important aquifer** which is **moderately productive only in local zones (LI)**.

Table 4.7 Summary of factors used to classify the Dinantian (early) Sandstone, Shale and Limestone Aquifers

Factor	Northeast Cavan-Monaghan	Central Cavan-Leitrim	South Cavan (part of North Midlands succession)
Rock Type	Varied Limestone, Siltstones and Mudstones (UC, CH)	Varied Limestone, Siltstones and Mudstones (UC, CH)	Varied Limestones, Sandstones and Shales (MH, ME*)
Structure	North-northeast south-southwest fracturing and faulting enhances permeability	NNW-SSE faults.	NE-SW and E-W faults; often dry.
T values	80-420 m ² /d	No data	No data
Productivity	Mainly Class II, some Class III and IV	No data	Mainly Class IV and V, some Class I, II & III.
Borehole Yields	8 Excellent yields 11 Good yields	No Excellent or Good yields known	5 Excellent yields 16 Good yields
Springs	No High yielding springs	No High yielding springs	No High yielding springs
Dolomite	n/a	n/a	Some in Meath Formation and Stackallan Member*
Karst	n/a	n/a	Some
Classification	Rf**	LI	LI

* The Stackallan member (MEst) of the Meath Formation (ME) is discussed with the Dinantian Pure Bedded Limestones (Section 4.12).

** Not large enough on its own to qualify for Regionally Important aquifer status; however, it is juxtaposed with other productive rock units.

4.8 Classification of the Dinantian Lower Impure Limestone Aquifers


The distribution of the rock unit is presented in Map 1, while the aquifer is depicted in Map 5. In County Cavan the aquifer grouping comprises the stripy dark grey shaly limestones of the Ballysteen Limestone rock unit, which occur in a NE-SW trending strip across central Cavan, and the Argillaceous limestones, which are found near to Lough Sheelin.

Groundwater flow occurs along fractures and faults within these rocks. In general, the lower impure limestones contain substantial amounts of clayey material and thus are generally not susceptible to solution or karstification. The upper portion of the Ballysteen rock unit is more thinly bedded and clay-rich, making widespread circulation of groundwater and dissolution of the limestone less likely than in the lower part. In addition to making the rock less brittle, the clay minerals and thin layers can smear along fault planes, potentially reducing the bulk permeability of the rock unit in intensely deformed regions. Different aquifer classifications are assigned for different areas in this rock unit group. The factors used in the classification are discussed below, and summarised in Table 4.8.

4.8.1 Northeast Cavan-Monaghan region

In the part of the aquifer that occurs in County Monaghan and northeast County Cavan, there is a strong structural influence on the productivity of these rock units. There are a number of large N-S faults cross-cutting the folds, and numerous smaller faults. The fracturing and faulting limits the influence on groundwater flow of the low permeability fine-grained shaly beds which occur in these units. In the area, there are 20 Excellent yielding wells and 16 known wells with Good yields. Productivity values spread across all classes relatively evenly, although there is a peak in class IV (Figure 4.4).

Figure 4.4 Well Productivities in the Dinantian Lower Impure Limestones in the Northeast Cavan-Monaghan region

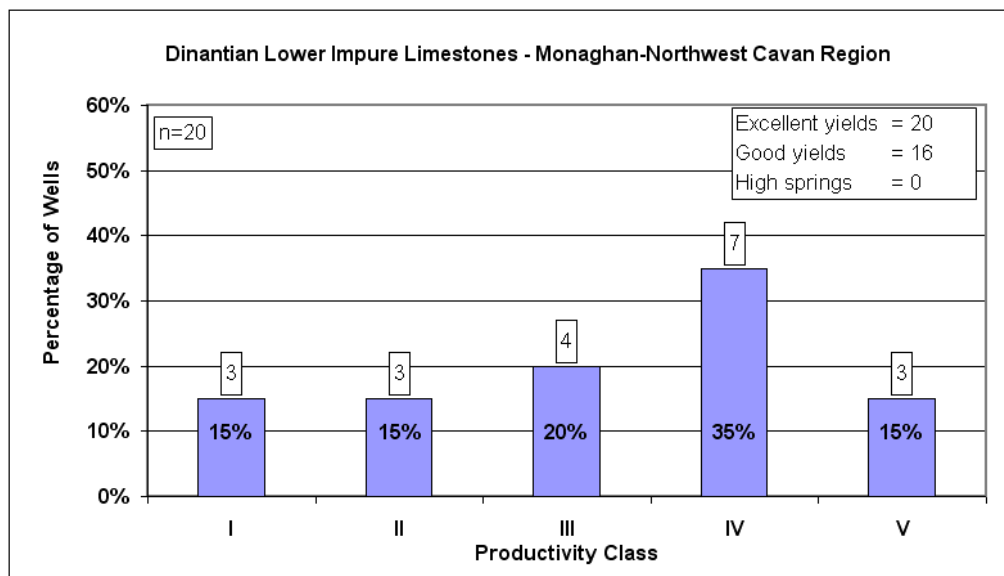


In this area, the Ballysteen Limestone rock unit is part of a regional flow system which includes the neighbouring Cooldaragh Limestone, Ulster Canal, Ballyshannon Limestone and Dartry Limestone rock units. On the basis of well yields and productivities, and structure, the rock units of the Dinantian Lower Impure Limestones in the Monaghan and northeast Cavan region are classified as a **regionally important fissured aquifer (Rf)**. Note that this aquifer is not large enough on its own to qualify for Regionally Important aquifer status; however, it is juxtaposed with other productive rock units (see Sections 4.7.1 and 4.12).

4.8.2 Central Cavan-Leitrim and South Cavan regions

West of Milltown, well yield and productivity data indicate that the same bedrock aquifer is less productive than in northeast Cavan-Monaghan. The location of the dividing line was made on the basis of large-scale geological structure. However, the exact location of the change in aquifer characteristics is difficult to define due to lack of data and the probable gradational nature of the change.


In these rock units there is almost no deep permeability; groundwater movement in these rock units occurs relatively slowly and is often concentrated in the weathered and shallow subsurface zone in the upper few metres or tens of metres of fractured bedrock. Therefore, the bulk (large-scale) fracture permeability, with the possible exception of areas near faults, is generally low. Flow directions are expected to approximately follow the local surface water catchments. Flow paths are short, and discharges are frequently to small springs or to the normally effluent (gaining) streams and rivers that traverse the aquifer. Groundwater levels are typically less than 15 m below ground level, and vary up to 5 m. Groundwater levels recorded as part of the NERDO study (AFF and GSI, 1981) near Killashandra show a typical seasonal variation of 3.5-4 m (Figure 4.5).

Figure 4.5 Borehole hydrograph in the Killashandra area, Co. Cavan (AFF and GSI, 1981)

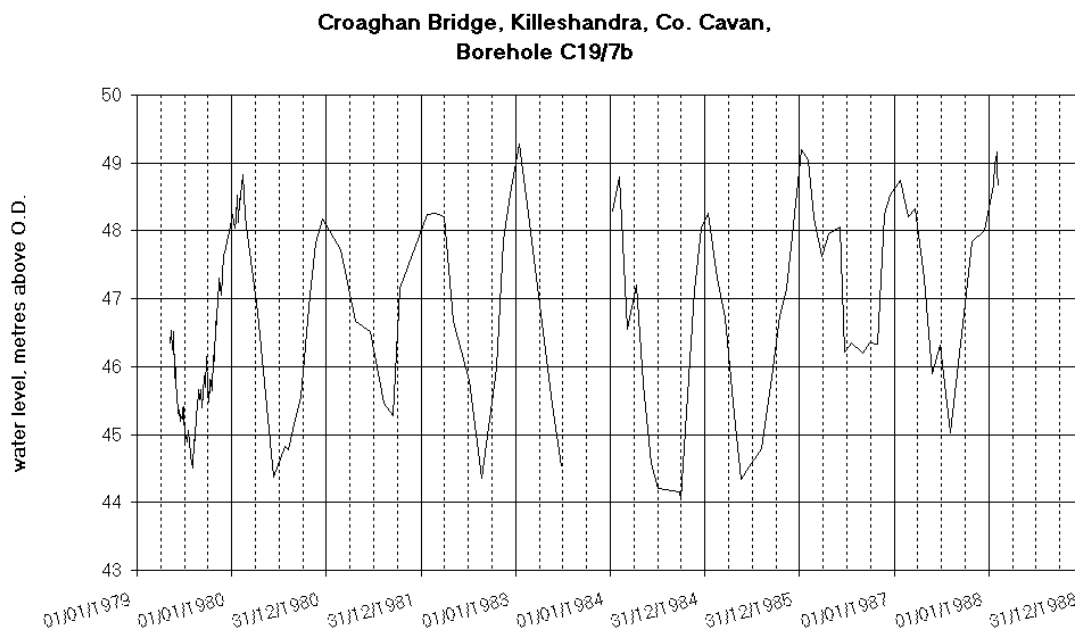

In general, groundwater development in the lower impure limestones is often not particularly successful: yields are often at the lower end of the scale (Poor to Moderate or Good), with corresponding lower productivity values (predominantly III to V, Figure 4.6). The fractured upper and more permeable layer is unlikely to provide sustainable enough supplies for larger wells, and will often contain lesser quality water than the deeper permeable horizons. However, as the number of data available to assess the Ballysteen rock unit (and its equivalents) shows, it is an aquifer that is widely used to satisfy domestic and other small groundwater supply demands.

Figure 4.6 Well Productivities in the Dinantian Lower Impure Limestones in the Central Cavan-Leitrim and South Cavan-North Midlands regions

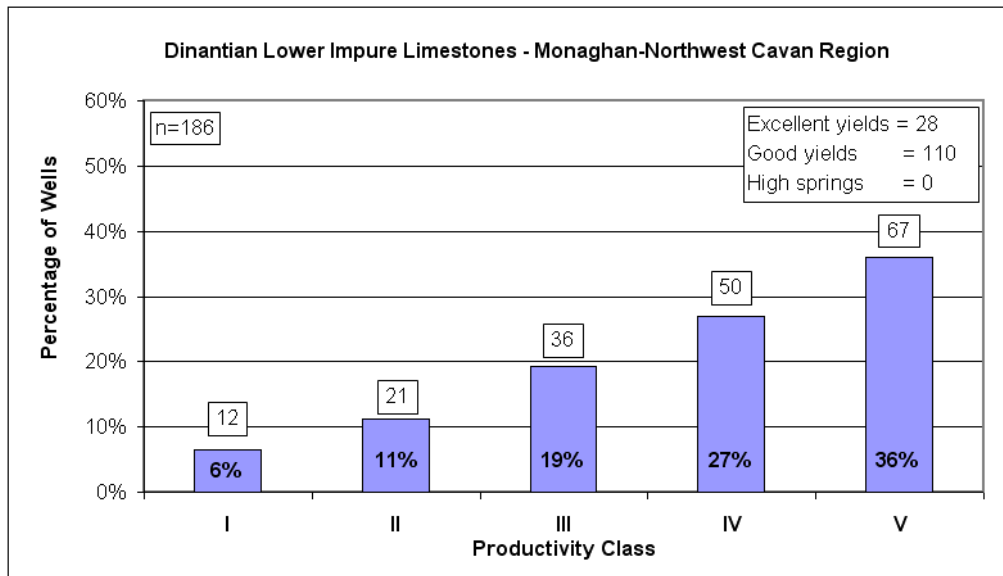

Obtaining good yields usually depends on locating fault zones and/or dolomitisation at depth. In general, optimum well yields from the lower impure limestone aquifer will be obtained from boreholes drilled into one of the many fault zones and penetrate at least 50-100 m of the aquifer. Geophysics has been used successfully to locate fault zones. Gravel/sand deposits above the bedrock unit may also help to provide flow and storage to aquifer and protect against pollution.

High concentrations of iron, manganese and hydrogen sulphide may occur, providing considerable problems for those with private wells. This effect is sometimes the result of contamination, but is often a consequence of the combination of both the natural iron sulphide in the shalier parts of the rock formation, and the generally slow groundwater circulation.

On the basis of lithology, well yields and productivities, the rock units of the Dinantian Lower Impure Limestones in the central Cavan-Leitrim and North Midlands-South Cavan regions are classified as a **locally important aquifer** which is **moderately productive only in local zones (LI)**.

Table 4.8 Summary of factors used to classify the Dinantian Lower Impure Limestone Aquifer

Factor	Northeast Cavan-Monaghan	South Cavan-North Midlands	Central Cavan-Leitrim
Rock Type	Impure (muddy) limestone with muddy layers and occasional evaporite minerals.	Impure (muddy) limestone with muddy layers.	Impure (muddy) limestone with muddy layers; occasional evaporite minerals.
Structure	Significant NNE-SSW fracturing and faulting enhances permeability	Moderate degree of faulting. NE-SW and E-W faults.	Moderate degree of faulting. NNW-SSE faults.
T values	No data	5 – 50 m ² /d	No data
Productivity	Limited data are spread across all categories	Skewed to lower productivity classes	No data for this area. Will be as for South Cavan-North Midlands
Borehole Yields	20 Excellent yields 16 Good yields	28 Excellent yields 110 Good yields	No Excellent or Good yields known; 14 Moderate and 11 Poor yields recorded.
Springs	No High yielding springs	No High yielding springs	No High yielding springs
Dolomite	Not recorded. Evaporite minerals present.	n/a	n/a
Karst	Not recorded.	Not recorded.	Not recorded.
Classification	Rf *	LI	LI

** Not large enough on its own to qualify for Regionally Important aquifer status; however, it is juxtaposed with other productive rock units.*

4.9 Classification of the Dinantian Sandstone Aquifers

The distribution of the rock units in this aquifer group is presented in Map 1, while the aquifers are depicted in Map 5. In County Cavan the aquifer grouping comprises the Fearnaght Sandstone and the Glenade Sandstones. The Fearnaght Sandstone rock unit is found in a narrow NE-SW trending strip across central Cavan that curves below Lough Oughter. It comprises cream, red and purple conglomerates and sandstones, and is estimated to be a maximum of 20 m thick. The rock unit is adjacent to the Dinantian (early) Sandstones, Limestones and Shales (Section 4.7), and Dinantian Lower Impure Limestones (Section 4.8). The Glenade Sandstone rock unit is a thick-bedded pale brown sandstone. It ranges in thickness from 80 m to 300 m. This rock unit occurs under the higher areas in the northwest of Cavan. The factors used in the classification are discussed below, and summarised in Table 4.9.

Groundwater in these sandstones circulate primarily through fissures, as these rocks do not have significant intergranular permeability. These rock units are predominantly sandstones and conglomerates with limited shale content. Coarse-grained rocks such as sandstones and conglomerates tend to deform by rupturing or brittle fracture resulting in more frequent fractures and joints. These rocks will therefore tend to have higher fissure permeabilities than fine grained rocks such as shales. The limited amount of shaly fine grained material in these rocks means that faults and fractures, where they occur, will be more likely to remain open allowing groundwater flow. Fissure permeability is generally more developed in the top 20-30 m of fractured and weathered rock, and in the vicinity of fault zones. Where there has been more intense faulting and folding these zones of high permeability will be more common.

4.9.1 Central Cavan region

The dominant lithologies of the Fearnaght rock unit are sandstone and conglomerate, which have the potential to develop fissure permeability. The sandstones and conglomerates were deposited on an erosion surface (unconformity). Prior to their deposition, the older Ordovician rocks were eroded, leaving a weathered and irregular surface. Where a weathered surface exists it increases the likelihood

of the existence of preferential flow paths that can act as a focus for groundwater flow. This is additionally likely when the first sediments laid down after deposition resumed are coarse conglomerates.

There are very limited well data available for these rock units. Based on the lithology of the units and the potential for increased groundwater flow along the unconformable contact, the Fearnaght Sandstone rock unit (excluding the northeast Cavan-Monaghan area) is classified as **locally important aquifers which are generally moderately productive (Lm)**.

4.9.2 Northeast Cavan-Monaghan region

The Fearnaght rock unit in the northeast Cavan-Monaghan area is part of a regional flow system that includes the neighbouring rock units of the Ballysteen Limestone, Ballyshannon Limestone and Dartry Limestone (Sections 4.8.1 and 4.12). The Fearnaght Formation in the northeast Cavan-Monaghan is therefore classified as a **regionally important fissured aquifer (Rf)**. The location of the dividing line was made on the basis of large-scale geological structure. However, the exact location of the change in aquifer characteristics is difficult to define due to lack of data and the probable gradational nature of the change. The grouped flow system is dominated by the NNE-SSW fracturing and faulting which cuts across these units.

4.9.3 Northwest Cavan region

To date there has been little development or investigation of groundwater in the sandstones of the northwest. There are very limited data available: only four wells with productivity data are known, three class III and one class II. There are only twelve wells in total for which yield data are available, of which nine were Good yields. An investigation near Sligo Town of sandstone units similar to the Glenade Sandstone (Daly, 1975) concluded that boreholes drilled through the entire formation should give yields in the region of 500-1000 m³/d. In this study, several fissures and water inflows were encountered in the test boreholes (the deepest at 50m in a 57m deep borehole), indicating development of fissure permeability.

Based on the dominant sandstone lithology of the Glenade Sandstone, and its similar depositional history to the Mullaghmore Sandstone near Sligo for which Excellent yields were suggested (Daly, 1975), these rock units are classified as a **locally important aquifer which is generally moderately productive (Lm)**.

Table 4.9 Summary of factors used to classify the Dinantian Sandstone Aquifers

Factor	Central Cavan	Northeast Cavan-Monaghan	Northwest Cavan
Rock Type	Sandstone and conglomerate.	Sandstone and conglomerate.	Thick-bedded quartzitic sandstone.
Structure	Moderate degree of faulting. NW-SE faults. Erosion surface focuses groundwater flow.	Frequent NNE-SSW faulting and associated fracturing. Erosion surface focuses groundwater flow.	Open fractures. Higher permeability zones likely in vicinity of NW-SE and E-W fault zones. Limited faulting.
T values	No data	No data	No data
Productivity	-	-	1 class II, 3 class III
Borehole Yields	-	-	9 Good Yields
Springs	No High yielding springs	No High yielding springs	No High yielding springs
Dolomite	-	-	-
Karst	-	-	-
Classification	Lm	Rf	Lm

4.10 Classification of the Dinantian Shale and Limestone Aquifers

The distribution of the rock unit group is presented in Map 1, while the aquifer grouping is depicted in Map 5. The rock units are composed predominantly interbedded shales and limestones with little or no

sandstone content. They occur mainly in the uplands in the northwest of the county, and also in a NE-SW trending band across the centre of County Cavan. The different rock units that comprise this aquifer group are listed in Table 4.2.

Groundwater in these rock units will circulate primarily through fractures and faults. However, fine-grained rocks such as mudstones and shales deform chiefly plastically rather than by jointing, and are likely to have low fissure permeability. Fractures are also often infilled by weathered material, reducing their ability to transmit groundwater. Consequently, development of fissure permeability will generally tend to be confined to weathered zones close to the surface of the rock and in the vicinity of fault zones. In general, development of interconnected fissuring at depth and across wide areas is unlikely in these shaly rocks. There are some areas, however, where a high frequency of faulting has significantly improved the permeability of some rock units. In the Monaghan-northeast Cavan area, numerous north-south faults cross-cut the Drumgesh Shale (and adjacent rock units). These faults and associated additional fracturing are thought to increase the permeability of the rock units in the area. Decisions on aquifer classifications are discussed below and are summarised in Table 4.10.

4.10.1 Northeast Cavan-Monaghan region

The Drumgesh Shale is found in a NE-SW trending band across central Cavan. It is composed of interbedded shales and limestones. The rock unit ranges from shale with some limestone interbeds in its lower part, to less shaly very fine dark limestone in the upper part, where there is a gradational contact with the overlying Dartry Limestone. While the overall nature of this unit may be shaly, groundwater flow is likely to occur along the non-shale, high permeability zones that develop in the purer limestone interbeds.

In the Monaghan-northeast Cavan area, numerous north-south faults cross-cut the Drumgesh Shale (and adjacent rock units). These faults and associated additional fracturing are thought to increase the permeability of this rock unit in the area east of Milltown. The location of the line separating more from less productive areas of the aquifer was made on the basis of large-scale geological structure. However, the exact location of the change in aquifer characteristics is difficult to define due to lack of data and the probable gradational nature of the change.

Well yield and productivity data are sparse. Only six wells with productivity data are available; productivities range from class I to class III. Four Excellent and 13 Good yielding wells are recorded. Weathered dolomitised limestones and cavities have been encountered at depth in limestone interbeds in the Drumgesh Shale. Borehole logs for two productivity class II wells in the Drumgesh Shale indicate that the productive zones correspond to the weathered, clean dolomitised portion of the well (Swartz & Daly, 2002).

On the basis of available well data, intensity of fracturing and the presence of high permeability zones within the purer limestone interbeds, the Drumgesh Shale in the northeast Cavan-Monaghan area is classified as a **locally important aquifer which is generally moderately productive (Lm)**.

4.10.2 Northwest and Central Cavan region

The rock units occurring in the northwest and centre of Co. Cavan are: the Carraun Shale, Benbulbin Shale, Bundoran Shale and Drumgesh Shale. As there are limited hydrogeological data available for the Dinantian Shales and Limestones, aquifer classification is based primarily on information about lithology and fissuring within these rock units, together with inferences from similar rock types around the country.

The Carraun Shale (CN) occurs only in the Lough Allan uplands. It is primarily composed of shale with thin subordinate limestones. No well data are available for this rock unit. Based on the dominant shaly lithology of this rock unit, which is likely to inhibit the development of fissure permeability, the Carraun Shale is classified as a **poor aquifer, generally unproductive except for local zones (PI)**.

The Bundoran and Benbulbin Shales are found east of Ballyconnell and around Swanlinbar respectively. They are composed of interbedded shales and limestones. There are very limited well data available for these rock units; over the whole area these rock units occur, there are ten Good yielding wells recorded. The high degree of fine-grained shaly material in these rock units is likely to restrict groundwater circulation. Although higher permeability zones may be developed in the vicinity of fault zones and in purer limestone interbeds, in general the dominant shaly lithology of these rock units means higher permeabilities will generally be confined to local zones. These rock units are classified as **locally important aquifers, generally productive only in local zones (LI)**.

There are few data available for the Drumgessh Shale where it occurs in County Cavan west of Milltown, and in Leitrim. Ten Good well yields are recorded, together with three well productivities in Classes III, IV and V. No data are available relating to weathering and dolomitisation. Primarily on the basis of lithology, and in the absence of any information regarding dolomitisation or dissolution, the Drumgessh Shale in Central Cavan (west of Milltown) and in Leitrim is classified as **locally important, generally productive only in local zones (LI)**.

Table 4.10 Summary of factors used to classify the Dinantian Shale and Limestone Aquifers

Factor	Northeast Cavan-Monaghan	Central and Northwest Cavan		Northwest Cavan
Rock Type	Drumgessh Shale: Shales & mudstones with subordinate limestones and dolomites.	Drumgessh Shale: Shales & mudstones with subordinate limestones.	Bundoran and Benbulbin Shales: interbedded shales and limestones	Carraun Shale: shale with thin subordinate limestones
Structure	Frequent North-south faulting and associated fracturing.	-	Significant localised NE-SW faulting in Benbulbin.	-
T values	200 m ² /d	No data	No data	No data
Productivity	1 Class I; 4 Class II; 1 Class III	1 each of Class III, Class IV and Class V	-	-
Borehole Yields	3 Excellent yields 13 Good yields	14 Good yields	10 Good yields	-
Springs	No High yielding springs	No High yielding springs	No High yielding springs	No High yielding springs
Dolomite	Dolomite and cavities recorded.	None recorded but potentially in purer limestone interbeds.	-	-
Karst	-	-	-	-
Classification	Lm	LI	LI	PI

4.11 Classification of the Dinantian Mixed Sandstone, Shale and Limestone Aquifers

The distribution of the rock type is presented in Map 1, while the aquifer is depicted in Map 5. The aquifer grouping consists of rock units composed of interbedded sandstones, shales and limestones. The different rock units that comprise this aquifer group are listed in Table 4.2 and discussed below.

The Meenymore rock unit is found on the flanks of Slieve Rushen and the Cuilcagh Mountains. The Meenymore is comprised of shales interbedded with laminated limestones, mudstones, sandstones and dolomites. It also contains evaporite deposits. At Drumhurrin, a borehole intersected over 6 m of gypsum at a depth of 140 m, close to the base of the rock unit. The rock unit ranges in thickness from no more than 20 m thick near Meenymore, County Leitrim to approximately 240 m on Slieve Rushen. The variations in thickness of the unit are partly because of the topography of the upper surface of the underlying Dartry Limestone, but also because of regional and fault-controlled local differential subsidence (Sevastopulo & Jackson, 2001). The Bellavally Shale occurs in the Lough Allen uplands, above the Meenymore rock unit. It is comprised of grey limestone, shale, laminated dolomicrite or micrite with evaporite beds, silty mudstone and thin bedded sandstones and siltstones. The unit is 33 m

thick northeast of Drumshambo, County Leitrim, but is uniformly thicker in County Fermanagh (Mac Dermot *et al*, 1996). The Doobally Sandstone member consists of sandstone with subordinate shales and siltstones. It is thickest at 17m near Doagh, and thins southward to no more than 1.5m thick in Leitrim.

In the Stradone area, there was insufficient information to differentiate the Dinantian rocks on the bedrock map (Geraghty, 1997). They have been assigned as undifferentiated Dinantian (DIN) and include a variety of limestone, shales and dolomites.

Groundwater in the Dinantian Mixed Sandstones, Shales and Limestones in Ireland will circulate primarily through fissures, as these rocks do not possess significant intergranular permeability. The rock units in the group are composed of a mixture of interbedded shales and limestones with some sandstone which would generally be expected to have low fissure permeability, except where more open faulting and associated fracture occur in the sandstone beds and where dissolution and dolomitisation of purer limestone interbeds or evaporites have enhanced permeability. Development of fissure permeability will generally tend to be confined to weathered zones close to the surface of the rock and in the vicinity of fault zones. While the presence of shale is likely to result in lower permeabilities, the varied nature of the rock units in this group, with the presence of sandstone and limestone beds means that these rock units are unlikely to be consistently poorly permeable. However, the shales will act to restrict large-scale development of permeability and development of interconnected fissuring at depth unless there is a high density of faulting and associated fracturing. High sulphate concentrations deriving from the dissolution of evaporite minerals may occur in groundwaters abstracted from these rock units.

As there are limited hydrogeological data available for the Dinantian Sandstones Shales and Limestones, aquifer classification is primarily based on what is known about the lithology and fissuring within these rock units, and inferences from experiences in areas where more data are available. The assessments of aquifer classification are discussed below, and summarised in Table 4.11.

In the absence of any well data or other information relating to the hydrogeology of these rock units the Bellavally Shale and Doobally Sandstone are classified on the basis of lithology and inferences from data available for the similarly variable Boyle Sandstone. While the presence of shale is likely to result in lower permeabilities, given the variability in the lithology of these rock units they are unlikely to be consistently poorly permeable and are classified as **locally important aquifers, generally moderately productive except in local zones (LI)**.

There are no well data available for the Meenymore Formation where it occurs skirting the Lough Allen uplands. Based on lithological descriptions alone the Meenymore Formation would seem to be very similar to the majority of the rock units in this group which have been classified as **locally important aquifers, moderately productive only in local zones (LI)**.

Described as a variety of limestones, shales and dolomites, there are no well data available for the rock unit near Stradone. In the absence of more detailed information on the lithology of these rocks, and given the suggested presence of limestones and dolomites, the Undifferentiated Dinantian (DIN) is classified as **locally important aquifers generally moderately productive (Lm)**.

Table 4.11 Summary of factors used to classify the Dinantian Mixed Sandstone, Shale and Limestone Aquifers

Factor	Bellavally Shale (BE), Doobally Sandstone (BEdo), Meenymore (ME)	Dinantian Undifferentiated Limestone (DIN)
Rock Type	Mixed sandstone, shale and limestone.	Limestones, shales and dolomites.
Structure	-	-
T values	5 – 70 m ² /d *	-
Productivity	Spread across classes III, IV and V*	-
Borehole Yields	Several Good yields, one Excellent yield in analogous rock unit.	Many Excellent well yields in analogous rock unit.
Springs	No High yielding springs	No High yielding springs
Dolomite	Depositional dolomite and evaporites.	Dolomite described.
Karst	-	-
Classification	LI	Lm

**Values are for the Boyle Sandstone, a similar rock unit*

4.12 Classification of the Dinantian Pure Bedded Limestone and Dinantian Pure Unbedded Limestone Aquifers

The rock units in the Dinantian Pure Bedded Limestone group generally comprise pure, pale grey, well-bedded, fine-to coarse-grained limestones and are listed in Table 4.2, and described in Table 2.1 and Section 2.3. These limestones are often fossiliferous, and can have considerable variations in grain size and the degree of re-crystallisation, and the occurrence of chert and shale bands. The Unbedded Pure Limestones are described with the bedded limestones, since they have very similar aquifer characteristics; in other areas of the country, pure limestones that are unbedded often have poorer aquifer characteristics than pure bedded limestones.

The rocks outcrop and subcrop mainly across north central County Cavan, with smaller occurrences in the very north, east and south of the county. The limestone area in the very north of the county is part of the 'Northwestern Plateau'. The limestones that underlie much of north central Cavan (from Brackley and Bunerky Lough in the west, to east of Ballyconnell, to Derrycassan Lough in the south) are the same as those of the Northwestern Plateau. They differ in that the north central Cavan area is lower-lying, and is also covered with thicker subsoils. In the far east of the County, the pure limestone belongs to the Milverton Group, which mainly occurs in Counties Monaghan and Meath. The pure bedded limestones in the south of the county are either part of the Meath Group (see Table 2.1) or are Undifferentiated Viséan limestones. The distribution of the rock unit group is presented in Map 1, while the aquifer classification is depicted in Map 5.

In general, the absence of clay minerals within the pure limestone beds and their generally shale-free nature makes them more brittle than their impure limestone counterparts, resulting in the greater development of fracturing, and hence permeability. These rocks, because of their purity, are also susceptible to solution and karstification. The rock's permeability depends on the presence of fissures, faults and joints along which groundwater can flow. Jointing developed in the limestones has allowed the percolation and flow of water in an extensive fracture network. Bedding planes can also act as preferential flow pathways. The enlargement by solution of these planar features often further enhances the bulk permeability of the pure bedded limestones. Karstification can be accentuated along structural features such as fold axes and faults and can result in high permeability and throughput in relatively narrow zones.

The development of karst results in distinctive features of topography, hydrology and hydrogeology. The main characteristic karst features include turloughs, swallow holes, sinking streams, sparse or intermittent streams, limestone pavement, dry valleys, caves and large springs.


4.12.1 North Cavan (the Northwest Plateau) and North Central Cavan

The Northwestern Plateau that spans Counties Sligo, Leitrim, Cavan and Fermanagh is largely a dissected plateau with caps of shale and sandstone on some of the mountains. Most karst features (including caves and potholes) in the northwestern area have developed around the edges of the mountains and on the sides of the associated valleys, which are capped with impermeable rocks off which streams drain (Map 4). In areas where the shale caps have been eroded and surface drainage is therefore not concentrated, swallow holes have not developed and the surface is characterised by enclosed depressions, dry valleys and limestone pavements. Recharge is generally through a diffuse system of enlarged joints.

The River Shannon itself emerges at a karst feature, the ‘Shannon Pot’ in Co. Cavan. While this was once thought to be the source of the River Shannon, research by Gunn (1982) suggests that the Shannon originates in Co. Fermanagh on the Cuilcagh Mountains, sinks, and then travels underground via the Shannon Caves to re-emerge at the Shannon Pot.

The numbers of different karst features known in County Cavan are shown graphically in Figure 4.7.

Figure 4.7 Known karst features in the Dinantian Pure Bedded and Unbedded Limestone Aquifers in County Cavan.

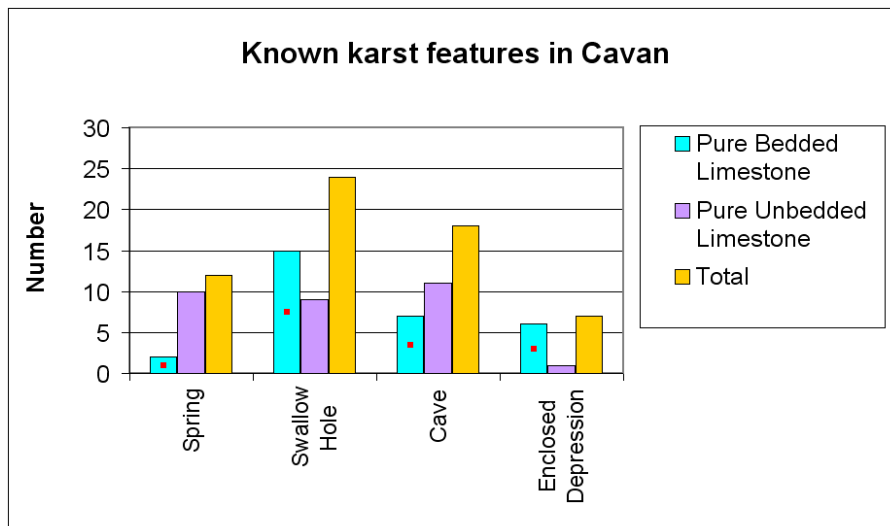


Within the areas underlain by these rocks, where subsoil cover is thin or comprises high permeability gravels, stream densities tend to be low and there is typically a high degree of interconnection between surface waters and groundwaters. Where subsoil is thicker and/or lower permeability, drainage densities are controlled primarily by subsoil characteristics. Recharge will tend to be diffuse.

Little groundwater data exist for the Northwestern Plateau area. However, it is thought that, like the Burren area (for which much work has been carried out), there is no continuous water table surface over much of the upland area. Instead, water is channelled along conduits and fissure systems and therefore rises to different levels across the region. In the lower-lying areas of north central Cavan, a more continuous water table is probable.

As with most karstic systems, permeability and transmissivity data are very variable. National data indicate that transmissivities can range from $<2\text{m}^2/\text{d}$ to several $1000\text{'s m}^2/\text{d}$. Well productivity data for both upland and lowland karst limestones in the West and Northwest (from Co. Clare to Co. Cavan) are spread across all categories (Figure 4.8). Usually in karstified limestones, well productivities are variable and most high productivities tend to correspond to intersected karst conduits. Low productivity or failed wells can be common, reflecting the lack of flow between individual conduits. In this type of aquifer, across the west and northwest, there are 19 High yielding springs, indicating

significant concentration of flow (see Section 4.4.4), in addition to 66 known Excellent yielding wells and 166 Good yielding wells. In County Cavan, there are 6 known Excellent yielding wells and 15 Good yielding wells. There are two Class II, one Class IV and two Class V productivity wells known in Cavan. Tracer testing in the northwest of Cavan indicate that groundwater flow velocities range from about 50 m/hr up to 250 m/hr (average 120m/hr).

Figure 4.8 Well Productivities in the Dinantian Pure Bedded Limestone Aquifers in Northwest and West

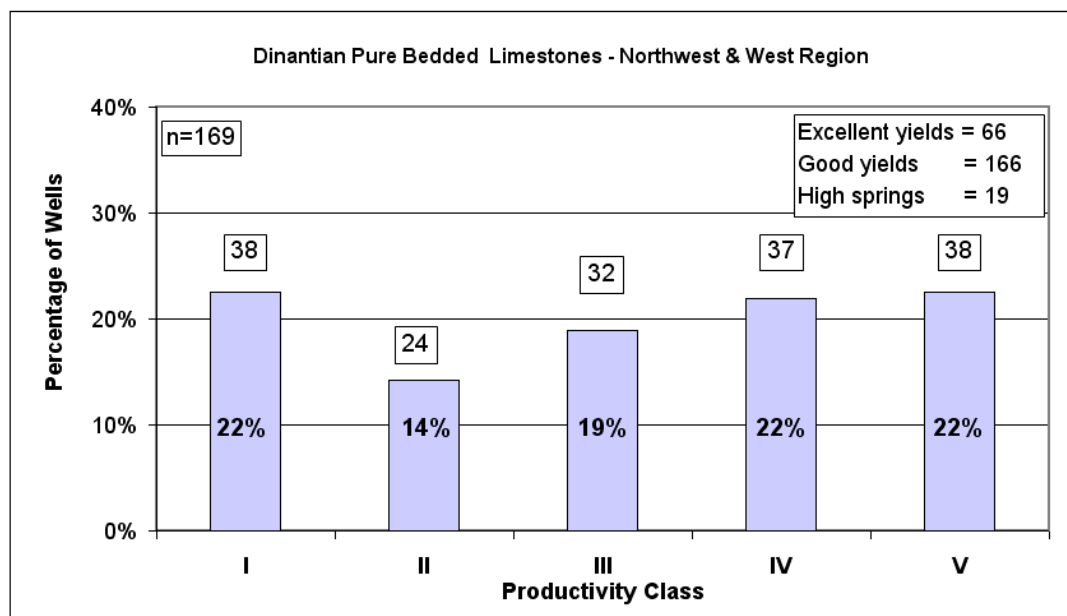


Depending on the known nature of the karstification (e.g. highly conduitised), and the size of the limestone, the Dinantian Pure Bedded Limestones and Pure Unbedded Limestones (listed in Table 4.2) are classified as **regionally important karstified aquifers (Rk)**, or **regionally important karstified aquifers that are dominated by conduit flow (Rkc)**, or **locally important karstified aquifers (Lk)**.

4.12.2 East Cavan

A small area (<1 km²) of east Cavan, approximately ½ km east of Kingscourt, is mapped as Milverton Group Limestone. This is described as clean, ‘conspicuously’ bedded limestones showing evidence of karstification. It is also reported to be dolomitised (Jackson, 1955), which increases the permeability and porosity of the limestone. Karst features are found throughout this aquifer in County Monaghan (Figure 4.9). Extensive field mapping of the karst features in this aquifer has not been carried out, and the number of karst features on record is likely to be only a small proportion of those present. Numerous springs are recorded within this aquifer, although not all of these are related to karstification.

Figure 4.9 Recorded karst features in the Milverton Group Limestones in County Monaghan (from Swartz and Daly, 2002)

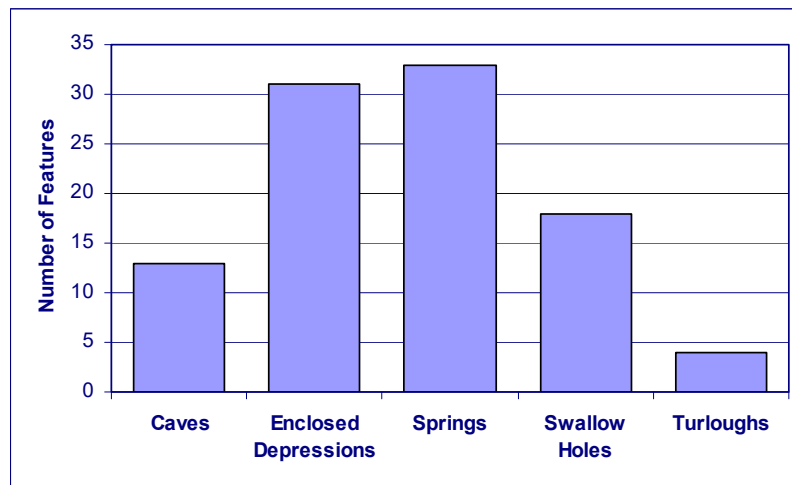

Limited tracer tests at some of the sinkholes and springs in Co. Monaghan were undertaken to investigate the hydrogeological characteristics in the vicinity of a landfill site at Annahaia Townland (Mullen, 1986). The maximum velocity measured during the test was 60 m/hr (1.4 km/d). A high degree of interconnection between surface water and groundwater is expected, as water flows into swallow holes and rises at springs. Fifteen wells have useful data for this aquifer; all of these wells have Good yields, eight of which have yields above 400 m³/d (Excellent yields). Well productivities fall into classes I (two) and II (five) and III (one).

On the basis of karstification and yield information, mainly in County Monaghan, but bearing in mind the very limited size of the occurrence in County Cavan, this limestone is classed as a **locally important karstified aquifer (Lk)**.

4.12.3 South Cavan

The pure bedded limestones in the south of the county comprise: the Stackallan member of the Meath rock unit (see Section 4.7.3 and Table 4.2); and Undifferentiated Visean Limestones.

The Stackallan limestone can be dolomitised, and karst has been recorded in it (McConnell *et al.*, 2001). In South Cavan, the Stackallan limestone is compartmentalised by faulting, and is limited in thickness, ranging from 200 m to about 1,000 m width on the map. Due to their highly faulted nature and limited extent, these limestones are classed as a **locally important aquifer, generally moderately productive (Lm)**.

Little is known about the Undifferentiated Visean Limestones. They are described generally as limestones that were deposited in shallow seas, so they are likely to be pure and bedded. These characteristics lend themselves to fracturing and karstification. The area of these limestones within County Cavan is limited, but the entire rock unit is almost 50 km². It is therefore classed as a **regionally important karstified aquifer that are dominated by diffuse flow (Rkd)**.

4.12.4 Central Cavan

Approximately 5 km southwest of Crossdoney, there is a very small (<0.2 km²) area of Croghan limestone. It is bounded by faults, and is surrounded by the Lower Palaeozoic altered sandstones and shales (Section 4.5). From what is known about the Croghan Limestone elsewhere, it assumed that this small inlier of limestone will be karstified to some degree. It is therefore classed as a **locally important karstified aquifer (Lk)**.

The aquifer classifications are summarised in Table 4.12.

Table 4.12 Summary of factors used to classify the Dinantian Pure Bedded Limestones and Pure Unbedded Limestones

Factor	South Cavan		East/Central Cavan	North and Northwest Cavan
	Pure Bedded Limestone – Stackallan Limestone (MEst)	Pure Bedded Limestone – Undifferentiated Visean Limestone (VIS)	Pure Bedded Limestone – Milverton Group (MLV); Croghan Limestone (CL)	Pure Bedded Limestone; Pure Unbedded Limestone – Dartry Limestone and members (DA, DAcr, DAKn, DAMk, DACw, crDA)
Rock Type				
Structure	Highly faulted	-	Fault-bounded	Faulted and fault-bounded by N-S and E-W faults.
T values	No data	No data	Data in Monaghan indicate 20-270 m ² /d.	<1-1,000's m ² /d.
Productivity	No data	No data	Concentrated in Classes I and II.	Productivities across all Classes.
Borehole Yields	No data	No data	8 Excellent yields 7 Good yields.	66 Excellent yields; 166 Good yields in this limestone type.
Springs	No High yielding springs.	No High yielding springs.	No High yielding springs.	High yielding springs in this limestone type.
Dolomite	Identified	-	Not described	
Karst	Reported	Presumed	Significant	Significant
Classification	Lm	Rkd	Lk *	Rkc/Rk/Lk **

* Note: classification of Lk due to restricted size.

** Note: classification depends on extent and nature of karstification, and size of contiguous limestone area.


4.13 Classification of the Dinantian Upper Impure Limestone Aquifers

The distribution of the rock type is presented in Map 1, while the aquifer is depicted in Map 5. The aquifer grouping generally comprises impure, dark grey to black, well-bedded, fine- to coarse-grained limestones. In County Cavan, the grouping includes the Calp, the Kilmore Slump member, the Glencar Limestone and the Lucan rock unit (Table 4.2) where they occur in small areas in the centre and south of the County. These rock types occupy large areas of East Connaught, the Midlands and North Leinster.

In these rock units there is often almost no deep permeability; groundwater movement is mainly restricted to the weathered and shallow subsurface zone, and is often concentrated in the upper few metres or tens of metres of fractured bedrock and in cleaner limestone beds. Therefore, the bulk (large-scale) fracture permeability, with the possible exception of areas near faults, is generally low. Even where highly transmissive fault zones are encountered, the ability to sustain the flow is generally absent. This is because, although the fault zone is permeable, there are insufficient connected fracture networks that can create sufficient storage or can transmit water quickly enough to the fault zone. Hence, the aquifer does not store sufficient water to maintain outputs during long periods without recharge. The water table usually closely mirrors topography. In low-lying areas, groundwater levels are often within 1-2m of ground surface, and usually within 10m of ground level in more elevated places. A relatively high density of streams and surface ditches is common (Daly *et al.*, 1998).

As part of the National Aquifer mapping, well productivity and yield data for this rock unit group were examined systematically across the country in order to identify trends in the data. A map of well productivities and yields shows that their values vary from area to area. In the Limerick, South and North Midlands area, productivities are skewed to lower values (Figure 4.10). Sixteen “Excellent” yields, 81 “Good” yields, and one “High” yielding spring are noted. There are no High yielding springs in this rock unit in Cavan/North Midlands. There are numerous small seeps and springs within the Upper Impure Limestones. The Upper Impure Limestones are not generally noted for the development of karst features.

Figure 4.10 Well Productivities in the Dinantian Upper Impure Limestones in the Limerick, South and North Midlands regions

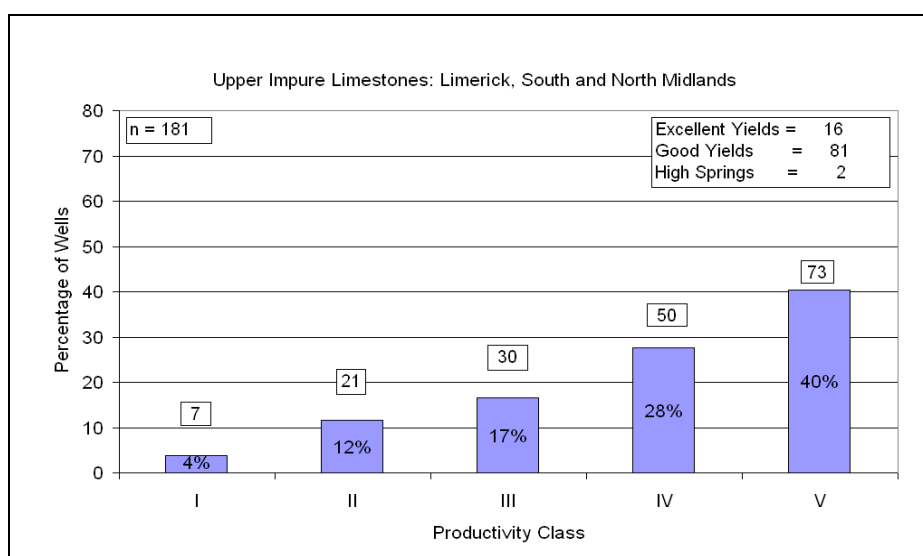

High concentrations of iron, manganese and hydrogen sulphide are also common, providing considerable problems for those with private wells. This effect is sometimes the result of contamination, but is often a consequence of the combination of both the natural iron sulphide in the shalier parts of the rock formation, and the generally slow groundwater circulation.

Based on generally low productivity values, the occasional Excellent borehole yield and the limited development of fracturing and jointing except in the vicinity of fault zones, the Upper Impure Limestone in this region is classed as a **locally important aquifer** which is **moderately productive only in local zones (LI)**. These factors are summarised in Table 4.13.

Table 4.13 Summary of factors used to classify the Dinantian Upper Impure Limestone Aquifers

Factor	Limerick, South and North Midlands
Rock Type	Impure, thin-bedded limestone with shale layers.
Structure	Moderate degree of faulting and folding. Folding intensity decreases northwards.
Hydrology	Moderately high drainage density. Drainage generally poor.
Well Hydrographs	-
T values	5-90 m ² /d
Well Productivity	Skewed towards the lower productivities (Categories IV and V).
Borehole Yields	Good yields frequently attainable, Excellent yields possible.
Springs	Small springs and seeps common. No High springs known in Co. Cavan.
Dolomite	Patchily dolomitised in areas.
Karst	Karst patchily developed. Known over most of area.
Classification	LI

4.14 Classification of the Namurian Aquifers

Namurian-age rock units encompass a range of rock types which generally comprise shales, siltstones and sandstones. In County Cavan, the majority of these rock units cap the hills in the uplands northwest of Lough Allen. There is also a very small area in the east of County Cavan, near to Kingscourt. The distribution of the rock type is presented in Map 1, while the aquifer is depicted in Map 5. The different rock units that comprise this aquifer group are listed in Table 4.2 and discussed below.

In general, the Namurian rock unit permeabilities depend on the presence of faults and joints along which groundwater can flow. In the shaly portions of the unit, movement of water along faults and joints is likely to be impeded by infilling of weathered shale and clay. The more productive portions of the unit are likely to be the thicker beds of sandstone, where brittle fracturing is likely to have occurred, and where groundwater flow is likely to be better developed.

High concentrations of iron, manganese and hydrogen sulphide are common in groundwater from the Namurian aquifers, providing considerable problems for those with private wells. This effect is sometimes the result of contamination, but is often a consequence of the combination of both the natural iron sulphide in the shalier parts of the rock formation, and the generally slow groundwater circulation.

4.14.1 Northwest Cavan

In northwest County Cavan, the Namurian rocks are typically folded into NW-SE trending synclines, which are relatively open. Given the high shale content and therefore low permeability of this aquifer, flow paths are short, and seeps and low flow springs are commonplace. Relatively high densities of streams and surface ditches are common.

The fractured upper and more permeable layer is unlikely to provide sustainable enough supplies for larger wells, and will often contain lesser quality water than the deeper permeable horizons. If gravel/sand deposits occur above the bedrock aquifer, they can help to provide flow and storage to the aquifer, and to protect against pollution. In general, optimum well yields from the Namurian aquifers will be obtained from boreholes drilled into one of the fault zones and penetrate at least 50-100m of the aquifer.

As there are limited hydrogeological data available for the Namurian rocks, aquifer classification is primarily based on what is known about the lithology and fissuring within these rock units, and inferences from experiences in areas where more data are available.

Based on a lithology of mixed sandstones, siltstones and some shales, productivity values clustering in Categories III to IV and limited development of fracturing and jointing except in the vicinity of fault zones, the Namurian sandstones – Lackagh Sandstone (LH) and Briscloonagh Sandstone (BR) – are classed as a **poor aquifer, generally unproductive except for local zones (PI)**.

Based on low productivity and yield values and expected low permeabilities in shale rocks, the Namurian shales (Gowlaun Shale (GO), Dergvone Shale (DE)) are classed as a **poor aquifer that is generally unproductive (Pu)**.

4.14.2 East Cavan

In the east of the county, the rocks dip westwards in fault-bounded blocks. In the Kingscourt area, the Cabra and Corratober Bridge Formations (Undifferentiated Namurian) appear to have high productivities and Excellent borehole yields. Despite being less than 20 km² in area (in total, with about 0.25 km² occurring in County Cavan), 10 productivity category I and II wells are found, and 'Excellent' yielding wells are the norm. A transmissivity of around 100 m²/d has been estimated, again indicating that these rocks can supply significant quantities of water, sufficient to provide for public water supplies.

Although the Namurian aquifer in the Kingscourt area has high productivity boreholes, due to its limited size it is classed as a **locally important, generally moderately productive aquifer (Lm)**.

The assessments of aquifer classification discussed above are summarised in Table 4.14.

Table 4.14 Summary of factors used to classify the Namurian Aquifers

Factor	Northwest Cavan		East Cavan
	Namurian Shales – Gowlaun Shale (GO); Dergvone Shale (DE)	Namurian Sandstones – Lackagh Sandstone (LH) and Briscloonagh Sandstone (BR)	Undifferentiated Namurian – Cabra (CB) and Corratober Bridge (CO) Formations
Rock Type			
Structure	Gentle synclinal folds; N-S and WNW-ESE cross-cutting faults.		Fault-bounded, faults known within major blocks.
T values	No data	No data	Data in Monaghan indicate 100 m ² /d.
Productivity	No data	Concentrated in Classes III to IV.	Concentrated in Classes I and II.
Borehole Yields	No data	No data	Excellent yields are the norm.
Springs	Numerous small springs, no High yielding springs.		No High yielding springs.
Dolomite	-	-	-
Karst	-	-	-
Classification	Pu	Pl	Lm

4.15 Classification of the Permo-Triassic Sandstone, Mudstone and Gypsum Aquifers

Rocks of Permo-Triassic age occupy a small area in the very east of County Cavan. The rock units are mapped as small fault-bound band to the southwest of Carrickmacross that extends into Counties Monaghan and Meath. The Kingscourt Sandstone unit is composed of approximately 80 m of siltstone overlain by 200 m of sandstone. The Kingscourt Gypsum unit is composed of mudstones with thick (10-20 m) gypsum deposits. A water table map prepared as part of the NERDO report (AFF and GSI, 1981) focuses on the Mullaghfin Limestone, but suggests that groundwater in these rock units flows south-southeast towards the River Lagan. The factors used to assign aquifer classifications to these rock units are discussed below, and summarised in Table 4.15.

4.15.1 Kingscourt Sandstone Aquifer

Groundwater flow in this aquifer is expected to be largely along faults and fractures within the sandstones. Fractures developed in the sandstone portions of these units are likely to be open. Additionally, this sandstone unit is poorly cemented and often very weathered, which will further increase permeability. Sandstones of similar age and depositional environment found in Northern Ireland are reported to have significant primary porosity, meaning that the permeability is not dependent wholly upon fractures and fissures.

Due to the limited extent of this rock unit, there are few hydrogeological data available for these rocks. The hydrogeological map of Northern Ireland shows these materials as a “highly productive aquifer in which intergranular flow is significant”, and having a transmissivity of 100 m²/d (BGS, 1994). It is assumed this is also the case in the Kingscourt Sandstones, although little research has been done on this topic. The fact that the sandstones are weathered, not very well cemented and fractured suggests that they are probably capable of transmitting significant volumes of groundwater.

Three Excellent wells are recorded in the Kingscourt Sandstone, with productivities ranging from class I to III. As part of the NERDO work, a well was drilled at Mullantra in 1981 to investigate the water

supply potential of these sandstones (AFF and GSI, 1981). The sandstone encountered in the well was very friable and liable to collapse. The well yielded 915 m³/d, with a specific capacity of 23 m³/d/m (productivity class II) and a transmissivity of 48 m²/d. Additionally, the aquifer was found to be locally confined by over 40 m of till (boulder clay) at this location. Two trial wells drilled for the Kingscourt water supply (in Counties Cavan and Meath) indicated estimated yields of 500 m³/d and 1030 m³/d, respectively. Specific capacities for these wells are 15 and 105 m³/d/m (productivity classes I and III).

Overall, well yields, productivities and transmissivities from these units suggest that these rocks are capable of supplying significant quantities of water. Since it is not aerially extensive, however, the Kingscourt Sandstone is **classified as a locally important, generally moderately productive aquifer (Lm)**.

4.15.2 Kingscourt Gypsum Aquifer

The Kingscourt Gypsum unit is composed of mudstones with thick (10-20 m) gypsum deposits. The high proportion of bedded, fine grained material is likely to restrict groundwater circulation in this aquifer. Where faults cut the aquifer, they are likely to increase permeability, although the high clay content of the mudstones will hinder clean fracturing. Groundwater flow through the aquifer is likely to be restricted to the upper few metres, where weathering and fracturing are probably most intense.

Water levels in one well in the Kingscourt Gypsum were monitored for over a year, showing an annual variation of 6.9 m. This is indicative of low aquifer storativity and/or low permeability. There is little hydrogeological information available for these rocks, with only one well with a yield of over 400 m³/d recorded in this unit. Mining has revealed karst features within the gypsum units that can transmit groundwater. However, the quality of water from the gypsum units would be unacceptable for drinking as a result of high sulphate concentrations.

Given the fine grained nature of this unit, widespread secondary permeability is unlikely to occur. This suggests that it is a **poor aquifer, which is generally unproductive except for local zones (Pl)**.

Table 4.15 Summary of factors used to classify the Permo-Triassic Sandstone, Mudstone and Gypsum Aquifers

Factor	Kingscourt Sandstone	Kingscourt Gypsum
Rock Type	Bedded sandstones, weakly cemented.	Bedded mudstones and gypsum
Structure	Fault-bounded	Fault-bounded.
T values	20-100 m ² /d.	-
Productivity	Limited data in Classes I, II and III.	-
Borehole Yields	3 Excellent yields.	1 Excellent yield.
Springs	No High yielding springs known.	No High yielding springs known.
Dolomite	-	-
Karst	-	Karst known from surface features and from subsurface workings.
Classification	Lm *	Pl

** Regionally important aquifer classification not given due to limited extent.*

5 Groundwater Vulnerability

5.1 Introduction

The term ‘Vulnerability’ is used to represent the intrinsic geological and hydrogeological characteristics that determine the ease with which groundwater may be contaminated by human activities (DELG/EPA/GSI, 1999).

The vulnerability of groundwater depends on:

- the time of travel of infiltrating water (and contaminants)
- the relative quantity of contaminants that can reach the groundwater
- the contaminant attenuation capacity of the geological materials through which the water and contaminants infiltrate.

All groundwater is hydrologically connected to the land surface along a ‘pathway’ through the overlying geological layers; the effectiveness of this connection determines the relative vulnerability to contamination. Groundwater that readily and quickly receives water (and contaminants) from the land surface is more vulnerable than groundwater that receives water (and contaminants) more slowly and in lower quantities. The quantity of contaminants which reach groundwater is a function of the vertical hydraulic gradient and the following natural geological and hydrogeological attributes of any area:

- (i) the type and permeability of the subsoils that overlie the groundwater
- (ii) the thickness of the unsaturated zone through which the contaminant moves
- (iii) the recharge type – whether point or diffuse

In other words, vulnerability is based on evaluating the relevant hydrogeological characteristics of the protecting geological layers along the pathway, and the possibility of bypassing these layers. In summary, the entire land surface is divided into four vulnerability categories: **Extreme**, **High**, **Moderate** and **Low** based on the geological and hydrogeological characteristics. Further details of the hydrogeological basis for vulnerability assessment can be found in the ‘Groundwater Protection Schemes’ (DELG et al., 1999).

The subsoil types described in Section 3 have been assessed and incorporated into permeability regions, which are described in this chapter. Permeability boundaries may cross mapped subsoil units in order to show areas of similar permeability. The Vulnerability Map (Map 6) shows the vulnerability of the first groundwater encountered, in either sand/gravel or bedrock aquifers, by contaminants released at depths of 1-2 m below the ground surface. The vulnerability maps are intended to be a guide to the likelihood of groundwater contamination, if a pollution event were to occur. It does not replace the need for site investigation. Additionally, the characteristics of individual contaminants are not considered.

The vulnerability map is derived by overlaying the permeability categories with the subsoil thickness, and superimposing areas with the potential for point recharge (e.g. swallow holes). There are three subsoil permeability categories: “high”, “moderate” and “low”; and five depth to rock categories: shallow rock (<1m), “<3 m”, “3 to 5 m”, “5 to 10 m” and “>10 m”. Table 5.1 describes how the criteria combine to derive a vulnerability assessment.

Table 5.1 Vulnerability Mapping Guidelines (adapted from DELG et al., 1999).

SUBSOIL THICKNESS	HYDROGEOLOGICAL CONDITIONS				
	DIFFUSE RECHARGE: SUBSOIL PERMEABILITY AND TYPE			POINT RECHARGE	UNSATURATED ZONE
	High Permeability (sand/gravel)	Moderate Permeability (e.g. sandy subsoil)	Low permeability (e.g. Clayey subsoil, clay, peat)	(e.g. within 30 m radius of swallow holes)	(Sand/gravel aquifers only)
0 - 3.0 m	Extreme	Extreme	Extreme	Extreme	Extreme
3.0 - 5.0 m	High	High	High	N/A	High
5.0 - 10.0 m	High	High	Moderate	N/A	High
> 10.0 m	High	Moderate	Low	N/A	High
Notes: (i) N/A = not applicable. (ii) Permeability classifications relate to the engineering behaviour as described by BS5930. (iii) Release point of contaminants is assumed to be 1-2 m below ground surface. (iv) Outcrop and shallow subsoil (i.e. generally <1.0 m) areas are shown as a sub-category of extreme vulnerability.					

5.2 Sources of Data

Specific vulnerability field mapping and assessment of previously collected data were carried out as part of this project. Fieldwork assessments were based on drilling of one hundred and forty-three subsoil sampling holes whereby the permeability of the different subsoil deposit types (Map 2) was assessed, so that they could be subdivided into the three permeability categories. Assessment and sampling of exposed subsoil sections was also undertaken (forty-two sites), and focused particularly on permeability boundaries. Subsoil assessment involved:

- Description of the engineering properties in the vicinity of the drilled locations using techniques based on BS5930:1999 (British Standards Institution, 1999).
- Collection of subsoil samples for laboratory particle size analyses (63 samples in total).
- Assessments of recharge acceptance indicators such as natural and artificial drainage density and vegetation.

Details on analytical methodologies are presented in Section 5.3.

The following additional sources of data were used to assess the vulnerability and produce the map:

- the FIPS-IFP Soil Parent Materials Map (see Chapter 3, Map 2);
- the Bedrock Geology Map sheets 7, 8, 12 and 13, and associated booklets;
- the Geological Survey of Ireland well database;
- the Department of Communications, Energy & Natural resources Open Files database;
- the Geological Survey of Ireland karst database. This was used to give information on areas of point recharge;
- the Geological Survey of Ireland geotechnical database;
- the Water Framework Directive interim vulnerability map and associated drilling data;
- Cavan County Council roads section Site Investigation Reports;
- Selected T-test and BS5930 results from site suitability assessments.

5.3 Permeability Assessment Methodology

The permeability and vulnerability categories are qualitative regional assessments of the subsoils based on how much potential recharge is infiltrating and how quickly potential contaminants can reach groundwater. The permeability of subsoils is largely a function of (a) the grain size distribution; (b) the amount (and sometimes type) of clay size particles present; and (c) the degree of sorting and organisation by size of grains. It can also be influenced by other factors such as discontinuities (e.g. cracks, plant roots and isolated higher permeability beds or lenses) and density/compactness. In glacial

tills, which are the most common subsoils in Cavan, these permeability characteristics also determine the engineering behaviour of the materials (Swartz, 1999) as described using the subsoil description and classification method, derived from BS5930:1999 (British Standards Institution, 1999). This method is therefore used to assess the permeability of the subsoils at each exposure, supported by recharge and drainage observations in the surrounding area.

Each of the approaches used in assessing the permeability is discussed briefly here:

Subsoil Description and Classification Method: (derived from BS5930). Using this method, subsoils described as sandy CLAY or CLAY have been shown to behave as low permeability materials. Subsoils classed as silty SAND and sandy SILT, on the other hand, are found to have a moderate permeability (Swartz, 1999). In general, sands/gravels which are sorted and have a low fines content are considered to have a high permeability. However, some sands and gravels found in Cavan are not as sorted as many fluvially deposited gravels elsewhere, and have sufficient clay and silt content in the matrix to behave as a moderate permeability material.

Particle size analyses: The particle size distribution of sediments describes the relationships between the different grain sizes present. Well-sorted sediments such as water-lain gravel (high permeability) or lacustrine clays (low permeability) will, on analysis, show a predominance of grain sizes at just one end of the scale. Glacial tills, on the other hand, are more variable and tend to have similar proportions of all grain sizes. Despite their complexity, evaluation of the grain size analyses for a range of tills in Ireland has established the following relationships (Swartz, 1999; Fitzsimons, pers. comm., 2002):

- i. Samples described as moderate permeability based on observations of recharge indicators (vegetation, drainage density) typically have less than 35% silt plus clay.
- ii. These ‘moderate permeability’ samples also tend to have less than 12% clay.
- iii. Samples described as low permeability frequently have more than 50% silt plus clay.
- iv. These ‘low permeability’ samples also tend to have more than 14% clay.
- v. High permeability sand/gravel deposits tend to be sorted and have less than 7.5% silt plus clay (O’Suilleabhain, 2000).

Parent Material of the Subsoil: The parent material, usually the bedrock, plays a critical role in providing the particles which have created the different subsoil permeabilities. Sandstones, for example, give rise to a high proportion of sand size grains in the deposit matrix, clean limestones provide a relatively high proportion of silt, while shales, shaly limestones and mudstones break down to the finer clay size particles. A good knowledge of the nature of the bedrock geology is, therefore, critical. It is also useful to know the direction of movement of the glaciers and the modes of deposition of the sediments as these will dictate where the particles have moved to, how finely they have been broken down, and what the relative grain size make-up and packing are. Understanding the processes at work enable predictions to be made where observations are lacking.

Recharge Characteristics: Examining the drainage and recharge characteristics in an area gives an overall representative assessment of the permeability. Poor drainage and vegetation suggest low permeability subsoils if iron pans, underlying low permeability bedrock, high water tables, or excessively high rainfall can be ruled out. Well-drained land suggests a moderate or high permeability if artificial drainage can be ruled-out (Lee, 1999). Much of the land in East Cavan has been improved, with large amounts of artificial drainage over a series of schemes stretching from the 1940’s until the mid 1990’s (“Farm Improvement Scheme”, “Land Project Scheme”, “Western Drainage Scheme” and the “Dry reclamation Scheme”. In fact, County Cavan has had the highest amount of Government financial support for artificial drainage schemes in Ireland (pers. comm. Oliver Creegan, Dept. of Agriculture, 2006). As a result, this approach is quite difficult to use successfully in Cavan.

Soil Type: Although no specific topsoil map exists for Cavan, the Soil Map of Ireland and explanatory bulletin (Gardiner & Radford 1980) can be used to indicate broad drainage characteristics, especially where specific site recharge observations are not available. Poorly drained soils such as surface water gleys are usually related to underlying low permeability subsoil; the more free draining soils such as grey brown podzolics are more typical of the sandy and silty moderate permeability subsoil. The availability of a county specific topsoil map would have increased the confidence of some permeability boundaries, especially in areas where permeability varies.

Quantitative Analysis. From a limited number of national field permeability measurements, the boundary between moderate and low permeability is estimated to be in the range of 0.0007-0.007 m/d. While the moderate to high boundary has not yet been looked at in detail, one study suggests that this boundary may be in the region of 10m/d (O'Suilleabhain, 2000). However, permeability measurements are highly scale dependent: laboratory values, for example, are often up to two orders of magnitude smaller than field measurements, which in turn are smaller than regional assessments measured from large scale pumping tests. Thus, for regional permeability mapping, qualitative assessments incorporating the engineering behaviour of the subsoil and recharge characteristics are more appropriate than specific permeability measurements.

None of these methods can be used in isolation; a holistic approach is necessary to gain an overall assessment of each site and thereby build up a three dimensional picture of the regional hydrogeology and permeability. In any one area, as many factors as possible are considered together to try to make a balanced, defensible permeability decision. In order to extrapolate from point data to area assessments, the county is divided into permeability regions, usually on the basis of similar subsoil and/or bedrock characteristics. In parts of County Cavan, some till deposits had a similar parent material origin and indicators of permeability at the low to moderate boundary. These areas required detailed field-scale permeability mapping as there were slight variations in permeability over short distances.

It is intended that the assessments will allow a broad overview of relative permeability across the county, in order to help focus field investigations for future development projects on areas of interest. In mapping an area at County scale, the process cannot hope to be comprehensive at a site-specific level. Consequently, it is stressed that these permeability assessments are not a substitute for site investigations for specific projects. The vulnerability, which is partly based on the permeability mapping, is presented in Map 6. Details of the supporting data for each permeability decision can be found in Appendix III.

5.4 Permeability Regions


Seven broad permeability units have been defined for County Cavan using all the available data from existing site investigation work and project-specific drilling. These regions are likely to include smaller, discrete units of differing permeability which cannot be individually mapped at the scale of mapping. The presence of samples with contradicting data reflect this variability; where possible, these units have been delineated. Furthermore, mapping at a more detailed level was undertaken where such local variations are widespread. The permeability units are described in the following Section, under their 'low', 'moderate' and 'high' permeability categories.

5.4.1 Low Permeability Units

The greatest proportion of County Cavan constitutes low permeability material as most of the glacial tills have a high clay content. Peat and Lacustrine Clays are also included amongst the low permeability units. Extensive areas of peat are found in the northwest part of the county due to the increase in rainfall across Slieve Rushen and the Cuilcagh Mountains. Here, blanket peat is draped across the mountains and in the valley interdrumlin areas. Small areas of cutover peat are scattered throughout the remaining southeast and south part of the county. There are three relatively extensive areas of Lacustrine Clays to the west and south of Lough Ramor, which are likely to be thick enough

to dictate the overall permeability at these locations. The low permeability areas are depicted in Figure 5.1.

Figure 5.1 Distribution of Low Permeability Subsoils in Cavan (>3m thick)

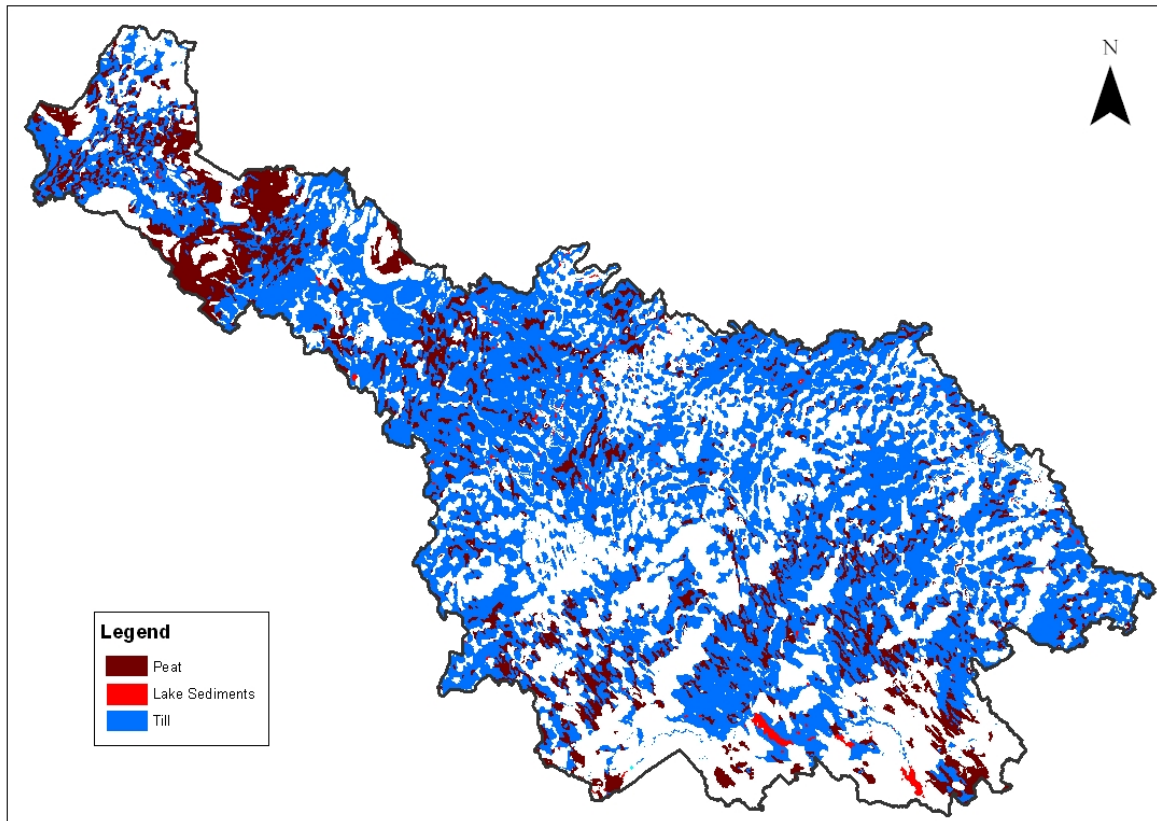

Permeability Unit 1: Central & East Cavan Till

This area comprises a large part of the county from Redhills, Butlers Bridge, Cavan Town and Arvagh, to Kilnaleck and Ballyjamesduff. The topography of the area is principally elevated hummocky land with drumlins and with low-lying drumlinised areas in the north (along Annalee River) and the south (around Lough Sheelin and Lough Ramor). The bedrock consists of Ordovician and Silurian metamorphics and volcanics, principally greywackes and shales, some sandstones, and with volcanics covering a minor aerial extent. The overlying till is a sandstone and shale till (Meehan, 2003), which was deposited by glaciers originating in the mountainous regions of Cavan and Fermanagh to the northwest. The till matrix reflects the clayey materials from which it originates. It includes a high proportion of crushed and broken shaly bedrock, particularly at the bedrock interface.

Artificial drainage is frequently seen at all elevations, though invariably around the base of drumlins. The vegetation in the area varies, partly due to intensive land management, from drumlins with rushes on the lower slopes to some completely rush covered slopes, supporting the low permeability assessment. Poaching of fields was occasionally seen, and marshy ground between elevated rocky gorse covered hills is evidence of a high water table in the area.

Of the samples collected, 78% are described as 'CLAY', and 18% as 'SILT/CLAY'. Seven of the 19 available grain size analyses have greater than 12% clay content and 14 samples have more than 35% total fines. The grain size data does highlight the mixed nature of the till matrix however, when all indicators reflecting recharge are considered, a low permeability category is supported.

Permeability Unit 4: Cavan Panhandle Till

This area, referred to in this text as the “panhandle”, describes the narrow strip in the northwest of the county. It includes the mountainous areas of Cuilcagh and Slieve Rushen, the low lying area to the south of Slieve Rushen and the low drumlinised area in the Erne Waterway basin. The bedrock is divided into three categories for the purposes of permeability potential: 1) the shales and shaly sandstones of the Namurian and the Lower Dinantian mountainous areas west of the Erne Waterway; 2) the Dinantian sandstones and limestones that occur in the centre of the Glenade valley and form Slieve Rushen; and 3) the pure bedded karstic limestone to the south and southeast of Slieve Rushen.

The characteristics of the overlying till matrix appear to have been influenced by the more clayey bedrock in the mountainous areas. The till overlying much of this unit, in the Glenade Valley, on the flanks of the mountainous areas and east of Ballyconnell, is described as a clayey shale and sandstone till, whilst above 200mOD to 250mOD it is mainly covered by blanket peat (see Permeability Unit 6). The till south of Slieve Rushen and Ballyconnell is described as a stony clayey chert and sandstone till. Two small area of Carboniferous Limestone till around Loughs Oughter and Gaffney, and Castlesaunderson Demesne are also included in this unit.

Both natural and artificial drainage density in the area is high. Vegetation includes a mixture of forestation, gorse and scrubland with some rushy fields used for grazing. The proportion of undeveloped scrubland and heath increases significantly in the Glenade Valley area, as does the extent of peat development due to high rainfall. The development of peat over moderately permeable bedrock (quartzitic sandstone) in the valley bottom suggests that the water table may be high in the area, which is confirmed by the gleyed nature of many samples.

Grain size analyses from this unit show that 6 out of 7 samples have greater than 12% clay content with over half having more than 14% clay content. The percentage of total fines for all of the samples is greater than 35%. Over 90% of the BS5930 field sample descriptions are ‘CLAY’. Therefore all evidence (descriptions, grain size analyses and recharge indicators) supports a low permeability categorisation.

Permeability Unit 8: Lacustrine Sediments

Deposits of lacustrine sediments occur throughout the county, typically as small strips around the edges of the many lakes in Cavan. Most of these deposits are likely to be too thin to influence the overall permeability. The exceptions are some relatively small lake deposits of the Erne River (in the Belturbet area) mapped as “undifferentiated lake sediments”, and three large areas of “clayey lacustrine sediments” in the southeast of the county.

The bedrock underlying the *lacustrine clays* is Silurian metasediments, whilst the Erne deposited lake sediments are on Dinantian rocks. The lacustrine clays were deposited by glacial lakes, which formed as the ice retreated and ultimately formed Lough Ramor and Lough Sheelin. These are typically very homogenous and very dense subsoils.

Rivers flowing into Lough Sheelin and out of Lough Ramor flow through the centre of these deposits. There is a distinct increase in the density of the arterial drainage network within each of the three areas, which is compatible with high density low permeability clays, and which also leaves the areas prone to flooding. Vegetation is generally marshy or wet grassland. Both drainage density and vegetation in the lacustrine clays indicate a low permeability material.

Only one BS5930 description is available for the *undifferentiated lake sediments* between Ballyconnell and Belturbet, which identified the subsoil type as CLAY. However, a strata of coarse gravel is logged under the clay (3m in thickness), which suggest that the lateral continuity of the gravels and the clay may vary in this deposit type. Therefore the undifferentiated lake sediments are categorised as moderate permeability, which concurs with the national categorisation of this material.

Permeability Unit 6: Blanket Peat, Cutover Peat and Fens

Deposits of blanket peat drape all the mountains in northwest County Cavan. There are four large areas of blanket peat; Slieve Rushen, the Cuilcagh Mountains, the toe of Bolebrack Mountain, and on The Playbank. As blanket peat frequently develops on rock, much of the blanket peat is categorised as 'Extremely Vulnerable' (<3m to bedrock), but it is likely to be up to 5m thick in places. Areas with deeper peat generally have intact, peat-associated vegetation, or occasionally have been cut for turf. These areas are assumed to have a greater than 3m thickness of peat and, apart from the less compacted upper layers, have a relatively low permeability.

Pockets of cutover (raised) peat are widespread throughout the county, occurring in the inter-drumlin areas and between rocky hillocks in the elevated terrain in the east of the county. Larger areas of cutover peat occur on the limestone tills, in the Mullagh area, and between Kilcolgy and Bellanagh.

These peat deposits are sufficiently thick at their centre to dominate the permeability of the area. However as Cutover Peat in Cavan is usually underlain by low permeability till, where it is thinner, the subsequent total thickness subsoil (peat plus till) has a low permeability categorisation. The exception is the Mullagh area, where the peat is considered to be greater than 3m thick (refer to section 5.4.2). Consequently, this has been classed as an area of low permeability.


Fen peat occurs in two areas of County Cavan; at Annagh Lough east of Ballyconnell, and to the northwest of Belturbet. Fens comprise peat and mixed birch woodland, which are groundwater fed and dependent. They represent the early stages of a raised bog.

Generally, peat consists of a build-up of organic matter in water-logged conditions, and principally developed in the warmer and wetter post glacial period. The water-logged conditions generally results from a combination of low permeability rocks (metamorphics and limestones in County Cavan) and appropriate topographic setting that inhibits surface water drainage. The low permeability of peat is well known and therefore the collection of samples for these deposits was not undertaken.

5.4.2 Moderate Permeability Units

In Cavan, deposits that have moderate permeability comprise either silty, and/or sandy/gravelly glacial till, or alluvium. Moderate permeability tills are divided into those within the Lower Palaeozoic Sandstone and Shale Till (Meehan, 2003), and till encompassing material from the Crossdoney Granite bedrock. The location of moderate permeability units are shown in Figure 5.2.

Figure 5.2 Distribution of Moderate Permeability Subsoils in Cavan (>3m thick)

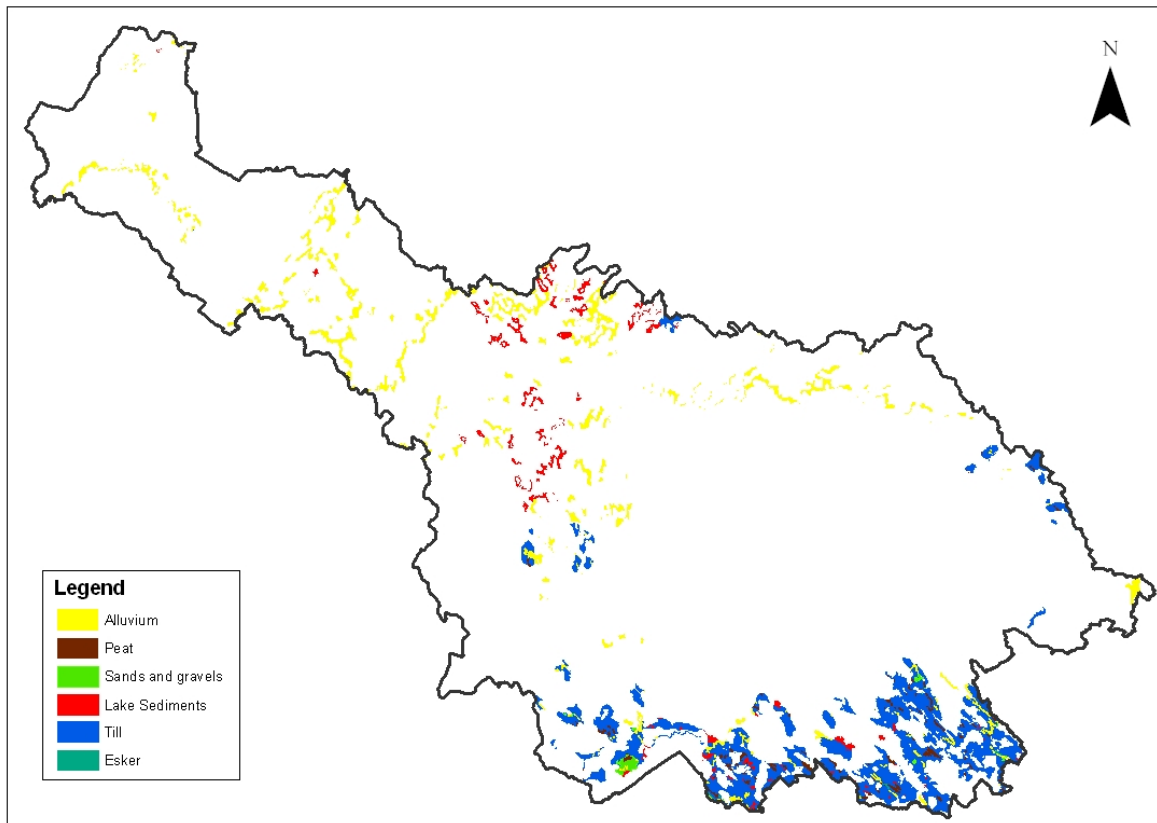

Permeability Unit 3: Loughs Sheelin and Ramor, Mullagh, and Shercock Tills

Detailed field mapping undertaken indicated moderate permeability till from the Kilcolgy area, across the edge of Lough Sheelin and Lough Ramor, to the Mullagh-Virginia area. An isolated ‘outlier’ of moderate permeability material is also found around Shercock, in the northeast of Cavan. These areas comprise mainly low-lying, undulating land, becoming slightly more elevated to the east of Lough Ramor. Bedrock in the area is a mixture of metasediments and limestones around Lough Sheelin, with minor areas of pure limestones to the east of Lough Sheelin, adjacent to the county boundary. The overlying subsoil is a clayey sandstone and shale till.

The generally well drained land in this area differentiates it from Permeability Unit 1. Few rushes are seen and it has a low natural drainage density and limited development of arterial drainage. The land is principally used for grazing, (silage), and pig farming activities.

The grain size analyses illustrates the low clay content ~ all have less than 12% clay, whilst the total fines content is generally less than 35%. Nineteen out of forty-seven samples are described as either SAND or GRAVEL, although their silt content and the angular to sub-angular nature of the gravels is indication that they have not been fluvially sorted. As such, they are not considered to be sorted enough to fall into a high permeability category. Over 95% of the samples are described as either SAND, GRAVEL, SILT or SILT/CLAY, which are considered to have a moderate permeability.

Permeability Unit 2: Crossdoney Granite Till

This unit is located east of Crossdoney and north of Bellananagh, and also around Cornafean. The bedrock is typically Crossdoney Granite with overlying Granite Till. The Granite Till also extends to the south and southeast of the Granite bedrock, which corresponds with the direction of glacial movement that transported the till beyond the boundary of its granite parent material.

Granites typically weather to a sandy till, although in this instance the unit covers only a couple of drumlins north of Bellananagh and a small area around Cornafean. The surrounding clay-rich bedrock material has been incorporated into much of the till in the area and has influenced the permeability. Evidence of this was recorded at one section, which had two distinct CLAY horizons, with sandy till noted at a higher topographical elevation than the clay samples.

The land use in the area consists of grazing and tillage, and a golf course at Cornafean. Negligible arterial drainage was recorded and there were very few rushes. An understanding of the deposition and the recharge indicators are consistent with a moderately permeable material.

Permeability Unit 7: Alluvium

Alluvial deposits are found in narrow strips along streams and rivers throughout the county. They are underlain by a wide range of rock types, occur within all permeability regions, and are largely composed of differing proportions of water-sorted silt and sand, with thin clay lenses.


Thin alluvial deposits (<3m thick) are not thick enough to influence permeability classifications, which are then based on the thicker, underlying subsoil. However, the alluvial deposits along the larger rivers are more likely to be thicker than 3 m and therefore determine the permeability. Substantial alluvial deposits in County Cavan have developed around the Rivers Erne, Annalee, Woodford and Shannon. The bedrock type and subsoils, across which the depositing river flows, were also taken into consideration when identifying alluvial deposits which are expected to influence the permeability.

Nationally, alluvium deposits are dominated by SILT and therefore are categorised as moderate permeability. The Cavan “Undifferentiated Alluvium” samples generally reflected national data: 5 of the 7 samples are described as either SILT or SILT/CLAY, one is described as SAND/GRAVEL and the final sample is described as CLAY. Of the five samples with grain size data, only two had the percentage of clay analysed. Both of these have less than 9% clay. All 5 samples have less than 50% fines and three have <35% fines.

The data indicate that the deposits are predominantly moderate permeability although the spread of sample descriptions reflects the nature of the surrounding subsoils, which also contribute to lenses of more clayey material. However, the one alluvial deposit that was described as CLAY was categorised as low permeability.

5.4.3 High Permeability Units

Figure 5.3 Distribution of High Permeability Subsoils in Cavan (>3m thick)

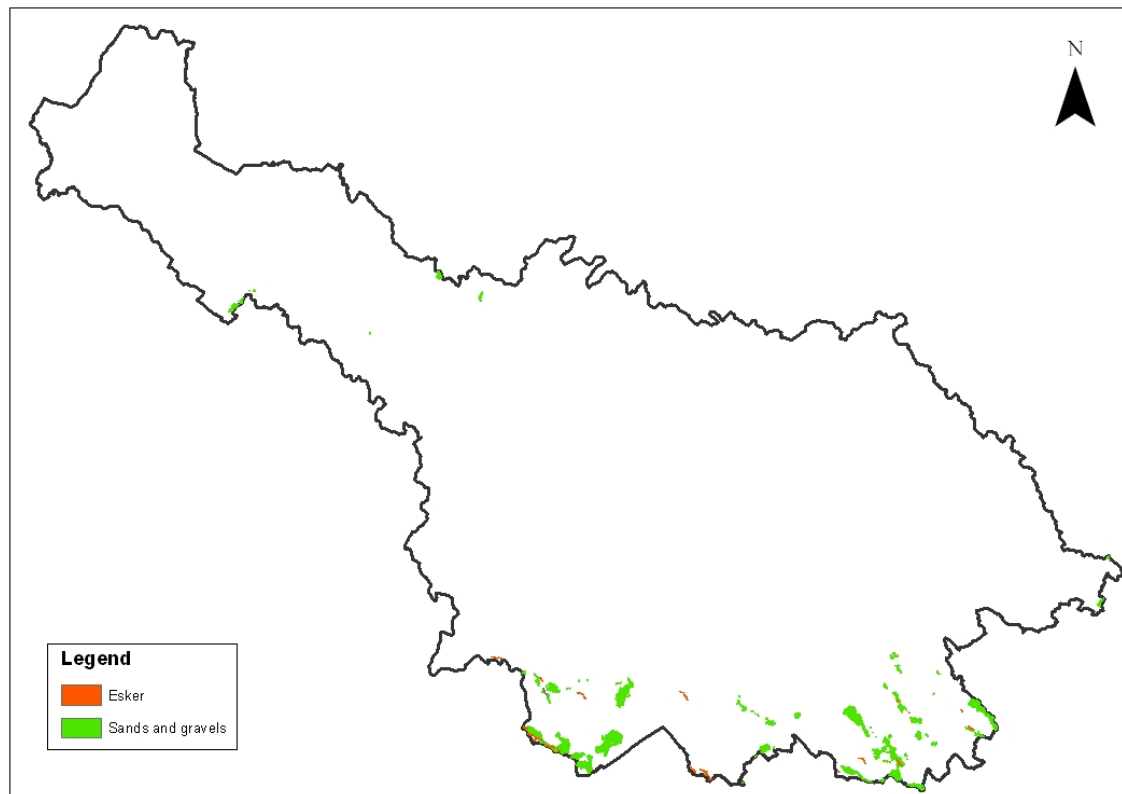

Permeability Unit 5: Sand & Gravel Deposits

Deposits that have a high permeability are mapped as sand/gravel on the Forest Inventory Planning Subsoil Map (Meehan, 2004). They generally occur as patches around Loughs Sheelin and Ramor in the southeast of the county, and are associated with glacial melt-water, which formed deltaic deposits in these lakes. Sand/gravel deposits in northwest Cavan and in the Kingscourt area are river deposits that have formed more recently. The bedrock underlying the rivers that transported the sand/gravel is more relevant to their origin than the bedrock directly underlying the deposits themselves. The bedrock source of the sand and gravels in Cavan is variable.

The soils overlying the sand/gravels in the Kingscourt area are all shallow well drained acid soils, whilst basic soils overlie the sand/gravels in northwest Cavan. Sand and gravel in Cavan associated with naturally well drained land and negligible arterial drainage (nine sample sites).

Subsoils in this unit are distinguished from sand and gravel areas within till deposits by the degree of 'washing' and sorting of fines which occurred during their water borne deposition. Just over half the samples are described as SAND/GRAVEL according to BS5930, with the remainder being SILT. Seven of the nine samples display evidence of sorting (round or sub-round cobbles due to fluvial transportation). Typically the boundary between high and moderate permeability sands and gravels is around 8% total fines (O'Suilleabhain, 2000). One of the four available samples with grain sizes has less than 8% fines, with the remainder, which were categorised as SILT, having greater than 8%. From assessment of the mass characteristics of the sections from which these were obtained, and the evidence of sorting (rounded cobbles), it is believed that the silts are discrete lenses within a larger SAND/GRAVEL complex. The overall permeability is therefore, considered to be high, which is supported by other permeability indicators as discussed above.

5.4.4 Areas of ‘Rock Close’ to the Surface

‘Rock close’ describes areas where the depth to bedrock is generally less than 1m, and consequently where the subsoil deposits are too thin to be effective for groundwater protection. They most commonly occur in topographically elevated areas in the “Panhandle” area of east Cavan, and at elevation in the mountainous areas in northwest Cavan (see Map 2). A permeability classification is not attached to these regions, as the depth to bedrock results in an ‘Extreme Vulnerability’ rating.

Similarly, areas where the depth to bedrock is less than 3m from the surface are rated as ‘Extreme Vulnerability’, which means that permeability classifications are not assessed. The permeability of these areas may be higher than those where sediments are deeper due to greater weathering and glacial abrasion of the material over its bedrock parent material. For example, thin subsoil over the Lower Palaeozoic rocks, tend to consist of angular rock pieces, as opposed to the fine and medium grained matrix of tills deposited under thick ice sheets, but with the same parent material.

5.5 Depth to Bedrock

Along with permeability, the subsoil thickness (depth to bedrock) is a critical factor in determining groundwater vulnerability to contamination. A brief description of subsoil thicknesses is given in Section 3. The source data are shown in Map 3.

5.6 Recharge at Karst Features

Bypassing of the protecting layers of subsoil can occur where water flows rapidly underground, with minimal attenuation, at karst features such as swallow holes and dolines. Therefore, groundwater is classed as ‘extremely’ vulnerable within 30 m of karst landforms, including the area of loss of sinking streams, and within 10 m on either side of losing or sinking streams upstream of the area of loss. The distances can be varied depending on the circumstances, for instance, they can be increased where overland surface runoff is likely. The locations of karst features on GSI records are shown in Map 4.

5.7 Groundwater Vulnerability Distribution

The vulnerability map (Map 6) is derived by combining the contoured depth to bedrock data with the inferred subsoil permeabilities. Areas are assigned vulnerability classes of low, moderate, high or extreme. Appendix I provides an outline of the principles used.

It is emphasised that the boundaries on the vulnerability map are based on the available data and local details have been generalised to fit the map scale. Evaluation of specific sites and circumstances will normally require further and more detailed assessments, and will frequently require site investigations in order to assess the risk to groundwater. Detailed subsurface investigations and permeability measurements may reduce the area of high, or even extreme, vulnerability. However, the vulnerability map (Map 6) is considered to provide a good basis for decision-making.

Much of the county, in the ‘panhandle’ area and in the northwest corner, consists of extreme to high vulnerability areas, with a continuous area of low vulnerability between the Erne Waterway and Slieve Rushen. The 3m contour, which delineates the extreme and high vulnerability categories, is based on outcrop information, Quaternary mapping, borehole data and topographic interpretation. The 5m and 10m contours, which influence the moderate and low vulnerability categories, are more reliant on borehole data for their interpretation. The contours cannot be drawn without data from the boreholes. As more information becomes available, the maps should be up-dated.

The areas of extreme vulnerability where rock is generally at or close to the ground surface include upland areas which have little existing development and less potential for groundwater development as they are generally areas of poor aquifers. When these are excluded, the proportion of the county’s groundwater that is extremely vulnerable is significantly reduced. Furthermore, many unrecorded, small pockets of deeper subsoil are likely to exist even within areas where rock outcrop is common. The areas of low vulnerability have been mapped where the subsoils (tills) have a low permeability and the depth to bedrock information indicates thicknesses of over 10 metres. Further confirmation by

site investigation is essential to verify the vulnerability for specific developments. The distribution of vulnerability as a percentage of the total county is given in table 5.2 below.

Table 5.2 Percentage of different vulnerability classes in County Cavan

Vulnerability Class	Square Kilometres	% county
E(Rock near surface or karst)	138	7.4
E	416.7	22.4
H	533	28.6
M	537	28.8
L	239	12.8

6 Groundwater Protection Zones and Responses

6.1 Introduction

The general Groundwater Protection Scheme guidelines were outlined in Section 1, and in particular, the sub-division of the scheme into two components – land surface zoning and codes of practice (responses) for potentially polluting activities – was described (see also Appendix I). Subsequent sections described the different geological and hydrogeological land surface zoning elements as applied to County Cavan. This Section draws these together to give the ultimate elements of land surface zoning – the Groundwater Protection Scheme map and the source protection maps. It is emphasised that these maps are not intended as ‘stand alone’ elements, but must be considered and used in conjunction with the groundwater protection responses for potentially polluting activities. Five supplementary publications are currently available: **Groundwater Protection Responses for On-Site Systems for Single Houses** (‘septic tanks’), **Groundwater Protection Responses for Landfills**, **Groundwater Protection Responses for Landspreading of Organic Wastes**, **Groundwater Protection Responses for Out Wintering Pads** and **Groundwater Protection Responses for Earth-Lined Slurry/Effluent Stores**.

6.2 Groundwater Protection Maps

The groundwater protection map (Map 7) was produced by combining the vulnerability map (Map 6) with the aquifer map (Map 5). Each protection zone on the map is defined by a code which represents both the vulnerability of the groundwater to contamination and the value of the groundwater resource (aquifer category). Most of the possible hydrogeological settings are present in County Cavan. Those which are present, and the percentage of the area they cover, are given in Table 6.1.

Table 6.1 Matrix of Groundwater Protection Zones

VULNERABILITY RATING	RESOURCE PROTECTION ZONES						
	Regionally Important Aquifers (R)		Locally Important Aquifers (L)			Poor Aquifers (P)	
	Rk(c/d)	Rf	Lk	Lm	Li	Pl	Pu
Extreme (E)	1.8	0.1	Negligible	1.4	1.8	23.6	0.8
High (H)	1.7	0.5	Negligible	2.6	4.2	17.9	1.5
Moderate (M)	1.9	0.5	Negligible	1.8	3.8	20.7	Negligible
Low (L)	2.6	0.3	Negligible	0.8	4.3	4.8	Negligible

6.3 Groundwater Source Protection Reports and Maps

Source protection zones have been delineated around three group scheme (GWS) supplies, identified by Cavan County Council: Annagh Lough GWS, GWS Ballymachugh and Bawnboy GWS. These have been produced as separate sections in Volume II, and have been incorporated into Map 7 as well as separately delineated in Map 8.

6.4 Integration of Groundwater Protection Zones and Responses.

The integration of the groundwater protection zones and the groundwater protection responses is the final stage in the production of a Groundwater Protection Scheme. The level of response depends on the different elements of risk: the vulnerability, the value of the groundwater (with sources being more valuable than resources and regionally important aquifers more valuable than locally important, and so on) and the contaminant loading. By consulting a **Response Matrix**, it can be seen: (a) whether such a development is likely to be acceptable on that site; (b) what kind of further investigations may be necessary to reach a final decision; and (c) what planning or licensing conditions may be necessary for that development. The groundwater protection responses are a means of ensuring that good environmental practices are followed. Appendix I provides more information on the use of groundwater protection responses.

As the appropriate level of response takes aquifer category, proximity to public supply sources and vulnerability into account, concentration on the vulnerability map alone may result in the false impression that the acceptability of certain activities is quite limited. Table 6.2 provides a broad indication of the acceptability of certain activities in Cavan with respect to groundwater contamination.

Table 6.2 Site Suitability Response Levels in Cavan

Activity*	Percentage of Cavan Occurring within Each Response Level		
	Least restrictive response level ('R1')	Intermediate response levels: ('R2' and 'R3')	Most restrictive response level ('R4')
	Risk to groundwater can be managed using normal good practice guidelines.	Higher risk to groundwater. In order to manage the risk, additional requirements over and above normal good practice are recommended. Requirements can relate to site-specific ground conditions, construction, operation, and the number of existing developments in the area. If the required site-specific ground conditions do not occur at a particular site, or if the density of existing developments is too high, the activity would be regarded as 'unacceptable'.	Additional requirements will not reduce the risk to groundwater to acceptable levels.
Landfill	11%	82%	7%
IPC Landspreading**	70%	30%	Negligible
On-site Treatment Systems	68%	32%	-
Out-Wintering Pads	63%	37%	Negligible
Earth-lined Slurry/Effluent Stores	63%	37%	Negligible

* Details on the precise response requirement for each activity can be found in (DOELG/EPA/GSI, 1999). Response levels for additional activities will be devised in the near future.

** Intensive farming, sewage sludges, poultry litter, industrial wastewater treatment plant sludges.

6.5 Conclusions

This Groundwater Protection Scheme will be a valuable tool for Cavan County Council in helping to achieve sustainable water quality management as required by national and EU policies. It will enable the County Council to take account of: (i) the potential risks to groundwater resources and sources; and (ii) geological and hydrogeological factors, when considering the location of potentially polluting developments. Consequently, it will be an important means of preventing groundwater contamination.

In considering the Groundwater Protection Scheme, it is important to remember that: (a) a scheme is intended to provide guidelines to assist decision-making in County Cavan on the location and nature of developments and activities with a view to ensuring the protection of groundwater; and (b) delineation of the groundwater protection zones is dependent on the available data. Cavan County Council will apply the scheme in decision-making on the basis that the best available data are being used. The maps have limitations because they generalise (according to availability of data) variable and complex geological and hydrogeological conditions. The scheme is therefore not prescriptive and needs to be qualified by site-specific considerations and investigations in certain instances. The investigation requirements depend mainly on the degree of hazard provided by the contaminant loading and, to a lesser extent, on the availability of hydrogeological data. The onus is on a developer to provide new information which would enable the zonation to be altered and improved and, in certain circumstances, the planning or regulatory response to be changed.

The scheme has the following uses for Cavan County Council:

- it provides a hierarchy of levels of risk and, in the process, assists in setting priorities for technical resources and investigations
- it contributes to the search for a balance of interests between groundwater protection issues and other social and economic factors
- it acts as a guide and provides a ‘first-off’ warning system before site visits and investigations are made
- it shows generally suitable and unsuitable areas for potentially hazardous developments such as landfill sites and piggeries
- it can be adapted to include risk to surface water
- it will assist in the control of developments and enable the location of certain potentially hazardous activities in lower risk areas
- it helps ensure that the pollution acts are not contravened.

7 References

- An Foras Forbartha and Geological Survey of Ireland, 1981. *Groundwater Resources in The N.E. (R.D.O.) Region*; Summary Report, Main Report and Technical Appendices, Volumes 1, 2 and 3. 170 pp.
- British Geological Survey, 1994. Hydrogeological Map of Northern Ireland. 1:250,000. British Geological Survey.
- British Standards Institution, 1999. BS 5930:1999, Code of practice for site investigations. British Standards Institution, London.
- Collins J.F. and Cummins, T. 1996. Agroclimatic Atlas of Ireland. AGMET – Joint working group on Applied Agricultural Meteorology, Dublin.
- Cullen K.T., 2001. Environmental Impact Statement for Groundwater Abstraction from North Kildare Aquifer, Robertstown, Co. Kildare. *Kildare County Council Report*.
- Daly D., 1994. Chemical Pollutants in Groundwater: a Review of the Situation in Ireland. Paper presented at Conference “*Chemicals – a Cause for Concern?*” in Cork, 3-4 November 1994.
- Daly, D., Cronin, C., Coxon, C., Burns, S.J., 1998. Offaly Groundwater Protection Scheme, Main Report. Geological Survey of Ireland. 78pp.
- Daly, D., Moore, B., Meehan, R., Murphy, G., Fitzsimons, V., Clenaghan, C., Beirne, M., Carty, G., O’Leary, G., O’Dwyer, R. 2000., Site Suitability Assessments for On-site Wastewater Treatment Systems: Course Manual. FÁS and Geological Survey of Ireland.
- Daly, E.P. 1975. Report on the Groundwater potential of the area around Sligo Town. Geological Survey of Ireland. Unpublished internal report.
- Daly, E.P., 1985. Hydrogeology. In: *The Quaternary History of Ireland*. Ed. Edwards, K.J. and Warren, W.P. Academic Press. 382pp.
- Daly, E.P., 1992. Groundwater Resources of the Nore River Basin: Interim Report. Geological Survey of Ireland. Unpublished internal report.
- Daly, E.P., 1995. The Principal Characteristics of the Flow Regime in Irish Aquifers. Paper presented at the 15th Annual Groundwater Seminar held in Portlaoise, on: *The Role of Groundwater in Sustainable Development*. Published by: IAH (Irish Group).
- Davis, S.N. and De Wiest, R.J.M., 1966. Hydrogeology. John Wiley & Sons, 464 pp.
- DELG/EPA/GSI, 1999. Groundwater Protection Schemes. Department of the Environment and Local Government, Environmental Protection Agency and Geological Survey of Ireland.
- Fitzgerald, D. and Forrestal, F., 1996. Monthly and Annual Averages of Rainfall for Ireland 1961-1990. Meteorological Service, Climatological Note No. 10, UDC 551.577.2(415).
- Geraghty M., 1997; Bedrock Geology 1:100,000 Scale Map Series Sheet 8/9, Monaghan – Carlingford, and A Geological Description to Accompany the Bedrock Geology Sheet Series; Geological Survey of Ireland.

Gardiner M.J., Radford T., 1980. Soil Associations of Ireland and their Land Use Potential. Explanatory Bulletin to Soil Map of Ireland. An Foras Talúntias.

Geological Survey of Ireland (in preparation). Draft National Aquifer Classification Report. Geological Survey of Ireland, Dublin.

Gunn J., 1982 Water tracing in Ireland: A review with special reference to the Cuilcagh Karst in *Irish Geography* 15: 94-106

Jackson, J., 1955. *Geology of the Kingscourt Outlier and Cuilcagh Mountains*. Unpublished PhD. thesis submitted to University College Dublin. 255 p.

Lee, M., 1999. Surface indicators and land use as secondary indicators of groundwater recharge and vulnerability. Unpublished (Research) MSc thesis. Department of Civil, Structural and Environmental Engineering, Trinity College Dublin.

MacDermot C.V., Long C.B., and Harney S.J., 1996. Bedrock Geology 1:100,000 Map Series, Sheet 7, Sligo-Leitrim; and A Geological Description to Accompany the Bedrock Geology Sheet Series; Geological Survey of Ireland.

McConnell B., Philcox M. and Geraghty M., 2001. Bedrock Geology 1:100,000 Map Series, Sheet 13, Meath, and A Geological Description to Accompany the Bedrock Geology Sheet Series; Geological Survey of Ireland.

Meehan, R.T., 1999. Directions of ice flow during the last glaciation in counties Meath, Westmeath and Cavan, Ireland. *Irish Geography*, 32(1), pp.26-51.

Meehan R., 2003. Forest Inventory and Planning System – Irish Forest Soils, Methodology for Subsoil Mapping, Teagasc. Unpublished internal report.

Meehan R., 2004. Forest Inventory and Planning System – Integrated Forestry Information System (FIPS-IFS) Soils Parent Material Map, Teagasc. Unpublished internal report.

Morris J.H., Somerville I.D. and MacDermot C.V., 2003. Bedrock Geology 1:100,000 Map Series, Sheet 12, Longford-Roscommon, and A Geological Description to Accompany the Bedrock Geology Sheet Series; Geological Survey of Ireland.

Mullen, B., 1986. *A study of groundwater characteristics in a karst area of County Monaghan in the vicinity of a landfill site*. Unpublished BSc. thesis, Sligo Regional Technical College. 71 p.

Ní Bhroin, 2001. The Carboniferous Geology of Sheet 8 (including County Monaghan and eastern County Cavan), Geological Survey of Ireland. Unpublished internal report.

Ó' Súilleabháin C., 2000. Assessing the Boundary Between High and Moderately Permeable Subsoils. Unpublished MSc thesis. Department of Civil, Structural and Environmental Engineering, Trinity College Dublin.

Sevastopulo, G.D. and Wyse Jackson, P.N., 2001. Carboniferous (Dinantian). In: (C. Hepworth Holland, Ed.) *The Geology of Ireland*, Dunedin Academic Press, Edinburgh, 531 pp.

Swartz, M. and Daly, D., 2002. County Monaghan Groundwater Protection Scheme, Main Report; Geological Survey of Ireland.

Swartz, M., 1999. Assessing the Permeability of Irish Subsoils. Unpublished (Research) MSc thesis. Department of Civil, Structural, and Environmental Engineering, Trinity College Dublin.

Wright, G.R., Aldwell, C.R., Daly, D., Daly, E.P., 1982. Groundwater Resources in the Republic of Ireland. Geological Survey of Ireland.

Wright, G.R., 2000. QSC Graphs: and Aid to Classification of Data-poor Aquifers in Ireland. From: Robins, N.S. and Missteart, B.D.R. (eds.) *Groundwater in the Celtic Regions: Studies in Hard Rock and Quaternary Hydrogeology*. Geological Society, London, Special Publications, **182**. The Geological Society of London.

GLOSSARY OF TERMS

Alluvium: Sediments consisting of silt, sand, clay and gravel in varying proportions that are deposited by flowing water.

Aquifer: A saturated geological formation (rock or sediment) capable of storing, transmitting and yielding significant quantities of water to wells and springs.

Attenuation: The process of diminishing contaminant concentrations in groundwater, due to filtration, biodegradation, dilution, sorption, volatilisation and other processes. Breakdown or dilution of a contaminant in water.

Baseflow: That part of the flow in a stream which is not attributable to direct runoff from precipitation or snowmelt, usually sustained by groundwater discharge. That part of a stream discharge derived from groundwater seeping into the stream.

Borehole: A particular type of well, constructed by a drilling machine in order to gain access to the groundwater system.

Confined Aquifer: An aquifer in which the groundwater is overlain by impermeable geological strata. The confined groundwater is usually subject to pressure greater than atmospheric pressure.

Contaminant Loading: The amount (volume and concentration) of a contaminant discharged to soil or groundwater.

Cone of Depression: The cone of depression is where the potentiometric surface dips down forming a cone shape due to a pumping well. In an unconfined aquifer, it is the zone (usually around a well, but also around excavations such as quarries) that is normally saturated, but becomes unsaturated as a well is pumped.

Down Gradient: In the direction in which groundwater or surface water flows (also referred to as down-slope). Opposite of up-gradient.

Evapotranspiration: The sum of evaporation (the process where water changes to gas vapour and gets carried into the atmosphere) and transpiration (the process where plants take up water through their roots and give off vapour through their leaves).

Fissure: A natural crack in rock which allows rapid water movement.

Glacial Till: Deposits composed primarily of unsorted sand, silt, clay, and boulders laid down directly by melting ice.

Groundwater: The water below the water table contained in void spaces (pore spaces between rock and/or soil particles, or bedrock fractures)

Hazard: In this context, a potential source of pollution.

Hydraulic Gradient: In general, this describes the slope and direction of groundwater flow due to changes in the depth of the watertable.

Karst: Type of landscape that develops from underground solution of rocks and diversion of surface waters to underground routes. Karst areas are usually characterised by closed depressions or sink holes and an absence of surface drainage. It forms in areas underlain by soluble rock such as limestone, dolomite, gypsum and other soluble rock. The Burren is the best well-known karst area in Ireland.

Karstification: The process of dissolution of limestone bedrock, resulting in enlargement of fractures, fissures and bedding planes. Certain fractures usually get enlarged at the expense of others creating a focus for groundwater movement .

Karst Feature: Landscape feature which results from karstification, such as a enclosed depression, swallow hole, or cave, formed due to the presence of an underground drainage system.

Landfill: A site used for the deposit of waste on to or under land.

Percolation: The actual movement of subsurface water either horizontally or vertically. Lateral percolation usually occurs in the unconsolidated layers towards nearby surface drainage feature and vertical percolation usually occurs in the unsaturated zone, towards the groundwater zone.

Permeability: The ability of a medium to transmit fluids under a potential gradient (units = $L^3/t/L^2$ or L/t). Measure of a soil or rock's capacity to transmit water.

Point (Pollution) Source: Any discernible, confined, or discrete conveyance from which pollutants are or may be discharged, including (but not limited to) pipes, ditches, channels, tunnels, conduits, wells, containers, slatted sheds and animal rearing sheds.

Porosity: the ratio of the volume of void or air spaces in a rock or sediment to the total volume of rock or sediment.

Recharge: The addition of water to the zone of saturation; also, the amount of water added to the groundwater (groundwater recharge).

Runoff (surface): Precipitation that cannot be absorbed by the bedrock or overlying layers because they are already saturated with water. It occurs when precipitation exceeds the infiltration capacity of a layer. The excess water usually moves across the land (or top layers of soil as interflow) and enters a surface water body.

Saturated Zone: The zone below the water table in which all pores and fissures are full of water.

Source: A source of water supply. In this context all sources are groundwater fed (to some degree), and are usually a well (dug well or borehole) or a spring, or occasionally an infiltration gallery.

Specific Yield: The ratio of the volume of water a rock or soil will yield by gravity drainage to the volume of the rock or soil. Gravity drainage may take many months to occur.

Spring: A natural discharge of groundwater at the land's surface.

Storativity: The volume of water an aquifer releases from or takes into storage per unit surface area of the aquifer per unit change in head. It is equal to the product of specific storage and aquifer thickness. In an unconfined aquifer, the storativity is equivalent to the specific yield.

Subsoil: The material between the topsoil and the bedrock.

Swallow Hole: The point at which concentrated surface drainage becomes underground drainage.

Time of Travel (TOT): The time required for a contaminant to move in the saturated zone from a specific point to an outlet point (usually a spring or a well). It is the average linear velocity of flowing groundwater using Darcy's Law.

Topography: The contour of the land surface, the arrangement of the land surface, including its relief and the position of its natural features.

Unconfined aquifer: An aquifer that is not bounded above by low permeability layer. The upper boundary is defined by the water table. The water table is in connection with the atmosphere through openings in the overlying materials. Therefore, the water table surface is at atmospheric pressure.

Unsaturated Zone: The zone between the land surface and the water table, in which pores and fissures are only partially filled with water. Also known as the vadose zone.

Vulnerability: A term used to represent the intrinsic geological and hydrogeological characteristics that determine the ease with which groundwater may be contaminated by human activities.

Water Table: The uppermost level of saturation in an aquifer at which the pressure is atmospheric.

Zone of Contribution (ZOC): The area surrounding a pumped well that encompasses all areas or features that supply groundwater recharge to the well. It is defined as the area required to support an abstraction from long-term groundwater recharge.

Appendix I

Extract taken from Groundwater Protection Schemes (DELG, EPA, GSI, 1999)

The following text is taken from **Groundwater Protection Schemes**, which was jointly published in 1999 by the Department of Environment and Local Government (DELG), Environmental Protection Agency (EPA) and Geological Survey of Ireland (GSI). This Appendix gives details on the two main components of Groundwater Protection Schemes – land surface zoning and groundwater protection responses. It is included here so that this can be a stand alone report for the reader. However, it is recommended that for a full overview of the groundwater protection methodology, the publications **Groundwater Protection Responses for On-Site Systems for Single Houses** (‘septic tanks’), **Groundwater Protection Responses for Landfills** and **Groundwater Protection Responses for Landspreading of Organic Wastes** should be consulted. These publications are available from the GSI, EPA and Government Publications Office.

Land Surface Zoning

Vulnerability Categories

Vulnerability is a term used to represent the intrinsic geological and hydrogeological characteristics that determine the ease with which groundwater may be contaminated by human activities.

The vulnerability of groundwater depends on: (i) the time of travel of infiltrating water (and contaminants); (ii) the relative quantity of contaminants that can reach the groundwater; and (iii) the contaminant attenuation capacity of the geological materials through which the water and contaminants infiltrate. As all groundwater is hydrologically connected to the land surface, it is the effectiveness of this connection that determines the relative vulnerability to contamination. Groundwater that readily and quickly receives water (and contaminants) from the land surface is considered to be more vulnerable than groundwater that receives water (and contaminants) more slowly and in lower quantities. The travel time, attenuation capacity and quantity of contaminants are a function of the following natural geological and hydrogeological attributes of any area:

- (i) the subsoils that overlie the groundwater;
- (ii) the type of recharge - whether point or diffuse; and
- (iii) the thickness of the unsaturated zone through which the contaminant moves.

In general, little attenuation of contaminants occurs in the bedrock in Ireland because flow is almost wholly via fissures. Consequently, the subsoils (sands, gravels, glacial tills (or boulder clays), peat, lake and alluvial silts and clays), are the single most important natural feature influencing groundwater vulnerability and groundwater contamination prevention. Groundwater is most at risk where the subsoils are absent or thin and, in areas of karstic limestone, where surface streams sink underground at swallow holes.

The geological and hydrogeological characteristics can be examined and mapped, thereby providing a groundwater vulnerability assessment for any area or site. Four groundwater vulnerability categories are used in the scheme – **extreme (E)**, **high (H)**, **moderate (M)** and **low (L)**. The hydrogeological basis for these categories is summarised in Table A.1 and further details can be obtained from the GSI. The ratings are based on pragmatic judgements, experience and available technical and scientific information. However, provided the limitations are appreciated, vulnerability assessments are essential when considering the location of potentially polluting activities. As groundwater is considered to be present everywhere in Ireland, the vulnerability concept is applied to the entire land surface. The ranking of vulnerability does not take into consideration the biologically-active soil zone, as contaminants from point sources are usually discharged below this zone, often at depths of at least 1 m. However, the groundwater protection responses take account of the point of discharge for each activity.

Table A.1 Vulnerability Mapping Guidelines

Vulnerability Rating	Hydrogeological Conditions				
	Subsoil Permeability (Type) and Thickness			Unsaturated Zone	Karst Features
	high permeability (sand/gravel)	moderate permeability (e.g. sandy subsoil)	low permeability (e.g. clayey subsoil, clay, peat)	(sand/gravel aquifers only)	(<30 m radius)
Extreme (E)	0–3.0 m	0–3.0 m	0–3.0 m	0–3.0 m	–
High (H)	>3.0 m	3.0–10.0 m	3.0–5.0 m	>3.0 m	N/A
Moderate (M)	N/A	>10.0 m	5.0–10.0	N/A	N/A
Low (L)	N/A	N/A	>10.0 m	N/A	N/A
Notes: i) N/A = not applicable. ii) Precise permeability values cannot be given at present. iii) Release point of contaminants is assumed to be 1-2 m below ground surface.					

Vulnerability maps are an important part of Groundwater Protection Schemes and are an essential element in the decision-making on the location of potentially polluting activities. Firstly, the vulnerability rating for an area indicates, and is a measure of, the likelihood of contamination. Secondly, the vulnerability map helps to ensure that a Groundwater Protection Scheme is not unnecessarily restrictive on human economic activity. Thirdly, the vulnerability map helps in the choice of preventative measures and enables developments, which have a significant potential to contaminate, to be located in areas of lower vulnerability.

In summary, the entire land surface is divided into four vulnerability categories – extreme (**E**), high (**H**), moderate (**M**) and low (**L**) – based on the geological and hydrogeological factors described above. This subdivision is shown on a groundwater vulnerability map. The map shows the vulnerability of the first groundwater encountered (in either sand/gravel aquifers or in bedrock) to contaminants released at depths of 1–2 m below the ground surface. Where contaminants are released at significantly different depths, there will be a need to determine groundwater vulnerability using site-specific data. The characteristics of individual contaminants are not taken into account.

Source Protection Zones

Groundwater sources, particularly public, group scheme and industrial supplies, are of critical importance in many regions. Consequently, the objective of source protection zones is to provide protection by placing tighter controls on activities within all or part of the zone of contribution (ZOC) of the source.

There are two main elements to source protection land surface zoning:

Areas surrounding individual groundwater sources; these are termed source protection areas (SPAs).

Division of the SPAs on the basis of the vulnerability of the underlying groundwater to contamination.

These elements are integrated to give the source protection zones.

Delineation of Source Protection Areas

Two source protection areas are recommended for delineation:

Inner Protection Area (SI);

Outer Protection Area (SO), encompassing the remainder of the source catchment area or ZOC.

In delineating the inner (SI) and outer (SO) protection areas, there are two broad approaches: first, using arbitrary fixed radii, which do not incorporate hydrogeological considerations; and secondly, a scientific approach using hydrogeological information and analysis, in particular the hydrogeological characteristics of the aquifer, the direction of groundwater flow, the pumping rate and the recharge.

Where the hydrogeological information is poor and/or where time and resources are limited, the simple zonation approach using the arbitrary fixed radius method is a good first step that requires little technical expertise. However, it can both over- and under-protect. It usually over-protects on the down gradient side of the source and may under-protect on the up gradient side, particularly in karst areas. It is particularly inappropriate in the case of springs where there is no part of the down gradient side in the ZOC. Also, the lack of a scientific basis reduces its defensibility as a method.

There are several hydrogeological methods for delineating SPAs. They vary in complexity, cost and the level of data and hydrogeological analysis required. Four methods, in order of increasing technical sophistication, are used by the GSI:

- (i) calculated fixed radius;
- (ii) analytical methods;
- (iii) hydrogeological mapping; and
- (iv) numerical modelling.

Each method has limitations. Even with relatively good hydrogeological data, the heterogeneity of Irish aquifers will generally prevent the delineation of definitive SPA boundaries. Consequently, the boundaries must be seen as a guide for decision-making, which can be re-appraised in the light of new knowledge or changed circumstances.

Inner Protection Area (SI)

This area is designed to protect against the effects of human activities that might have an immediate effect on the source and, in particular, against microbial pollution. The area is defined by a 100-day time of travel (ToT) from any point below the water table to the source. (The ToT varies significantly between regulatory agencies in different countries. The 100-day limit is chosen for Ireland as a relatively conservative limit to allow for the heterogeneous nature of Irish aquifers and to reduce the risk of pollution from bacteria and viruses, which in some circumstances can live longer than 50 days in groundwater.) In karst areas, it will not usually be feasible to delineate 100-day ToT boundaries, as there are large variations in permeability, high flow velocities and a low level of predictability. In these areas, the total catchment area of the source will frequently be classed as SI.

If it is necessary to use the arbitrary fixed radius method, a distance of 300 m is normally used. A semi-circular area is used for springs. The distance may be increased for sources in karst aquifers and reduced in granular aquifers and around low yielding sources.

Outer Protection Area (SO)

This area covers the remainder of the ZOC (or complete catchment area) of the groundwater source. It is defined as the area needed to support an abstraction from long-term groundwater recharge i.e. the proportion of effective rainfall that infiltrates to the water table. The abstraction rate used in delineating the zone will depend on the views and recommendations of the source owner. A factor of safety can be taken into account whereby the maximum daily abstraction rate is increased (typically by 50%) to allow for possible future increases in abstraction and for expansion of the ZOC in dry periods. In order to take account of the heterogeneity of many Irish aquifers and possible errors in estimating the groundwater flow direction, a variation in the flow direction (typically $\pm 10-20^\circ$) is frequently included as a safety margin in delineating the ZOC.

A conceptual model of the ZOC and the 100-day ToT boundary is given in Fig. A.1.

If the arbitrary fixed radius method is used, a distance of 1000 m is recommended with, in some instances, variations in karst aquifers and around springs and low-yielding wells.

The boundaries of the SPAs are based on the horizontal flow of water to the source and, in the case particularly of the Inner Protection Area, on the time of travel in the aquifer. Consequently, the vertical movement of a water particle or contaminant from the land surface to the water table is not taken into account. This vertical movement is a critical factor in contaminant attenuation, contaminant flow velocities and in dictating the likelihood of contamination. It can be taken into account by mapping the groundwater vulnerability to contamination.

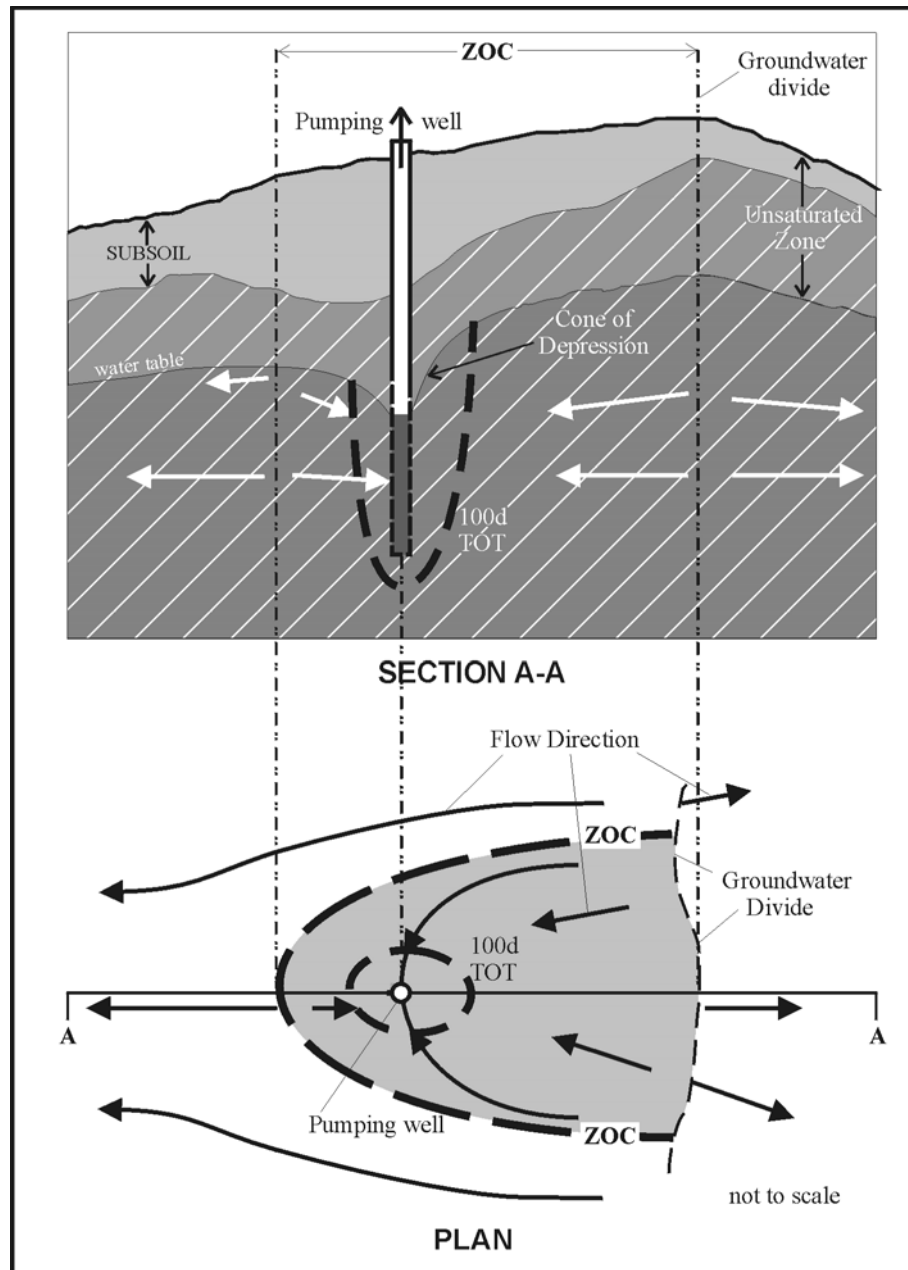


Fig. A.1 Conceptual model of the zone of contribution (ZOC) at a pumping well (adapted from US EPA, 1987)

Delineation of Source Protection Zones

The matrix in Table A.2 gives the result of integrating the two elements of land surface zoning (SPAs and vulnerability categories) – a possible total of eight source protection zones. In practice, the source protection zones are obtained by superimposing the vulnerability map on the source protection area map. Each zone is represented by a code e.g. SO/H, which represents an Outer Source Protection area where the groundwater is highly vulnerable to contamination. The recommended map scale is 1:10,560 (or 1:10,000 if available), though a smaller scale may be appropriate for large springs.

All of the hydrogeological settings represented by the zones may not be present around each groundwater source. The integration of the SPAs and the vulnerability ratings is illustrated in Fig. A.2.

Table A.2 Matrix of Source Protection Zones

VULNERABILITY RATING	SOURCE PROTECTION	
	Inner (SI)	Outer (SO)
Extreme (E)	SI/E	SO/E
High (H)	SI/H	SO/H
Moderate (M)	SI/M	SO/M
Low (L)	SI/L	SO/L

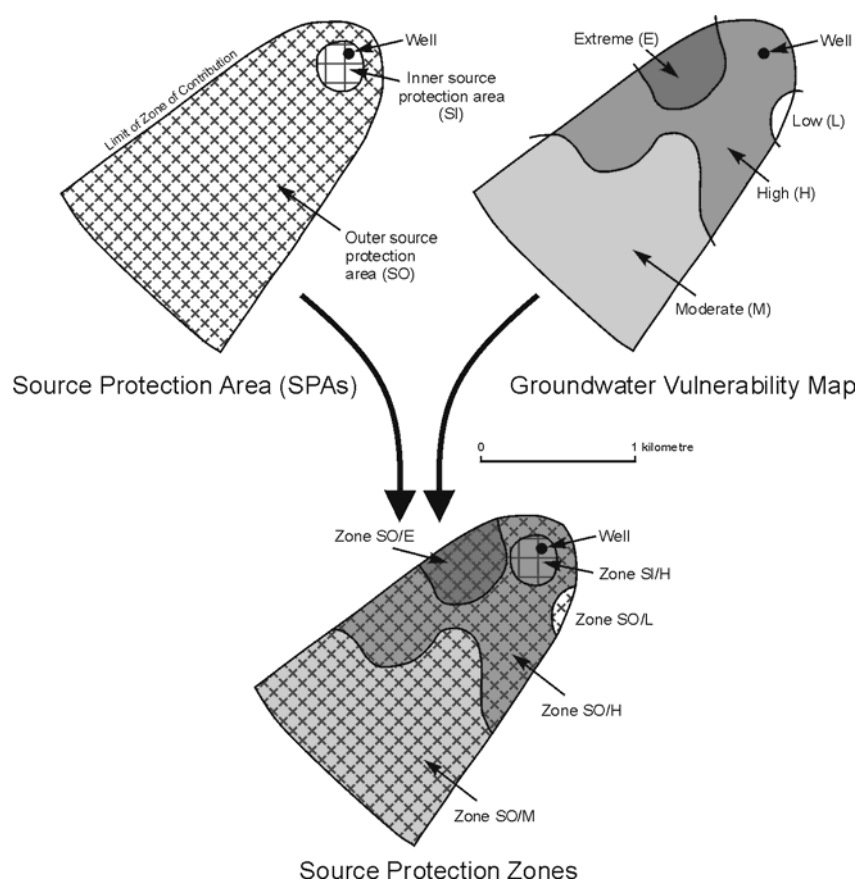


Fig. A.2 Delineation of Source Protection Zones Around a Public Supply Well from the Integration of the Source Protection Area Map and the Vulnerability Map

Resource Protection Zones

For any region, the area outside the SPAs can be subdivided, based on the value of the resource and the hydrogeological characteristics, into eight aquifer categories:

Regionally Important (R) Aquifers

- (i) Karstified aquifers (**Rk**)
- (ii) Fissured bedrock aquifers (**Rf**)
- (iii) Extensive sand/gravel aquifers (**Rg**)

Locally Important (L) Aquifers

- (i) Sand/gravel (**Lg**)
- (ii) Bedrock which is Generally Moderately Productive (**Lm**)
- (iii) Bedrock which is Moderately Productive only in Local Zones (**LI**)

Poor (P) Aquifers

- (i) Bedrock which is Generally Unproductive except for Local Zones (**PI**)
- (ii) Bedrock which is Generally Unproductive (**Pu**)

These aquifer categories are shown on an aquifer map, which can be used not only as an element of a Groundwater Protection Scheme but also for groundwater development purposes.

The matrix in Table A.3 gives the result of integrating the two regional elements of land surface zoning (vulnerability categories and resource protection areas) – a possible total of 24 resource protection zones. In practice this is achieved by superimposing the vulnerability map on the aquifer map. Each zone is represented by a code e.g. **Rf/M**, which represents areas of regionally important fissured aquifers where the groundwater is moderately vulnerable to contamination. In land surface zoning for groundwater protection purposes, regionally important sand/gravel (**Rg**) and fissured aquifers (**Rf**) are zoned together, as are locally important sand/gravel (**Lg**) and bedrock which is moderately productive (**Lm**). All of the hydrogeological settings represented by the zones may not be present in each local authority area.

Table A.3 Matrix of Groundwater Resource Protection Zones

VULNERABILITY RATING	RESOURCE PROTECTION ZONES					
	Regionally Important Aquifers (R)		Locally Important Aquifers (L)		Poor Aquifers (P)	
	Rk	Rf/Rg	Lm/Lg	LI	PI	Pu
Extreme (E)	Rk/E	Rf/E	Lm/E	LI/E	PI/E	Pu/E
High (H)	Rk/H	Rf/H	Lm/H	LI/H	PI/H	Pu/H
Moderate (M)	Rk/M	Rf/M	Lm/M	LI/M	PI/M	Pu/M
Low (L)	Rk/L	Rf/L	Lm/L	LI/L	PI/L	Pu/L

Flexibility, Limitations and Uncertainty

The land surface zoning is only as good as the information which is used in its compilation (geological mapping, hydrogeological assessment, etc.) and these are subject to revision as new information is produced. Therefore a scheme must be flexible and allow for regular revision.

Uncertainty is an inherent element in drawing geological boundaries and there is a degree of generalisation because of the map scales used. Therefore the scheme is not intended to give sufficient information for site-specific decisions. Also, where site specific data received by a regulatory body in the future are at variance with the maps, this does not undermine a scheme, but rather provides an opportunity to improve it.

Groundwater Protection Responses

Introduction

The location and management of potentially polluting activities in each groundwater protection zone is by means of a **groundwater protection response matrix** for each activity or group of activities. The level of response depends on the different elements of risk: the vulnerability, the value of the groundwater (with sources being more valuable than resources and regionally important aquifers more valuable than locally important and so on) and the contaminant loading. By consulting a **Response Matrix**, it can be seen: (a) whether such a development is likely to be acceptable on that site; (b) what kind of further investigations may be necessary to reach a final decision; and (c) what planning or licensing conditions may be necessary for that development. The groundwater protection responses are a means of ensuring that good environmental practices are followed.

Four levels of response (**R**) to the risk of a potentially polluting activity are proposed:

R1 Acceptable subject to normal good practice.

R2^{a,b,c,...} Acceptable in principle, subject to conditions in note a,b,c, etc. (The number and content of the notes may vary depending on the zone and the activity).

R3^{m,n,o,...} Not acceptable in principle; some exceptions may be allowed subject to the conditions in note m,n,o, etc.

R4 Not acceptable.

Integration of Groundwater Protection Zones and Response

The integration of the groundwater protection zones and the groundwater protection responses is the final stage in the production of a Groundwater Protection Scheme. The approach is illustrated for a hypothetical potentially polluting activity in the matrix in Table A.4.

The matrix encompasses both the geological/hydrogeological and the contaminant loading aspects of risk assessment. In general, the arrows (→↓) indicate directions of decreasing risk, with ↓ showing the decreasing likelihood of contamination and → showing the direction of decreasing consequence. The contaminant loading aspect of risk is indicated by the activity type in the table title.

The response to the risk of groundwater contamination is given by the response category allocated to each zone and by the site investigations and/or controls and/or protective measures described in notes a, b, c, d, m, n and o.

It is advisable to map existing hazards in the higher risk areas, particularly in zones of contribution of significant water supply sources. This would involve conducting a survey of the area and preparing an inventory of hazards. This may be followed by further site inspections, monitoring and a requirement for operational modifications, mitigation measures and perhaps even closure, as deemed necessary. New potential sources of contamination can be controlled at the planning or licensing stage, with monitoring required in some instances. In all cases the control measures and response category depend on the potential contaminant loading, the groundwater vulnerability and the groundwater value.

In considering a scheme, it is essential to remember that: (a) a scheme is intended to provide guidelines to assist decision-making on the location and nature of developments and activities with a view to ensuring the protection of groundwater; and (b) delineation of the groundwater protection zones is dependent on the data available and site specific data may be required to clarify requirements in some instances. It is intended that the statutory authorities should apply a scheme in decision-making on the basis that the best available data are being used. The onus is then on a developer to provide new information which would enable the zonation to be altered and improved and, in certain circumstances, the planning or regulatory response to be changed.

Table A.4 Groundwater Protection Response Matrix for a Hypothetical Activity

VULNERABILITY RATING	SOURCE PROTECTION		RESOURCE PROTECTION						
			Regionally Imp.		Locally Imp.		Poor Aquifers		
	Inner	Outer	Rk	Rf/Rg	Lm/L g	LI	PI	Pu	
Extreme (E)	R4	R4	R4	R4	R3 ^m	R2 ^d	R2 ^c	R2 ^b	↓
High (H)	R4	R4	R4	R3 ^m	R3 ⁿ	R2 ^c	R2 ^b	R2 ^a	↓
Moderate (M)	R4	R3 ^m	R3 ^m	R2 ^d	R2 ^c	R2 ^b	R2 ^a	R1	↓
Low (L)	R3 ^m	R3 ^o	R2 ^d	R2 ^c	R2 ^b	R2 ^a	R1	R1	↓
→ → → → → → → → →									

(Arrows (→ ↓) indicate directions of decreasing risk)

Use of a Scheme

The use of a scheme is dependent on the availability of the groundwater protection responses for different activities. Currently, responses have been developed for three potentially polluting activities: IPC-licensable landspreading of organic wastes (primarily piggeries and poultry waste), domestic wastewater treatment systems, and landfills. Additional responses for other potentially polluting activities will be developed in the future.

Appendix II, Explanation of Borehole Productivity concept

QSC graphs: an aid to classification of data-poor aquifers in Ireland G.R. Wright

From: Robins, N.S. and Misstear, B.D.R. (eds.) *Groundwater in the Celtic Regions: Studies in Hard Rock and Quaternary Hydrogeology*. Geological Society, London, Special Publications, **182**. The Geological Society of London.

QSC graphs: an aid to classification of data-poor aquifers in Ireland

G. R. WRIGHT

*Geological Survey of Ireland, Beggars Bush, Haddington Road, Dublin 4, Ireland
(e-mail: geoffwright@gsi.ie)*

Abstract: The Geological Survey of Ireland's aquifer classification system recognizes three main categories: Regionally Important, Locally Important and Poor Aquifers. This system is increasingly used to assist local authorities and state agencies to make decisions on planning applications and integrated pollution control licences, by prioritizing areas according to the value of their underlying groundwater resources. Most aquifers in Ireland are unconfined fractured hard rock aquifers, often of limited extent, which can exhibit a wide range of properties. Pumping test data are scarce, patchy and often of uncertain quality, and reliable transmissivity or permeability values are unavailable for many aquifers. Under these circumstances, the classification of a given geological formation in a given region can be difficult. The 'QSC Graph' compares the specific capacity (SC) for a borehole, determined by a pumping test, with the abstraction rate during the test (Q), and indicates a 'borehole productivity index', in five classes (I, II, III, IV and V from highest to lowest). From the relative frequency of productivity classes for a given aquifer, the appropriate aquifer category can be inferred. However, other types of information for the aquifer should also be considered. The current QSC data set comprises about 1100 boreholes, and for individual formations up to 150 boreholes. The minimum data set required for an aquifer, depending on the diversity or compactness of the data, is between 20 and 50. Examples are given of the application of the approach to a number of Irish aquifers.

The Geological Survey of Ireland (GSI) has created a system of aquifer classification for use in groundwater protection schemes (Daly & Warren 1998; Department of Environment and Local Government *et al.* 1999). Three basic aquifer categories are recognized – Regionally Important Aquifers (R), Locally Important Aquifers (L) and Poor Aquifers (P), further subdivided as follows:

- Regionally Important Sand/Gravel Aquifers (Rg)
- Regionally Important Fractured Bedrock Aquifers (Rf)
- Regionally Important Karstified Aquifers (Rk)
- Locally Important Sand/Gravel Aquifers (Lg)
- Locally Important Bedrock Aquifers which are generally moderately productive (Lm)
- Locally Important Bedrock Aquifers which are moderately productive only in local zones (Li)
- Poor Bedrock Aquifers which are unproductive except in local zones (Pi)
- Poor Bedrock Aquifers which are generally unproductive (Pu)

This classification acknowledges that wells in almost any type of rock in Ireland can yield

sufficient water to supply at least a single household, and therefore no bedrock type is termed a 'non-aquifer'. The Republic of Ireland lacks any thick clay or shale lithologies (cf. the Oxford Clay of England) which are sufficiently unproductive to be unequivocally 'non-water-bearing'. The GSI classification also avoids the use of such terms as 'aquitard', 'aquiclude' or 'aquifuge', which are largely unknown to the wide range of people who are involved in water supply and protection in Ireland.

Because hydrogeological data are often scarce and patchy, various criteria are used in aquifer classification, including lithology, karstification, structural setting, occurrence/size of springs, baseflow estimation, and drainage density. However, where data are available on borehole yields and specific capacities, these are normally the main evidence whereby an aquifer is classified. While transmissivity (T) estimates from pumping tests would be desirable, there are currently too few of these for any given aquifer, and they are particularly scarce for the poorer aquifers. Even where pumping test data are available, they often fail to yield unambiguous T values, and often only a range can be suggested.

GSI's initial efforts to use borehole yield data for aquifer classification were based on the relative occurrence of 'excellent', 'good', 'moderate'

From: ROBINS, N. S. & MISSTEAD, B. D. R. (eds) *Groundwater in the Celtic Regions: Studies in Hard Rock and Quaternary Hydrogeology*. Geological Society, London, Special Publications, **182**, 169–177. 1-86239-077-0/00/\$15.00 © The Geological Society of London 2000.

and 'poor' yields (>400 , $<400 > 100$, $<100 > 40$, and $<40 \text{ m}^3/\text{d}$). However, it was known that the reported yield of a well could be quite different from its maximum sustainable yield. Specific capacities were also taken into account, where available, but there was no simple or consistent way to do this. There was a need for a means of integrating borehole yield data with specific capacity data in a consistent manner (Wright 1997).

Methodology

All available specific capacity data for Irish boreholes (currently almost 1100) have been compiled. The data come from four main sources: (1) local authority public supply boreholes, mostly with relatively high yields ($>100 \text{ m}^3/\text{d}$), and (2) GSI records, including boreholes drilled for GSI projects.

Two important features of Irish aquifers need to be borne in mind when reviewing the data:

- Most Irish aquifers are unconfined.
- Except for Quaternary gravel/sand deposits, Irish aquifers depend almost entirely on fracture permeability, and well losses are

very significant. Since fracture frequency and openness tend to decrease with depth, permeability also tends to decrease with depth, and transmissivity and specific capacity can vary substantially according to the water table level. Thus a given borehole can show very different specific capacities at different times of year, due to water table changes, and may also show sharp decreases in specific capacity at higher drawdowns.

From the data set, graphs were prepared for the commonest geological formations, plotting well 'yield' (Q) against specific capacity (SC), hence the graphs are termed 'QSC Graphs'. The QSC graphs allow the available yield and specific capacity data to be viewed simultaneously and in the context of similar data from other aquifers.

Results

The QSC graph for all boreholes (Fig. 1) covers a range of several orders of magnitude for both parameters, showing an obvious general trend within a broad 'envelope' of data points. The upper boundary of the envelope is very 'fuzzy', but the lower boundary is sharper and can be seen as controlled by two main factors, one artificial and one natural: (a) borehole depths limit the available drawdown, and (b) permeability tends to decrease with depth.

In general, a data point close to the lower boundary indicates a deep borehole which is being

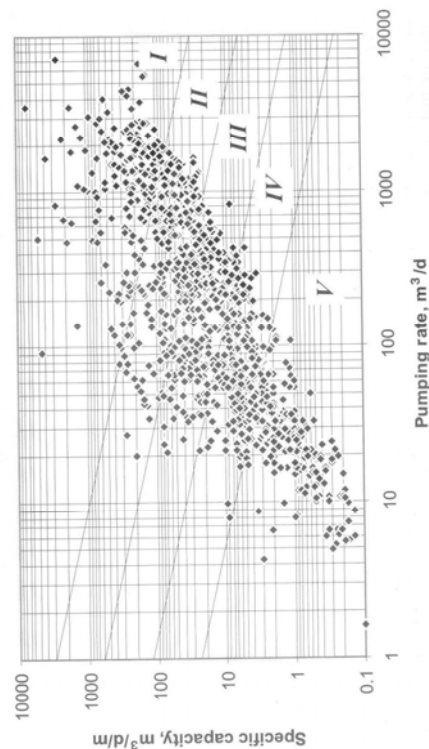


Fig. 1. QSC graph for full data set (c. 1100 boreholes), showing productivity classes I, II, III, IV & V.

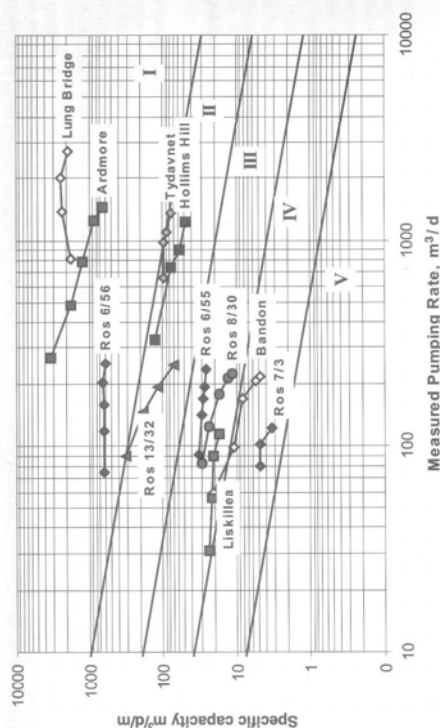


Fig. 2. QSC data for selected step tests in Ireland.

pumped near its maximum sustainable rate (i.e. most available drawdown has been used). Conversely, a data point in the upper part of the envelope indicates a borehole which could be pumped at a much higher rate than indicated, or a shallow borehole with little available drawdown.

The QSC axes can also be used to plot data from multiple tests (e.g. step tests) from the same borehole, in which case the points normally plot along a line which falls from left to right, i.e. as the pumping rate increases the specific capacity decreases (Fig. 2). The gradient will normally be quite gentle until a critical point is reached, after which it may become much steeper as well losses increase. This critical point may indicate the maximum sustainable yield of the borehole, due to increasing well losses and/or decreasing permeability down the hole.

If the general slope of such curves from individual boreholes in a given aquifer can be estimated, it is possible to extrapolate from a single data point on a QSC graph in order to predict the approximate maximum yield of a given borehole. However, it should be borne in mind that step tests may give different curves at different times of year.

By plotting QSC data from a number of boreholes in a given geological formation or aquifer unit, a classification of the aquifer can be attempted. In some cases, the graph indicates that the formation is too variable for a single classification, or that no single classification applies in all regions. In such cases the data must be

examined to see if a regional or stratigraphical-lithological sub-division is valid (or both), i.e. the wide spread of the data due to lithological variations within the formation or due to regional (perhaps structural) variations, or both?

In considering the data, too much attention must not be paid to any single data point, because the data quality may be suspect. The validity of any conclusions depends on the totality of the data, and therefore depends on having enough data points, so that occasional extreme values can be discounted. A number of factors may detract from the data quality:

- data collection by untrained personnel, low accuracy of measurements;
- pumping tests of variable length, sometimes too short: in some cases it is possible to extrapolate drawdown to, say, one week, in order to derive a realistic specific capacity value; in many cases, pumping rates were not constant;
- often, drawdown may not have stabilized; pumping tests may have been carried out at a time of relatively high water table, thus giving an unduly high SC; this may be particularly important in the poorer aquifers;
- the geological formation/lithology may not have been identified/inferred correctly;
- borehole depths are very variable (graphs plotting depth against yield show virtually no correlation, but in an individual borehole the depth will often be significant);

- borehole construction is often unknown, is very variable and may adversely affect the yield.

Comparing well yields and specific capacities highlights the difficulties of using well yield categories alone, because each category includes wells with a very wide range of SC and, by inference, a wide range of transmissivities.

Borehole productivity index

To simplify comparisons between aquifers, and to supplement the four existing well yield

categories, the QSC graphs were used to create a new index ('Productivity'), with five classes: I (highest), II, III, IV and V (lowest), with boundaries as shown on Fig. 1. The boundary lines have a gradient of 1:10 (corresponding to the approximate gradient given by step tests in unconfined Irish aquifers) and are half an order of magnitude apart on the y-axis. The boundaries were set so that each class contained approximately equal numbers of data points: in practice, this worked out as follows: (I) 19%, (II) 21%, (III) 22%, (IV) 19% and (V) 19%. A five-class system seems to offer a suitable balance between simplicity and discrimination.



Fig. 3. Map of Ireland, showing counties.

For any given formation or aquifer unit, the numbers of wells in each productivity class are plotted as bar charts, to provide a 'productivity profile' which should be attributable to a particular aquifer category. Boreholes in a Regionally Important Aquifer should plot largely within classes I & II, and those in a Poor Aquifer should plot predominantly within classes IV & V. Locally Important Aquifers will plot largely in classes II to IV. However, boreholes in limestone aquifers in particular may plot across all classes because of the extreme variability produced by karstification.

Figure 3 shows a map of Ireland, with counties identified for reference. The relative frequency of occurrence of productivity classes are shown by means of bar charts for each aquifer (Figs 4-8). To illustrate the usefulness of these charts, the data are discussed below, beginning with aquifers already known to be either very good or very poor.

Regionally Important Aquifers

Quaternary Deposits (Sands & Gravels) (Fig. 4a). Well-sorted sand/gravel deposits, if sufficiently thick and saturated, are good aquifers. There are 98 data points from Quaternary deposits, mainly known sand/gravel aquifers. As expected, both Q

and SC are generally high, and many data points indicate higher ultimate well yields. Lower values are probably from very thin aquifers, glacial tills, or poorly constructed wells. The great majority of data points fall into productivity classes I or II. These aquifers, if sufficiently extensive, are categorized as Regionally Important (Rg), or if too small, as Locally Important (Lg).

Wexford Formation (Limestone) (Fig. 4b). This is a small dolomitized limestone formation in County Wexford in SE Ireland, which has been quite intensively developed. Only 17 data points exist, but the data are of good quality. This is the most compact data set, with a relatively small logarithmic range of both Q (600-3000 m³/d) and SC (15-350 m³/d/m), and the aquifer is classed as a Regionally Important Aquifer (Rk). Most wells plot near the lower boundary of the QSC envelope, indicating that they have been tested near their maximum yield.

Campile Formation (Ordovician volcanics) (Fig. 4c). This is a highly fractured aquifer in the SE corner of Ireland (Counties Wexford and Waterford), providing 39 data points. The data set is fairly compact, and even the few lower yielding wells have rather high SCs, indicating much higher ultimate yields.

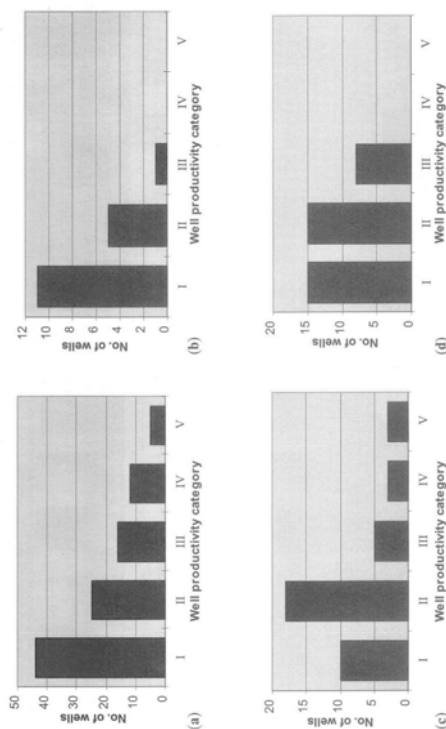


Fig. 4. Productivity bar charts for Regionally Important Aquifers (a) Quaternary deposits, (b) Wexford Limestone Formation, (c) Campile Formation, (d) Kiltoran Sandstone Formation.

range. Median Q is about $100 \text{ m}^3/\text{d}$, and median SC about $12 \text{ m}^3/\text{d}/\text{m}$. The data show substantial regional variations. In County Galway, in the west of Ireland, values are almost invariably low (Poor) (Fig. 7b). In County Meath in the east, Q and SC are fairly high, justifying a Locally Important (Lm) rating (Fig. 7d). Values in the intervening counties (Offaly, Westmeath, Dublin, and Kildare) are intermediate, justifying a Locally Important (LI) rating (Fig. 7c).

Variable aquifers

Devonian 'Old Red Sandstone' (excluding Kiltoran Sandstone) (Fig. 7a). This provides 61 data points spread widely through the range, except at the very top and bottom. Median Q is $70\text{--}80 \text{ m}^3/\text{d}$ and median SC is about $13 \text{ m}^3/\text{d}/\text{m}$. A general classification of Locally Important (LI) is supported, but there is evidence that the coarser formations (conglomerates/coarse sandstones) are more productive, whereas finer-grained formations (siltstones, etc.) may be Poor Aquifers (PI).

Calp Formation (Limestone) (Figs 7b–d). The Calp is a Lower Carboniferous argillaceous limestone sequence occurring widely across central Ireland from Dublin in the east to Galway in the west. The 122 data points cover a very wide

Waulsortian Formation (Limestone) (Figs 8a–b). The Waulsortian Formation is a clean, fine-grained, massive Lower Carboniferous limestone which was deposited as large mud-mounds. Ninety data points exist, covering a very wide range, but mostly in the upper half of the envelope. A marked regional contrast is evident. In the south (Counties Cork, Kilkenny, Limerick, Tipperary and Waterford), where it was intensively fractured by the Variscan orogeny, and is extensively karstified and often dolomitized, a classification of Regionally Important (RI) is amply justified (Fig. 8a). Elsewhere it is no better than Locally Important (LI) (Fig. 8b). Further investigation may extend the Regionally Important area.

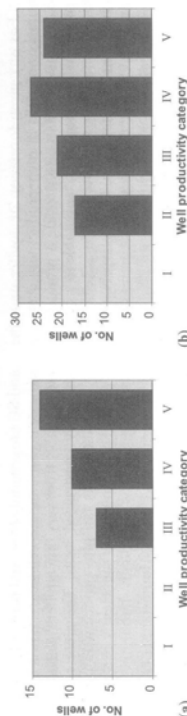


Fig. 5. Productivity bar charts for Poor Aquifers (a) Granites and metamorphic rocks, (b) Lower Palaeozoic rocks (excluding Campile Formation).

Kiltoran Formation (Sandstone) (Fig. 4d). This Upper Devonian-Lower Carboniferous sandstone formation provides 37 data points, almost all in the upper half of the envelope, and mostly in the upper third. This aquifer is often confined. Step test results from confined aquifers show that the SC values decline only slightly with increases in discharge, so the use of the 'standard' QSC graphs tends to underestimate their productivity index. However, most values still fall into productivity classes I or II. Ideally, a different set of productivity classes should be created for confined aquifers.

Locally Important Aquifers

Poor Aquifers

Granites and Metamorphic rocks (Fig. 5a). These lithologies, which would be expected to be poor aquifers, provide 31 data points, clustered in the lower half of the total range, and mostly in the lower third. Some SCs are higher than might be expected (these probably derive from pumping tests at high water tables). Median yield is about $33 \text{ m}^3/\text{d}$. These data can be taken as characteristic of a Poor Aquifer.

Cork Group (Fig. 6a). These Lower Carboniferous rocks, mainly fine sandstones, siltstones and mudstones, are found only in County Cork, and are quite intensely fractured. Twenty-five data points exist, generally in the middle third of the envelope, suggesting a Locally Important (LI) classification.

Ballysteen Formation (Limestone) (Fig. 6b). This Lower Carboniferous argillaceous bioclastic limestone formation provides 75 data points over a wide range, but with few yields over $400 \text{ m}^3/\text{d}$.

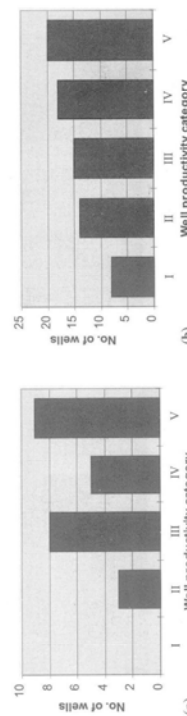


Fig. 6. Productivity bar charts for Locally Important Aquifers (a) Cork Group, (b) Ballysteen Limestone.

Fig. 7. Productivity bar charts for Variable Aquifers (sandstones and muddy limestones) (a) Old Red Sandstone (excluding Kiltoran Formation), (b) Calp Limestone (Galway), (c) Calp Limestone (Midlands-Dublin), (d) Calp Limestone (Meath-North Dublin).

Conclusions

QSC graphs and bar charts offer a useful semi-quantitative method of using limited pumping test data to evaluate the appropriate aquifer categories in Ireland. It is envisaged that their principal use will be to support aquifer categorization which may come under challenge where important planning decisions are involved.

A similar approach may be applicable in other countries where groundwater mainly occurs in unconfined fractured formations and where good hydrogeological data are scarce. However, the boundaries between productivity classes used in Ireland are essentially arbitrary and would probably require adjustment in other environments.

The size of the data set and its distribution are important. A total data set of at least 500 is probably needed for an area of the size and complexity of Ireland, and (depending on variability) a data set of at least 20 to 40 data points is probably needed for a defensible aquifer categorization.

The method demonstrates the need for regional discrimination: virtually identical rocks can have quite different aquifer characteristics in

different areas, owing to differing geological and geomorphological histories.

Past and present colleagues in GSI are thanked for useful discussions. I am also grateful to many hydrogeologists, engineers and well drillers who contributed data, and to two anonymous reviewers for suggestions. The paper is published by permission of the Director of the Geological Survey of Ireland, Dr. Peadar McArdle.

References

- DALY, D. & WARREN, W. P. 1998. Mapping groundwater vulnerability: the Irish perspective. In: ROBINS, N. S. (ed.) *Groundwater Pollution, Aquifer Recharge and Vulnerability*. Geological Society, London, Special Publications, **130**, 179–90.
- DEPARTMENT OF ENVIRONMENT AND LOCAL GOVERNMENT, ENVIRONMENTAL PROTECTION AGENCY & GEOLOGICAL SURVEY OF IRELAND. 1999. Groundwater Protection Schemes. Department of Environment & Local Government, Environmental Protection Agency, and Geological Survey of Ireland, Dublin.
- WRIGHT, G. R. 1997. *QSC Graphs*. GSI Groundwater Newsletter, Issue no. 32, December.

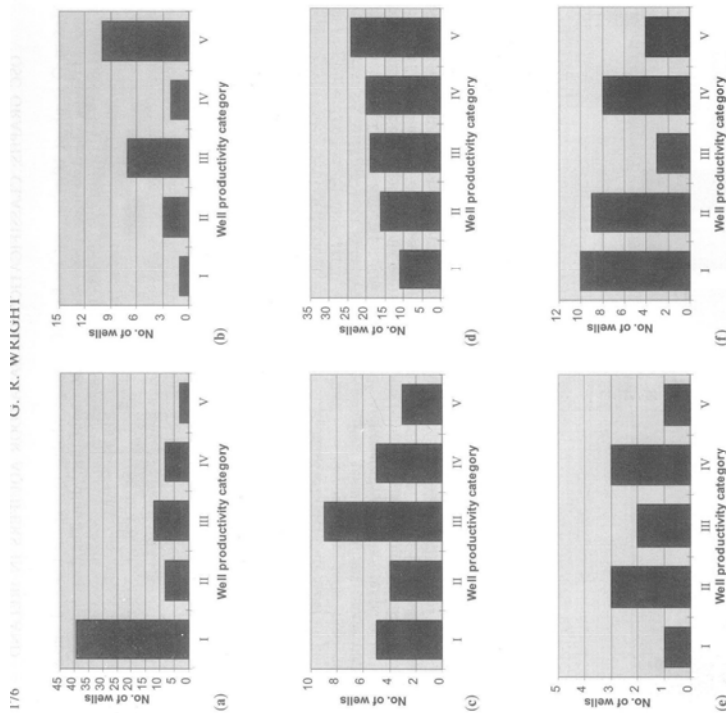


Fig. 8. Productivity bar charts for Variable Aquifers (clean limestones) (a) Waulsortian Limestone (North), (b) Waulsortian Limestone (South), (c) Ballyadams Limestone, (d) Burren Limestone (Galway-Mayo), (e) Burren Limestone (Laois-Offaly), (f) Burren Limestone (north-central region).

Ballyadams Formation (Limestone) (Fig. 8c). This Lower Carboniferous formation comprises clean, generally coarse-grained, bedded limestones, often karstified and/or dolomitized. Twenty six data points cover quite a wide range. The occurrence is limited to the southern and SE midlands (Counties Carlow, Laois, Kilkenny, and South Tipperary), so further regional analysis is difficult. Generally it is regarded as Regionally Important (Rk), but the QSC data throw some doubt on this, and in places Locally Important (Ll) may be more appropriate.


Burren Limestone Formation (and equivalents) (Figs 8d-f). These are also clean, generally coarse-grained, bedded Lower Carboniferous limestones. One hundred and forty one data points cover almost the whole range of Q and SC. Counties Galway and Mayo (Fig. 8d) show lower values than the Laois-Offaly region (Fig. 8c) and the 'north-central' region (counties Cavan, Leitrim, Longford, Meath and Roscommon, Fig. 8f). Classification is currently Regionally Important (Rk), but to some extent this derives from the high aquifer throughput rather than the QSC data.

Appendix III, Permeability Regions in County Cavan

Summary of Permeability Data and Analyses for Permeability Region 1: Central East Cavan Till

Description of unit location:	Extends across much of east Cavan (from the Erne Waterway east to Virginia and Kingscourt areas, and north to the Cavan border.
Why is this a single K unit?	Similar rock types and subsoils over areas of generally elevated topography
1. General Permeability Indicators and Region Characteristics	
Rock type	Silurain and Ordovician Metasediments
Depth to bedrock	Highly variable, thin cover on elevated bedrock controlled areas to >10m thickness won the edges of the upland areas, moving into drumlinised areas. Drumlins generally till cored, with the exception of the Redhills area in which they are rock cored,and some crag and tail features in the lower elevations at the edge of the area.
Subsoil type	Mainly tills derived from sandtones and shales of Palaeozoic origin
Soil type	Principally acid mineral soils, deep on lower ground and shallow on elevated topography, usually well drained, with patches of poorly drained soil in places.
Vegetation and land use	Grazing and silage land, which is frequently heavily artificially drained and managed with fertilizer.
Artificial drainage density	Typically high, occasionally moderate
Natural drainage density	Moderate
Topography and altitude	Most of the area is elevated rocky hills with elevated drumlins between, an area of low lying drumlins stretches across the north around the Annalee River, and an area of relatively flat lo
Ave. effective rainfall (mm)	100 to 120mm/yr

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.

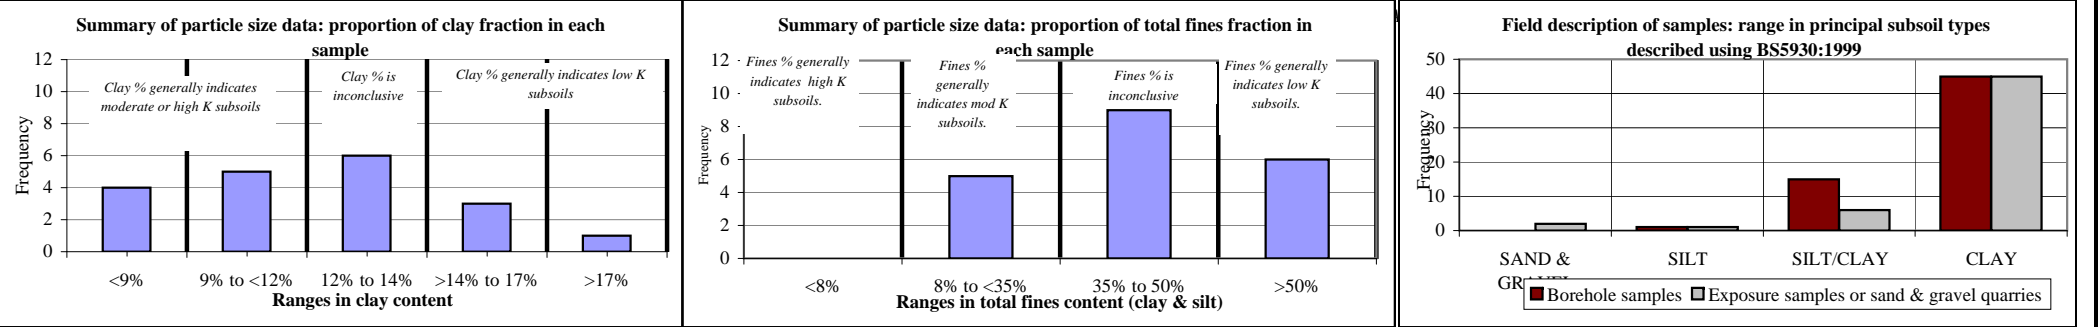

3. Data from Permeability Tests.

T' tests: # Results # Tests T<1 # Tests T>50	Variable head # Results Range Values Typical value	Pump tests # Results Range Values Typical value	Lab tests # Results Range Values Typical value
min/25mm	tests (m/sec):	(m/sec):	(m/sec):

4. Summary and Analysis

Criteria	Comments	Implications of each criterion for assessment of subsoil permeability	
Quaternary / subsoil origin	Till with a clay rich matrix and often high gravel content, from shales and minor sandstones.	>>>	Low
Particle size data	Highest proportion of samples have borderline clay content, but high total fines content	>>>	Low
Field description data	Borehole samples	>>>	Low
	Exposure samples	>>>	Low
Soil type	AminDW	>>>	Moderate
Artificial drainage density	Generally High	>>>	Low
Natural drainage density	Moderate	>>>	Moderate
Permeability test data	No data	>>>	-
Rock type	Mainly low permeability Metamorphics (shales and greywackes) and minor Volcanics.	>>>	Low
Land use	Grazing on well managed and artificially drained land	>>>	Low
Overall conclusion		>>>	LOW

5. COMMENTS: The majority of the data points to a low permeability area, which corresponds with the bedrock type (mainly shales and greywackes) and source of the overlying till. Variation in the sedimentary origin of the metamorphics results in localised variabilities in the clay content of the till (such as where sandstones occur), and permeabilities which are close to the Moderate-Low boundary in some areas. Hence, the area is used for grazing with good land management.

Summary of Permeability Data and Analyses for Permeability Region 2: Crossadoney Area Till


Description of unit location:	Corlismore to west of Crossadoney, and south 2km past Bellananagh
Why is this a single K unit?	Presence of Granite till subsoil and the Crossadoney Granite have resulted in patches of localised higher permeability where the gr

1. General Permeability Indicators and Region Characteristics

Rock type	Crossodoney Granite
Depth to bedrock	Much "rock close" in the area, generally <10m elsewhere.
Subsoil type	Granite till
Soil type	Acid mineral well drained soils (with very minor patches of acid mineral poolry drained soil).
Vegetation and land use	Grazing and tillage crops. The till areas are reasonably free draining due to a thin (upper horizon ~2m) of free draining topsoil/subsoil, and more dense low permeability dark subsoil below
Artificial drainage density	Moderate to Low
Natural drainage density	Moderate to Low
Topography and altitude	Central Cavan with low lying NW SE trending drumlins
Ave. effective rainfall (mm)	variable; 100 to 600mm/yr

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.

NB Particle distributions adjusted to discount particles greater than 20mm. Graphs only depict samples taken from 1) a known depth exceeding 1.5m in boreholes or 1m in exposures, AND 2) locations not at permeability boundaries.

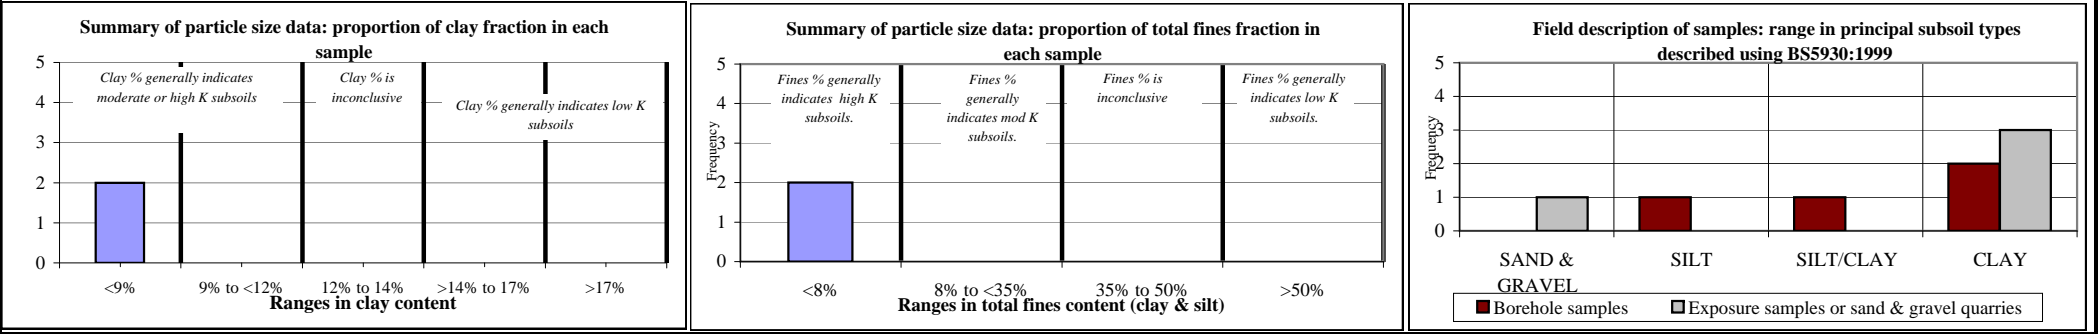

3. Data from Permeability Tests.

T' tests: # Results	# Tests T<1	# Tests T>50	Variable head # Results	Range Values	Typical value	Pump tests # Results	Range Values	Typical value	Lab tests # Results	Range Values	Typical value
min/25mm			tests (m/sec):			(m/sec):			(m/sec):		

4. Summary and Analysis

Criteria	Comments	Implications of each criterion for assessment of subsoil permeability
Quaternary / subsoil origin	Till with a sand/silt matrix - probably derived locally from coarse-grained granitic rocks.	>>>> Moderate
Particle size data	<12% clay in the only PSDs available.	>>>> Moderate
Field description data	Borehole samples	>>>> Moderate-Low
	Exposure samples	>>>> Moderate-Low
Soil type	AminDW	>>>> Moderate-Low
Artificial drainage density	Low	>>>> High
Natural drainage density	Moderate to Low	>>>> Moderate-High
Permeability test data	No data	>>>> -
Rock type	Crossodoney Granite	>>>> Moderate-low
Land use	Grazing and tillage.	>>>> Moderate-High
Overall conclusion		>>>> MODERATE

5. COMMENTS: Limited areas of the granite tills displayed this moderate permeability (rushes and arterial drains mapped) probably due to mixing in of material from the surrounding metasediments during iceflow. Some quite large tracts of alluvium have formed between the drumlins on the granite which is to be expected for alluvial sediments formed on granites/granite till.

Summary of Permeability Data and Analyses for Permeability Region 3: Loughs Sheelin Ramonr, Mullagh Shercock Tills


Description of unit location:	This permeability Unit is locate in the southeast of Cavan, around Loughs Sheelin and Ramor, and stretches up through the Mullagh area. There is also a small area of similar permeability around Lough Silian to north of Shercock.
Why is this a single K unit?	Uniform till which frequently has a high fines, but borderline low to mod, or low CLAY content. The area also has similar topsoil and land use and relatively uniform topography.

1. General Permeability Indicators and Region Characteristics

Rock type	Principally Silurian Metasediments and Volcanics, with some impure and pure Dinantian Limestones (sandstones and shales) around Lough Sheelin.
Depth to bedrock	The range in depth to bedrock is between 2m and 9.3m, the southern part is generally shallower including the limestone tills to the east of Lough Sheelin.
Subsoil type	Palaeozoic tills with an area of limestone tills to the east of Lough Sheelin.
Soil type	Principally acid mineral soils, deep on lower ground and shallow on elevated topography, usually well drained, with patches of poorly drained soil in places.
Vegetation and land use	The area in the south of the county is generally free draining and used for grazing cattle and occasionally sheep. Piggery's and coillte land also take up a portion of the land, the former pa
Artificial drainage density	Generally low
Natural drainage density	Moderate to low
Topography and altitude	The topography is mainly low lying undulating land, and some small areas of elevated land, with the exception of the Shercock area which is an elevated drumlinised area.
Ave. effective rainfall (mm)	Principally 400 to 500mm/yr, 500 to 600mm/yr in places

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.

NB Particle distributions adjusted to discount particles greater than 20mm. Graphs only depict samples taken from 1) a known depth exceeding 1.5m in boreholes or 1m in exposures, AND 2) locations not at permeability boundaries.

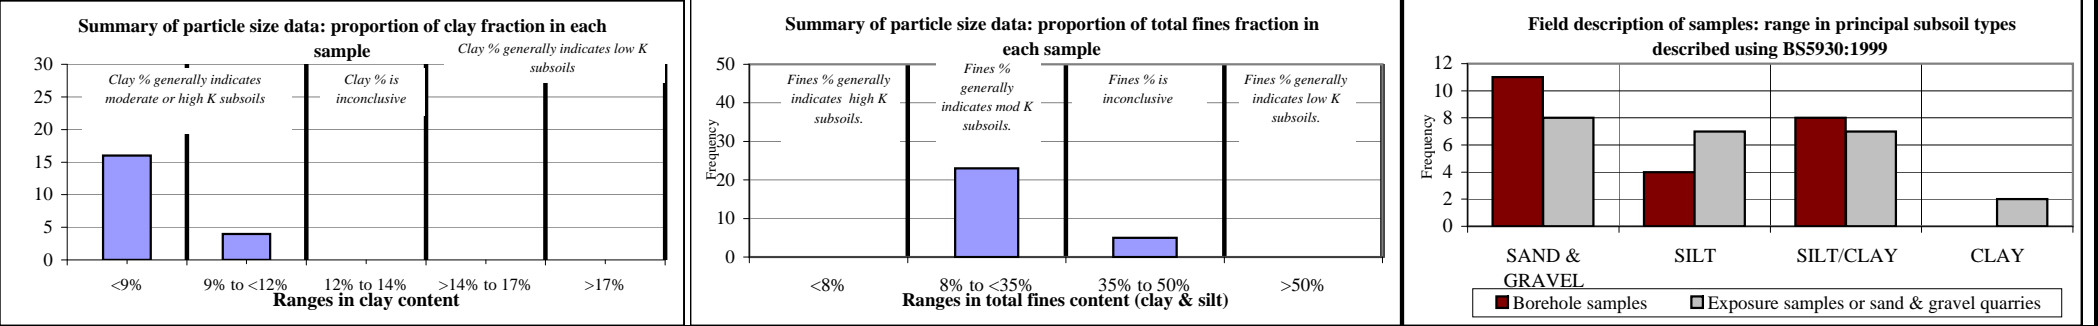

3. Data from Permeability Tests.

T' tests: # Results	# Tests T<1	# Tests T>50	Variable head # Results	Range Values	Typical value	Pump tests # Results	Range Values	Typical value	Lab tests # Results	Range Values	Typical value
min/25mm			tests (m/sec):			(m/sec):			(m/sec):		

4. Summary and Analysis

Criteria	Comments	Implications of each criterion for assessment of subsoil permeability	
Quaternary / subsoil origin	Till with a clay rich matrix and often high gravel content, from shales and minor sandstones.	>>>	low
Particle size data	All PSD samples have <12% clay, fines generally<35%	>>>	moderate
Field description data	Borehole samples	>>>	high-moderate
	Exposure samples	>>>	high-moderate
Soil type	AminDW and AminSW	>>>	moderate
Artificial drainage density	low	>>>	high
Natural drainage density	moderate to low	>>>	moderate-high
Permeability test data	No data	>>>	-
Rock type	Mainly low permeability metasediments and impure limestones	>>>	moderate-low
Land use	Grazing land, generally with few rushes.	>>>	moderate-high
Overall conclusion		>>>	MODERATE

5. COMMENTS: The presence of clean sand and gravel patches within this permeability unit will affect the overall drainage patterns and vegetation. A significant proportion of sand and gravels have been recorded in this unit, although they still contain sufficient fines to result in a moderate permeability.


Summary of Permeability Data and Analyses for Permeability Region 4: Cavan Panhandle Till

1. General Permeability Indicators and Region Characteristics

Rock type	Namurian Shales and sandstones, and Dinantian shales, sandstones and limestones in the mountaineous areas, Dinantian sandstones and Pure Bedded Limestones in the centre of Glengevlin and to the southwest, south and east of Slieve Rushen. Impure Dinantian Limestones underly the southeast of the area.
Depth to bedrock	Formation of thick tills of >10m depth between mountaineous areas.
Subsoil type	Namurian shale and sandstone till in Glangevlin, Carboniferous chert and sandstone till south and east of Slieve Rushen, patches of limestone till in the east.
Soil type	Mixture of deep well drained and poorly drained acid mineral soils in the mountaineous areas, principally the former in the remainder of this area.
Vegetation and land use	Much forested land, scrub/unused land and bog, with occasional areas for grazing.
Artificial drainage density	Very high where land has been used for forestry or grazing.
Natural drainage density	Very high draining off upland peat and in valley areas, moderate in southeast of area.
Topography and altitude	Mountainous areas up to ca. 300mOD, valleys and lowland areas generally 60 to 100m OD
Ave. effective rainfall (mm)	120 up to 160mm/yr on elevated areas, to 100 to 120 in low lying areas of the valleys and southeast.

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.

NB Particle distributions adjusted to discount particles greater than 20mm. Graphs only depict samples taken from 1) a known depth exceeding 1.5m in boreholes or 1m in exposures, AND 2) locations not at permeability boundaries.

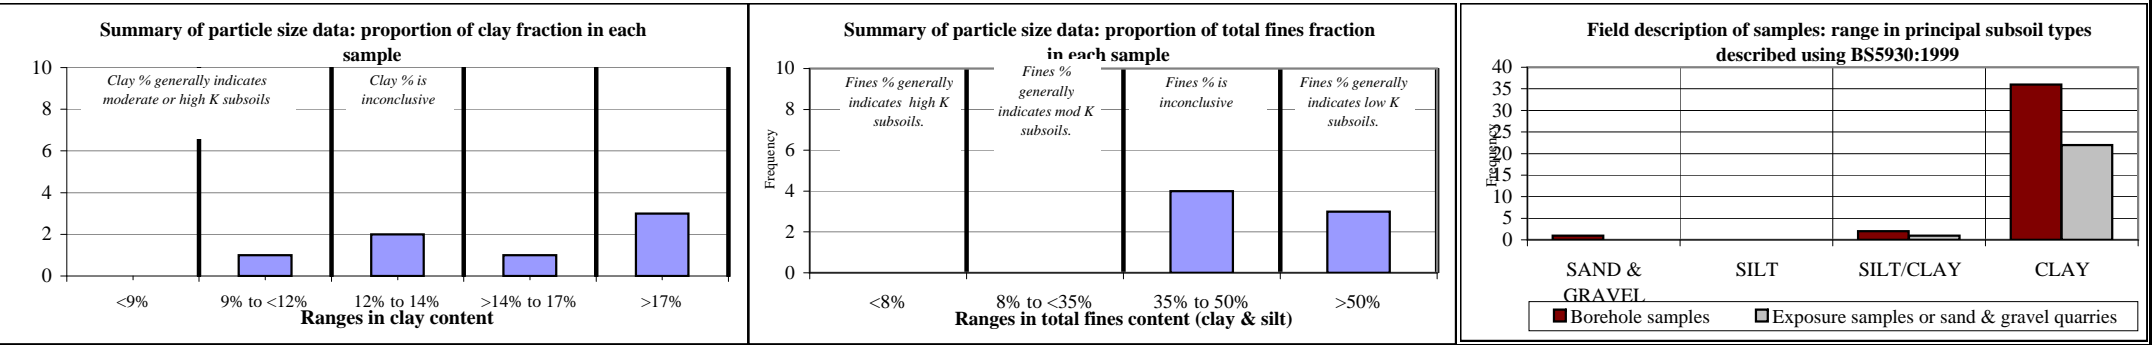

3. Data from Permeability Tests.

T' tests: # Results	# Tests T<1	# Tests T>50	Variable head # Results	Range Values	Typical value	Pump tests # Results	Range Values	Typical value	Lab tests # Results	Range Values	Typical value
min/25mm			tests (m/sec):			(m/sec):			(m/sec):		

4. Summary and Analysis

Criteria	Comments	Implications of each criterion for assessment of subsoil permeability
Quaternary / subsoil origin	Till derived from very sandstones and shales, from carboniferous sandstone, and from carboniferous limestone.	>>> Low to Moderate
Particle size data	Majority have >12% Clay and all have >35%fines	>>> Low
Field description data	Borehole samples	>>> Low
	Exposure samples	>>> Low
Soil type	Mainly AminDW, some Amin PD	>>> Low to Moderate
Artificial drainage density	Very High	>>> Low
Natural drainage density	Very High	>>> Low
Permeability test data	No data	>>>
Rock type	Low permeability shales, sandstones, and muddy limestones, karst limestones and moderately permeably sandstones.	>>> Low top Moderate
Land use	Forestry, scrub, and occasional sheep grazing	>>> Low
Overall conclusion		>>> LOW


5. COMMENTS: Argillaceous shales, sandstones and limestones at head of the glaciaers has resulted in high % clay content, and a till matrix which is particularly stiff may result from the weight of particularly thick glaciers overhead in the mountaineous area at the head of the glacier formation. The limestone tills were included in this unit as they display similar till densities and % clay content. High annual precipitation is a further reason for differences in land use between this area and the rest of Cavan.

Summary of Permeability Data and Analyses for Permeability Region 5: Sand and Gravel.

Description of unit location:	Sand and Gravel Areas
Why is this a single K unit?	Delineated as sand and gravel. Similar topsoil land use and topography.
1. General Permeability Indicators and Region Characteristics	
Rock type	Various. Generally low permeability rocks.
Depth to bedrock	Generally >5m and sometimes >10m.
Subsoil type	Glaciofluvially deposited sand and gravel of various rock type origins; metamorphics, limestones and sandstones.
Soil type	Mainly well drained acid mineral soils.
Vegetation and land use	Grazing. Very free draining land.
Artificial drainage density	Very low.
Natural drainage density	Low, although areas are quite small. Sometimes has streams because located in low lying discharge areas.
Topography and altitude	Generally in undulating low lying areas, less than 100m OD, frequently near or at the edges of Loughs Ramor or Sheelin.
Ave. effective rainfall (mm)	Typically 500-800

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.

NB Particle distributions adjusted to discount particles greater than 20mm. Graphs only depict samples taken from 1) a known depth exceeding 1.5m in boreholes or 1m in exposures, AND 2) locations not at permeability boundaries.

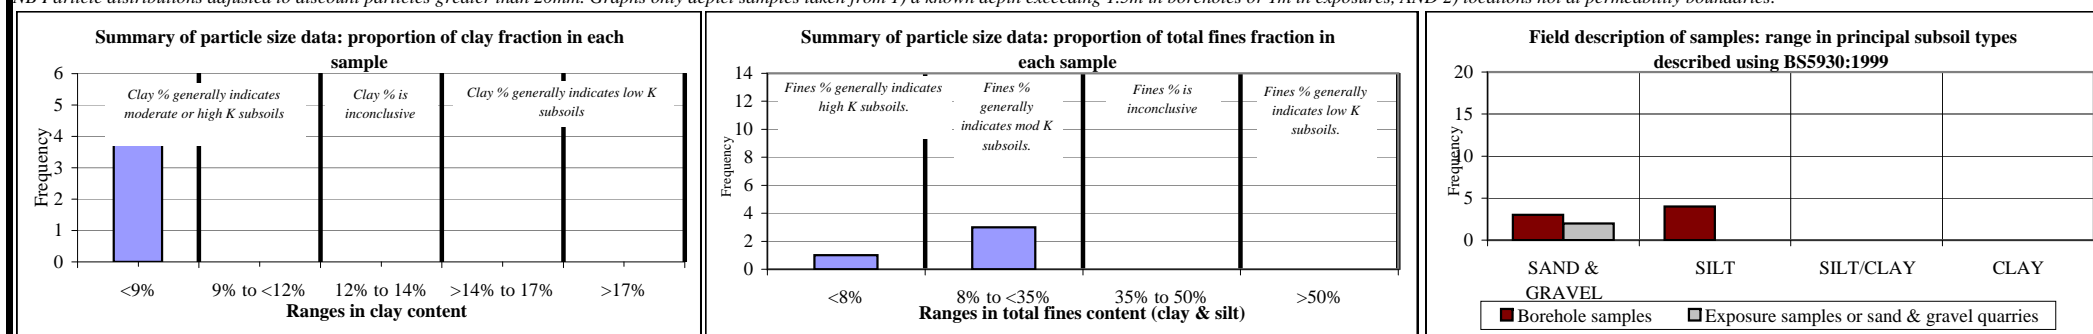

3. Data from Permeability Tests.

T' tests: # Results min/25mm	# Tests T<1	# Tests T>50	Variable head tests (m/sec):	# Results	Range Values	Typical value	Pump tests # Results (m/sec):	Range Values	Typical value	Lab tests # Results (m/sec):	Range Values	Typical value
---------------------------------	-------------	--------------	------------------------------	-----------	--------------	---------------	----------------------------------	--------------	---------------	---------------------------------	--------------	---------------

4. Summary and Analysis

Criteria	Comments	Implications of each criterion for assessment of subsoil permeability	
Quaternary / subsoil origin	Sand and/or gravels from glacial melt-water	>>>	high
Particle size data	<9% clay in 2 of 4 PSDs. <8% fines in 8 of 12 PSDs.	>>>	high - moderate
Field description data	Borehole samples	>>>	high
	Exposure samples	>>>	-
Soil type	Mainly acid brown earths	>>>	high - moderate
Artificial drainage density	Very low - negligible	>>>	high - moderate
Natural drainage density	Generally low, although is influenced by topographic positions (discharge zones) over larger areas.	>>>	high - moderate
Permeability test data	No data.	>>>	-
Rock type	Mainly low permeabilities Precambrian Quartzites, Gneisses & Schists .	>>>	low
Land use	Grazing, very free draining, occasional small quarries.	>>>	high - moderate
Overall conclusion		>>>	HIGH

5. COMMENTS: Most areas are well sorted sand and gravel are characteristicly flat, adjacent to the coast. The limited PSD reflect a high to moderate permeability although it is anticipated that some of the larger deposits to grade to, or include 'channels' of, finer-grained material. Generally, the BS descriptions, vegetation, land use, artificial and natural drainage, soil and occasional gravel pits all support a decision of high permeability.

Summary of Permeability Data and Analyses for Permeability Region 6: Peat.

Description of unit location:	Peat areas
Why is this a single K unit?	Delineated as peat. Uniform subsoil and topsoil. Similar topography and land use.
1. General Permeability Indicators and Region Characteristics	
Rock type	Various, but more extensively on Namurian sandstones and shales, and Dinantian sandstones, shales and limestones.
Depth to bedrock	Generally less than 5m in low lying areas,(expected to be 5m or less in mountainous areas also)
Subsoil type	Predominantly Blanket Peat over the higher areas. Some areas of 'Cutover Peat' that are likely to be sitting on top of lake clays and silts.
Soil type	Frequently recorded as blanket peat and cutover peat
Vegetation and land use	Much of the area is covered with coniferous forest plantations, particularly mountainous areas, otherwise heather, moss and rushes dominate, with occassional areas of sheep grazing.
Artificial drainage density	High on worked or aforested areas of peat, drainage is extensive to allow entry for machinery.
Natural drainage density	Moderate. The bog can store a great deal of the recharge.
Topography and altitude	Generally the higher upland areas - frequently mountainous. Also lower, shallow rock areas. Altitudes variable from 70m to 700m.
Ave. effective rainfall (mm)	Variable (80 - 160) upland to low lying areas, 160 to 180 in areas of mountainous blanket peat.

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.
NB Particle distributions adjusted to discount particles greater than 20mm. Graphs only depict samples taken from 1) a known depth exceeding 1.5m in boreholes or 1m in exposures, AND 2) locations not at permeability boundaries.

Summary of particle size data: proportion of clay fraction in each sample

Clay % Range	Frequency	Interpretation
<9%	6	Clay % generally indicates moderate or high K subsoils
9% to <12%	6	Clay % generally indicates moderate or high K subsoils
12% to 14%	6	Clay % is inconclusive
>14% to 17%	6	Clay % generally indicates low K subsoils
>17%	6	Clay % generally indicates low K subsoils

Summary of particle size data: proportion of total fines fraction in each sample

Fines % Range	Frequency	Interpretation
<8%	4	Fines % generally indicates high K subsoils.
8% to <35%	4	Fines % generally indicates mod K subsoils.
35% to 50%	4	Fines % is inconclusive
>50%	1	Fines % generally indicates low K subsoils.

Field description of samples: range in principal subsoil types described using BS5930:1999

Subsoil Type	Frequency	Sample Type
SAND & GRAVEL	0	Exposure samples or sand & gravel quarries
SILT	0	Exposure samples or sand & gravel quarries
SILT/CLAY	0	Exposure samples or sand & gravel quarries
CLAY	5	Borehole samples

3. Data from Permeability Tests.

T' tests: # Results # Tests T<1 # Tests T>50	Variable head # Results Range Values Typical value	Pump tests # Results Range Values Typical value	Lab tests # Results Range Values Typical value
min/25mm	tests (m/sec):	(m/sec):	(m/sec):

4. Summary and Analysis		Implications of each criterion for assessment of subsoil permeability	
Criteria	Comments		
Quaternary / subsoil origin	Peat	>>>	Low
Particle size data	only one data set available	>>>	Low
Field description data	Borehole samples	>>>	Low
	No Exposures	>>>	n/a
Soil type	Blanket Peat, peaty podzols, gleys.	>>>	Low
Artificial drainage density	High where developed	>>>	Low
Natural drainage density	Moderate to High	>>>	Moderate to low
Permeability test data	-	>>>	-
Rock type	Variable but mostly low permeability bedrock	>>>	Low
Land use	Sheep grazing, turf-cutting, if any	>>>	Low
Overall conclusion		>>>	LOW

5. COMMENTS: Blanket bogs consist of a build-up of organic matter in water-logged conditions where there is high precipitation. They developed in the warmer and wetter post glacial period. Cutover peat (raised bogs) developed in depressions in the bedrock which were originally lakes, until the lakes became colonised by plants which filled in the lake as they died. Apart from the less compacted upper layers, peat has a relatively low permeability. Data are sparse but it seems likely that the overall depth to bedrock is 5-10m. Extensive cutting and draining effects the depth and permeability of the material.

Summary of Permeability Data and Analyses for Permeability Region 7: Alluvium.


Description of unit location:	Alluvium strips mainly along Rivers Owenmore, Claddagh, Blackwater, Woodford and Annalee
Why is this a single K unit?	They are primarily fine-grained water-lain deposits found on the banks and flood-plains of rivers.

1. General Permeability Indicators and Region Characteristics

Rock type	Variable
Depth to bedrock	Typically greater than 5m. The alluvium generally overlies till or gravel deposits.
Subsoil type	Interbedded, predominantly fine-grained and sorted: sandy, silty and clayey water-lain alluvial deposits.
Soil type	Various. Not differentiated from surrounding till. Locally, groundwater gleys expected due to high water table.
Vegetation and land use	Immediately next to the rivers, the land is commonly water-logged and rushy. Where the alluvium is extensive, it may be grazed.
Artificial drainage density	High, reflecting the proximity of the watertable to the surface.
Natural drainage density	High.
Topography and altitude	Typically in valley flats throughout the county.
Ave. effective rainfall (mm)	Variable (500 - 700)

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.

NB Particle distributions adjusted to discount particles greater than 20mm. Graphs only depict samples taken from 1) a known depth exceeding 1.5m in boreholes or 1m in exposures, AND 2) locations not at permeability boundaries.

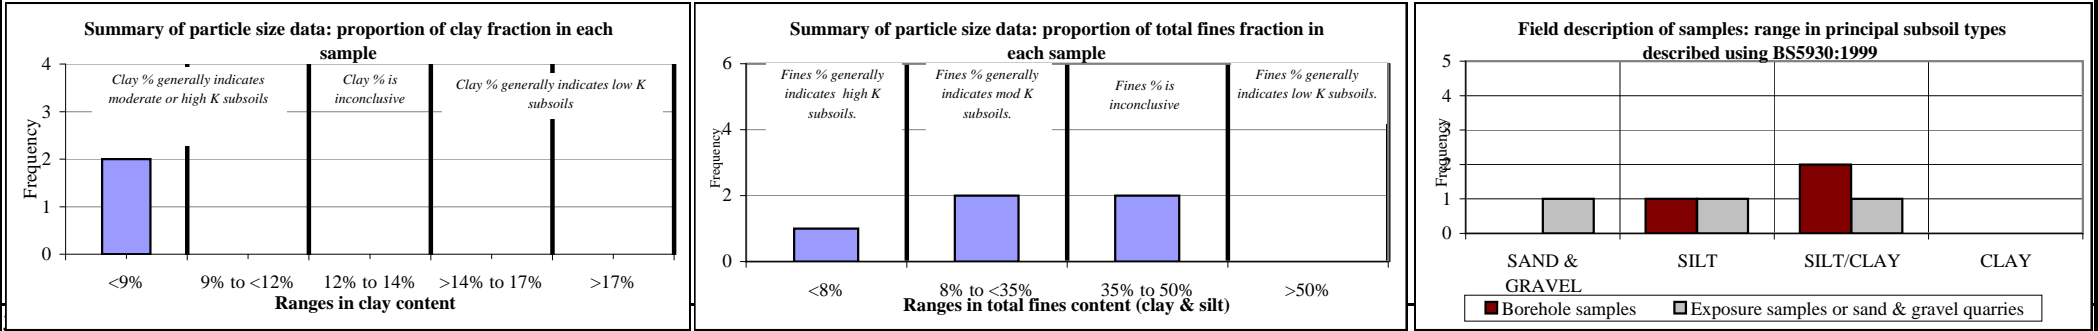

T' tests: # Results min/25mm	# Tests T<1	# Tests T>50	Variable head # Results tests (m/sec):	Range Values	Typical value	Pump tests # Results (m/sec):	Range Values	Typical value	Lab tests # Results (m/sec):	Range Values	Typical value
--	-------------	--------------	--	--------------	---------------	---	--------------	---------------	--	--------------	---------------

4. Summary and Analysis

Criteria	Comments	Implications of each criterion for assessment of subsoil permeability
Quaternary / subsoil origin	Water-lain, bedded, sands, silts and clays.	>>> high - low
Particle size data	High percentage of fines but SILT is likely to be dominant fraction	>>> moderate
Field description data	Borehole samples	>>> moderate - high
	Exposure samples - only one sample	>>> Low
Soil type	Varied.	>>> -
Artificial drainage density	High	>>> low
Natural drainage density	High	>>> low
Permeability test data	No data.	>>> -
Rock type	Variable.	>>> -
Land use	Some grazing where land is not water-logged.	>>> moderate - low
Overall conclusion		>>> MODERATE

5. COMMENTS: The alluvial deposits all share a common origin and the BS descriptions highlight a mix of sands, silts and clays. This makes it most likely that they will have a moderate permeability. One PSD has very high clay but the fines are extremely high and thus the silts dominate the behaviour (i.e. sample dilates). This is likely to be the case for the other high fines samples. Alluvium is a quite recent deposit that is likely to be underlain by the subsoil types surrounding it. Deposits are likely to be thicker along the larger rivers although are likely to have an influence on the overall permeability in most instances.


Summary of Permeability Data and Analyses for Permeability Unit 8: Lacustrine Clays

1. General Permeability Indicators and Region Characteristics

Rock type	Variable; Silurian Metasediments under lacustrine clays, Dinantian shales, sandstones and limestones under undifferentiated lacustrine deposits.
Depth to bedrock	Typically greater than 3m. Lacustrine clays generally overly tills.
Subsoil type	Fine grained, very homogenous, high density water-lain clays, whilst undifferentiated lacustrine clays can be less homogenous and more interbedded.
Soil type	Various. Not differentiated from surrounding till. Locally, groundwater gleys expected due to high water table.
Vegetation and land use	Marshy and often water-logged.
Artificial drainage density	Very high, reflecting the proximity of the watertable to the surface, and the dense low permeability material.
Natural drainage density	High.
Topography and altitude	Typically in low lying areas adjacent to lakes throughout the county.
Ave. effective rainfall (mm)	Variable (500 - 700)

2. Summary of Particle Size Analysis and Field Descriptions of Subsoil Samples.

NB Particle distributions adjusted to discount particles greater than 20mm. Graphs only depict samples taken from 1) a known depth exceeding 1.5m in boreholes or 1m in exposures, AND 2) locations not at permeability boundaries.

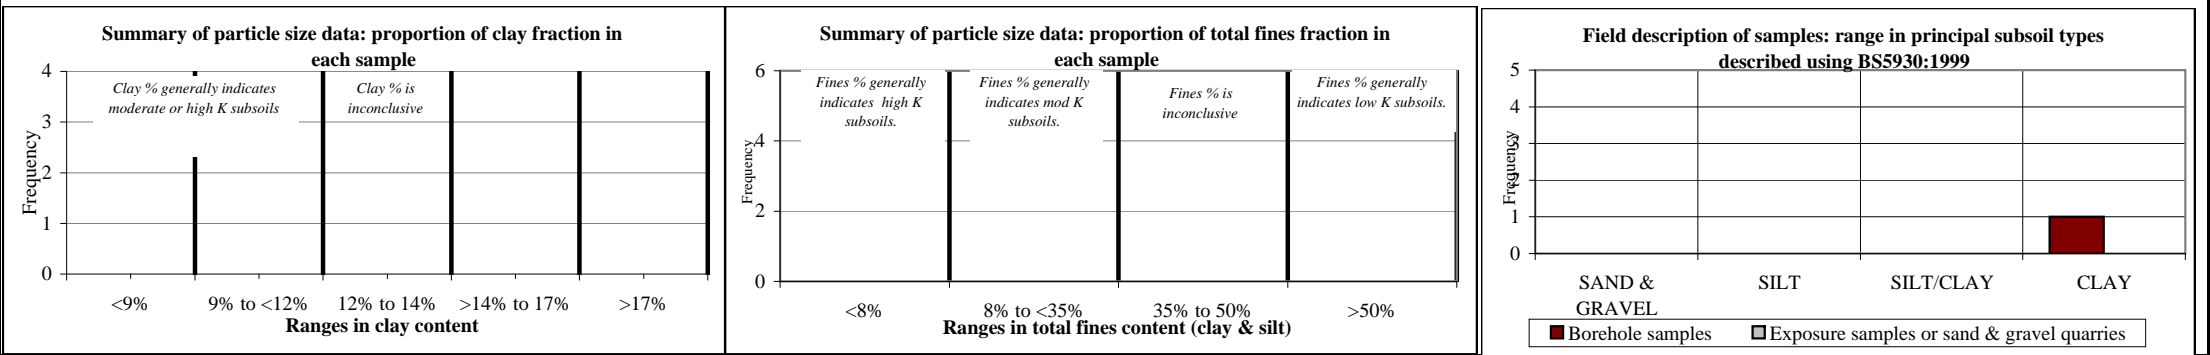

3. Data from Permeability Tests.

T' tests: # Results # Tests T<1 # Tests T>50	Variable head # Results Range Values Typical value	Pump tests # Results Range Values Typical value	Lab tests # Results Range Values Typical value
min/25mm	tests (m/sec):	(m/sec):	(m/sec):

4. Summary and Analysis

Criteria	Comments	Implications of each criterion for assessment of subsoil permeability	
Quaternary / subsoil origin	Water-lain (quiescent), homogenous clays.	>>>>	Low
Particle size data	n/a	>>>>	-
Field description data	Borehole samples - only one sample	>>>>	Low
	Exposure samples - none available	>>>>	-
Soil type	Varied.	>>>>	-
Artificial drainage density	High	>>>>	Low
Natural drainage density	High	>>>>	Low
Permeability test data	No data.	>>>>	-
Rock type	Variable.	>>>>	-
Land use	Some grazing, generally marshy and water-logged.	>>>>	Low
Overall conclusion		>>>>	LOW

5. COMMENTS: Deposits of lacustrine sediments occur throughout the county, typically as small strips around the edges of the many lakes in Cavan, but most of these deposits are considered too small and therefore likely to be too thin to influence the overall permeability, but rather reflect the permeability of the underlying till

Appendix 7-F Water Framework Directive

Introduction

The EU Water Framework Directive³ (WFD) became EU law in December 2000 and provides for a single European framework to assess water quality (Ecological status) and allows for the comparison of results across Europe. The WFD covers rivers, lakes, estuaries or transitional waters, coastal waters as well as groundwaters.

Surface waters are classified into five quality classes (Ecological status) under the WFD; High, Good, Moderate, Poor and Bad Ecological status. Groundwater is classified into just two quality classes, Good and Poor Ecological status. High Ecological status is when the water is unpolluted, while at the opposite end of the classification Bad Ecological status is when the water is highly polluted.

The WFD required baseline water quality in all waterbodies to be established for biological, chemical and hydromorphology quality. These three quality variables are combined to give the overall Ecological status classification of the waterbody; good or high ecological status and good chemical status for surface waters and good chemical and quantitative status for groundwaters.

The two principal objectives of the WFD are:

- that all water bodies must reach at least 'Good' overall status by 2027, at the latest. For surface waters, good overall status is a combination of good ecological status (or potential) and good chemical status; and
- that the status of each water body, including all the quality elements which make up the overall status, must not deteriorate relative to the baseline reported in the relevant RBMP.

The WFD identifies where actions are required to achieve Good Ecological status or maintain waterbodies which are already Good or High Ecological status. Waterbodies can be restored Good and High Ecological status by using targeted actions and measures to reduce the impact of human activities on them.

For heavily modified or artificial water bodies, which are incapable of achieving Good Ecological status without impairing an existing specified water use, the environmental objective is to achieve good ecological potential.

The WFD requires that management plans are prepared on a river basin basis and specifies a structured method for developing these plans

River Basin Management Plans

The River Basin Management Plans (RBMP) provide a single system of water management based on the natural delineation of river catchments and is the method by which the aims of the WFD are achieved.

For each river basin district in Ireland a RBMP plan needs to be established and updated every six years, to provide the context for the co-ordination requirements of the WFD key aims which are to:

- Provide for protection to all waters, surface waters and groundwater;

³ **Directive 2000/60/EC of the European Parliament and of the Council of 23 October 2000 establishing a framework for Community action in the field of water policy.**

- achieving Good Ecological status for all waters by 2027;
- establish water management measures based on river basin catchment areas;
- establish a combined approach of emission limit values and quality standards for waters;
- involving citizen more closely in the WFD and RMBMP; and
- streamlining and aligning national legislation.

The RBMP provides a detailed account of how the objectives set for each river basin in terms of ecological status, quantitative status, chemical status and protected area objectives are to be reached within the timescale of the plan. The plans include the results of the catchment analysis including the river basin's characteristics, a review of the impact of human activity on the status of waters in the basin, estimation of the effect of existing legislation and the remaining gap to meeting these objectives; and establish a set of measures designed to meet the objectives.

River Basin Management Plan for Ireland 2022-2027

The current RMBP report for Ireland is at the draft stage⁴. The draft report states that while substantial progress has been made in the management of water services and how we work together to protect, restore and improve water quality with the improvement in some areas and aspects of water quality, many waterbodies are still subject to mounting environmental pressures and overall water quality is in decline primarily due to nutrient pollution.

The RMBP states that due to the overall decline in water quality stronger measures are now required which will improve overall water quality; the sustainable management of water resources is important to address and adapt to the impacts of climate change, with many of the required measures having co-benefits for climate mitigation and biodiversity. Protecting and restoring water quality in Ireland will most of all need measures to address:

- the loss of agricultural nutrients to water;
- continue to improve waste water treatment; and
- to re-establish natural free-flowing conditions in more rivers.

The plan states that Ireland's water resources and services face challenges on a number of fronts including a continued need for investment in infrastructure and an ever increasing demand for water services due to urbanisation, population and economic growth. These challenges are set against a backdrop of widespread, rapid, and intensifying climate change.

⁴ Draft River Basin Management Plan for Ireland 2022-2027, Government of Ireland

Appendix 7-G

Rating of Existing Environment Significance / Sensitivity

Rating of Existing Environment Significance / Sensitivity (IGI, 2013 Guidelines)

Importance	Criteria	Typical Example
High	Attribute has a high quality or value on an international scale	Groundwater/ Surface Water supports river, wetland or surface water body ecosystem protected by EU legislation e.g. SAC or SPA status
	Attribute has a high quality or value on a regional or national scale	Regionally Important Aquifer with multiple wellfields. Groundwater supports river, wetland or surface water body ecosystem protected by national legislation – e.g. NHA status. Regionally important potable water source supplying >2,500 homes Inner source protection area for regionally important water source. Drinking water supply from river. Amenity use of waterbody
	Attribute has a high quality or value on a local scale	Regionally Important Aquifer. Groundwater provides large proportion of baseflow to local rivers. Locally important potable water source supplying >1000 homes. Outer source protection area for regionally important water source. Inner source protection area for locally important water source.
Medium	Attribute has a medium quality or value on a local scale	Locally Important Aquifer Potable water source supplying >50 homes. Outer source protection area for locally important water source. No specific recreational use of waterbody
Low	Attribute has a low quality or value on a local scale	Poor Bedrock Aquifer. Potable water source supplying <50 homes. No water supply from surface water, no abstraction designation for watercourse No amenity value of waterbody
Negligible	Attribute has negligible quality or value on a local site scale	No groundwater supply from a bedrock aquifer in vicinity of site. Surface water not used for any specific purpose.


Appendix 7-H Descriptions of Effects (EPA, 2022)

Descriptions of Effects (EPA, May 2022)

Impact Characteristic	Term	Description
Quality of Effects	Positive Effects	A change which improves the quality of the environment
	Neutral Effects	No effects or effects that are imperceptible, within normal bounds of variation or within the margin of forecasting error
	Negative / Adverse Effects	A change which reduces the quality of the environment
Describing the Significance of Effects	Imperceptible	An effect capable of measurement but without significant consequences
	Not significant	An effect which causes noticeable changes in the character of the environment but without significant consequences.
	Slight Effects	An effect which causes noticeable changes in the character of the environment without affecting its sensitivities
	Moderate Effects	An effect that alters the character of the environment in a manner that is consistent with existing and emerging baseline trends.
	Significant Effects	An effect which, by its character, magnitude, duration or intensity alters a sensitive aspect of the environment
	Very Significant	An effect which, by its character, magnitude, duration or intensity significantly alters most of a sensitive aspect of the environment.
	Profound Effects	An effect which obliterates sensitive characteristics
Describing the Extent and Context of Effects	Extent	Describe the size of the area, the number of sites, and the proportion of a population affected by an effect
	Context	Describe whether the extent, duration, or frequency will conform or contrast with established (baseline) conditions (is it the biggest, longest effect ever?)
Describing the Probability of Effects	Likely Effects	Describe the size of the area, the number of sites, and the proportion of a population affected by an effect.
	Unlikely Effects	Describe whether the extent, duration, or frequency will conform or contrast with established (baseline) conditions (is it the biggest, longest effect ever?)

Impact Characteristic	Term	Description
Describing the Duration and Frequency of Effects	Momentary Effects	Effects lasting from seconds to minutes
	Brief Effects	Effects lasting less than a day
	Temporary Effects	Effects lasting less than a year
	Short-term Effects	Effects lasting one to seven years
	Medium-term Effects	Effects lasting seven to fifteen years
	Long-term Effects	Effects lasting fifteen to sixty years
	Permanent Effects	Effects lasting over sixty years
	Reversible Effects	Effects that can be undone, for example through remediation or restoration
	Frequency of Effects	Describe how often the effect will occur. (once, rarely, occasionally, frequently, constantly – or hourly, daily, weekly, monthly, annually.
Describing the Types of Effects	Indirect / Secondary Effects	Likely, significant effects on the environment, which are not a direct result of the project, often produced away from the project site or because of a complex pathway.
	Cumulative Effects	The addition of many minor or significant effects, including effects of other projects, to create larger, more significant effects.
	Do-Nothing Effects	The environment as it would be in the future should the subject project not be carried out.
	Worst Case Effects	The effects arising from a project in the case where mitigation measures substantially fail.
	Indeterminable Effects	When the full consequences of a change in the environment cannot be described.
	Irreversible Effects	When the character, distinctiveness, diversity or reproductive capacity of an environment is permanently lost.
	Residual Effects	The degree of environmental change that will occur after the proposed mitigation measures have taken effect.
	Synergistic Effects	Where the resultant effect is of greater significance than the sum of its constituents, (e.g. combination of SOx and NOx to produce smog).

Appendix 7-I Classification of the Significance of Impacts

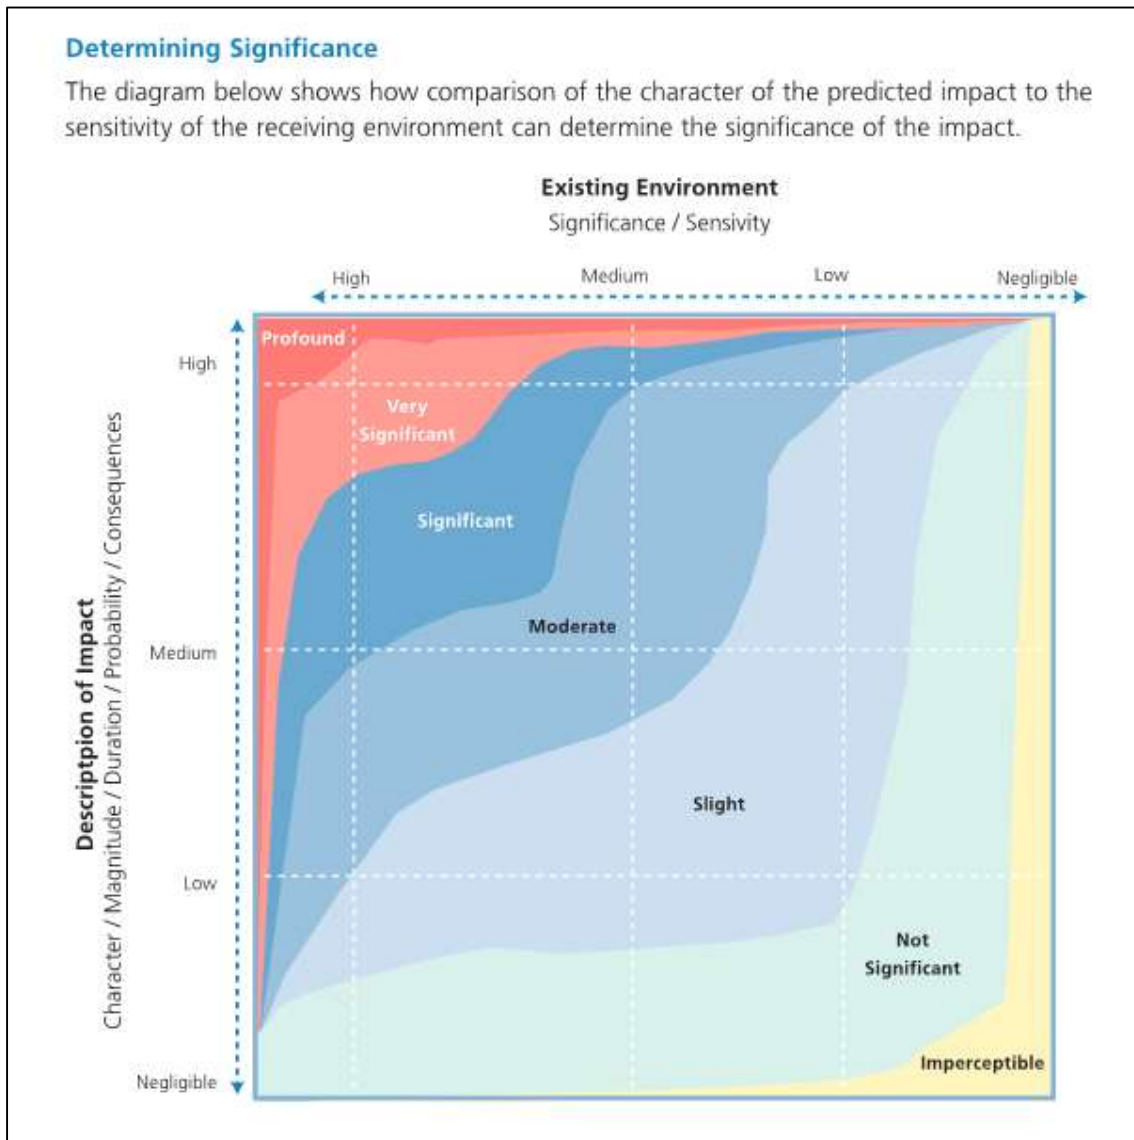

(Source: Environmental Protection Agency (May, 2022), 'Guidelines on the Information to be contained in Environmental Impact Assessment Reports').