NOTE:

ORIGINAL EXISTING WINDOWS Refer to conservation architects report and window schedule.

Remove later non-original windows. Remove external blind boxes.


ORIGINAL INTERNAL DOORS Where possible, all existing original doors are to be re-used and upgraded to meeting current fire requirements ie: FD20 & FD30.

Where FD60 is required, new FD60 rated panelled doors to match original design will be used

Refer to conservation architects report for reference to existing doors.

ORIGINAL CEILINGS

Refer to conservation architects report for reference to existing ceilings.

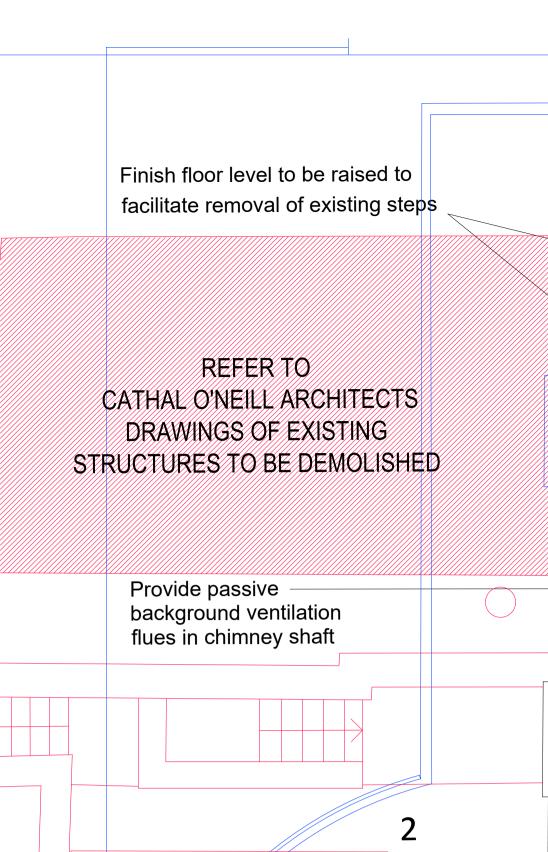

Remove

existing

raiser

Denotes existing cornice to be retained _____

Denotes existing ceramic tiles Existing timber floor otherwise throughout

ADDITIONS AND REMOVALS_UPPER GROUND FLOOR PLAN

Existing structure to be retained



Removal/ Increase/ create openings in existing wall

Proposed additions/ infill openings in existing wall

NOTE:

- ORIGINAL SURVEY INFORMATION FROM MURPHY SURVEYS DRAWING ASSEMBLED BY OMP
- DRAWINGS TO BE READ IN CONJUNCTION WITH CONSERVATION ARCHITECTS REPORT


New wall and railing on top to edge of proposed sunken courtyard New granite paving to be provided to match existing


G.W4

G.W3

New external steps to Lower Ground units



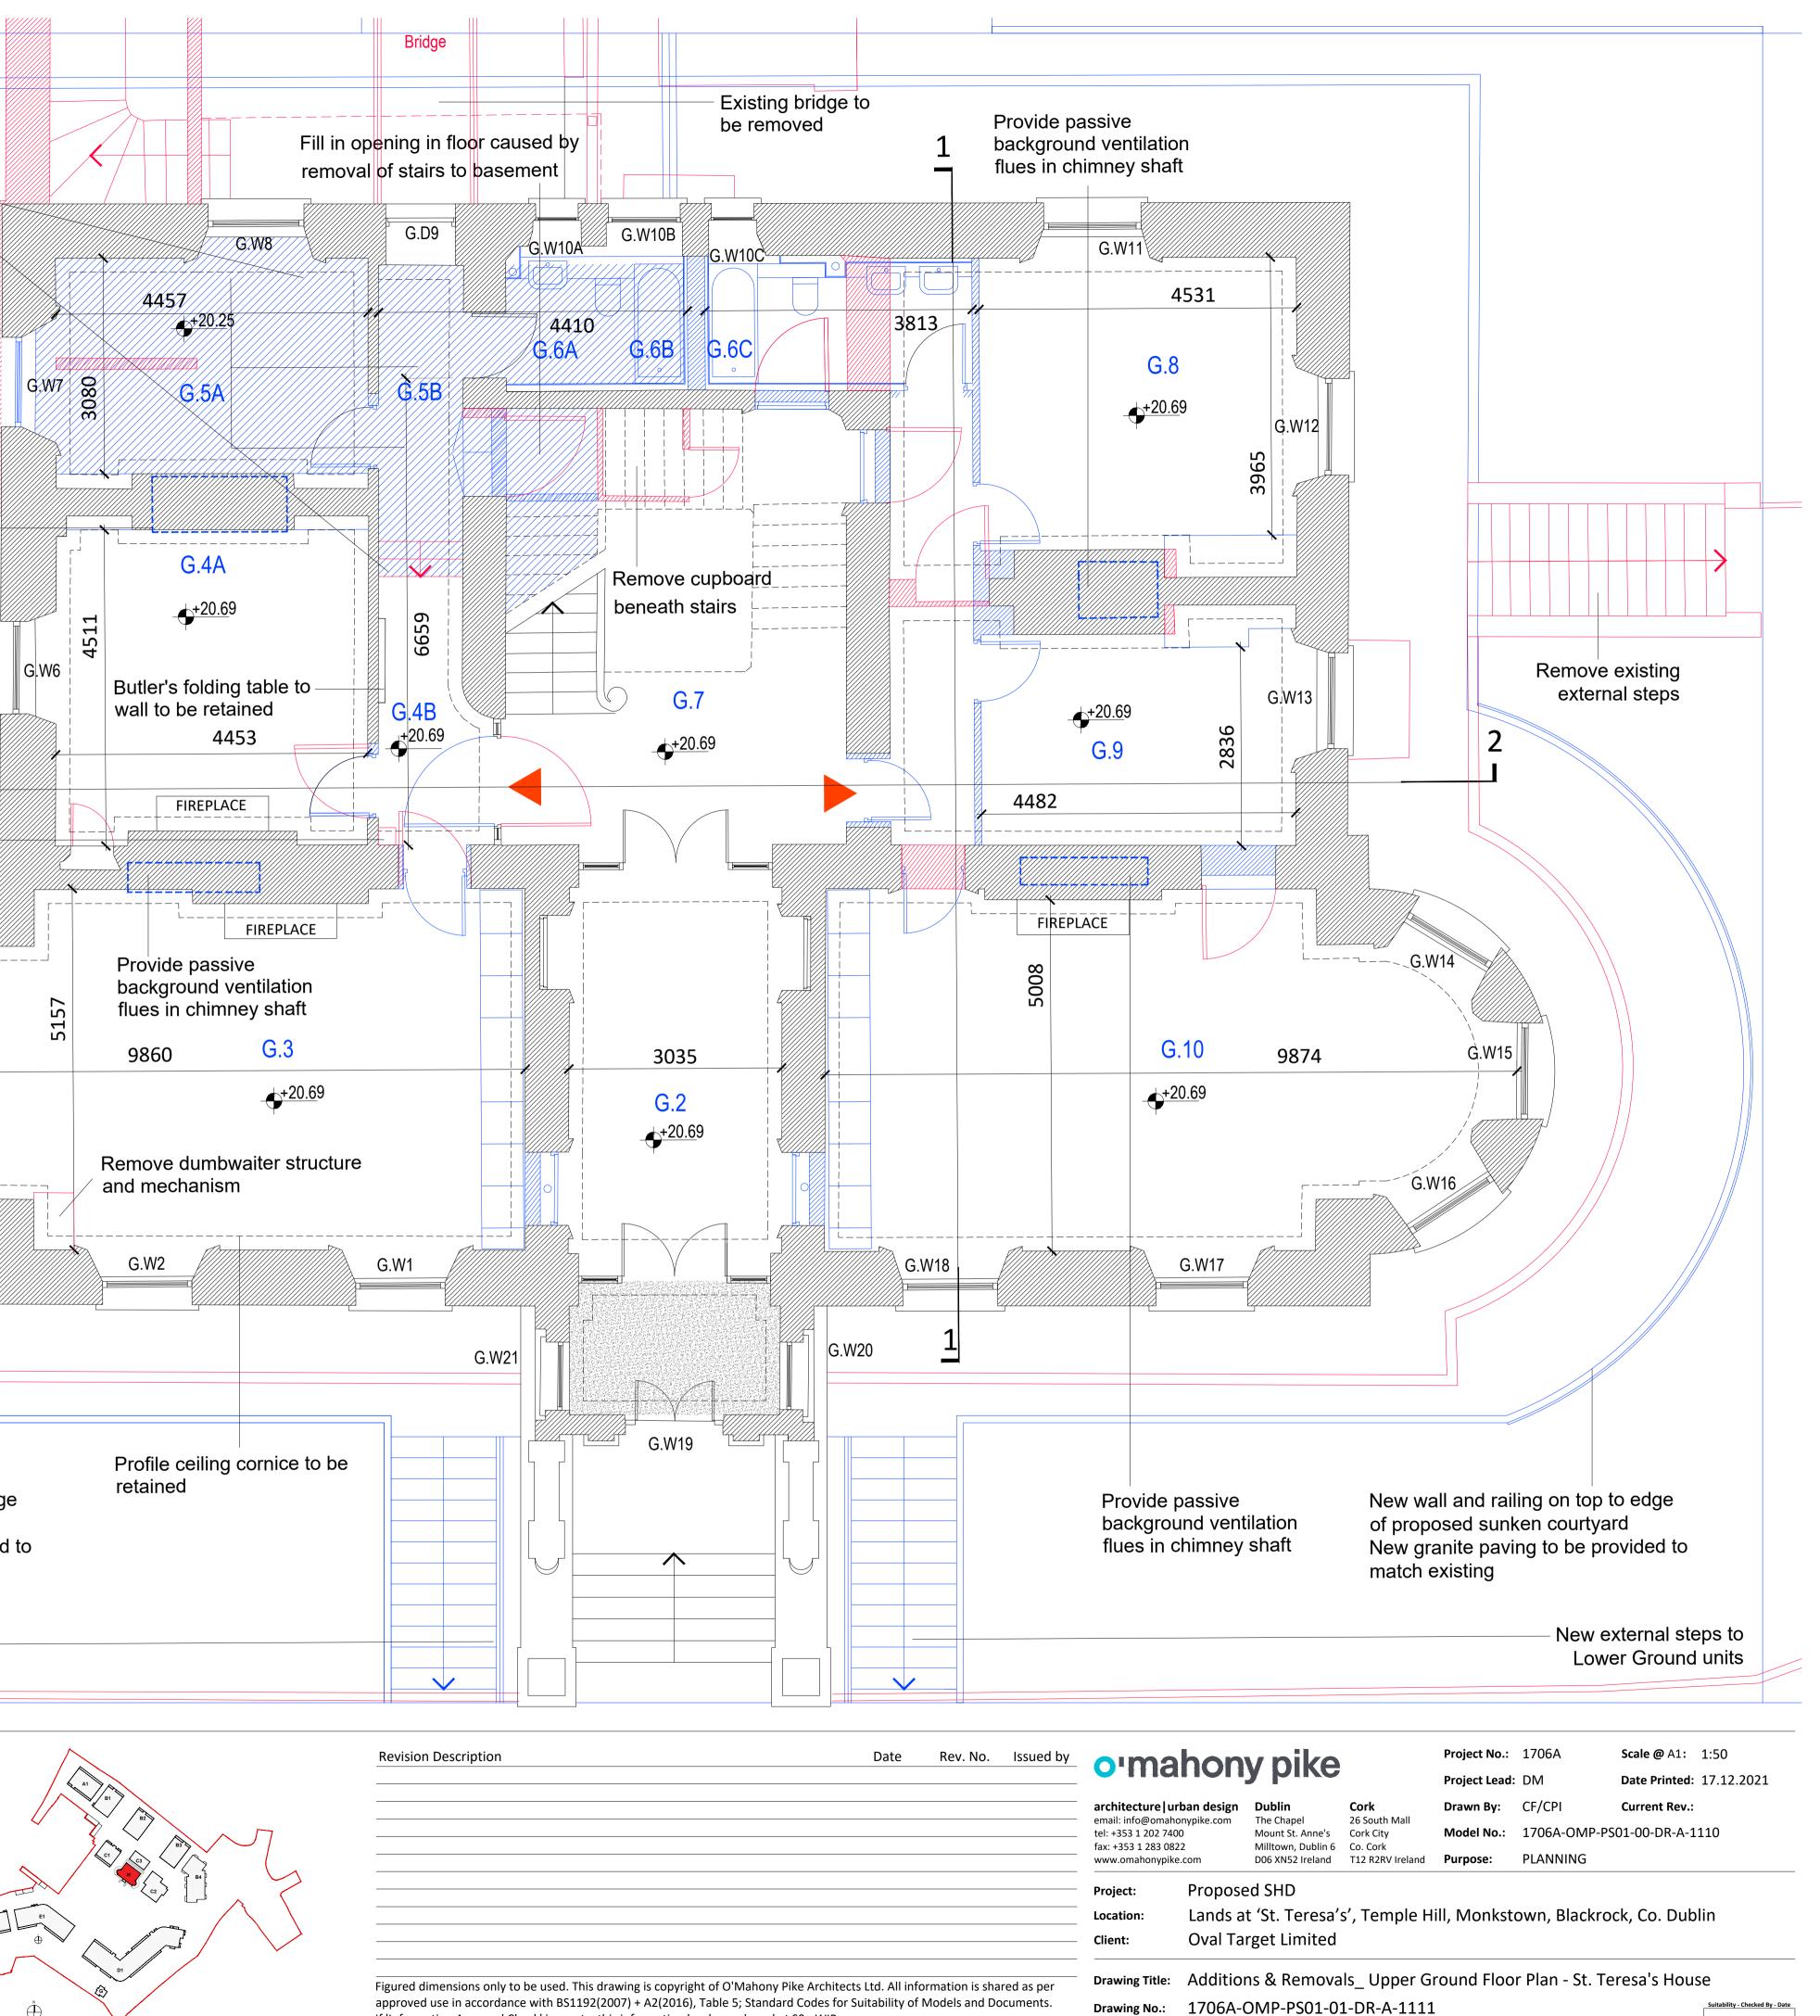

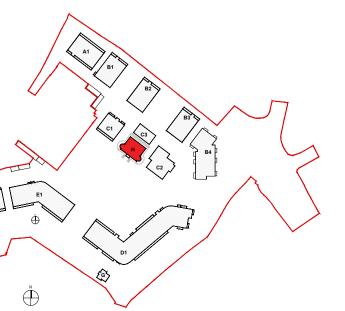

approved use in accordance with BS1192(2007) + A2(2016), Table 5; Standard Codes for Suitability of Models and Documents. If 'Information Approval Check' is empty, this information has been shared at S0 - WIP.