


LONGITUDINAL SECTION:

SERVICE UNDER CROSSING - 200mm DUCTING BELOW IN FLAT FORMATION SCALE 1:25

NOTES

- 1. ALL PRODUCTS AND MATERIALS TO BE UTILISED DURING CONSTRUCTION TO COMPLY WITH EIRGRID FUNCTIONAL SPECIFICATION, ESBN STANDARDS. TII SPECIFICATION FOR ROAD WORKS AND ALL RELEVANT IRISH (EUROPEAN) AND BRITISH STANDARDS.
- 2. 300mm MINIMUM VERTICAL AND HORIZONTAL CLERANCES TO BE OBSERVED BETWEEN CABLE DUCTS AND THIRD PARTY SERVICES (e.g. GAS PIPES, WATER MAINS, CULVERTS etc.) IN THE CASE OF HIGH RISK 3rd PARTY SERVICES, GREATER CLEARENCAS MAY BE REQUIRED. DESIGNER TO CONSULT EIRGRID AND 3rd PARTY SERVICES OWNERS FOR GUIDANCE.
- 3. STEEL PLATES MUST COVER DUCTS. NO OVERLAP IS REQUIRED HOWEVER STANDARD DIMENSIONS MAY RESULT IN AN OVERLAP, SPACING OF 10mm TO BE MAINTAINED BETWEEN STEEL PLATES TO PREVENT THE TRANSFER OF STRAY CURRENT.
- 4. THE MINIMUM CLEARANCE BETWEEN ALL HV AND COMMUNICATION DUCTS IS 75mm (CABLE RATING CALCULATIONS TO BE PROVIDED FOR ACCEPTANCE).
- 5. TEMPLATES ARE TO BE USED AT 5m INTERVALS DURING DUCT INSTALLATION IN CBGM. PRE-MADE 75mm WIDE CONCRETE SPACERS TO BE USED DURING DUCT INSTALLATION IN WET CONCRETE.
- 6. MINIMUM SPACING BETWEEN POWER DUCTS TO BE CONFIRMED WITH RATING CALCULATION.
- 7. HAND DIG WITHIN 500mm OF EXISTING SERVICE.
- 8. WHERE AN EARTH CONTINUITY CONDUCTOR (ECC) IS REQUIRED.
- A MIN 65mm DUCT TO BE INSTALLED OUTSIDE OF PHASE DUCT.

 9. IF EXISTING SERVICE MARKER TAPE IS NOT PRESENT, THE ESBN YELLOW MARKER TAPE SHOULD BE ISNTALLED AT MAXIMUM 300mm BELOW FINISHED SURFACE LEVEL.

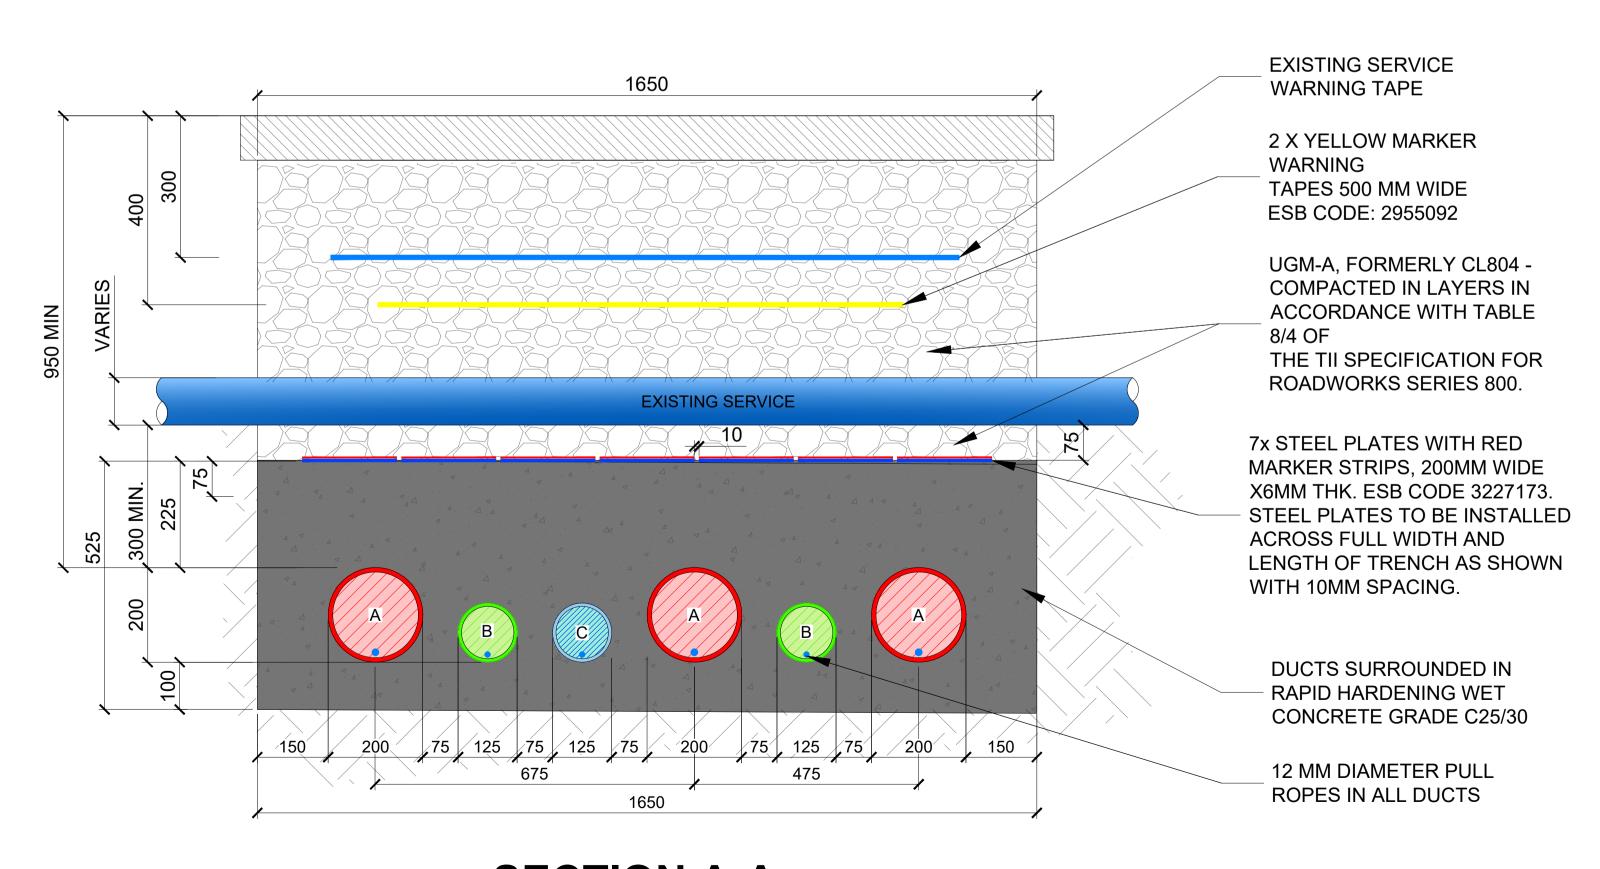

SECTION A-A: SERVICE UNDER CROSSING 200mm DUCTING BELOW IN FLAT FORMATION SCALE 1:8

