



APPENDIX 4-10

**BNM PEAT DEVELOPMENT IN
IRELAND 1954**

bord na móina



Peat Development in Ireland

bord na móna

A Statutory Organisation for the Development of the Peat Resources of Ireland

BOGS are a characteristic feature of the Irish landscape. It has been calculated that one seventh of the area of Ireland is bogland. Throughout the centuries these great wastelands have provided fuel for the farmers living in their vicinity: but only the perimeter of the bogs was used and the implements were of the simplest—the slean, the barrow and the fork.

Inside these outer fringes the bogs were impenetrable and unuseable. It was impossible to walk on them, because bog, despite its seemingly solid surface is ninety-three per cent. water and only seven per cent. solid matter. The problem of converting this very low-grade but abundant material to useful ends presented a challenge to which the successful response is described in this brochure. In essence the problem is to remove the water from the peat economically;

the methods and stages by which this is done are shown herein.

Bord na Móna or in English the Peat Board is an organization set up by the Oireachtas i.e. the Irish Parliament, to carry out the task of producing fuel from the bogs. It was established in 1946 following successful experiments carried out by its predecessor the Turf Development Board Ltd. on the large scale production of fuel from a bog at Clonsast near Portarlinton. It is endowed with statutory powers and is authorised by legislation to spend on its projects up to £14 million of public funds all of which is repayable with interest.

There are two main methods in use by the Board for the production of fuel:

- (a) Machine sod peat process.
- (b) Milled peat process.

THE two methods are here illustrated and described in outline. The objective of the Board is to produce one million tons of sod peat and two and a half million tons of milled peat. The sod peat is used partly for electricity generating stations and partly for domestic and industrial consumption; the milled peat except for a relatively small quantity used at present for conversion to briquettes will be used only in power stations.

The Board employs seven thousand workers at peak and an executive staff of four hundred consisting of engineers, accountants, clerks and supervisors. It has built villages for its employees and maintains hostels where two thousand men are catered for and housed. There is a research station, museum and library. The Board constructs and maintains light railway systems

which when completed will comprise nearly four hundred miles of rail; it also has a road transport system. It operates shops, canteens and recreation halls. Trees, flowers and shrubs are planted to make bright and cheerful the environment of its works, villages and buildings.

Mechanisation is the keynote of the Board's response to the challenge of the bogs and a rural population is being industrialized without being up-rooted. When the peat is cut away the land will be left in a fit condition for the cultivation of crops or for afforestation.

The swamps which for so long were a dreary and useless wasteland are already sustaining new families; the fuel from them is producing cheap electricity for the national network and heat and power for factory and home.


STAGES OF DEVELOPMENT

ACQUISITION, DRAINAGE, BUILDINGS, RAILWAYS, MACHINES, POWER

STAGES OF PRODUCTION

SOD PEAT

Stripping
Cutting and Spreading
Windrowing or Footing
Windrow Turning
Collecting and Ricking
Loading
Transport

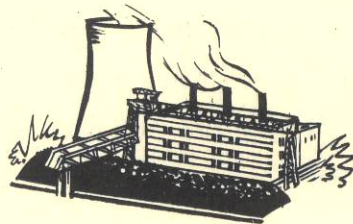


POWER
STATION




PRIVATE
CONSUMERS

MILLED PEAT

Disc Ditching
Milling
Harrowing
Ridging
Harvesting
Loading
Transport



POWER
STATION

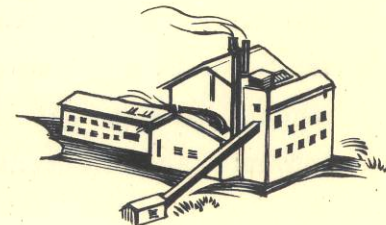


BRIQUETTE
FACTORY



BAILE DHIARMADA HOSTEL

SITUATED NEAR RATHANGAN, CO. KILDARE, THIS HOSTEL IS TYPICAL OF OTHERS IN VARIOUS AREAS. SEASONAL WORKERS CAN OBTAIN FULL BOARD AND ACCOMMODATION AS REQUIRED

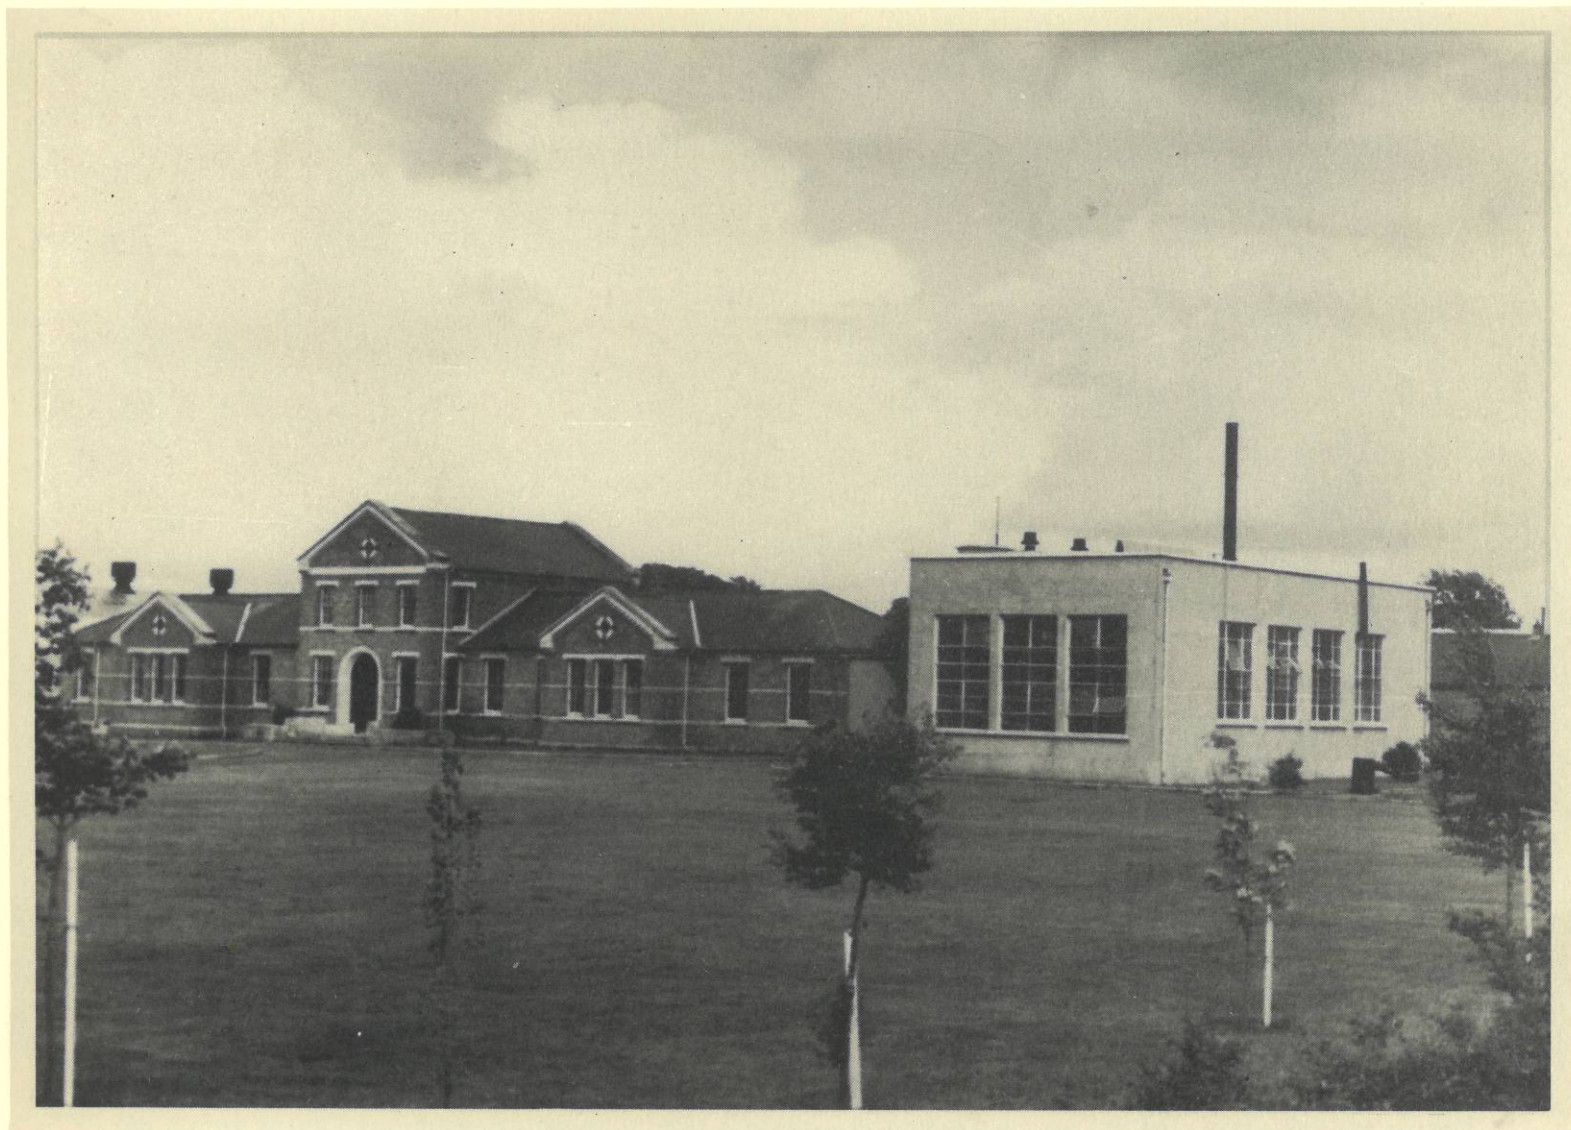

STAI SIUN TURGHNAMHACH AT DROICHEAD NUA
HEADQUARTERS OF THE BOARD'S RESEARCH STAFF




COILL DUBH VILLAGE

ONE OF THE BOARD'S NEW HOUSING SCHEMES OF ONE HUNDRED AND FIFTY-SIX HOUSES AND FOUR SHOPS FOR THE BOARD'S PERMANENT EMPLOYEES AT TIGH MOCHUA, CO. KILDARE. THE WORKS BUILDINGS AND HOSTEL CAN BE SEEN IN THE BACKGROUND



COILL DUBH VILLAGE
CHILDREN AT PLAY IN THE NEW VILLAGE

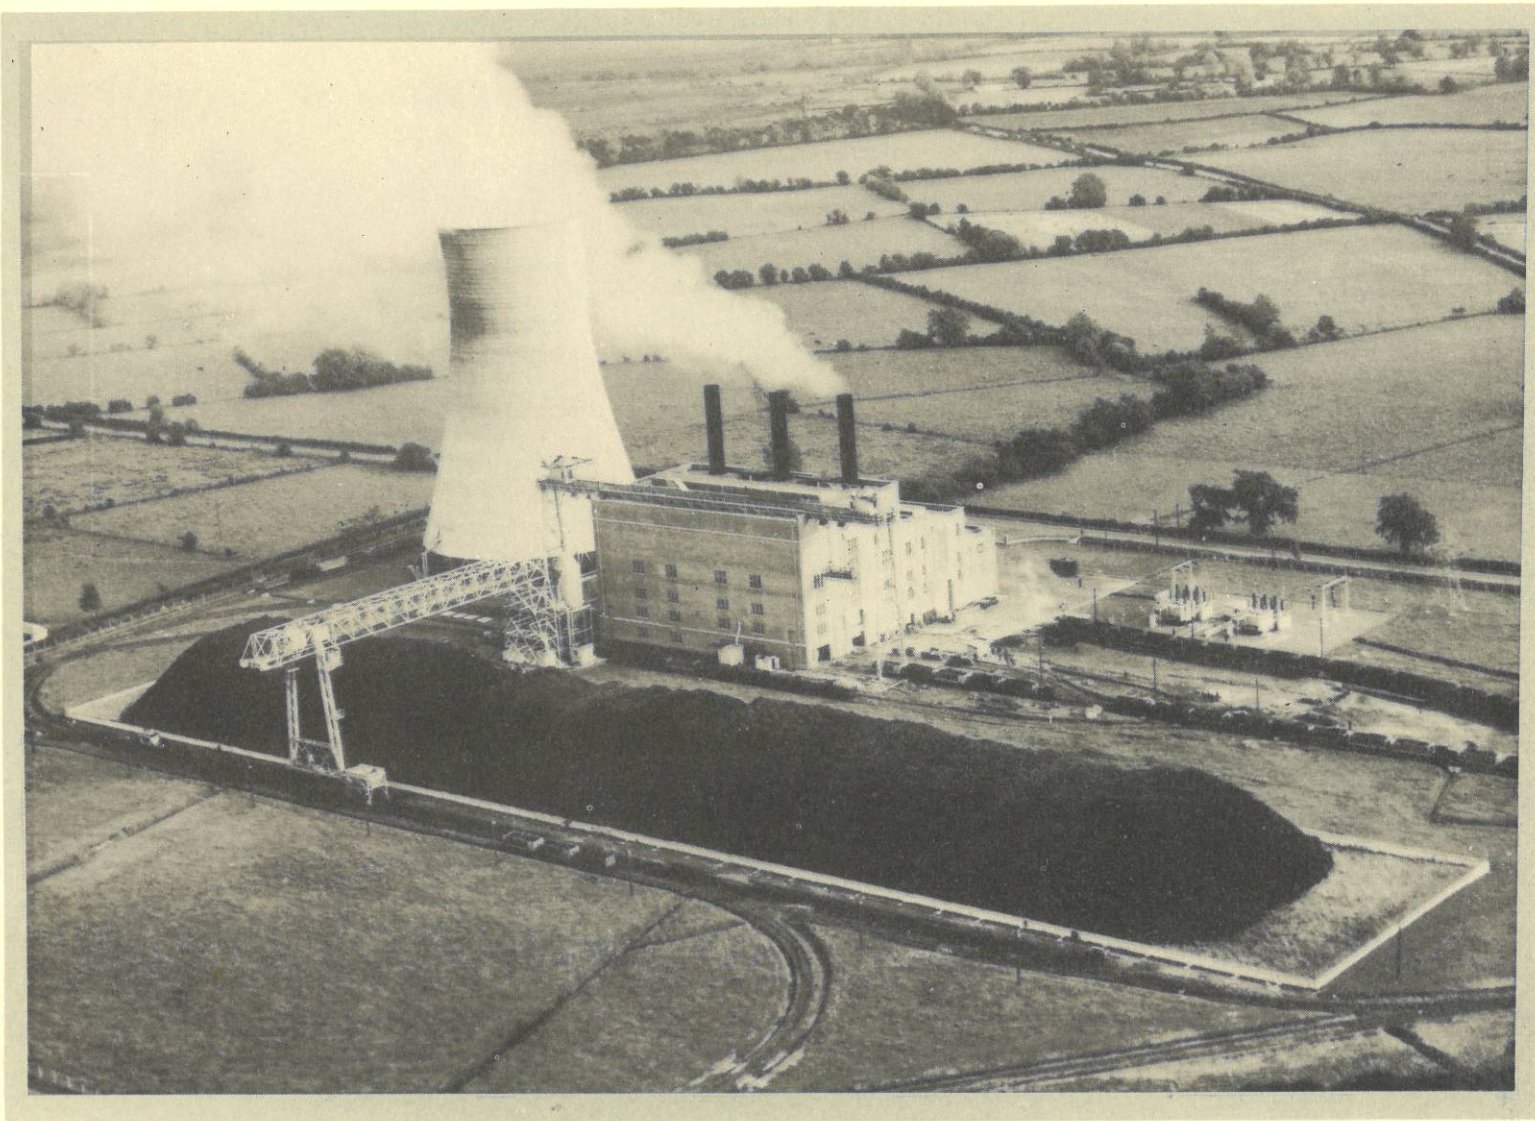

SOD PEAT FUELLED POWER STATION

PORTARLINGTON POWER STATION HAD A DESIGNED AVERAGE CONSUMPTION OF ONE HUNDRED AND TWENTY THOUSAND TONS OF PEAT PER ANNUM PRODUCING NINETY MILLION UNITS OF ELECTRICITY. IT IS NOW KNOWN THAT THE STATION CAN USE AND PRODUCE AT LEAST FIFTY PER CENT MORE
THIS POWER STATION IS OWNED AND OPERATED BY THE ELECTRICITY SUPPLY BOARD



SOD PEAT STRIPPER

A TWO METRE WIDTH OF MOSS AND HEATHER UP TO HALF A METRE DEEP IS MILLED FROM
THE BANK AND DISCHARGED IN THE CUTAWAY BELOW



UNDRAINED BOG


WESTERN BOG INTENDED FOR MILLED PEAT DEVELOPMENT. THE BOG
HAS RISING ROLLING CONTOURS BROKEN BY LAKES AND OUTFALLS



MILLED PEAT BOG BEING DRAINED
INITIAL PLOUGH AND DISC DITCHER DRAINS
SPACED AT FIFTY FEET INTERVALS



PEAT MOSS CUTTING TRENCHES AND SPREAD FIELDS
PEAT MOSS IS CUT BY HAND FROM THE TRENCHES, WEATHERED, FOOTED, HARVESTED
AND SUBSEQUENTLY RICKED IN OPEN SIDED DRYING SHEDS ON THE BOG

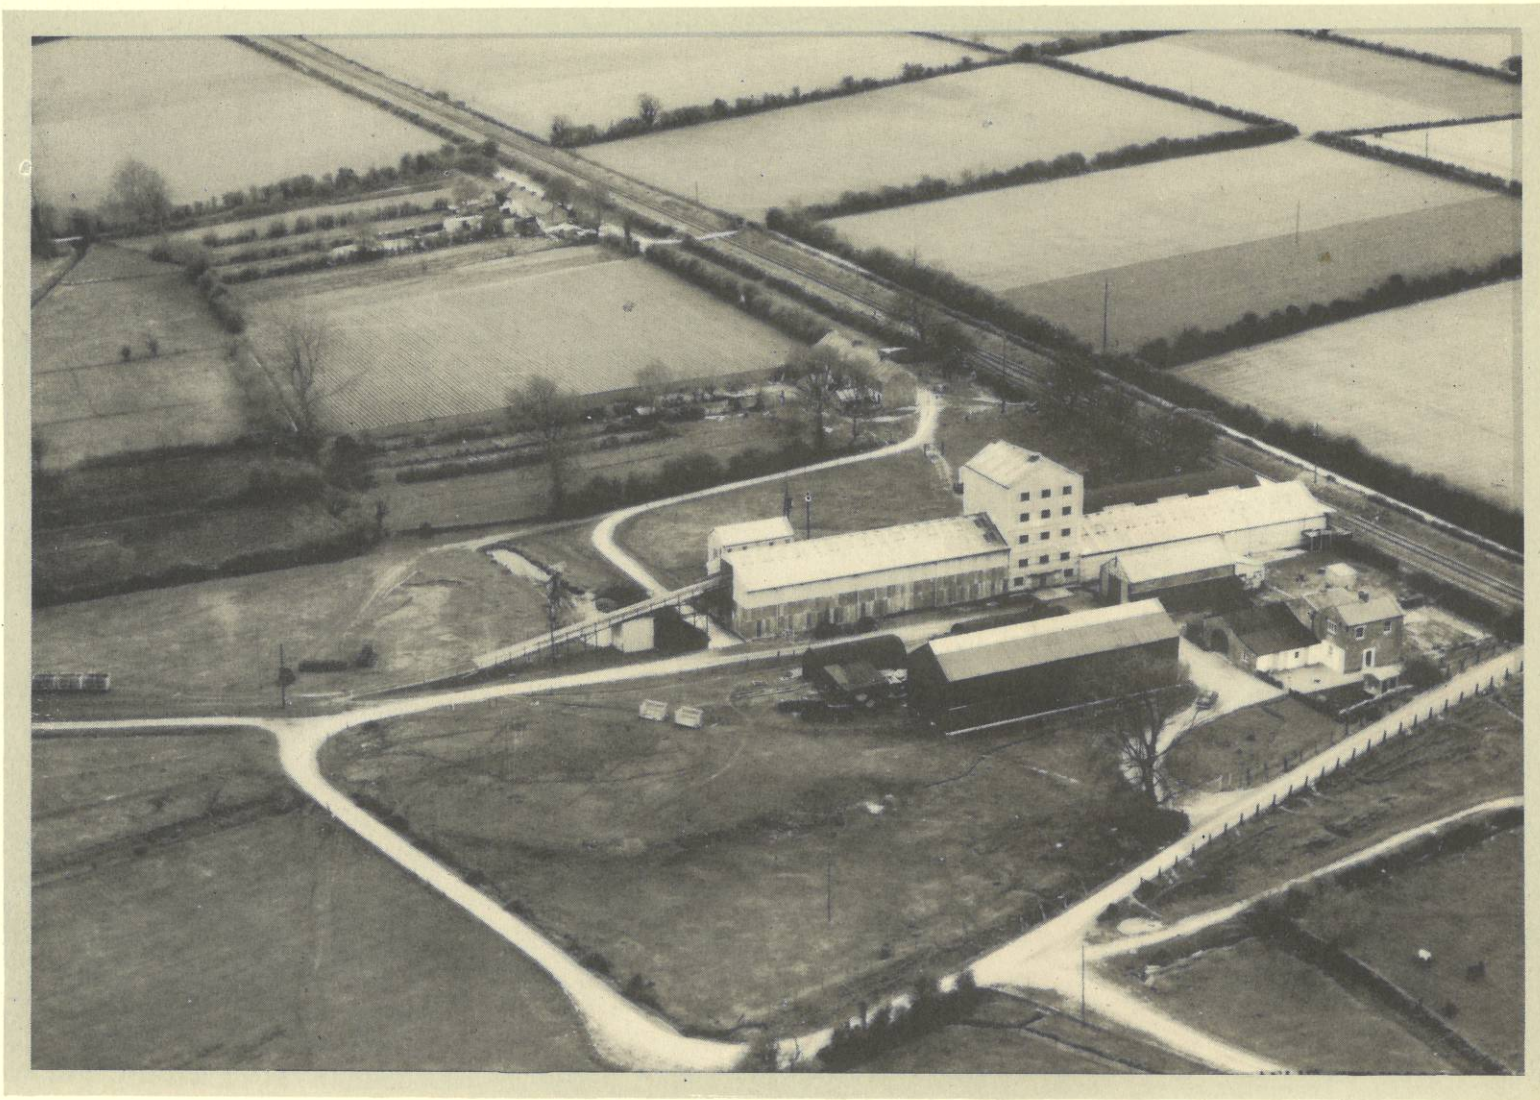


CILL BEARA PEAT MOSS FACTORY

THE DRIED PEAT MOSS IS DELIVERED INTO THE FACTORY WHERE IT IS DISINTEGRATED, SCREENED, GRADED AND BALED READY FOR DELIVERY BY ROAD OR RAIL TO THE CONSUMER



DISC DITCHER

BOG DRAIN BEING EXCAVATED TO A DEPTH OF FOUR FEET SIX INCHES.
THE SPOIL IS UNIFORMLY DISPERSED OVER ADJOINING AREAS

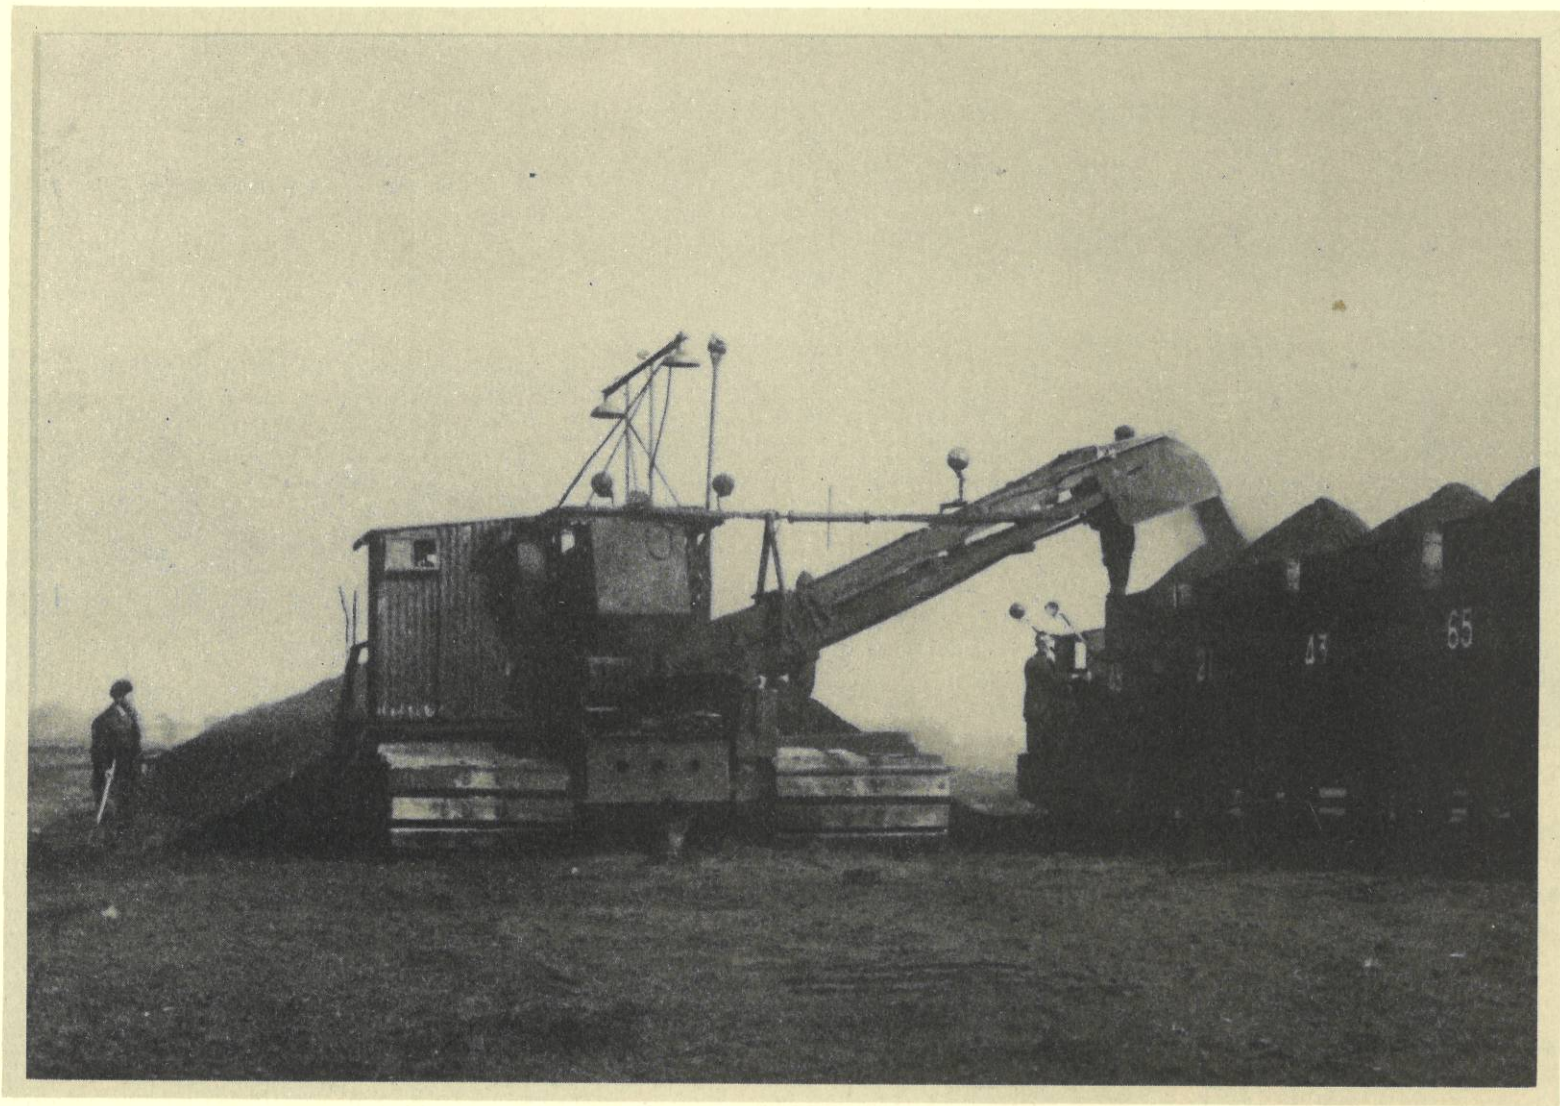

LOADER

THE LOADER CONVEYS MILLED PEAT AT THE RATE OF FIFTY TONS PER HOUR FROM THE RAILPILE INTO RAILWAY WAGONS WHENCE DELIVERY IS MADE EITHER TO THE FACTORY FOR THE MANUFACTURE OF BRIQUETTES OR TO THE POWER STATION FOR THE GENERATION OF ELECTRIC POWER

DRAINAGE PLOUGH

PRELIMINARY MARKING OUT AND INITIAL SHALLOW CUTS ON DRAINS CAN BE RAPIDLY MADE ON VIRGIN BOGS.




MOLE DRAINER

IMPROVEMENT OF SURFACE CONDITIONS ON SPREAD GROUNDS CAN BE ACHIEVED AT RELATIVELY LITTLE COST. THE MACHINE IS MAINLY USED TO SUPPLEMENT THE CROSS DRAIN SYSTEM BETWEEN MAIN TRENCHES ON SOD PEAT BOGS.


HARROWS

SINGLE AND DOUBLE SPOON HARROWS ACCELERATE
THE DRYING OF THE MILLED PEAT

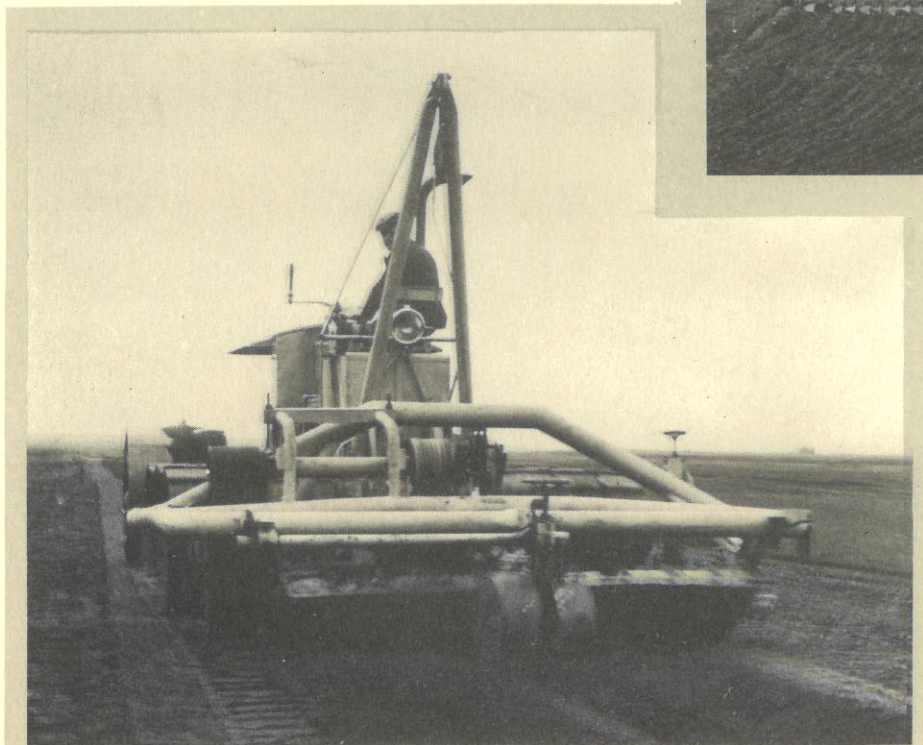

MILLER

THE SURFACE AREA OF THE FIELD IS CUT TO A DEPTH
OF APPROXIMATELY HALF AN INCH BY THE MILLING
ATTACHMENT FITTED TO A SPECIALLY DESIGNED HALF-
TRACK TRACTOR


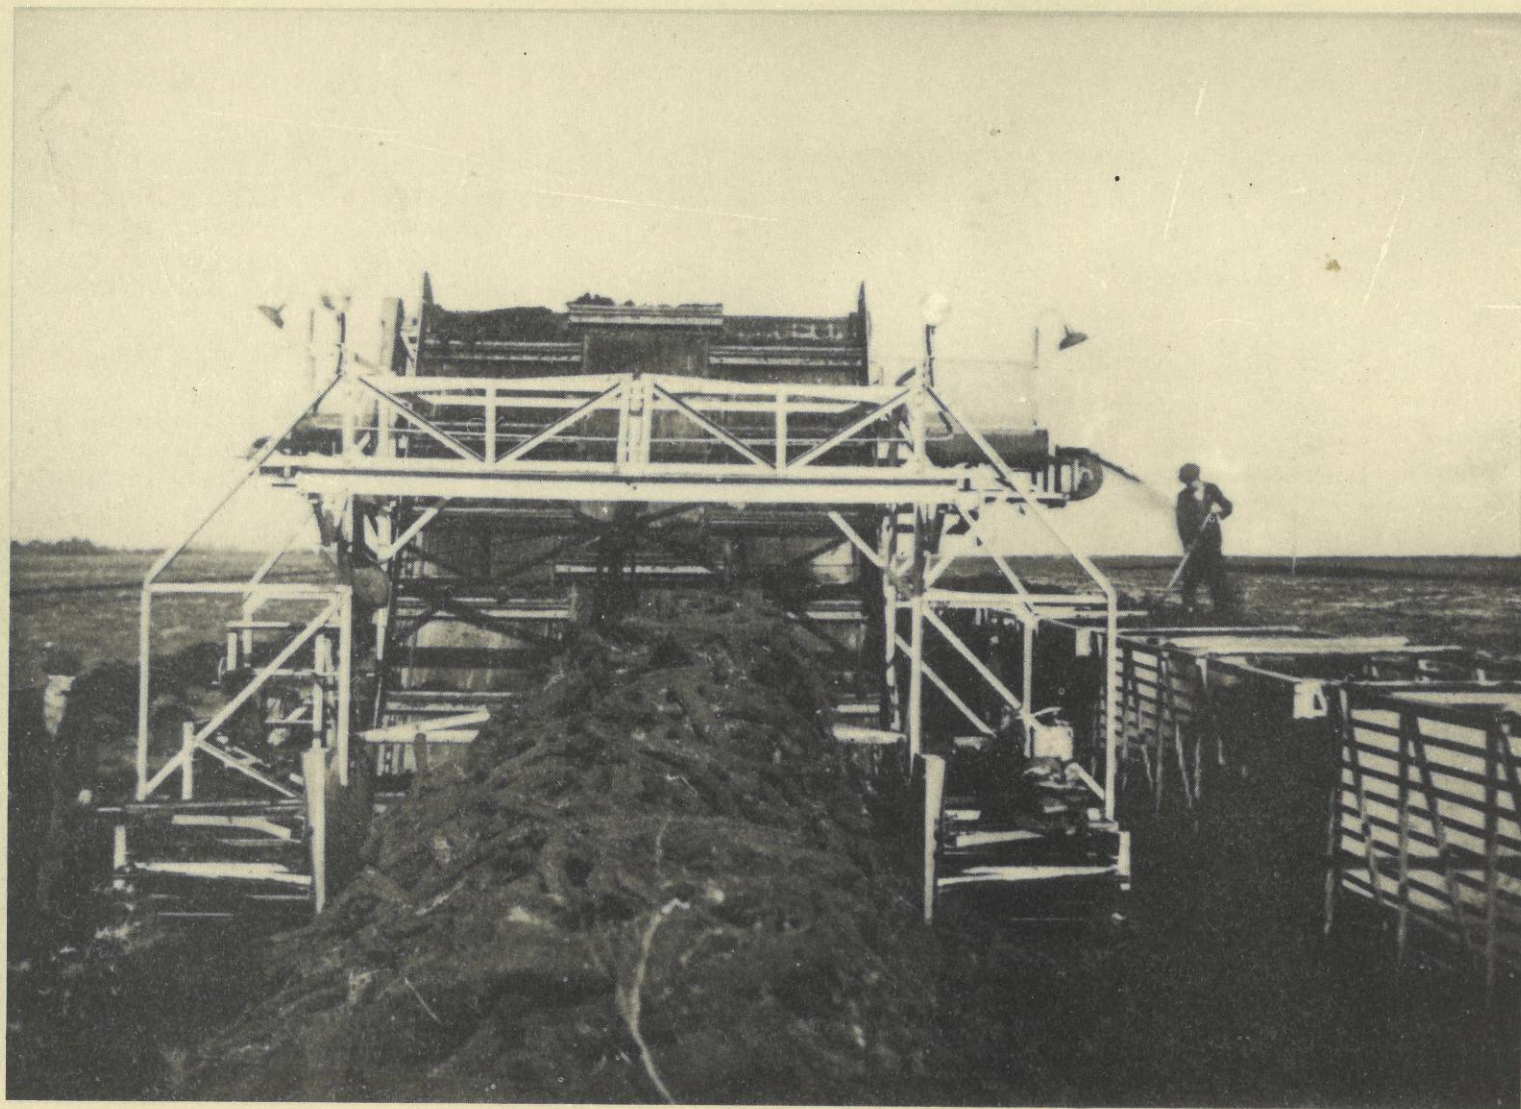


SOD PEAT LOADING MACHINE

THE LOADER FILLS WAGONS OF SIXTEEN CUBIC METRE CAPACITY
FROM A CLAMPED RICK OF TURF FOR DELIVERY TO CONSUMERS
OR POWER STATION


SOD PEAT WINDROW TURNER

THE WINDROWS REQUIRE TO BE TURNED AFTER A PERIOD SO THAT THE SODS AT THE BOTTOM OF THE ORIGINAL WINDROW CAN BE EXPOSED. THE WINDROWS ARE TURNED AND RE-MADE THREE METRES AWAY FROM THE ORIGINAL POSITION, LEAVING THE PEAT IN POSITION READY FOR COLLECTION

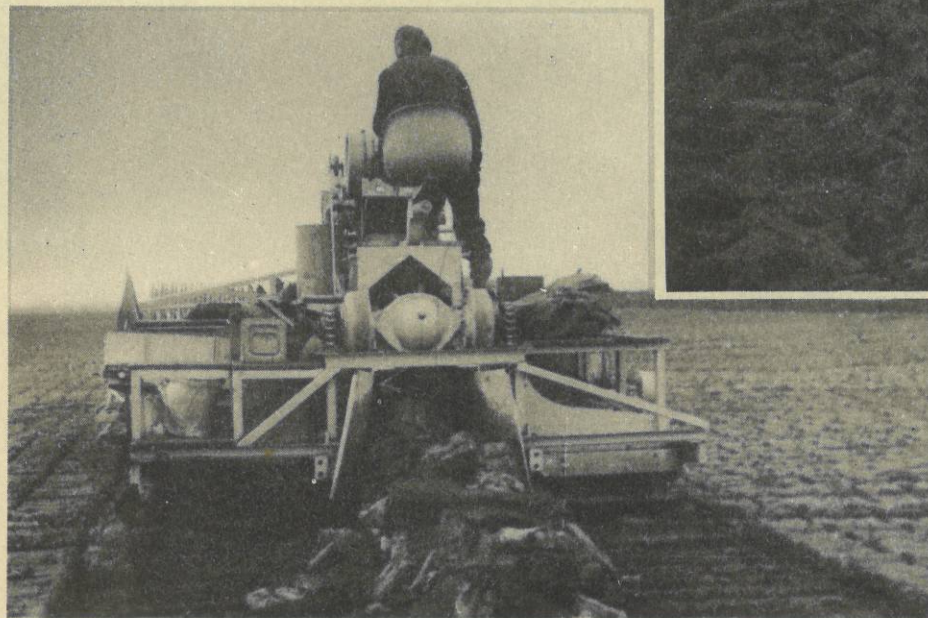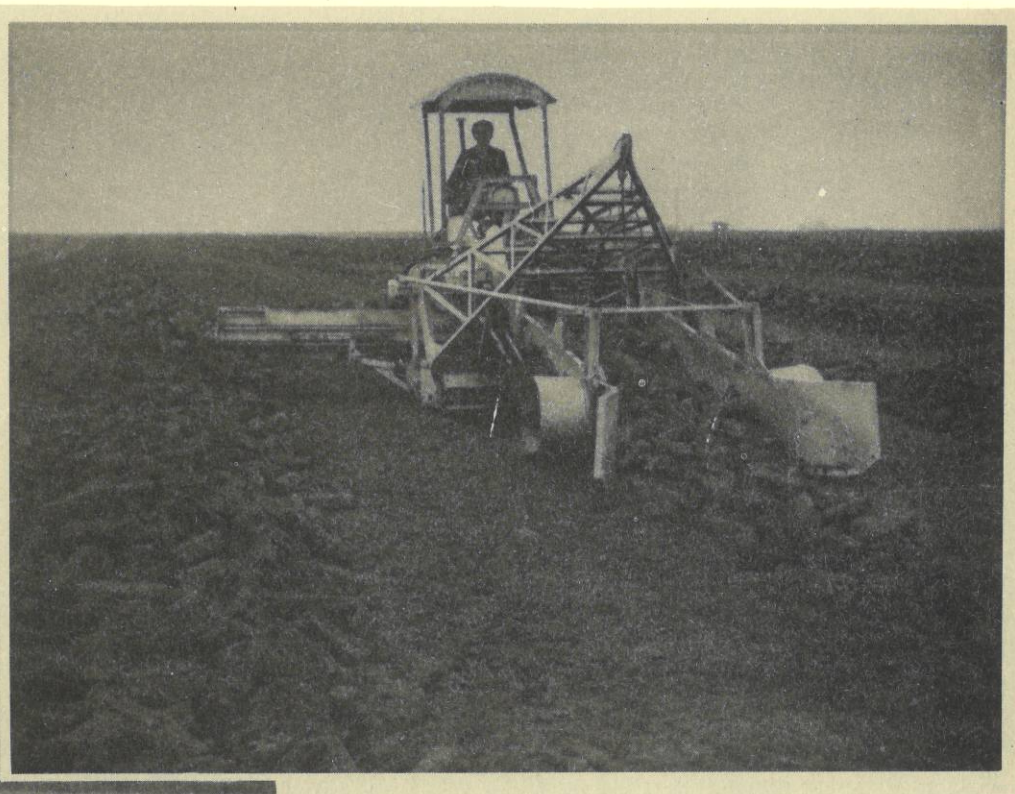

SOD PEAT WINDROWER (*Rear*)

THE PEAT IS DISCHARGED AT THE REAR AND FORMED INTO A CONTINUOUS WINDROW, IN WHICH IT GRADUALLY DRIES

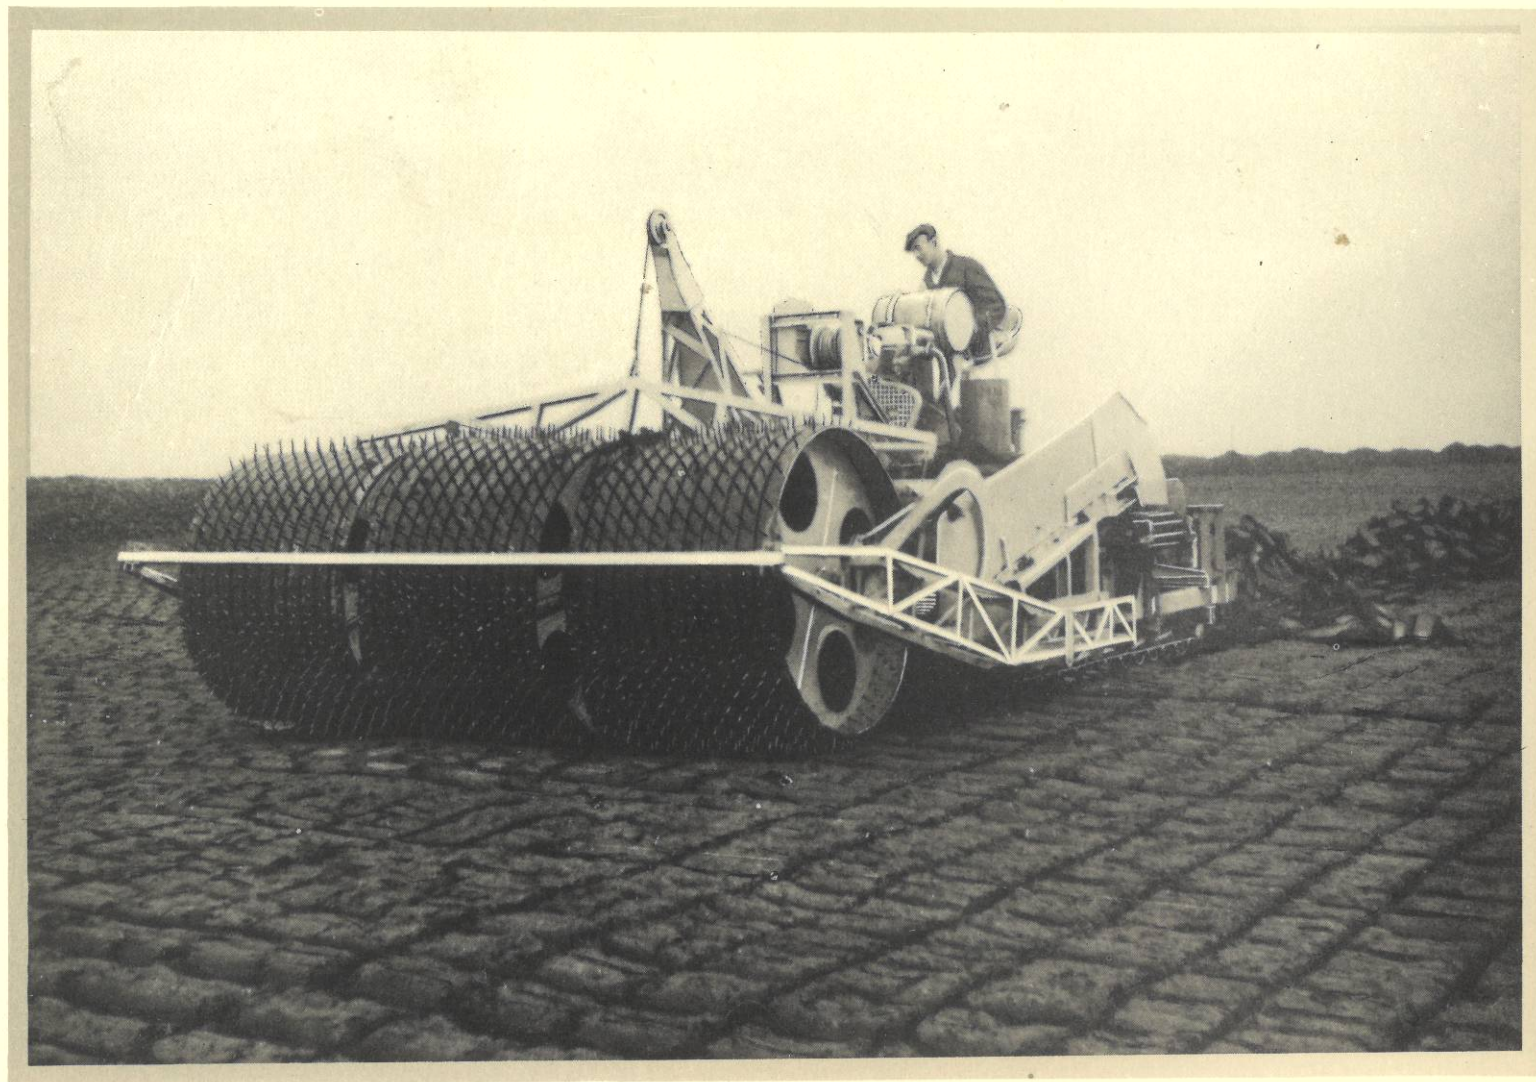

SOD PEAT WINDROWER (*Front*)

THIS IS THE LATEST IMPROVEMENT IN SOD PEAT MECHANISATION. THE DRYING PEAT IS PICKED UP ON PINS AND FED ON TO A CHUTE DELIVERING AT THE REAR OF THE MACHINE. THIS MACHINE WILL REDUCE THE AMOUNT OF MANUAL FOOTING REQUIRED ON EACH CROP



SOD PEAT AUTOMATIC COLLECTOR

THIS NEWLY DEVELOPED MACHINE COMPLETES THE LAST PHASE OF FULLY MECHANISED PRODUCTION—
LIFTING THE WINDROWS POSITIONED BY THE PREVIOUS MACHINES AND CONVEYING THEM TO THE RICK



SOD PEAT BAGGER SPREADER WITH CUTTING DISCS

THE SPREADER ARM IS MOUNTED ON CATERPILLARS AND ROLLERS AND MOVES FORWARD WITH THE BAGGER. THE MACERATED PEAT IS FED OUT ALONG THE ARM AND IS DEPOSITED IN CONTINUOUS ROWS ON THE GROUND WHERE IT IS CUT BY THE DISCS




SOD PEAT BAGGER

FULLY-AUTOMATIC EXCAVATOR CUTTING A TWO METRE WIDTH OF BANK THREE METRES DEEP. THE TURF IS SUBSEQUENTLY MACERATED AND FED ON TO THE FIFTY-FOUR METRE SPREADER ARM OF THE MACHINE AS A CONTINUOUS SOD



SOD PEAT BOG IN PRODUCTION


CUTTING TRENCHES, SUB DRAINS, CROSS DRAINS AND RAILWAYS
SHOWING TYPICAL LAYOUT FOR SOD PEAT PRODUCTION

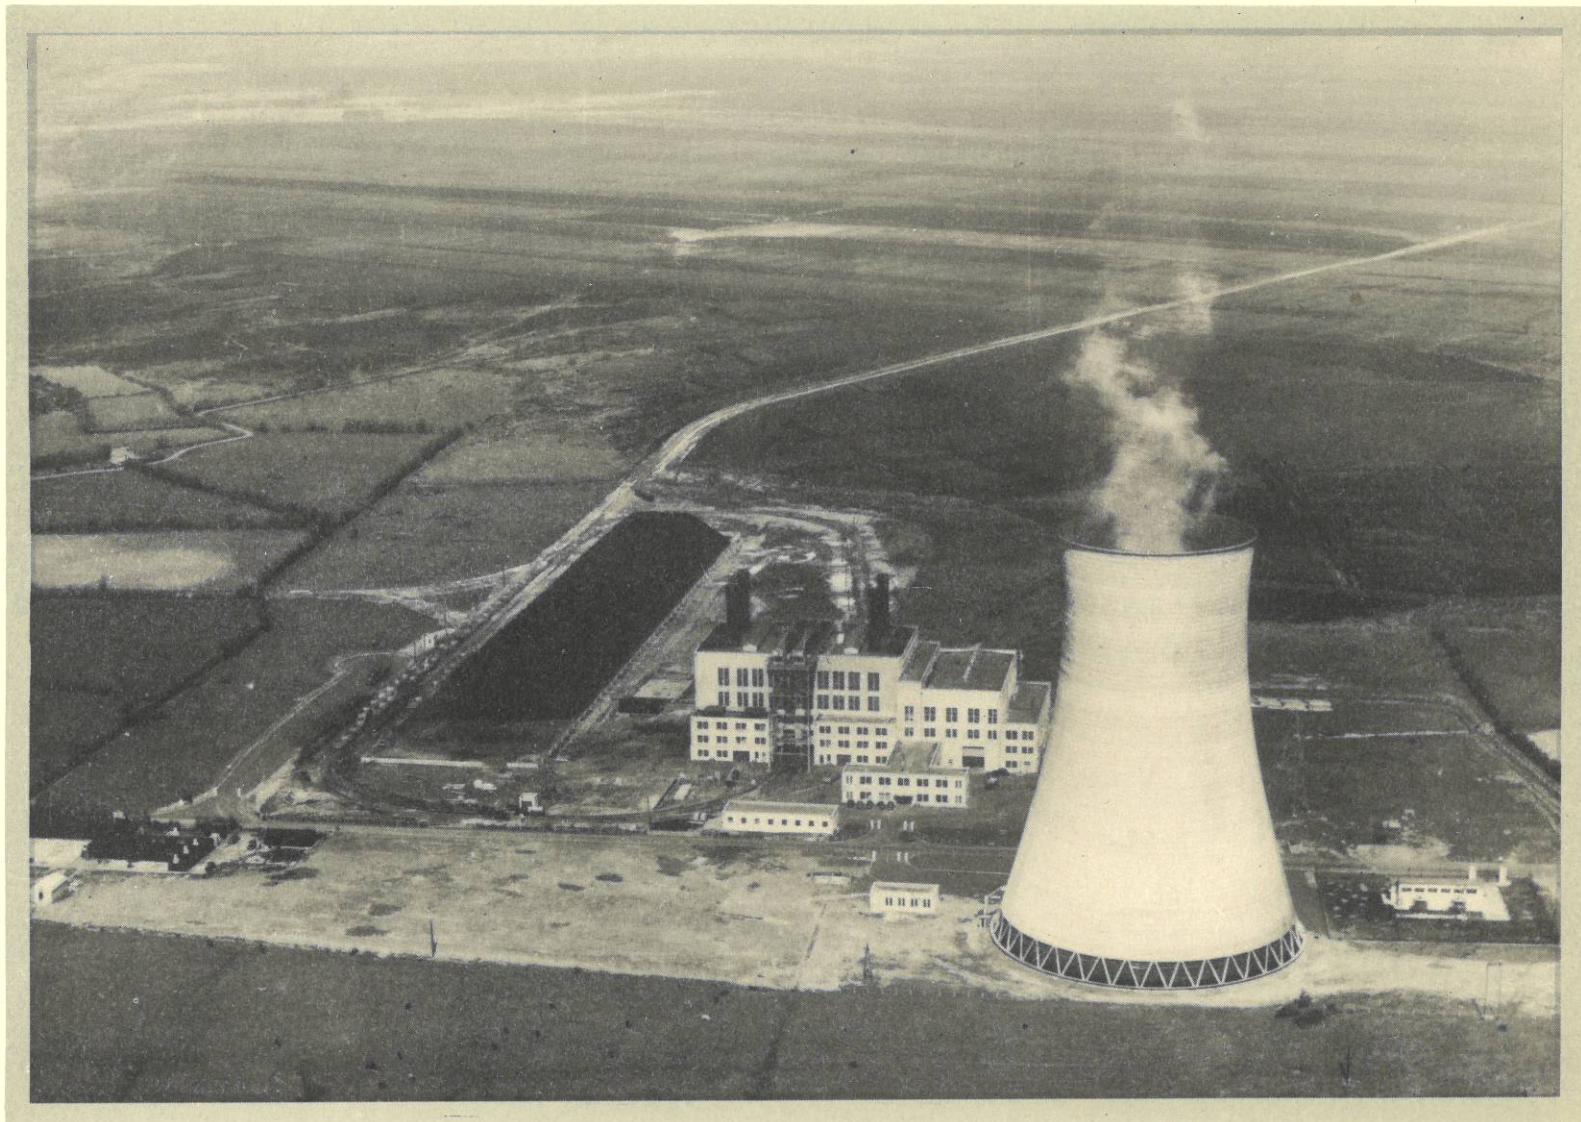

SOD PEAT FUELLED POWER STATION

ALLENWOOD POWER STATION, CO. KILDARE WITH A DESIGNED CONSUMPTION OF ONE HUNDRED AND EIGHTY THOUSAND TONS OF PEAT PER ANNUM AND AN OUTPUT OF ONE HUNDRED AND THIRTY-FIVE MILLION UNITS OF ELECTRICITY. IT IS NOW ESTIMATED THAT THE STATION CAN USE AND PRODUCE AT LEAST FIFTY PER CENT MORE

THIS POWER STATION IS OWNED AND OPERATED BY THE ELECTRICITY SUPPLY BOARD

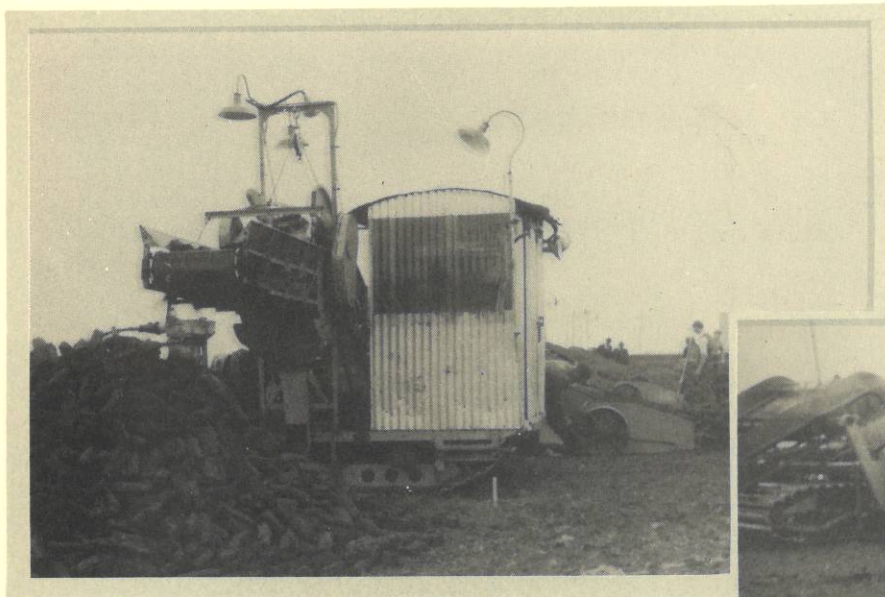

WINDROW ELEVATOR OF AUTOMATIC SOD COLLECTOR

THE WINDROWS ARE LIFTED FROM THE GROUND
ON TO THE STEEL-PLATE CONVEYOR OF THE
SOD COLLECTOR WHICH FEEDS THE ELEVATOR



ELEVATOR OF AUTOMATIC SOD COLLECTOR

PARALLEL TO THE CUTTING TRENCH, THE
AIR-DRIED PEAT IS FORMED INTO A RICK
ALONGSIDE WHICH TEMPORARY TRACK IS LAID
TO MAKE DELIVERIES TO THE RAILHEAD



Ceapad agus rinnead an leabhrán
so imDaile Aia Cliať paot comarta
na dTrí gCoinneal. In Éirinn a rinn-
ead a bpuil ann de plátaí de páipéar
agus de dubac. † Dia dár gcabair.

1954



Sé príosún-cúir foillriche an leabhráin seo, é a
rcaipeasó i mearg daoine i dtíortha ear leas.

Fágtar le h-uacht ag Muinntir na h-Éireann
anoir í, mar annál ar déantairí Boro na Móna,
cóimlucth Gaeólaic a rátann í féin i gceir
teicniúil Gaeólaic ppeirialta.

boro na móna