



SR
LA

MOORETOWN FCC HOUSING, SWORDS, CO. DUBLIN

LANDSCAPE AND GREEN INFRASTRUCTURE REPORT

MAY 2026

01 Introduction to proposed landscape project

This report presents a comprehensive landscape design strategy aimed at enhancing the site's environmental, aesthetic, and functional qualities. Through a detailed analysis of the existing conditions, ecological considerations, and user experience, the proposed landscape approach seeks to create a harmonious and sustainable environment that integrates seamlessly with its surroundings.

The design framework is guided by key principles of sustainability, biodiversity enhancement, and placemaking, ensuring that the landscape not only serves practical needs but also fosters a strong connection between people and nature. By incorporating native planting, innovative water management solutions, and thoughtfully designed open spaces, the proposal aspires to enrich both the ecological and social fabric of the site.

This document outlines the design vision, objectives, and methodology, providing a structured approach to achieving a resilient and engaging landscape that enhances the overall character of the development.



A landscape photograph showing a vibrant green field in the foreground, sloping upwards from the bottom left towards the center. A dense, dark green line of trees runs across the middle ground, separating the field from the background. The sky above is a clear, bright blue. The text "LANDSCAPE ANALYSIS" is centered in the upper half of the image in a white, sans-serif font.

LANDSCAPE ANALYSIS

Site Context

The Mooretown lands are situated on the western side of Swords. The surrounding context is predominantly suburban to the east and south, characterised by medium-density housing, local schools, and neighbourhood green spaces. To the west, the landscape transitions toward semi-rural farmland, with open fields and glasshouse horticulture still present.



Ward River Valley Regional Park



Rathbeal Archaeological Park

Microclimate

The Moorestown area experiences a temperate maritime climate typical of the Dublin region, with mild winters, cool summers, and consistent rainfall throughout the year. Prevailing south-westerly winds influence local comfort levels, particularly in open areas with limited shelter. The site benefits from good daylight exposure, though wind exposure may be higher in more open or elevated parts of the surroundings.



Topography

The Mooretown site features a gently sloping topography that generally falls from south to north. The slope facilitates gravity-based runoff management, while the gradual level change allows for a varied spatial experience—potentially accommodating green corridors, attenuation zones, or open space terraces without the need for significant earthworks.



Existing Vegetation

Vegetation within the Moortown site is dominated by the network of hedgerows that define historic field boundaries and drainage lines. These hedgerows form the most significant ecological and visual features on site, providing structure, enclosure, and a sense of maturity within an otherwise open agricultural landscape.




Site Picture



Site Picture

Ecological Connectivity

The site sits within a transitional zone between established suburban areas to the East and the semi-rural landscape to the West. Although the immediate context is largely urbanised, several linear features contribute to a degree of ecological continuity across the area. Existing hedgerows, tree lines, and drainage ditches along field boundaries provide local movement corridors for birds, small mammals, and invertebrates. These features also serve as visual and ecological links between fragmented patches of semi-natural habitat within and beyond the site.

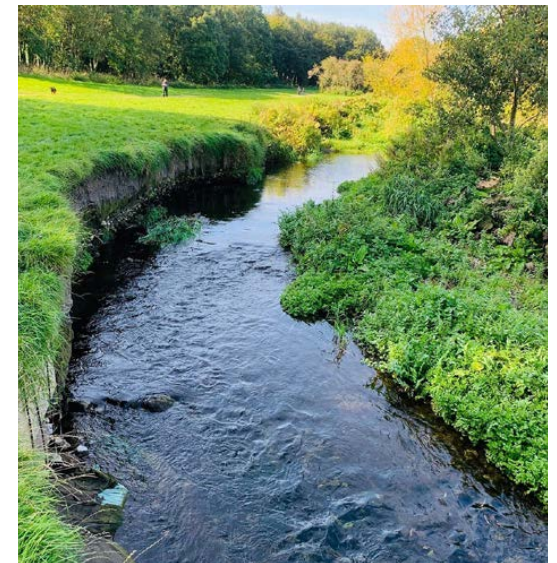

Archaeological Sites

This wider contextual diagram illustrates the application site in relation to recorded archaeological sites and monuments which have been surveyed within the surrounding landscape. The inclusion of sites beyond the application boundary is intended to provide an understanding of the broader historic and cultural context, demonstrating how the site sits within an established pattern of archaeological features and contributing to an appreciation of the overall character of the area. This broader context helps inform the landscape design approach by responding to the wider setting and reinforcing a sense of place within the surrounding landscape.



Archaeological Sites

Archaeological studies revealed an extensive subsurface early medieval ecclesiastical complex extending north and south of the Rathbeale Road, with an associated field system, the southern portion of which lies within the subject lands. In addition, a medieval settlement comprising subsurface yards and boundary features was identified near Glasmore Abbey, to the east of the site. Lastly, investigations recorded a natural spring—believed to be the source of the holy well—and an adjacent fulacht fiadh.



RATHBEAL ARCHEOLOGICAL PARK

The annex associated with the early medieval site extends into the subject site and is represented by a subsurface haphazard field system to the south the main of the enclosure, it does not have any above ground indication. There is a natural level ridge in the northeast corner of the field, where it generally runs level towards the western field boundary. There is a natural valley/dip in the northern half of the field, referred to previously as a paleochannel running roughly east-west.

GLASMORE GREEN ARCHEOLOGICAL PARK

The archaeology consists of an east northeast–west southwest, L-shaped row of sub-rectangular yards or 'tofts', delimited by boundary ditches/gullies and atop a slight raised platform. Possible surviving building remains were concentrated in the southern two thirds of the toft, with either a yard surface or east northeast–west northwest 'back lane' to the north. To the south, down a slight slope, an east northeast–west southwest metalled hollow trackway ran parallel to the tofts, with a delimiting field bank on its southern side.

ST. CRONAN'S WELL ARCHEOLOGICAL PARK

Within the southeast corner framework plan lands, there is a holy well dedicated to St Cronan, the seventh-century-AD saint, it appears on early mapping. Holy Wells are a Christian adaptation of a pre-Christian tradition of sacred springs, which like their pagan predecessors, were often visited at certain times of the years, and often had a reputation for effecting cures. Even though this well is 455m south of the secular activity revealed in Mooretown and some 700m from the ecclesiastical complex at Oldtown it may well have been venerated and linked to this establishment and later used by the settlement in the vicinity of Glasmore Abbey.



LANDSCAPE VISION

Landscape Vision



PEDESTRIAN CONNECTIVITY

The design increases permeability across the site, enhancing connections from north to south and east to west by providing public access at key existing links. The pedestrian-oriented layout promotes walking and cycling, with amenities included to support these sustainable transportation options.



HERITAGE

The site holds archaeological features that contribute to its cultural significance and sense of identity. These elements provide insight into the historical development of the area and form an important link to the wider heritage context. The design approach recognizes and respects this value by protecting known features, avoiding unnecessary disturbance, and integrating archaeological assets into the landscape where appropriate.



ECOLOGY & BIODIVERSITY

The protection and enhancement of the site's natural features will define the planting design and sense of place. Native tree species and pollinator-friendly plants will be introduced, with ongoing maintenance to ensure a continuous supply of flowering plants during the shoulder months, supporting year-round biodiversity.



SENSE OF COMMUNITY




The design fosters a strong sense of community by creating welcoming, inclusive, and multifunctional outdoor spaces that encourage social interaction, shared experiences, and a sense of belonging. Open spaces are strategically placed to support informal gatherings, play, and neighborly exchange. Pathways and visual connections link homes to shared amenities, promoting walkability and spontaneous encounters.



Pedestrian Oriented Design

Sustainable Movement Strategy

The landscape design establishes a pedestrian-first circulation system, integrating residential developments, shared open spaces, and parks through a coherent network of pathways. Routes are strategically aligned to ensure direct and efficient connections, reducing walking distances and enhancing permeability across the site.

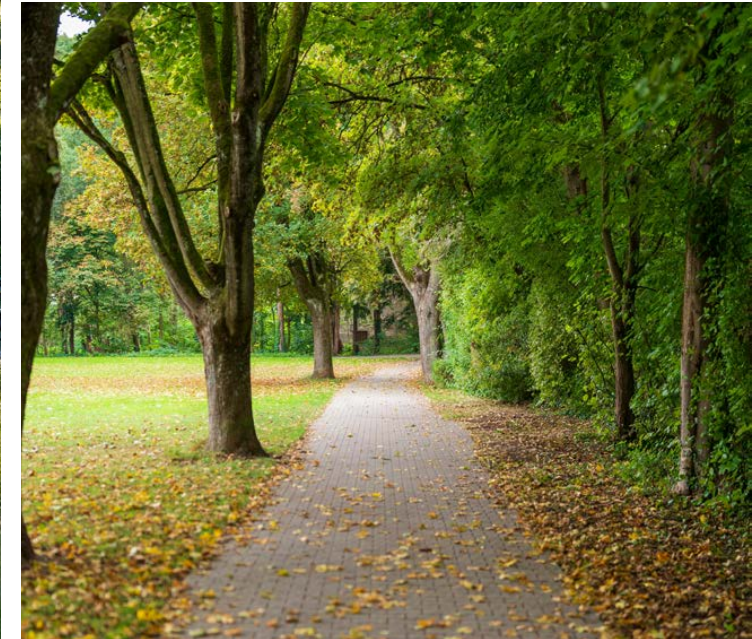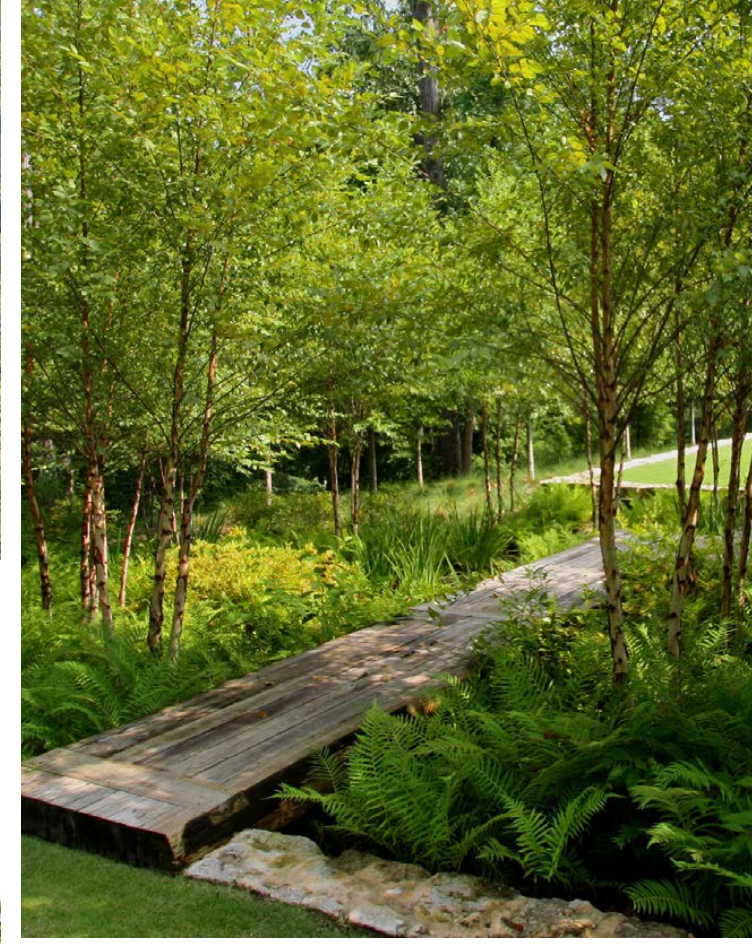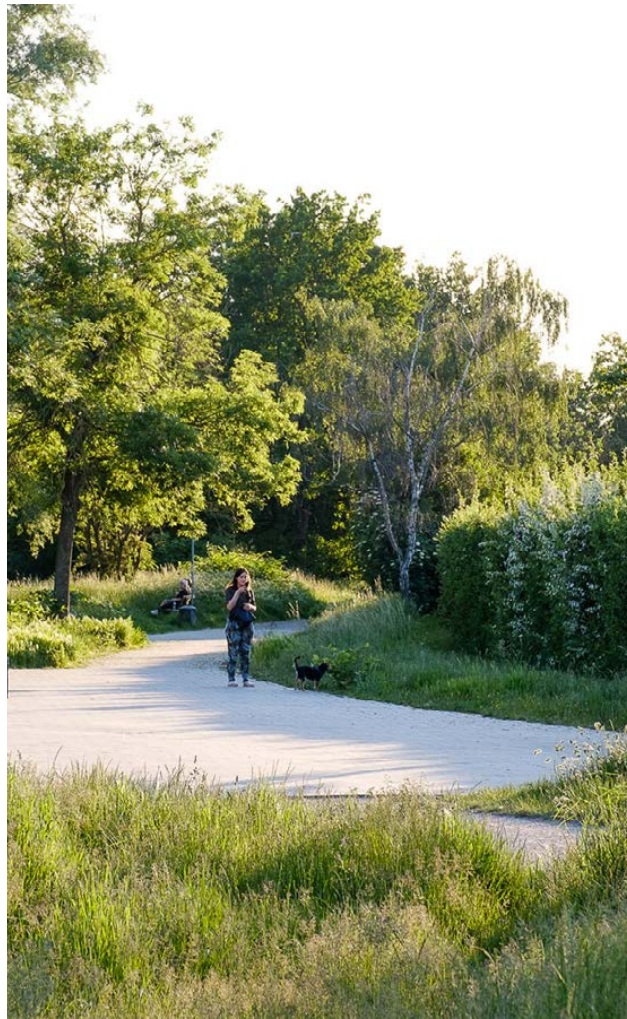




Cycle and Pedestrian Links

The design includes a network of routes for walking and cycling that connect different parts of the development. Main paths provide straightforward connections, while smaller routes allow flexible access throughout the area.

Paths are designed to be safe, comfortable, and easy to use, with consideration for accessibility and separation from traffic where possible. The network also links to surrounding routes, supporting active travel and encouraging movement throughout the community.

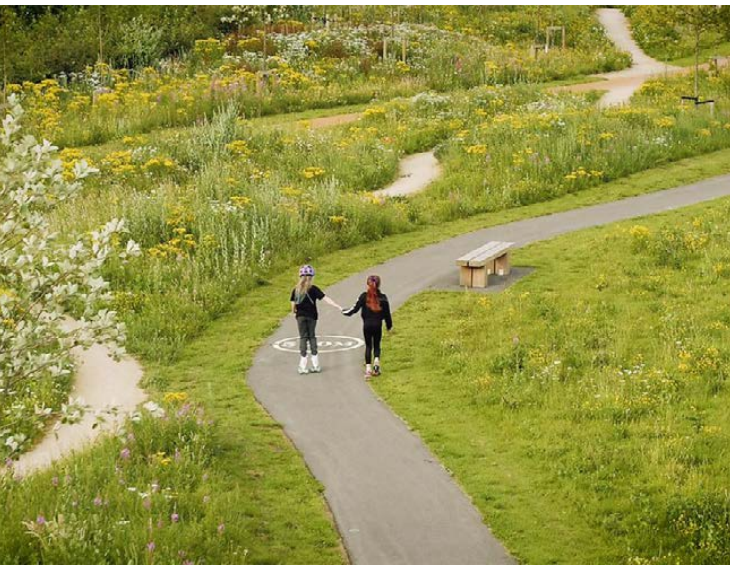






Cycle and Pedestrian Links

A network of well-defined pathways creates safe, inviting routes that enhance connectivity and encourage active travel.



Legend:


-  Active Travel Route - Main Link
-  Active Travel Route - Shared Path
-  Vehicular Connections
-  Primary Pedestrian Connections
-  Secondary Pedestrian Connections

Ramp Access To Rathbeal Park

The ramp provides a gentle and accessible connection between the different levels. Gabion walls form a series of terraces that shape and stabilise the slope while helping to define the route. The path is framed by planting, creating a soft transition through the landscape and integrating the structure within the wider green setting. Guardrails are provided where required to ensure a safe and comfortable route for all users.



Key Plan

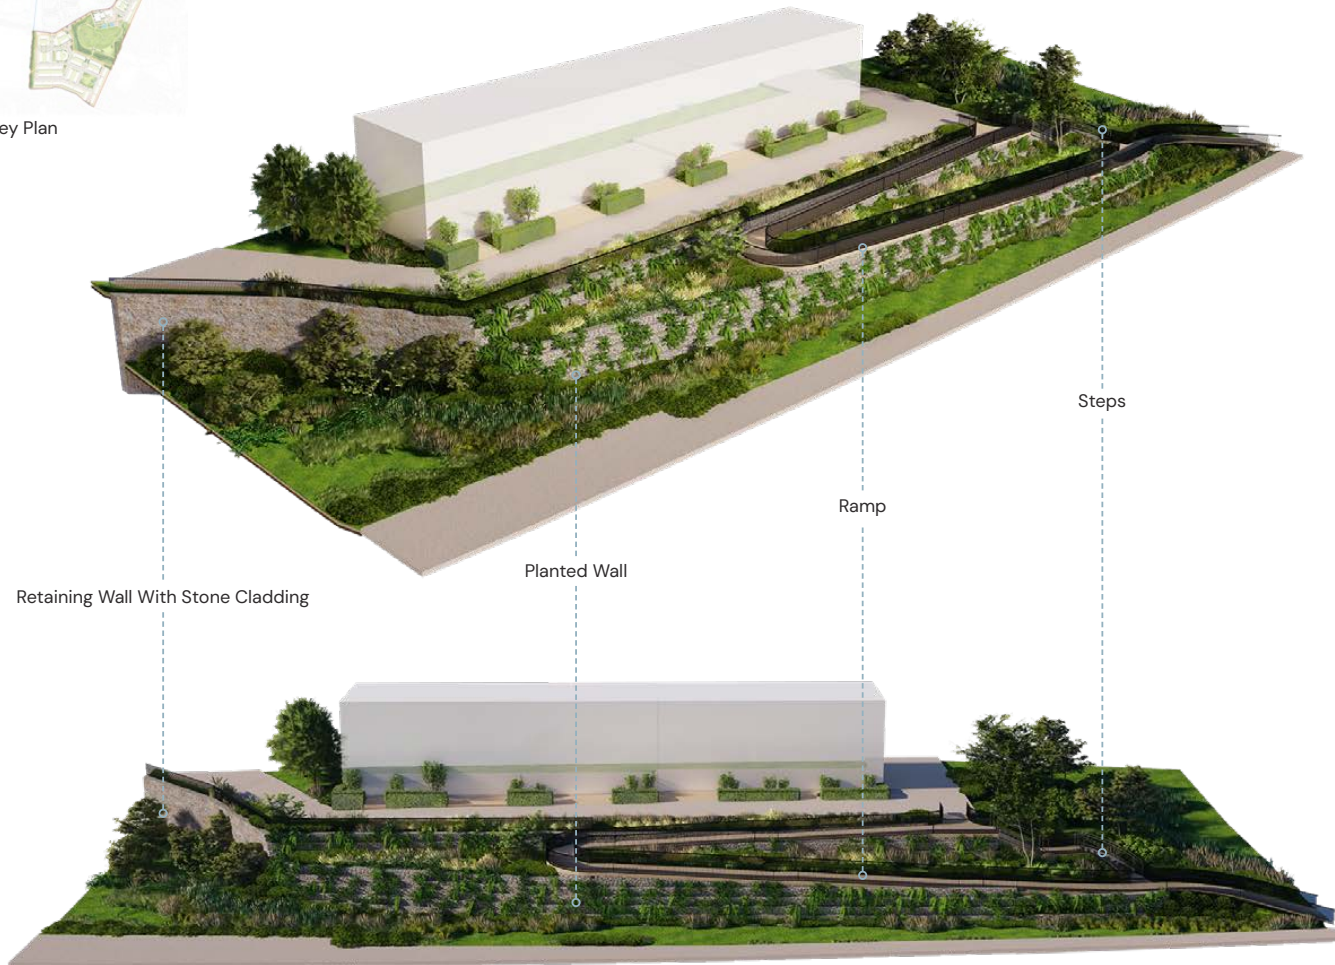

Retaining Wall With Stone Cladding



CGI View



Planted Wall



Archaeological Areas

The site demonstrates notable archaeological potential, reflecting patterns of settlement, land use, and cultural activity over time. The archaeological resource is largely sub-surface in nature, with evidence identified through cropmarks, recorded excavations, and archaeological mapping rather than visible above-ground remains. These assets contribute to the historical depth of the landscape and form part of a much wider archaeological landscape. In this context, the site at Mooretown, located immediately to the south of Rathbeal Archaeological Park North, should be understood as functionally and historically connected to a broader network of archaeological sites within the surrounding area. This relationship strengthens the connection between the proposed development and its wider heritage context and underlines the importance of a careful, informed design response that balances contemporary use with the protection and appreciation of cultural resources, including the respectful reinstatement and acknowledgement of St Cronan's Well within an open landscape setting.

Archaeological remains are considered a non-renewable resource, and their preservation in situ is prioritised wherever possible. The masterplan incorporates appropriate protective measures to minimise the potential for disturbance during construction, including buffer zones, controlled access, and clear demarcation of sensitive areas. Where integration is feasible, archaeological features are incorporated into the public realm, reinforcing local identity and providing opportunities for education and interpretation."



Archaeological Sites

The site is understood to possess archaeological potential arising from historic patterns of settlement, land use and cultural activity. Such features contribute to the layered character of the landscape and form an important part of the site's wider heritage context. This archaeological background informs the design approach, reinforcing the need for sensitivity in how the site is interpreted and developed. Archaeological remains are a finite and non-renewable resource, and their consideration is integral to ensuring that development responds appropriately to inherited cultural value. The masterplan acknowledges this by promoting an informed and precautionary approach, ensuring that archaeological assets are respected and that their presence continues to contribute to place identity and understanding of the site's history. St Cronan's Well is recognised as a feature of archaeological and cultural significance within the site. Its presence adds to the historic depth of the landscape and is an important element of the area's cultural narrative.

The well is accommodated within an open landscape setting, with appropriate separation from surrounding development and measures in place to protect its setting and integrity, allowing for appreciation and interpretation in a manner consistent with its heritage significance.



These historic photos capture the original character of the Mooretown landscape — open pasture, gentle landform, rough meadow edges and small watercourses shaped by grazing and natural hydrology. The solitary trees, shallow depressions and wet ground reveal a landscape defined by subtle shifts in topography and long-term use.



Our design reinterprets these qualities through a broad central meadow, gentle mounding at the edges, and naturalistic planting that reflects the raw textures of the original fields. The archaeological gravel lines overlay the site's heritage, creating a contemporary reading of the past while retaining the open, understated rural character shown in the historic images.

II Archaeology In The Landscape

Archaeology forms an integral part of the landscape, shaping its structure, identity, and sense of continuity over time. The physical traces of past human activity reveal how communities have historically interacted with their environment.

Even where visible features have disappeared, the underlying archaeological record continues to influence landform, soil character, and vegetation patterns, embedding cultural memory within the landscape fabric.







Archaeology In The Landscape



In the context of contemporary planning and design, archaeology provides an opportunity to understand, interpret, and celebrate the historic depth of place. Recognising archaeological landscapes encourages a more sensitive approach to land use and spatial arrangement, ensuring that development respects both tangible and intangible heritage values.



II Archaeology In The Landscape

In Ireland, this relationship between archaeology and landscape is particularly evident. Features such as ringforts, enclosures, barrows, and early field systems are often positioned in response to topography, water availability, and defensibility, reflecting a sophisticated awareness of landform and ecology. These traces connect modern communities to an ancestral geography

Understanding archaeology within the landscape context allows for a more layered reading of place, where the past is not treated as a static record but as an active influence on spatial planning and environmental design. Integrating archaeological knowledge into landscape assessment supports decisions that respect both tangible remains and the intangible sense of time and memory embedded in the terrain.

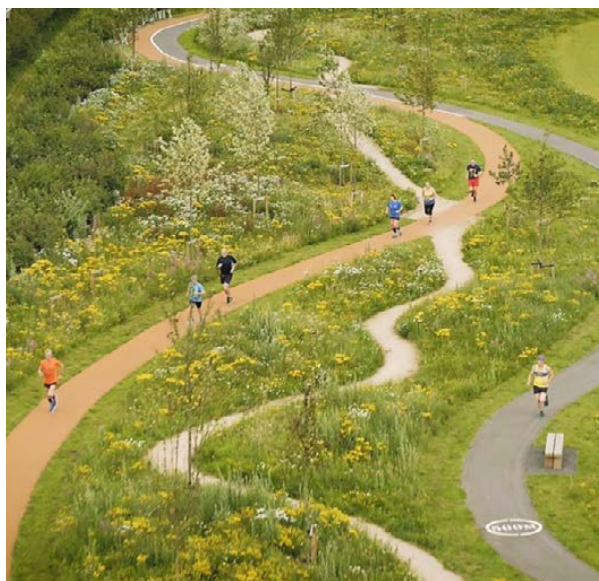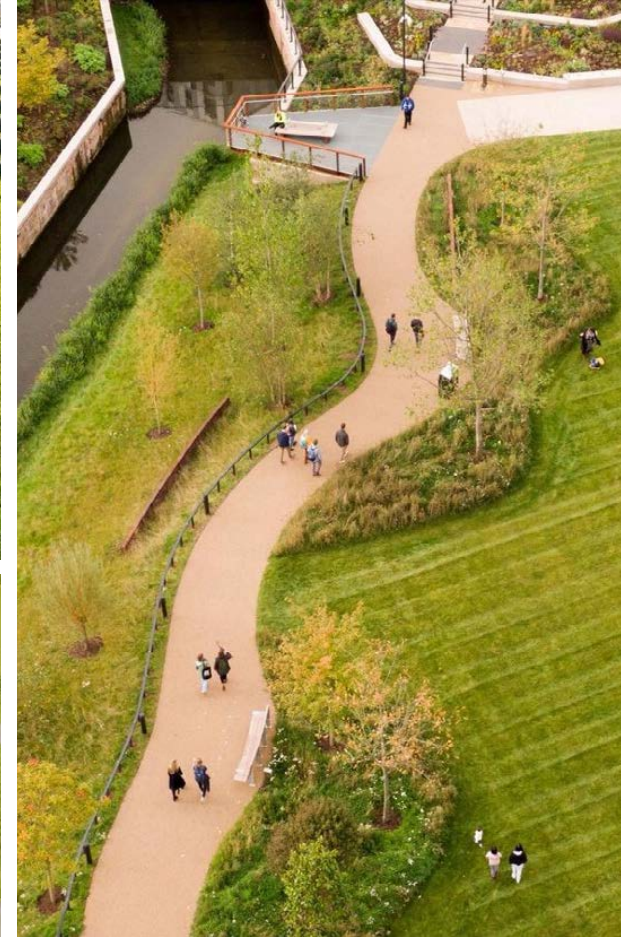

Hedgerow Connectivity

The site retains sections of established hedgerow that play an important role in defining boundaries, enhancing biodiversity, and contributing to local character. These hedgerows provide ecological value by supporting habitat connectivity, offering shelter and foraging opportunities for wildlife, and strengthening green infrastructure links within and beyond the site.

Where possible, hedgerows are preserved and integrated into the design, forming natural edges to paths and open areas. Management measures such as selective cutting, reinforcement planting, and protection during construction ensure their long-term health and continuity.



Hedgerow Protection

Living Boundaries: The Role of Native Hedgerows in Ireland.

Hedgerows are one of the most distinctive features of the Irish landscape, acting as living boundaries that shape the countryside. Beyond their visual and cultural importance, native hedgerows play a vital role in biodiversity, water management, and climate resilience.

Composed of species such as hawthorn, blackthorn, hazel, holly, and ash, native hedgerows provide habitat and food sources for birds, pollinators, and small mammals. They serve as ecological corridors, linking fragmented habitats and supporting wildlife movement across agricultural land. Their roots stabilize soil, reduce erosion, and help manage surface water, while their dense structure acts as a natural windbreak.

Preserving native hedgerows is not only about conservation but also about cultural heritage. They represent centuries-old field patterns and traditional farming practices that have shaped rural Ireland. Protecting and restoring them contributes to biodiversity goals, supports sustainable agriculture, and safeguards the character of the Irish countryside for future generations.








Hedgerow Treatment Plan

Existing hedgerows will be carefully assessed, with key sections retained to preserve ecological value. Selective removals will allow for improved connectivity and new native planting to enhance biodiversity and site resilience, whilst also facilitating appropriate development.



Legend:


-  Existing Hedgerow Retained
-  Existing Hedgerow Removed
-  Proposed Hedge




Ecological Connectivity

Ecological First Principles


Linking open spaces throughout the site is a key design principle, aimed at facilitating wildlife movement and ensuring a seamless connection between habitats. This approach not only supports local biodiversity by providing safe corridors for species to travel, but also integrates the site into the broader ecological network, enhancing its ecological resilience and contributing to the health of surrounding natural areas.




Intersection Effect



Ecologically "optimum" Patch Shape

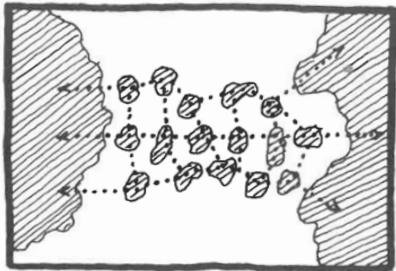

Cluster of Stepping Stones



Network Connectivity & Circuitry






Tree Plan

The project significantly increases tree coverage to enhance the landscape and environmental quality. A key focus is carbon sequestration, with green spaces strategically designed to capture carbon, mitigate urban heat effects, and improve air quality, contributing to a healthier and more resilient environment.



Legend:

-  Existing Trees to be removed
-  Existing Trees to be retained
-  Proposed Trees









Net Biodiversity Gain

The project prioritizes net biodiversity gain through carefully designed planting schemes that support native pollinators and strengthen local ecosystems. A diverse mix of native species ensures year-round habitat availability, enhances ecological resilience, and contributes to a thriving natural environment.



Legend:


-  Meadow and pollinator friendly planting
-  Existing Hedgerow to be retained
-  Existing Trees to be retained
-  Proposed Trees



Social Spaces

The design incorporates a variety of social spaces to support community interaction, recreation, and informal gathering. These areas are distributed throughout the development, providing residents with convenient opportunities to meet, relax, and engage in shared activities.


Spaces are designed with flexibility in mind, accommodating different uses such as seating areas, play zones, and open lawns. Landscape features, seating, and planting help create comfortable, inviting environments, while clear sightlines and accessibility ensure that all users can enjoy the spaces safely.

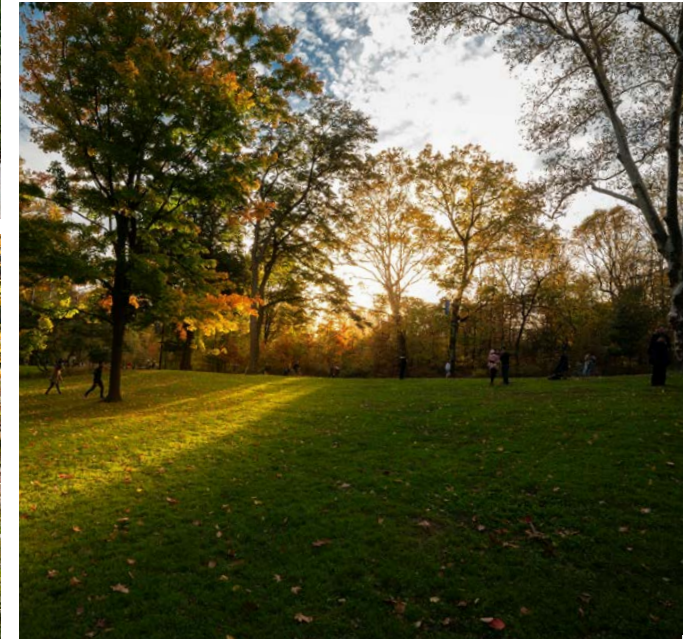

Play Strategy – Landscape for all Ages

The design fosters play and exploration through a rich mix of natural and structured environments that inspire children of all ages. A network of natural incidental play spaces—integrated within pathways, landscapes, and green corridors—encourages spontaneous discovery, imagination, and sensory engagement with the environment.

Complementing these are designated play areas and kickabout open spaces, providing safe, stimulating settings for both social and physical activity. These spaces are carefully distributed across the development, offering opportunities for children to climb, run, create, and connect through shared play experiences.

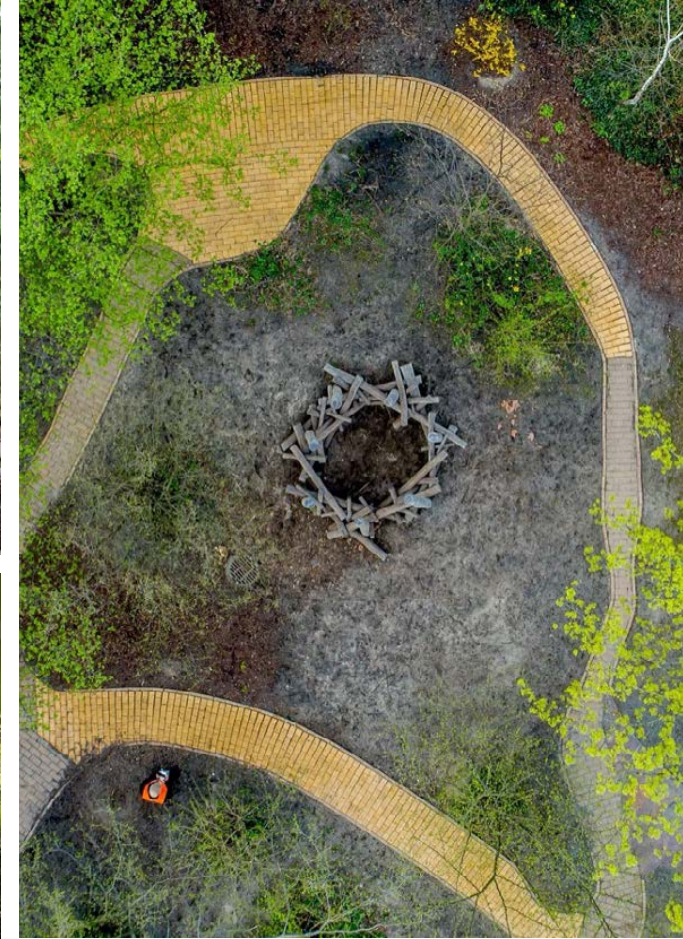

Play Provision Quantum

The diagram demonstrates the overall quantum of play provision within the development, totalling 1,620 sqm. This includes both dedicated play areas and a significant provision of natural play space, ensuring a diverse and distributed play offering across the site.



Legend:

 Play Area - Tot. 1620 m2





Play Strategy

Multifunctionality and Flexibility

Play areas are designed to support a wide range of activities and age groups. Open lawns, climbing structures, and event spaces offer both active and passive recreation. These adaptable spaces can also host community gardens or local gatherings, encouraging shared use.

Natural Surveillance and Safety

Positioning play areas near homes ensures they are easily observed by residents. This natural surveillance enhances safety and helps foster a sense of community ownership, making the space more secure and welcoming for families.

Year-Round Usability and Sunlight

Layouts prioritize sunlight exposure to make outdoor play more comfortable year-round. Durable materials and smart drainage ensure the space remains usable in all seasons, while shelters and seating add comfort in Ireland's changeable weather.

Inclusive and Sustainable Design

Playgrounds are accessible to all abilities, with features that support physical, sensory, and social inclusion. Sustainable materials and nature-friendly elements like pollinator plants promote environmental awareness and resilience.



Play Strategy – Engaging Community

Having accessible open green spaces and play areas is essential for both healthy childhood development and community engagement of the local area. Here are some of the key reasons why play areas are crucial:



Foster a Sense of Belonging

A shared play space becomes a familiar local spot that anchors families within their neighbourhood, promoting local pride and identity.



Create Opportunities for Local Events and Initiatives

Play areas double as gathering spots for community picnics, seasonal celebrations (e.g. Halloween, Easter egg hunts), or local clean-up days.



Bridge Generations and Cultures

Open play areas invite participation from all ages and backgrounds, helping newcomers integrate and creating opportunities for intergenerational interaction.



Promote Health and Wellbeing

Encourages outdoor time and physical activity, reducing screen time and supporting mental health for children and adults alike.



Encourage Natural Social Interaction

Playgrounds create daily opportunities for children—and their parents or carers—to meet, talk, and form friendships organically.



Strengthen Informal Support Networks

As parents and guardians connect, they build informal childcare support systems and share local knowledge, boosting overall community resilience.



Play Along The Way

Children who play in natural playscape environments and engage in sensory activities outdoors develop a stronger sense of well-being. These experiences encourage physical activity, creativity, and social interaction while fostering a deeper connection to nature. Exposure to diverse textures, sounds, and natural elements supports cognitive development, reduces stress, and enhances emotional resilience, creating a more enriching and holistic play experience.





Designated Play Areas

Designed play areas with equipment offer clear benefits for children's development and community connection. Purpose-built features like swings, slides, and climbing frames encourage physical activity, improve coordination, and support imaginative play. They provide engaging, age-appropriate challenges that keep children active and entertained. These spaces also promote social interaction, helping kids learn cooperation and communication through shared play. For families, equipped play areas become reliable gathering spots, fostering stronger neighbourhood connections and a sense of belonging. The dedicated play areas will have universal access and they will be suitable for all abilities.

All equipment to be supplied/installed to BS EN 1176 Installation/inspection/maintenance regime in accordance with BS EN 1176-7



Inclusive Play

Universal Access & Inclusive Design

The play areas have been developed following universal design principles to ensure accessibility and inclusivity for users of all ages and abilities.

Equipment Durability


In response to the Parks & Green Infrastructure Division's comments, primary play structures will incorporate galvanised and/or powder-coated steel frames to enhance structural durability, vandal resistance and long-term performance.

Where timber is proposed, it will consist of:


- Pressure-treated, sustainably sourced hardwood or laminated engineered timber
- Factory-treated to improve resistance to rot and moisture ingress
- Designed to minimise ground contact and prolong lifespan
- Detailed with stainless steel fixings to reduce corrosion

The combination of steel structural elements and high-quality treated timber components provides a balance between long-term durability, reduced maintenance requirements, and a natural aesthetic appropriate to the landscape setting.

Final play equipment proposals to be agreed with FCC.

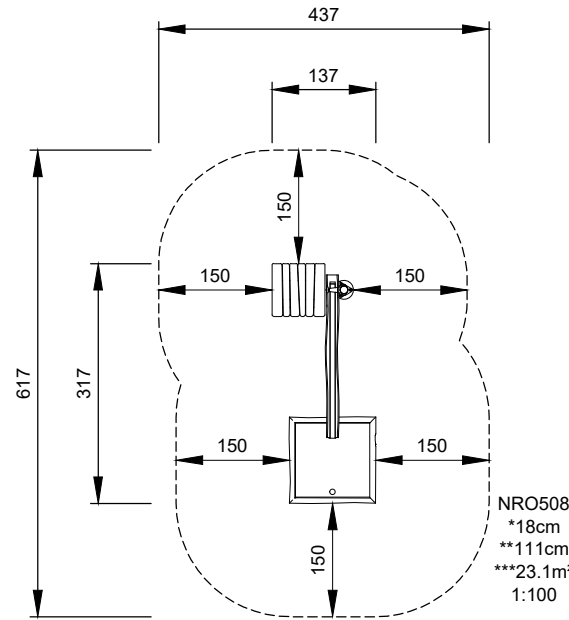

KOMPAN - Water Channel with Splash Table

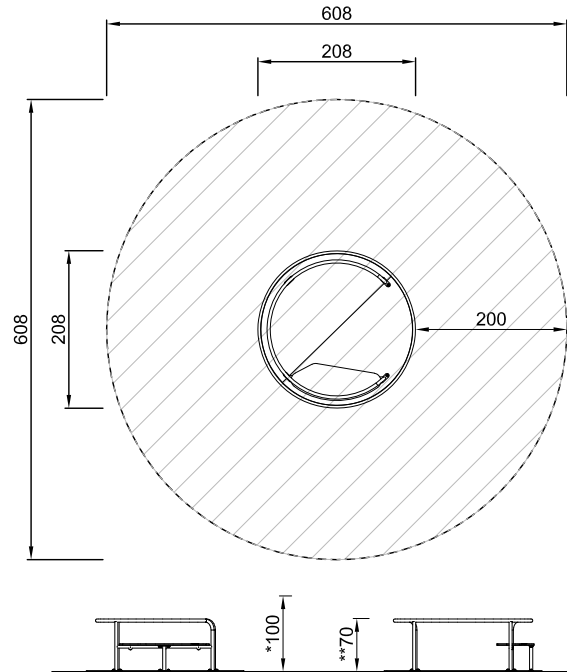

KOMPAN - Universal Carousel





Discover while playing



LANDSCAPE DESIGN

Illustrative Masterplan



A network of open spaces is distributed throughout the site, ensuring that all residential areas have easy access to green amenities. Larger parks provide space for recreation and community use, while smaller pockets of landscape offer variety and moments of relief within the built environment. Tree planting, retained hedgerows and new green links help to define neighbourhood identity and support a pleasant, human-scaled environment.




Legend:

- 01 Active Travel Route
- 02 Existing hedgerow
- 03 Archaeological Site
- 04 Playscape
- 05 Informal Kickabout Lawn
- 06 Lawn
- 07 Mounds
- 08 Walking Loop
- 09 Natural Play

Open Space Quantum

Overall quantum of open space within the development, comprising Public Open Space, Communal Open Space, and Additional Amenity Space. Together, these elements provide a balanced and integrated network of open spaces serving both the wider community and residents.

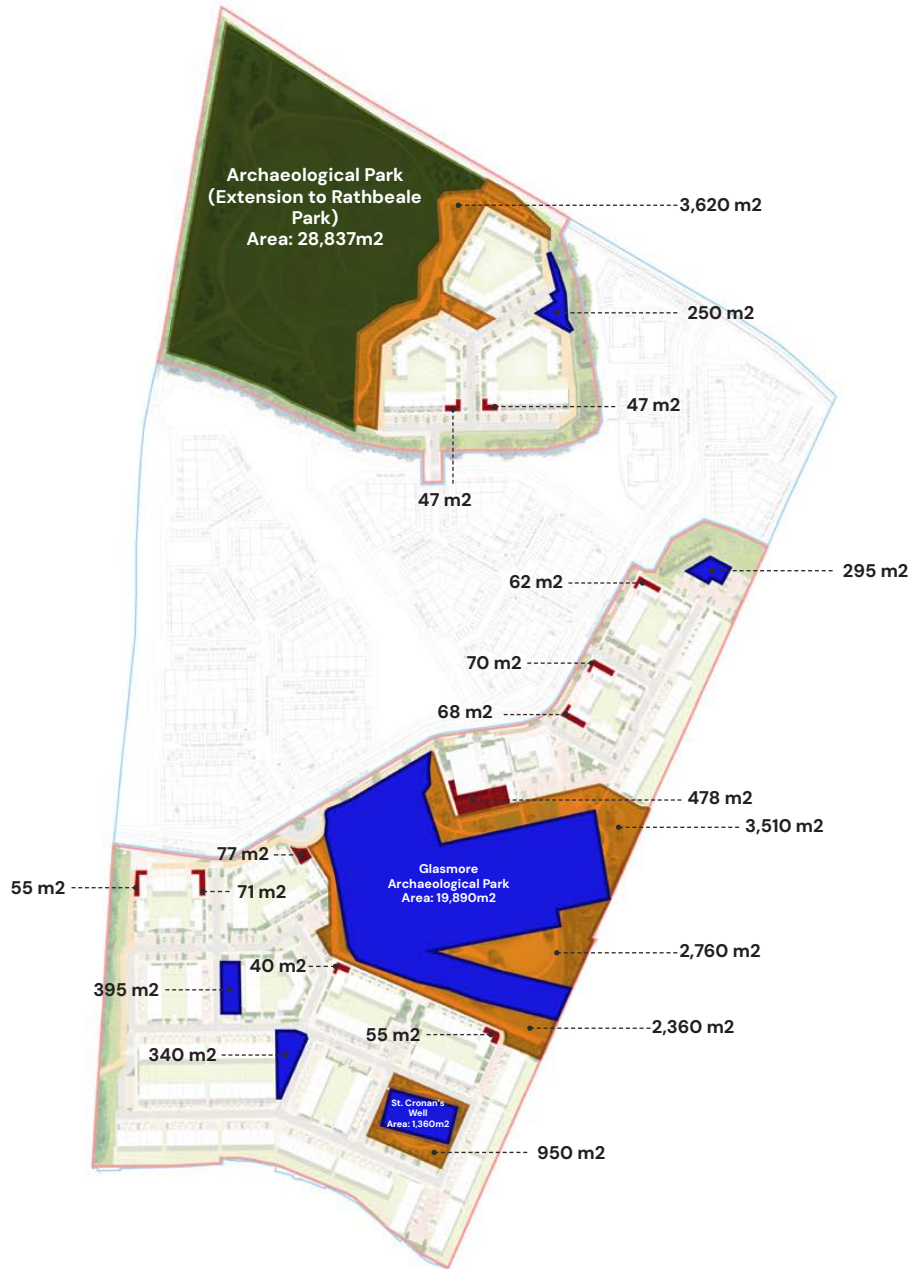


Legend

	Required:	Provided:
 Class 1 Public Open Space	8,770 m2	28,837 m2
 Class 2 Public Open Space	1,800 m2	(15%) 13,200 m2
 Communal Open Space	355 m2	1,070 m2
 Additional Open Space		22,530 m2



Open Space Adjacencies

The proposed open space network is positioned within a wider landscape framework, directly adjoining established public open spaces and green infrastructure. These connections extend the amenity offer beyond the site boundary, providing access to larger open spaces while supporting permeability, movement and ecological continuity across the wider area.

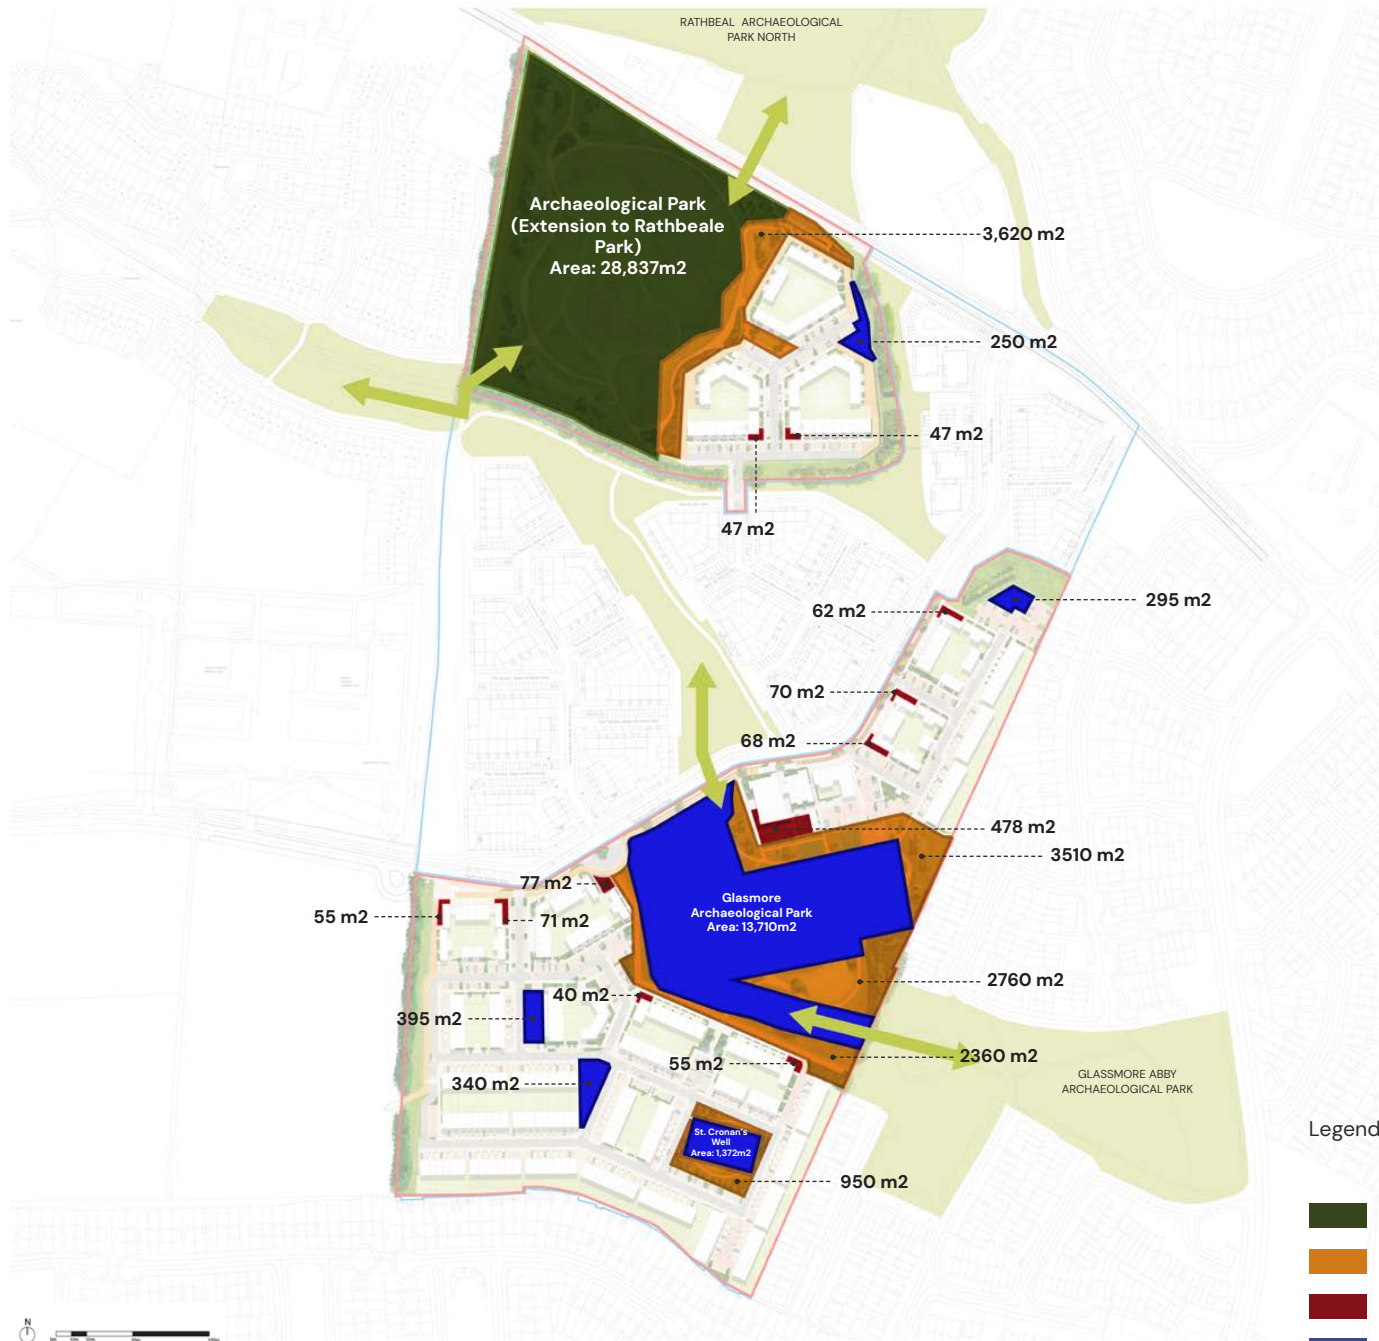

Legend

	Required:	Provided:
 Class 1 Public Open Space	8,770 m ²	28,837 m ²
 Class 2 Public Open Space	1,800 m ²	(15%) 13,200 m ²
 Communal Open Space	355 m ²	1,070 m ²
 Additional Open Space		22,530 m ²





Rathbeal Archaeological Park South



Key Plan

Legend:

- 01** Access to the Site
- 02** Existing hedgerow
- 03** Archaeological Site
- 04** Natural Play
- 05** Walking Loop
- 06** Lawn
- 07** Private Gardens
- 08** Mounds
- 09** Circular Hut Site
- 10** Mown Path
- 11** Seating Overlook
- 12** Feature Planting | Integrative Seating
- 13** Active Travel Route - Shared Path



Glasmore Archaeological Park



Key Plan

Legend:


- 01 Active Travel Route
- 02 Existing hedgerow
- 03 Archaeological Remains
- 04 Play Area
- 05 Informal Kickabout Lawn
- 06 Creche
- 07 Private Gardens
- 08 Mounds
- 09 Half Basketball Court
- 10 Mowed Path
- 11 Walking Loop
- 12 Seating
- 13 Feature Planting | Integrative Seating
- 14 Active Travel Route - Shared Path

Glasmore Archaeological Park





St. Cronan's Well Archaeological Park





Key Plan

Legend:

- 01 St. Cronan's Well
- 02 Fulacht Fiadh
- 03 Pathway
- 04 Lawn
- 05 Meadow
- 06 Seating Area
- 07 Mound
- 08 Old Stream
- 09 Home Zone
- 10 Play Along the Way



St. Cronan's Well Archaeological Park

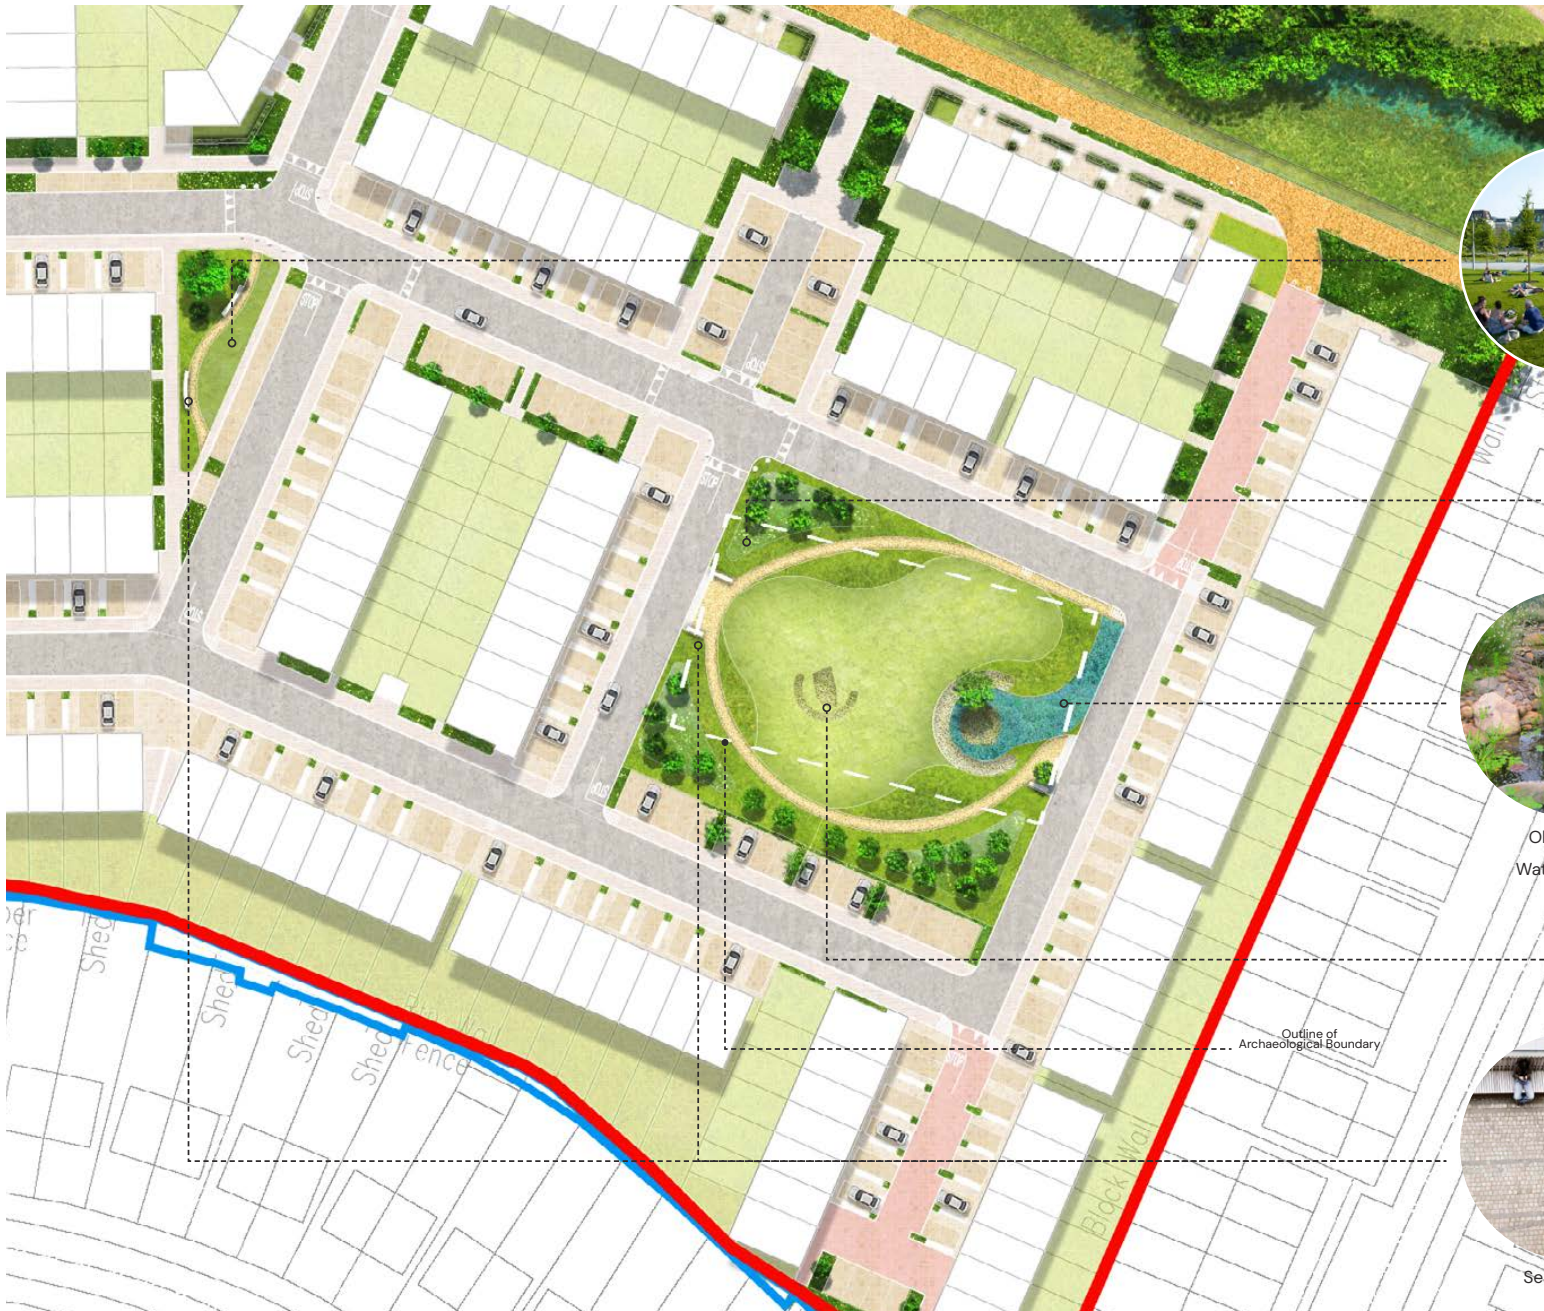

Lawn



Mound



Old Stream
Water Planting



Fulacht Fiadh



Seating Area

A soft-focus photograph of a meadow. The scene is filled with tall, thin grasses and various wildflowers. In the foreground, there are several purple flowers with white centers, and some white flowers. The background is a dense field of similar plants, all rendered in a soft, out-of-focus state. The lighting is natural, creating a gentle, ethereal atmosphere. The text "SOFT LANDSCAPE" is centered in the middle of the image in a clean, white, sans-serif font.

SOFT LANDSCAPE

Regenerative Landscapes

Regenerative Landscapes: Principles and Application to the Proposed Development

1. INTRODUCTION

The concept of regenerative landscapes goes beyond conventional sustainability by actively restoring and enhancing ecological systems while supporting human habitation. In the context of this project, the existing site comprises green fields and hedgerows—an important ecological asset that will be carefully integrated into the new residential development. By applying regenerative design principles, the landscape strategy aims to improve biodiversity, soil health, water management, and overall ecosystem resilience. This approach will not only mitigate the environmental impact of construction but also create a long-term positive contribution to the local landscape and community.



2. UNDERSTANDING REGENERATIVE LANDSCAPES

Regenerative landscapes are designed to restore and enhance natural processes rather than simply minimizing harm. Key principles include:

Biodiversity Enhancement – Supporting native flora and fauna to create self-sustaining ecosystems.

Soil Regeneration – Improving soil structure, organic matter, and microbial health through thoughtful planting and management.

Water Resilience – Maximizing natural infiltration, reducing runoff, and improving water quality.

Climate Adaptation – Designing for resilience against temperature extremes, flooding, and drought.

Community Connection – Creating spaces that foster a connection between people and nature, improving health and well-being.



These principles will guide the landscape strategy for the proposed development, ensuring the transformation from open grassland to residential use enhances the ecological value of the site.

It is not enough just to protect the hedgerows from further loss; their quality also needs to be improved through sensitive and effective management.

3. EXISTING LANDSCAPE & ECOLOGICAL VALUE


The site is currently characterized by:

Open grass fields with limited plant diversity, primarily composed of agricultural grasses.

Established hedgerows, which serve as vital ecological corridors for birds, insects, and small mammals.

Soils that have been historically managed for pasture, with potential for improved organic content and microbiological activity.

Hedgerows are particularly important as they provide habitat, shelter, and food sources for wildlife while acting as natural windbreaks and water regulators. Recognizing their value, the design strategy will retain, enhance, and expand these hedgerows as part of the development.

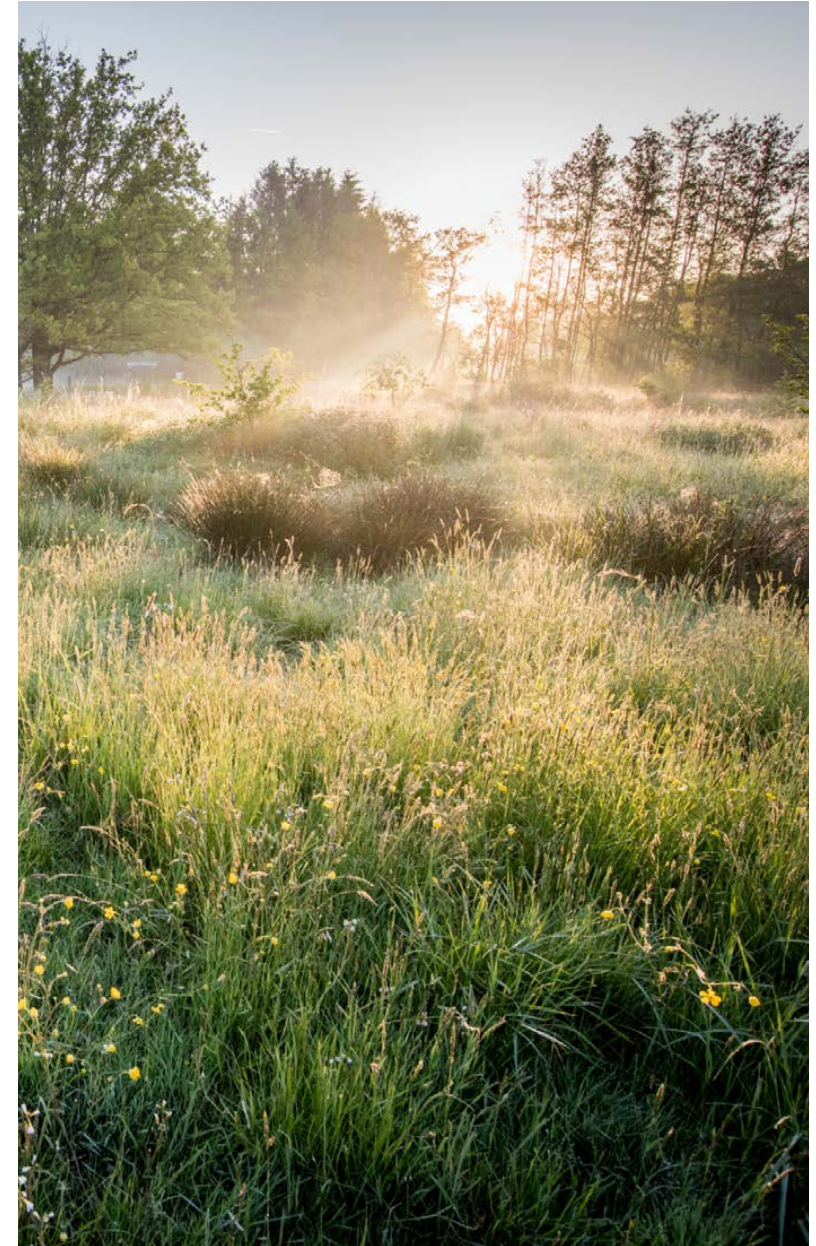

Regenerative Landscapes



4. REGENERATIVE LANDSCAPE STRATEGY

The following strategies will be implemented to ensure the landscape actively contributes to ecological regeneration:

4.1 Hedgerow Integration and Enhancement

Existing hedgerows will be retained and strengthened through the planting of additional native species such as hawthorn, blackthorn, hazel, and alder.

New planting will extend the existing network to improve connectivity between green spaces.

Selective gapping-up (filling in sparse sections) will ensure continuous shelter and habitat function.

A buffer zone of diverse groundcover and wildflower meadows will surround hedgerows to support pollinators.



4.2 Soil Regeneration and Planting Design

Minimizing soil compaction during construction to maintain soil health and permeability.

Using biochar, compost, and cover crops to improve soil fertility and water retention.

Introducing diverse planting layers, including trees, shrubs, and groundcovers, to increase soil organic matter and microbial activity.



4.3 Water Management & Climate Resilience

Implementing sustainable drainage systems (SuDS) such as swales, rain gardens, and permeable surfaces to reduce runoff.

Designing planting areas that retain water and increase infiltration, reducing flood risks.

Using native, drought-resistant species to create a low-maintenance, climate-adaptive landscape.

4.4 Biodiversity & Habitat Creation

Planting a mosaic of native species to attract birds, bees, and butterflies.

Integrating bat and bird boxes within hedgerows and tree lines.

Creating wildlife corridors that connect the development to surrounding green areas.

Incorporating pollinator-friendly meadows in open spaces and along pathways.

5. LONG-TERM MANAGEMENT & COMMUNITY INVOLVEMENT

A successful regenerative landscape requires ongoing stewardship. Strategies include:

Encouraging resident participation in community gardening and biodiversity monitoring.

Establishing a maintenance plan that prioritizes regenerative practices such as seasonal hedgerow trimming and soil enrichment.

Partnering with local ecological groups to monitor biodiversity improvements over time.

6. CONCLUSION

By integrating regenerative design principles into the landscape strategy, this development will not only preserve but enhance the ecological integrity of the site. Retained hedgerows will be strengthened, soils will be revitalized, and new habitats will be established to support local biodiversity.

This approach ensures that the landscape becomes an asset for both residents and the environment—creating a resilient, thriving ecosystem that will continue to regenerate for generations to come.

The Pollinator Plan

The pollinator plan 2021–2025 has greatly influenced the planting palette and soft landscape strategy. This, combined with a selection of native plant species, will define the landscape design. Planting will educate and define public paths, distinguishing them from communal or private spaces.

Native Meadow

Meadows managed in the following way will allow bloom throughout the pollinator season. A further benefit is that bumblebees are provided with an undisturbed area for nesting. Over a number of years, the area will become more and more flower-rich with local species that are adapted to the site's conditions.



Annual Flowers For Pollinators

Work with local authorities to ensure a component of annual planting in parks is with pollinator friendly annual plants – single rather than double flowered varieties. You should always try to select scented, single-flowered varieties. The block planting of these can be an excellent source of food for pollinators.



Perennial Flowers For Pollinators

Incorporate pollinator friendly perennial plants into the local community to provide food for pollinators from spring through to autumn.

Pollinator friendly perennial plants are excellent sources of pollen and nectar. They are much more attractive to bees when planted in blocks rather than as single plants. Having a pollinator friendly perennial bed is an excellent way to provide food for pollinators across their lifecycle.



Pollinator Friendly Urban Planters

Identify some urban planters or hanging baskets where the standard annual bedding mix could be replaced by perennial pollinator friendly plants.



Flowering Trees And Shrubs

Incorporate a mix of pollinator friendly trees and shrubs into the local community that will flower throughout the season. An orchard can be a wonderful addition for pollinators and the community.

It is important to priorities increasing native plants (trees, shrubs, wildflowers) across the landscape to provide food for pollinators.



Training

Facilitate or execute local training sessions on pollinators and how to conserve them. Resources will be available for interested parties to deliver training on topics such as creating nest sites for wild pollinators, identifying common pollinator species, participating in the AllIreland Bumblebee Monitoring Scheme, and collecting, storing, and using local wildflower seed to improve areas managed as small grassy meadows in parks, schools, along greenways, etc.



The Pollinator Plan

Hedgerows For Pollinators

Flowering hedgerows with hazel, willow, blackthorn, and hawthorn provide food for wild bees as they emerge from hibernation in spring. Bramble is a good source of food in the summer, and ivy in the fall. Bumblebees frequently nest in long grass around the foot of hedgerows.



Clover Lawns

Identify small areas where grass could be entirely replaced with a permanent clover mix. Red and white clovers will provide colour, and are a very important food source for bees.



Eliminate The Use Of Pesticides

Identify some instances where pesticide use may be eliminated. This could refer to streets or locations where your group is willing to take on manual weed management. The majority of herbicides are applied along edging or at tree bases where mowers cannot reach. Identify sections of south-facing edging that could not be sprayed to give solitary bee nesting sites.



Awareness

Advocate for the All-Ireland Pollinator Plan among local companies, urging them to create pollinator-friendly outdoor areas or provide sponsorship for local initiatives that support pollinators.



Bee Hotels For Pollinators

Incorporate a limited number of solitary bee nest boxes into the community to attract cavity nesting solitary bees. Bee hotels can be valuable and effective awareness-raising tools, however actions 13 and 14 are superior methods for creating nest sites. In terms of reducing the chance of disease and predators harming the bees, a number of little hotels outperforms one large one.



Signage

Install informative signs elucidating the significance of pollinators and detailing local efforts in accordance with the All-Ireland Pollinator Plan. Signage templates are available for download on the website.



Planting Strategy

The planting strategy prioritizes biodiversity and sustainability by sourcing native trees from Tree Council-approved nurseries and selecting all planting species and wildflower seed mixes from the Irish Pollinator Plan. This ensures the landscape supports local ecosystems, enhances pollinator habitats, and promotes long-term ecological resilience.



Shade loving plants for woodlands

Woodland tree planting

- + Informed by the existing and formative tree planting and a native palette the tree planting will bleed into the site and grade out from north to south.



Shade loving plants for woodlands

Street trees + small feature trees + podium trees


- + Specimen tree planting will provide year long interest and beauty - landmarks in the landscape, to celebrate and identify with.



Shade loving plants for woodlands

Wildflower & shrub planting

- + To enhance bio-diverse credentials wildflower planting will occupy edges and large swathes of the sites periphery along with shade tolerant understory planting.



Shade loving plants for woodlands

Woodland understory & shade-loving plants

- + Woodland areas and shaded gardens will be planted with mix of shade loving plants.



Pinus sylvestris
Scots Pine



Sorbus aucuparia
Mountain Ash



Corylus avellana
Hazel




Alnus glutinosa
Alder



Quercus robur
Oak



Ilex aquifolium
Holly



Quercus petraea
Oak (Sessile)



Betula pendula
Birch (silver)



Prunus padus
Bird Cherry

Plant Palette



Viburnum lantana
Wayfaring Tree



Betula pubescens
Birch (downy)



Arbutus unedo
Arbutus (strawberry)



Juniperus communis
Juniper



Crataegus monogyna
Hawthorn



Veronica longifolia
Long-Leaf Speedwell



Anemone x hybrida
Windflower



Helianthus x laetiflorus
Cheerful Sunflower



Doronicum x excelsum
Leopard's Bane



Prunus padus
Cherry (Bird)



Sorbus hibernica
Irish Whitebeam



Hyssopus officinalis
Hyssop



Phlomis species
Jerusalem sage



Lavandula x intermedia
'Provence' Lavender



Gaillardia x grandiflora
Blanket Flower

Hedgerow Management

Trimming Hedgerows

Existing hedges that are of good structural condition require maintenance by periodic trimming. Teagasc recommends that hedges be cut periodically every 3-5 years, leaving the hedge as high as possible and allowing standard trees to grow up through it at intervals (www.teagasc.com, 2 February 2007).

This is supported by studies of hedgerow management on the fruiting yields of Whitethorn in lowland Britain (Croxtan & Sparks 2002, Sparks & Martin 1999). There is evidence, however, to suggest that allowing Whitethorn to go for long periods without management (beyond the 3-5 year rotation) will actually increase its fruit yields, but will compromise its stock-proof structure as it becomes a tree.

It is suggested that some *Crataegus* is left to grow up as standards in the hedge while maintaining the rest of the hedge at the desired height. Such a diversification of the hedge structure will increase the niches available to wildlife, especially birds, and thereby enhance biodiversity.

Teagasc also recommends trimming hedgerows in a triangular shape to allow the maximum amount of light to reach the hedge base, especially on the shadier north side of a hedge, thus allowing it to remain thick, and therefore stock-proof, at the base. The consequences of allowing the woody component to grow wide at the base on the already squeezed herb species of the hedge margin have not been fully explored and this recommendation may need to be re-evaluated.



Hedgerows should not be cut during their active growth period since the practice involves the removal of the most productive parts of the hedge, thereby reducing its vigor. In addition, Sections 19-22 of the Wildlife (Amendment) Act of 2000 give directives for the protection of birds, many of which nest in hedgerows. The cutting of hedges during the nesting season may destroy both eggs and young, threatening bird populations, and the Act indicates that hedges should not be cut between the 1st March and the 31st of August. The best time to cut the hedge is in the winter months when the plants are dormant. This reduces stress to the shrubs and improves their

recovery period, while avoiding disturbance to nesting birds. Unless safety is an issue, hedges do not need to be cut more than once every 3-5 years, while varying the height at which the hedge is cut will diversify its structure, improving its value to wildlife.

Management of Hedge Margins & the Hedge-Bottom Flora


All hedgerows in the should be managed at widths between 4 and 9 metres with the retention of wide margins as an ameliorating buffer between the hedgerow flora and the adjacent land use. In stock-rearing areas, this can be accomplished by fencing animals away from the hedgerow using post-and-wire fences. While this may be more difficult to encourage in tillage areas, where farmers need to cultivate a maximum amount of land to meet slipping profit gains, financial incentives such as REPS could encourage them to leave wider margins between the fields under cultivation and hedgerows. It has been suggested that this practice can reduce the effects of nutrient runoff and herbicide drift on the hedge-bottom flora

(Cummins & French 1994)

Rejuvenating overgrown or "escaped" hedgerows

Overgrown or "escaped" hedgerows have lost their function as a fence and, in stock-rearing areas, are reinforced with wire fencing. Oftentimes the fencing is strung up along the remaining hedge shrubs and trees and fixed to their stems. This practice contributes to further deterioration of the hedge. Gaps in the base allow grazing and trampling of the hedge-bank, causing further structural deterioration as well as loss of biodiversity as herbs and seedlings are trampled or grazed. This trend can be reversed, however. Fencing the stock away from the hedgerow and replanting or allowing natural regeneration to take place, coupled with sensitive management, can return the hedge to its former function as a barrier. Some of the older shrubs of escaped hedges can be cut off just above ground level or laid (provided that they will not be grazed) to produce thick new growth, or they can be left as standards, while encouraging new growth at the base.

It is not enough just to protect the hedgerows from further loss; their quality also needs to be improved through sensitive and effective management.

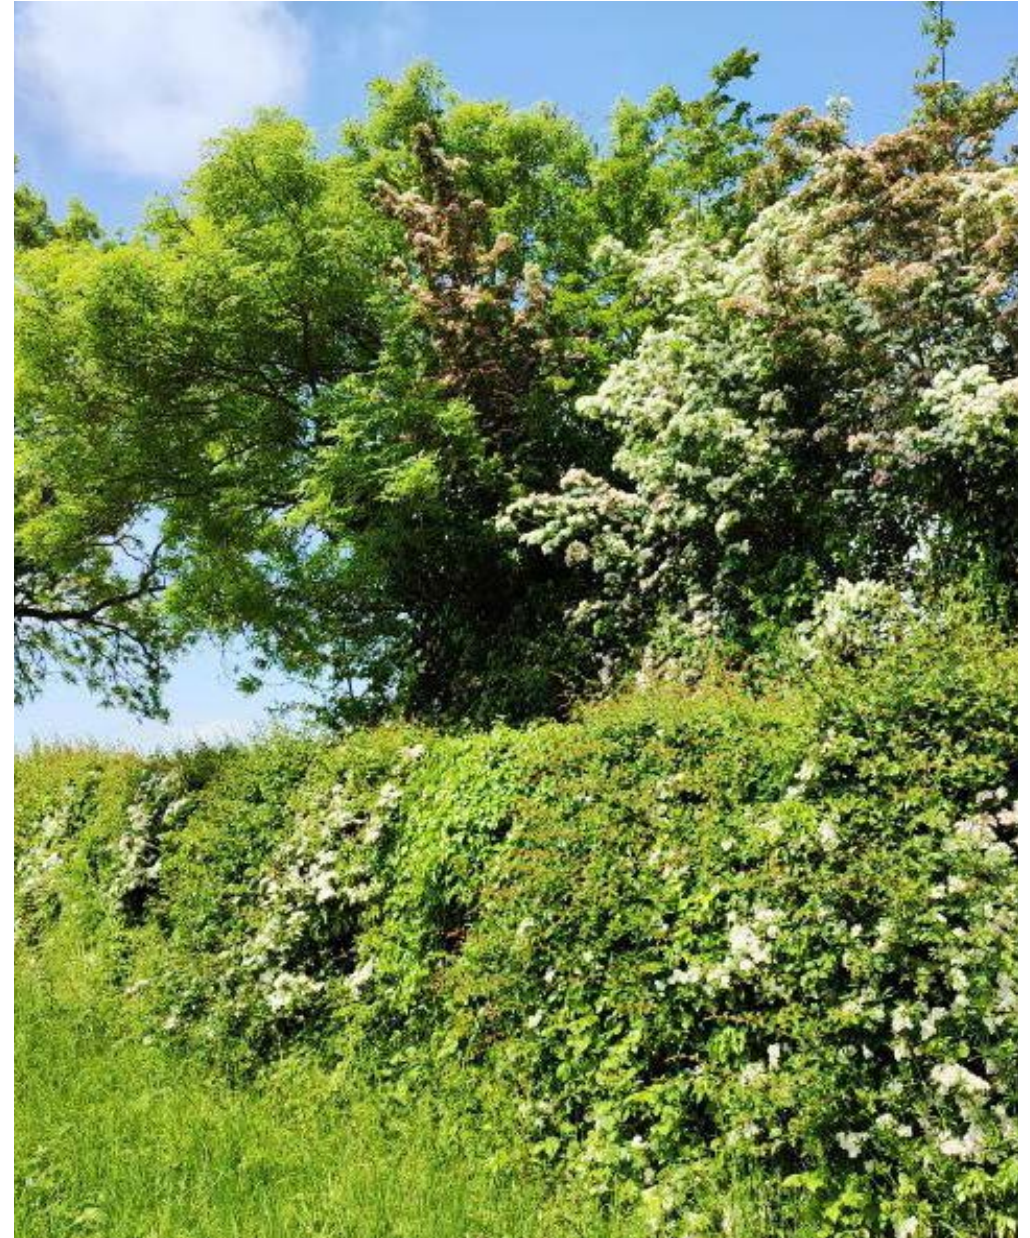

Hedgerow Management

Laying or Coppicing

Hedges are largely human-made features of the countryside, with much of Ireland's network established over the last 100 years. Many of the stems are at the end of their natural life span and since most hedgerow species (especially whitethorn) don't reproduce well in the shade many of our hedgerows are dying out. Also, a lot of hedges no longer fulfil their basic function as barriers to stock having become gappy or bare at the base.

Hedge laying rejuvenates the hedge by taking advantage of the broad-leaf tree species' ability to re-grow after being cut back. Hedge laying is the art of cutting hedgerow stems partly through near ground level so that they will bend without breaking and will continue to grow in the shape of a stock-proof barrier. New growth comes from the cut stump rejuvenating the hedge and thickening up the base. If carried out regularly (approx. every 20-30 years), this process can extend the life span of most hedgerow species almost indefinitely.

The technique of hedge laying was widespread in Ireland in the middle of the 20th century but the practice has largely died out. The revival of interest in hedgerows through agri-environmental schemes has resulted in a resurgence in this valuable traditional country craft. The benefit of hedge laying is that it retains a nesting and foraging habitat for wildlife, whereas coppicing or cutting suspends these habitats until re-growth occurs. The cost of professional hedge laying is also shared over the years as the hedge is sequentially laid in small sections.



Hedge laying is a system that should be part of the annual (winter) maintenance. E.g. If you have 1000m of hedge suitable for laying, then every winter you should lay or get laid 50m to 100m and after 10-15 years the length is completed and you start again at the beginning. This perpetual management process protects habitats and ensures resources are available for wildlife.

It is the systematic nature of the process that ensures the both health of the hedge and that the work is not arduous, never working on stems more than 15 years old. It also maintains the skill itself as it is learned over time and handed on by the hedge managers.

It is also advised to use some of the woody material to make log piles, for example, in awkward corners or shrubby areas. The rotting wood benefits decomposers and provides a foraging and hiding spot for other wildlife.

Foulkes and Murray found evidence of past hedge-laying in their surveys of midland Irish counties, and Westmeath had the highest proportion of laid hedges, suggesting that the practice may have been well-developed that county.

The practice has been revived in Britain as an ecologically friendly means to rejuvenate an overgrown hedgerow, and this practice should be encouraged across Ireland.



The following is a rough outline or guide to laying an overgrown hedgerow but in all instances a qualified hedge layer should be employed to carry out the work:

1. Clearing

Clear around the bottom of the hedge to give yourself room to work. Get rid of any broken glass and rubbish. Clean away dead rotting timber from the hedge litter. Take note of old wire fencing – billhooks can bounce off it.

2. Selecting pleachers

Pleachers are the stems that are cut and laid. Cut out all dead wood and all growth that is out of line with the hedge. Keep sufficient spare pleachers until you are certain they are not needed. Always remove elder. It grows vigorously and suppresses other plants, but cannot be laid properly. Whenever there is a choice between young and old pleachers, lay the young ones because they regenerate better.

Try to use relatively evenly spaced pleachers.

3. Preliminary trimming

Trim excess brush from the nearside of the hedge, ie the side opposite the stock, cutting back to the line of the hedge.



4. Laying the pleachers


Stems (pleachers) are cut at the base, 70-80% of the way through, keeping the cuts as low as possible to the ground.

Stems (pleachers) are laid at an angle of 45 degrees running up the slope, producing a hedge approximately 1.2m in height. Always lay a hedge uphill if the ground slopes to get better transpiration of moisture so the sap rises and the hedge remains living. Stems (pleachers) are left attached to the cut stump by a long living hinge and woven into each other.

The first group of pleachers cannot be laid into the standing hedge alongside. They should be cut and laid out to one side so that they are available to fill the gap left when the last pleachers of the adjacent section are laid. Make sure the pleacher you are about to lay is not tangled in the rest of the hedge. Cut so that the trimmed stump will be at between 3-10cm above the ground. If you are forced to cut higher than this, cut a notch in the stump to encourage low resprouting.

Cut through far enough that the pleacher will lower into place without forcing, but leave sufficient cambium and sapwood uncut to allow the pleacher to survive.

When laying, try to keep the angle even. This is not always possible because the stems (pleachers) are multiple shapes. As stems are woven in, you have to work out the shape as you lay the hedge down. Each piece has got to fit into the piece below. So when looking at a standing stem you've got to work out the shape and where it's going to fall into the hedge. It's all got to knit together.



When you lay it down sometimes you get pieces that stick up. You can

make cuts on the stems higher up to flex the hedge into the shape you want. These also act as points from which the hedge grows. Those cuts will send up shoots, thickening the hedge at the same time.

Don't lay the hedge directly down on the line of the cut base. Roll the hedge back slightly from the ground cuts. This is to allow light to get into the hedge and for the hedge to rejuvenate and re-shoot up along the cut face. If the hedge is too far forward on top of the cuts, shading suppresses new growth. Exposure of the cuts to sunlight maximises regeneration.

The hinges are fairly strong but if they get enough wind or enough movement, they will start to tear. You don't want it rocking around, so especially on a windy site, in order to hold the laid hedge in place, a gawlog or hooked pin cut from the hedge can be used. It hooks over a stem in the hedge and is hammered down to pin the hedge in place. Alternatively, stakes can be used every half metre woven in with hazel rods (binders) to hold in place. Don't tie stems down with bailer twine because it doesn't rot down and it will strangle the stems, resulting in losses.

It is good practice to leave some mature trees or straight stems (pleachers) uncut within the hedge. The structure of the laid hedge is ideal for nesting thrushes, blackbirds, and robins. Preferably smaller trees like whitethorn or cherry because large broadleaved trees such as beech oak and sycamore cause shading.

5. Staking

Stakes should be about 4cm diameter and long enough to be knocked 50cm into the ground but still project about 10cm above the top of the hedge.

Put the stakes in as you go so that the brushy tops of the pleachers can be woven in between the stakes as you lay them.



6. Binding

Binding or heathering is done on most hedges to keep the pleachers in place and strengthen the newly-laid hedge. Binders should be about

Hedgerow Management

3m long and about 25mm in diameter. Hazel is best. Sweet chestnut, elm and willow are adequate.

7. Trimming

Trim the tops of the stakes after binding a section of hedge, then trim off all the spriggy bits sticking out of the hedge on the far side and even up its overall shape.

8. Season

October to March, i.e. outside the breeding season for birds and while tree growth is relatively inactive but avoid during frosty spells.



Planting of new Hedges

Oliver Rackham has stated in *The History of the Countryside* that "tree-planting is not (synonymous with) conservation; it is an admission that conservation has failed (1986)." The rate of hedgerow loss in Fingal and the neglected status of those remaining, means that existing hedges will need better protection to encourage their growth and spread, while many new hedges may need to be planted in order to ensure the long term sustainability of the resource. If so, incentives will have to be made to encourage new hedge planting throughout the county as very little is being done at the present time. In the interests of conservation, native trees and shrubs of local provenance should be used when planting a new hedge, as research has found that these are most likely to prosper under local conditions with better growth, flowering, and resistance to disease (Jones, et al. 2001). The origin of the planting material should always be questioned since much of the current supply comes from Continental sources which may erode the unique genetic makeup of Ireland's indigenous populations, or even fail to thrive in Ireland's oceanic climate (Hubert & Cundall 2006).

It is essential that you purchase native trees of Irish provenance (grown from seed collected in Ireland, ideally local to your area). The Tree Council describe all 28 native Irish tree species on their website, click here to read more. Native, Irish provenance trees are better adapted to our climate and therefore have more resilience to ecological shocks and stressors. They are also more suitable as food sources because their nutritional quality

and flowering time match the seasonal needs of Irish wildlife. Including pollinator-friendly trees in your species mix also benefits insects such as bees, butterflies, moths, and hoverflies. Ireland's native pollinators are in decline due to agricultural intensification (reduced flower-rich areas and increased use of chemicals), urban land-use change, and other environmental pressures.

Plant bare-root stock (whips) from October-March in a double staggered row with 30-40cm in between rows, larger trees should be planted 10-15 metres apart. Double staggered rows are wider and provide more shelter and habitat for wildlife than single row hedges.

Planting early, before January, will allow the plant roots to develop before spring. However, in clay soils, it is best to avoid waterlogged periods (this causes root rot) and wait till after frost periods to avoid frost heave (this causes root exposure).

Leave a nature-friendly margin on each side of the hedgerow, where possible. The wider and wilder your grass or wildflower margin is, the more suitable it is for ground-nesting birds and foraging wildlife. Hedge margins are essential networks for nature by improving food availability and protecting wildlife from predation.

Do not use chemical sprays and slurry as these have a negative effect on plant diversity and wildlife, counteracting the positive effect of less intensively managed hedgerows and wilder hedge margins. They reduce the health of wildlife and remove their food source, thus limiting their ability to recover from shocks and stressors and raise young.

Species to Use in Planting Schemes

Many planting schemes purporting to use native species often contain a mixture of native and exotic species, and this is especially noticeable in motorway plantings throughout Fingal. Local provenance is seldom used, and many of these plantings may fail to perform well. In the planting of new hedgerows, non-native and potentially invasive species such as Beech (*Fagus sylvatica*), Cherry-Laurel (*Prunus laurocerasus*), Snowberry (*Symphoricarpos albus*), and Sycamore (*Acer pseudoplatanus*) should be avoided at all costs. They are of limited value to wildlife, while their aggressive tendencies and heavy shading may overwhelm the native species, eventually leading to gaps in the hedgerow. As mentioned in the previous section, local provenance should be used wherever possible to protect the unique genetic diversity of the indigenous stock and to improve overall performance. The support or establishment of nurseries producing planting stock from sources within the county should be developed, perhaps in collaboration with the Irish Seed Savers Association and Crann, the Tree Council of Ireland, or Coillte, the Irish Forestry Company. Addi-

tional funding may also be developed through such a partnership.

The creation of a mixed hedge with three or more fruiting native species and a diversified structure with well-spaced standard trees tends to be the most beneficial to wildlife. An accompanying drain beside the hedge will also benefit the shrubs to be planted, as well as the hedge-bottom flora and wildlife. In areas that are waterlogged for long periods of time, Blackthorn, Alder, Guelder Rose, Ash, Pedunculate Oak (*Quercus robur*) and native Willows (such as *Salix cinerea*) may be used, as all are tolerant of water-logging. Listed below are native species that make excellent hedging material and their use should be encouraged in planting new hedges, including those around homes and businesses.

Native shrubs/small trees tolerant of heavy pruning (to no less than 1.5m):

Whitethorn (*Crataegus monogyna*)

Blackthorn (*Prunus spinosa*)

Spindle (*Euonymus europaeus*)

Holly (*Ilex aquifolium*)

Wild Privet (*Ligustrum vulgare*)

Yew (*Taxus baccata*)

Gorse (*Ulex europaeus*)

Tall, native shrubs/small trees tolerant of infrequent trimming or coppicing (to 2 metres

or more):

Hazel (*Corylus avellana*)

Crab apple (*Malus sylvestris*)

Willows (*Salix caprea*, *Salix cinerea*)

Guelder Rose (*Viburnum opulus*)

Wych Elm (*Ulmus glabra*)

Native standard trees (should be allowed to grow tall in the hedge)

Those marked with an * can also be coppiced

Alder (*Alnus glutinosa*)*

Birch (*Betula pendula*) - does not trim or coppice well

Ash (*Fraxinus excelsior*)* - may become a very large tree

Wild Cherry (*Prunus avium*)*

Oak (*Quercus robur*)* - becomes a very large tree

Whitebeam (*Sorbus hibernica*)*





HARDSCAPE PALETTE

Indicative Hardscape Palette




Surface Finishes

The hard materials palettes have been selected to represent and respond to use and character of specific spaces. They will be durable and of high quality with patterning developed in the latter stages to indicate moments and celebrate thresholds.



High Quality Paving




Edge Treatment



In Situ Concrete



Buff Coloured Asphalt



Permeable Paving



Walls

The boundaries between the site both external and internal will be of high quality and provide a degree of visual transparency.



Walls



At raised beds

Fences



2.1m metal palisade fence

Furniture

Bins, bollards and seating have been selected as appropriate to the design language and surroundings within which they fit. these for the most part will be off the shelf products and specified accordingly.



Bike Stand



At bike parking

Bins



In pedestrian areas

Tree Grille



Trees in paving

APPENDIX

X1 Outline Soft Landscape Specification

1. Specifications for supply.

1.0 Schedule of supply:

The nursery stock material will be delivered following consultation between the Landscape Architect, landscape contractor and the selected nursery, and the Engineer. Delivery will be at all times by means of covered vehicles, and all plant material will be clearly labeled. The source of origin must be from the selected nursery as no other additional stock from other nurseries will be permitted without prior inspection and approval.

1.1 Programme of Works

The planting works shall be executed at the earliest opportunity.

1.2 Nursery stock:

All plant material shall be good quality nursery stock, free from fungal, bacterial or viral infection, aphids, red spider or other insect pests and any physical damage. It shall comply with the requirements of B.S. 3936: Parts 1-10: 1965 Specification for Nursery Stock, where applicable.

All plants shall have been nursery grown in accordance with good practice and shall be supplied through the normal channels of the wholesale nursery trade. They shall have the habit of growth that is normal for the species. Country of origin must be shown in all cases for species grown from seed.

Unless otherwise stated, the plant materials shall be supplied in accordance with the following codes where stated:

1+0	1 Year old seedling
1+1	1 Year old seedling lined out for 1 year
1+2	1 Year old seedling lined out for 2 years
1+1+1	1 Year old seedling lined out for 1 year, lifted and lined out for one further year
1u1	1 Year old seedling undercut then 1 more

year in seedbed.

1u2 1 Year old seedling undercut then 2 more years in seedbed.

0/1 1 Year old Hardwood cutting

0/2 2 Year old Hardwood cutting

2X Twice transplanted tree

3X Three times transplanted tree

4X Four times transplanted tree

P9 Containerised plant in 9cm pot

1.3 Species:

All plants supplied shall be exactly true to name as shown in the plant schedules. Unless stipulated, varieties with variegated and/or coloured leaves will not be accepted, and any plant found to be of this type upon leafing out shall be replaced by the contractor at his/her own expense.

Bundles of plants shall be marked in conformity with B.S. 3936: Part 1: 1965 and B.S. 3936: part 4: 1966. The nursery supplier shall replace any plants which, on leafing out, are found not to conform to the labels. Definitions of all terms used are in accordance with the following British Standards: -

B.S. No. 3936: Part 1: 1965 entitled "Nursery Stock-Trees and Shrubs"

B.S. No. 3936: Part 4: 1966 entitled "Nursery Stock-Forest Trees"

B.S. No. 3936: 1967 entitled "Specification for Nursery Stock"

2.0 Tree specifications:

Trees shall have a sturdy, reasonably straight stem, and a well-defined straight and upright central leader, with branches growing out of the stem with reasonable symmetry. The crown and root systems shall be well formed. Roots shall be in reasonable balance with the crown and shall be conducive to successful transplantation.

2.1 Standard trees shall have a clear stem 1.70m in

height from ground level to the lowest branch, a minimum girth of 8cm measured at 1.00m above ground level and a total height of 2.75-3.00 m.

2.2 Light Standard trees have a clear stem 1.30m in height from ground level to the lowest branch, a minimum girth of 6cm measured at 1.00m above ground level and a total height of 1.80-2.40m.

2.3 Select standard trees shall have a clear stem 1.70 m in height from ground level to the lowest branch, a minimum girth of 10 cm. Measured at 1.00m. above ground level and a total height of 3.0 to 3.5 metres.

2.4 Heavy standard trees shall have a clear stem 1.80-1.90m in height from ground level to the lowest branch, a minimum girth of 14 cm. measured at 1.00m. above ground level and a total height of 4.0 to 4.5 metres. All trees shall have been undercut a minimum of three times.

2.5 Extra Heavy standard trees shall have a clear stem 2.0m in height from ground level to the lowest branch, a minimum girth of 16 cm. measured at 1.00m. above ground level and a total height of 4.5 to 5 metres. All trees shall have been undercut a minimum of three times.

2.6 Semi-mature trees shall have a clear stem 2.0m in height from ground level to the lowest branch, a minimum girth, as specified in the Bill of Quantities, measured at 1.00m. above ground level and a total height of min. 5 metres. All trees shall have been undercut a minimum of three times.

All standards shall be clearly labeled.

2.7 Feathered Trees 180-240cm

Feathered trees shall be not less than four years old, and shall have been transplanted at least three times. Trees of species not listed in BS 3936: Part 4: shall be sturdy, with a balanced root and shoot development. Size shall conform to the schedules.

Trees shall be well furnished with lateral fibrous roots, and shall be lifted without severance of major roots.

Roots shall be of the habit normal for the species, without deformation. Transplants shall be wrapped in polythene in bundles of 50 no. and clearly labeled from the time of lifting until planting to conserve moisture.

2.8 Feathered Transplants 120-150cm

Transplants shall be not less than two years old, and shall have been transplanted at least once. Trees of species not listed in B.S. 3936: Part 4: shall be sturdy, with a balanced root and shoot development. Size shall conform to the schedules.

Trees shall be well furnished with lateral fibrous roots, and shall be lifted without severance of major roots. Roots shall be of the habit normal for the species, without deformation. Transplants shall be wrapped in polythene in bundles of 50 no. and clearly labeled from the time of lifting until planting to conserve moisture.

2.9 Feathered Transplants 90-120 cms, 60-90 cm, 40-60 cm, 30-40 cm

Transplants shall be not less than one year old. Trees of species not listed in B.S. 3936: Part 4: shall be sturdy, with a balanced root and shoot development. Size shall conform to the schedules. Trees shall be well furnished with lateral fibrous roots, and shall be lifted without severance of major roots. Roots shall be of the habit normal for the species, without deformation. Transplants shall be wrapped in polythene in bundles of 50 no. and clearly labeled from the time of lifting until planting to conserve moisture.

2.10 Shrubs

(1) Containerised Shrubs shall be of the size specified in the schedules, with several stems originating from or near ground level and of reasonable bushiness, healthy, vigorous and with a sound root system. Pots or containers shall be appropriate to the size of shrub supplied and clearly labeled. Shrubs shall not be pot bound or with girdled or restricted roots.

(2) Bare Root Shrubs shall be of size specified in the schedules, with several stems originating from or near

X1 Outline Soft Landscape Specification

ground level, with reasonable bushiness, healthy, and vigorous. They shall be well furnished with fibrous roots and shall be lifted without severance of major roots. All bare root shrubs shall be wrapped in polythene in bundles of 50 no. and clearly labeled from the time of lifting until planting to conserve moisture.

2.11 Container Grown Conifers:

Conifers shall be of the size specified in the schedules, with one main stem originating from or near ground level and of reasonable bushiness and health, with a well-grown, root system. Pots or containers, where required, shall be appropriate to the size of plant supplied and clearly labeled. Plants shall not be pot bound, or with deformed or restricted roots.

2.12 Protection:

The interval between the lifting of stock at the nursery and planting on site is to be kept to an absolute minimum. Plants shall be protected from drying out and from damage in transport. All stock awaiting transport shall be protected from the wind and frost and from drying out.

Protection shall include for the supply of stock to site to a suitable heeling-in/ storage area prior to planting. The landscape contractor shall allow for liaison with the site engineer to arrange the heeling-in area/ storage. The contractor shall continue to be entirely responsible for the maintenance of this stock to ensure that at the time of planting the stock complies with the requirements for the supply of nursery stock as per clause 1.0 thereof. No responsibility for the maintenance of the stock will attach to the site engineer whilst the stock is protected on site. No time limit shall attach to the period of protection.

In the event of the Landscape Architect being dissatisfied with the care and attention given to the stocks, following heeling-in, he shall notify the Landscape Contractor who shall take steps to ensure careful heeling-in procedures.

The preparation of the heeling-in area and its subsequent maintenance is the sole responsibility of the Landscape Contractor.

2.13 Damage

On completion of lifting of plants in the nursery, any broken shoots or severed roots shall be pruned, areas of damaged bark neatly pared back to sound tissue.

2.14 Inspections

The Landscape Architect will inspect the hardy nursery stock on the selected nursery during the execution of the works. Only plants selected and approved in the landscape contractors selected nursery will be accepted on the site.

2.15 Delivery and heeling in

All plants will be delivered on a phased basis as called up in advance in agreement with the Engineer, Landscape Architect and the appointed Landscape Contractor. In the event of the Landscape Architect being dissatisfied with the care and attention given to the stocks, following heeling-in, he shall notify the Landscape Contractor who shall take steps to ensure careful heeling-in procedures.

The preparation of the heeling-in area and its subsequent maintenance is the sole responsibility of the Landscape Contractor.

3.0 Specifications for site operations:

3.1 Setting out:

Setting out shall be in accordance with site meetings with the Landscape Architect, and the drawings listed in the preliminaries. No planting works shall take place when the soil /fill is in a waterlogged condition.

3.2 Finished grading:

All planting pits and topsoiled areas disturbed by the landscape contractor shall be left in an even state, with all soil clumps broken up and stones of greater than 50mm diameter shall be removed.

Outline Soft Landscape Specification

4.0 Specifications for Planting and Plant Materials

4.1.1 Staking/Protection:

2m high willow wrap to be installed around each tree for protection of bark

4.1.2 Canes:

Bamboo canes or similar approved shall be used to provide spot spraying location markers for small plants including Pinus, species. The canes are not to be attached to the plants.

4.2 Tree ties:

For standard and select standards, tree ties shall be of rubber, PVC or proprietary fabric laminate composition and shall be strong and durable enough to hold the tree securely in all weather conditions for a period of three years. They shall be flexible enough to allow proper tightening of the tie. Ties shall be min. 25mm wide for 120cms height trees and min. 38mm for larger sizes. They shall be fitted with a simple collar spacer to prevent chafing. Two ties per tree shall be applied to standards; for staked transplants, one tie per tree is required.

Ties shall be nailed to the stake with one galvanised nail.

4.3 Protection:

The interval between the lifting of stock at the heeling-in area and planting on site is to be kept to an absolute minimum. Plants shall be protected from drying out and from damage in transport. All stock awaiting planting on site shall be stored in a sheltered place protected from the wind and frost and from drying out.

All transplants shall be wrapped in polythene from the time of lifting to conserve moisture. Except when heeled-in, they shall be protected in polythene at all times until planted into their final position on site.

4.4 Damage:

On completion of planting any broken branches shall be pruned, areas of damaged bark neatly pared back to sound tissue.

4.5 Watering / / Fertilisers:

All bare rooted light standards and select standards shall be soaked in water overnight, on site, before planting in a liquid solution containing "Alginure" at the recommended dilution rate. Fertilisers shall conform to BS 5581: 1981. In the case of granular fertiliser being added to plantings, it must be mixed through and incorporated into the base of the planting hole and covered over in order to avoid roots of plants coming in direct contact.

4.6 Setting out:

Setting out shall be in accordance with site meetings with the Landscape Architect. Transplants in mixtures shall be planted in staggered rows. Species shall be planted in groups, as indicated in the planting drawings.

No planting shall take place until all planting holes (with ameliorants) have been inspected and approved by the Landscape Architect, or a person appointed by him as a representative, to ensure accordance with the specifications. No planting shall take place when ground conditions are frozen or waterlogged. All planting holes shall be opened and closed on the same day.

4.7 Tree planting:

Trees shall be planted at the same depth as in the nursery, indicated by the soil mark on the stem of the tree. They shall be planted in the centre of the planting pit and planted upright. Stones or other rubbish over 75mm shall be removed. Supply and drive the stake 800mm into the ground for standards, 500mm for other transplants. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position. Drainage layer to specification CL505.

4.7.1. Select Standards/Standards

Excavate tree pits to 800mm x 800mm x 600mm deep,

or as approved. The base of the pit shall be broken up to a depth of 200mm and glazed sides roughened. F.Y.M. at the rate of 0.047 cu.m. (equivalent to 60mm deep) and 100gms of 0.10.20 shall be applied to each tree pit prior to planting. Farm manure shall consist predominantly of faecal matter and shall be free of loose, dry straw and undigested hay. It shall be free of surplus liquid effluent. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position. Drainage layer to specification CL505.

4.7.2 Heavy and Extra Heavy Standards

Excavate tree pits in soft landscape to 1000mm x 1000mm x 800mm deep, or as approved. The base of the pit shall be broken up to a depth of 200mm and glazed sides roughened. F.Y.M. at the rate of 0.047 cu.m. (equivalent to 60mm deep) and 100gms of 0.10.20 shall be applied to each tree pit prior to planting. Farm manure shall consist predominantly of faecal matter and shall be free of loose, dry straw and undigested hay. It shall be free of surplus liquid effluent. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position. Drainage layer to specification CL505.

4.7.2 Semi-mature trees

Excavate tree pits to 1200mm x 1200mm x 1000mm deep, or as approved. The base of the pit shall be broken up to a depth of 200mm and glazed sides roughened. F.Y.M. at the rate of 0.047 cu.m. (equivalent to 60mm deep) and 100gms of 0.10.20 shall be applied to each tree pit prior to planting. Farm manure shall consist predominantly of faecal matter and shall be free of loose, dry straw and undigested hay. It shall be free of surplus liquid effluent. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position. Drainage layer to specification CL505.

4.7.3. Light Standard Trees

Excavate tree pits to 500mmx500mmx500mm deep, or as approved. The base of the pit shall be broken up to a depth of 80mm and glazed sides roughened. F.Y.M. at the rate of 0.047 cu.m. (equivalent to 60mm deep) and

100gms of 0.10.20 shall be applied to each tree pit prior to planting. Farm manure shall consist predominantly of faecal matter and shall be free of loose, dry straw and undigested hay. It shall be free of surplus liquid effluent. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position. Drainage layer to specification CL505.

4.8 Feathered Trees 180-240cm, container grown conifers (>2l)

Excavate tree pits to 400mm x 400mm x 400 mm deep, or as approved (slit or notch planting are not acceptable planting methods). The base of the pit shall be broken up to a depth of 80mm and glazed sides roughened. Trees shall be planted at the same depth as in the nursery and backfilled with compound fertiliser 0.10.20 at the rate of 50gm per tree and 0.020m³ of Mushroom Compost or similar approved. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position. Drainage layer to specification CL505.

4.9 Feathered Whips 120-150 cm:

Excavate tree pit to depth of 300mm x 300mm x 300mm deep, or as approved (slit or notch planting are not acceptable planting methods). Excavation to be achieved by machine digging or augering methods, approved by the Landscape Architect. The base to be broken up to a depth of 60mm and glazed sides roughened. Whips to be planted at same size as in the nursery. Apply 60gm 0.10.20 and 0.020m³ of Mushroom Compost or similar approved per tree pit to plants. Stakes 1.2m high x 37mm dia. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position. Drainage layer to specification CL505.

Outline Soft Landscape Specification

4.10 Feathered Whips and Transplants 90-120cm, 60-90 cm, 40-60cm, 30-40cm, container grown conifers (<2l size) and container grown shrubs (<2l size):

Excavate planting hole to a depth of 300mm x 300mm x 300mm deep; the base to be broken to a depth of 50mm and glazed sides roughened (slit or notch planting are not acceptable planting methods). Excavation to be achieved by machine digging or augering methods, approved by the Landscape Architect. Apply 30gm 0.10.20.per planting pit. Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position.

4.11 C. G. Shrubs / C. G. Wall Shrubs / C.G. Climbers:

Excavate planting hole to a depth of 300mm x 300mm x 300mm deep; the base to be broken to a depth of 50mm and glazed sides roughened. The following products are to be supplied and incorporated in to the bottom 100mm of topsoil at the base of the planting pit and in to the topsoil for backfilling around each plant: (1) Seanure soilbuilder as supplied by Farmura @ 1.5Kg per cu.m of topsoil, (2) clean and friable green waste compost @ 25 Kg per cu.m of topsoil and (3) Sierrablen Flora 15:9:9 slow release fertiliser @ 70 grams per m2 Backfill planting hole with excavated topsoil, and remove all stones and debris, firming plant into position.

4.12 Grassing

All grass areas to be ripped with a tractor mounted tine prior to rotovating. The contractor shall grade off all areas to smooth flowing contours, removing all stones greater than 10mm diameter and tip off site. All hollows to be filled in. Roll all areas with a roller as approved. Following the completion of final grading and raking, the area is to be left fallow for a period of 14 days. Spray with 'Basta' at recommended rates, and seed with fine grass mix at a rate of 35gr/Sq.m together with fertilizer 10:10:20 at a rate of 50gr/Sq.m use Coburns Irish premier low maintenance mixture or other as approved by the Landscape Architect.

4.12.1 Grass cutting

Grass cutting shall be carried out during the three year

maintenance period and is defined into three categories:

4.12.2 Regular grass cutting

Shall be carried out to the frequencies indicated in the Bill of Quantities. Attention to neat and tidy cutting shall be required to all areas. Sightlines, as set out with the Engineer, at junctions and roundabouts must be kept clear of vegetation at all times.

GENERAL

Upon completion of planting, all pits shall be raked over lightly to leave an even surface and neat appearance. All stones greater than 50mm dia. to be removed. Provision should be made for the watering of light and select standards during periods of prolonged drought in the first year following planting.

4.13 Inspections:

The Landscape Architect will inspect the site with the Landscape Contractor during the execution of the works and following maintenance visits.

4.14 Presentation of certificates:

The Landscape Contractor shall present for the Landscape Architect's inspection, all seed and fertiliser bags, together with their markings. If requested, the contractor shall furnish the Landscape Architect with receipts of purchase for these respective materials.

4.15 Spraying:

1) Following planting of embankments, slopes etc., weed free circles to be formed around individual plants, as directed, using an approved broad-spectrum contact herbicide, as approved by the landscape architect, in mid-spring following planting. Herbicide to be applied using controlled drop applicator containing a dye to indicate areas sprayed. In areas where grass is excessively long, such grass will be strimmed off and collected prior to spraying. The contractor shall be responsible for keeping the ground (1m diameter circle) around all planted material

weed free by means of herbicidal application, using approved sprays, during the course of the contract. Weeds to be removed include grasses, broad-leaved annual and perennial weeds and all noxious weeds.

2) Selective spot spraying will be carried out to all grassed areas, whether planted or unplanted through the application of contact herbicide to control broad-leaved annual and perennial weeds, including thistle, dock and ragwort. Contact herbicide to be approved by the landscape architect prior to application. Herbicide to be applied using controlled drop applicator containing a dye to indicate areas sprayed. The contractor shall allow for the removal of gorse by cutting, as required prior to spraying to ensure its eradication from all grassed areas for the duration of the contract.

3) The boundary hedgerows shall be kept weed free by herbicidal application by forming a 300mm wide sprayed strip along the full length of each respective hedgerow. Approved herbicide (broad-spectrum contact herbicide) to be applied using controlled drop applicator containing a dye to indicate areas sprayed. Spraying of planted areas on roundabouts is also included in this spraying application.

4) Such routine spraying (1, 2 and 3 above) shall be carried out during maintenance visits over the three-year period. No spraying shall take place during adverse weather conditions or at times not recommended by the manufacturer.

4.16 Cutting back:

Plants for cutting back/tip pruning shall be cut back after inspection by the Landscape Architect. This work to be carried out initially following planting for plants suffering from wind damage.

4.17 Mulching

Mulching may be considered as an optional factor that may be implemented. Mulch shall be from coniferous

trees. It shall be shredded, but not pulverised, so that no dimension exceeds 75mm. Bark shall have been composted for a min. of 3mths. In the case of areas requiring mulch the depth of bark shall measure 30 mm.

4.18 Ground finish:

Upon completion of planting, all ground finish shall include for the removal of stones greater than 50mm excavated during the course of the digging for planting purposes.

The Pollinator Plants – Maintenance

Perennial planting schemes

Pollinator friendly perennial plants are excellent sources of pollen and nectar. They are much more

attractive to bees when planted in blocks rather than as single plants. Having a pollinator friendly

perennial bed is an excellent way to provide food for pollinators across their lifecycle.

Perennials can be used to great effect in traffic islands and public spaces, providing a strong visual

impact and giving a good display of flowers over a long period. Pollinator friendly perennial planting

should be designed to provide a food source from spring through to autumn. In addition they are:

- Low maintenance
- Easy to establish
- Have strong visual impact
- More cost effective than bedding schemes over the long term
- Less maintenance than lawn mowing
- Provide a natural style of planting
- Provide habitat and nesting materials for birds and insects

Maintenance:

Good ground preparation is essential to minimise maintenance in the future.

- Removal of all root weeds before planting such as scutch grass, bindweed etc. will reduce

weeding later on. Sometimes it is best to leave the site fallow for a season to sort out any

issues.

- The soil must be well drained and not compacted, and have good nutritional content.

Organic material can be added. There is usually no need to add fertiliser.

- Plants ideally should contain a slow release fertiliser in the pot and should be watered well before planting.

- In the first few months after planting beds will have to be weeded by hand as hoeing can

damage spreading plants. This should be done regularly, maybe three or four times in year

one depending on the weed population. When the perennials have established and provided

dense cover, the frequency of weeding can be reduced.

- In year two and onwards, weed the beds at the beginning of and end of the growing season, and spot check for the odd weed in between.

- Watering may have to be taken into consideration during dry spells.

- Leave dead stems on plants for the winter as they provide protection for the plants, offer

food and habitat and nesting materials for wildlife, prevent weed seeds from germinating

and increase the organic matter.

- The dead foliage can be removed in spring by mass pruning to approx. 10cm height when

there is new growth appearing. Some plants like Grasses & Thymes will look good without pruning back.

- Organic matter like compost can be added to keep the soil in good condition.

Planting time:

March-April is the best time for planting as the plants will have plenty time to root in before

summer. If planted in June then weeds will have already established and they will be easy to

remove, but the plants have less time to root in and provide ground coverage.

Life span of perennial planting:

The life span of a well planted and well maintained perennial scheme is 10 to 12 years, maybe

longer, which is about the same as a shrub bed. Small amount of replacements may be required

depending on the site but in general the plants are trouble free.

Thanks to Young Nurseries who voluntarily provided suggested perennial plant lists and example

costings.

Best Practice in the Use of Pesticides

In addition to the honeybee who lives in hives, we also have 20 different types of bumblebees and

77 different types of solitary bees in Ireland. Bumblebees and solitary bees live entirely in the wild.

We need healthy populations of all these bees to carry out pollination if we want to have

wildflowers in the landscape, be able to grow our own fruits and vegetables, or buy affordable,

locally grown apples or strawberries in our shops. Bees and other pollinators can only survive in a

landscape that provides them with food, shelter and safety throughout the year. Already, one third

of our 98 bee species are threatened with extinction from Ireland.

Insecticides pose the greatest direct hazard to insect pollinators. However, herbicides use is having a

much greater negative impact on pollinators because it is so widely used.

Herbicides, Fungicides and Plant Growth Regulators typically have little or no toxicity to pollinators,

but many of the plants we spray as weeds are vital sources of food for pollinators, especially in early

spring. Pollinators need a range of flowers to feed on from spring through to autumn. The overuse of

these chemicals is making it very difficult for them to find enough food to survive in our landscape.

Pesticides should be used sparingly and only when absolutely necessary, such as in the treatment

of invasive species like Japanese Knotweed

Do's

- Check the label and select pesticides that are less harmful to pollinators

- Always read, understand and follow the product label instructions fully

- Treat only the target area

- Spot treat rather than use blanket sprays

- Follow the buffer zone instructions on the product label

- Leave areas of pollinator-friendly habitat free from all pesticides. These include areas of

clover or wildflowers, the base of hedgerows, and any natural areas.

- Minimize spray drift to non-target areas by:

o Using equipment that reduces drift

o Checking the weather forecast before application and be mindful of changing

conditions.

o Ensure that you spray when the wind is blowing away from beehives and pollinatorfriendly habitat.

Don'ts

- Do not apply pesticides to bees or other pollinating insects

- Do not spray flower-rich areas (including weeds) when flowers are in bloom and providing

food for bees. Plants that we might consider weeds like dandelions, vetches, clovers, deadnettles and knapweed are important food sources as they provide high quality

pollen and nectar for bees.

- Do not apply pesticides to areas that have been identified as important nesting areas for

wild pollinators

- Do not apply pesticides to standing water.

Outline Hard Landscape Specification

Paving & Kerbs

Footpaths

General: Public footpaths, roadways, kerbs etc. shall be constructed in accordance with the requirements of the City Council Roads Dept.

Accuracy of Levels and Alignment: The levels of paths and paving shall be carefully set out and frequently checked. All care shall be taken to ensure that the correct cross sections are maintained. The finished face of paths shall be formed so as to provide adequate fall and satisfactory run off to surface water outlets, gullies, etc. Cross-falls of paths shall be carried without break across verges and kerbs to prevent ponding of water between back of kerb and

path.

Sub-Base: Granular material shall comply with Clause 804 of the D.o.E. Specification for Roadwork's and shall be spread uniformly over the formation and compacted by vibrator roller. Rolling shall continue until there is no movement under the roller. The finished surface of the compacted sub-base shall be parallel to the proposed finished surface of the footpath. The surface levels for each layer shall not deviate from the design levels by more than +15mm or -15mm.

For sub-base thickness in paved areas see area engineers spec. and attached following schedule. Each contractor shall do all necessary tests to ensure a well compacted, plain even surface on all areas with traffic movement. If paving shows settling after 1 year which normally is related to an insufficient depth and compaction of the sub-base the contractor shall rebuild the failed area to his own cost.

Use of Surfaces by Construction Traffic:

Constructional traffic used on pavements under construction shall be suitable in relation to the courses it traverses so that damage is not caused to the sub-grade. Where damage is caused to the formation of the sub-grade in strength or level the damaged area shall be excavated for an area and depth which shall be determined by the Architect and this area shall be filled to the required levels with crushed rock of 50mm maximum size. The degree of compaction for this area shall be the same as that specified for the remainder of the formation. All this excavation and making good of damaged areas shall be carried out at the expense of the Contractor. Where damage is caused to the sub-base, the damaged area shall be made good as noted above, using the material of which the sub-base is composed. The wheels or tracks of plant moving over the various pavement courses shall be kept free from deleterious materials.

Modular Paving

Concrete Pavers Precast concrete pavers shall conform to the requirements of BS 6717 Part 1.

Ensure that sub-bases are suitably accurate and to specified gradients before being laid.

Sample: Before placing orders submit representative samples for approval.

Ensure that delivered materials match sample.

Laying Generally:

1. Laying Specification

1.1 Paving blocks/bricks shall be laid to the requirements of Part 3: 1997, BS 7533,

except that the lip onto gully gratings is modified to 5 - 6 mm.

Note, in particular, the following requirements of Part 3.

i. The difference in level between two adjacent blocks shall not exceed 2 mm.

ii. The finished pavement surface shall not deviate more than 10 mm under a 3m

straight edge.

iii. The accuracy of cutting a block should be such that the resulting joint should not

exceed 5 mm.

iv. The surface course should be between

(a) 3 - 6 mm above drainage channels

(b) 5 - 10 mm above gullies (*BRL modify this to 5 - 7 mm above gullies to

reduce "trips")

v. The surface course should be inspected soon after completion and at regular

intervals thereafter - additional sand should be brushed in where necessary.

1.2 The surface course for chamfered units should be 3 - 5 mm above the kerb to

facilitate surface drainage. The surface course for non-chamfered units should be 2 mm above the kerb to facilitate surface drainage.

1.3 When paving units need to be trimmed, pieces with a dimension less than 50 mm

should not be used.

2. Drainage Channels

2.1 Where paving blocks are used in a channel, they shall be laid on freshly mixed moist 3:1 sand-cement mortar. The mortar should have thickness between 10 mm and 40 mm. Vertical joints should be filled with 3:1 wet sand-cement mix.

2.2 Mortar, which has been mixed for over 2 hours, should be discarded.

2.3 The mortar should be laid on a previously prepared concrete base as per construction drawing detail. Select blocks/paviors vertically from at least 3 separate packs in rotation, or as recommended by manufacturer, to avoid colour banding. Lay blocks/paviors on a well graded sand bed and vibrate to produce a thoroughly interlocked paving of even overall appearance with sharp sand filled joints and accurate to line, level and profile. Refill joints once a week three weeks after first fill. Commencing from an edge restraint lay blocks/paviors hand tight with a joint width of 2-3mm for pedestrian use and 3-5 mm for areas with traffic. Maintain an open working face and do not use mechanical force to obtain tight joints. Place blocks/paviors squarely with minimum disturbance to bedding. Supply blocks/paviors to laying face over newly laid paving but stack at least 1 m back from laying face. Do not allow plant to traverse areas of uncompacted paving. Continually check alignment of pavers with string lines as work proceeds to ensure maintenance of accurate bond. Infill at edge restraints as work proceeds. Wherever the type of bond and angle of edging permit, avoid very small infill pieces at edges by breaking bond on the next course in from the edge, using cut blocks/paviors not less than 1/3 full size. Cut stones shall be rectangular or trapezoidal; the smallest point shall be a minimum of 35mm. (May be pavers have to be turned by 90 deg.) Half stones shall be cut at manufacture. Thoroughly compact blocks/paviors with vibrating plate compactor as laying proceeds but after infilling at edges. Apply the same compacting effort over the whole surface.

Do not compact within 1 m of the working face. Do not leave uncompacted areas of paving at the end of working periods, except within 1 m of unrestrained edges. Checks paving after compacting first few metres, then at frequent intervals to ensure that surface levels are as specified; if they are not, lift blocks/paviors and relay. Brush sharp sand into joints, revibrate surface and repeat as required to completely fill joints. Make sure that paving is held by a kerb on both sides before vibration to avoid uneven joints. Avoid damaging kerb haunching and adjacent work during vibration. Do not begin vibration until kerbs have matured. The paving pattern will be stretcher bond, make sure that the joints will be in straight line after vibrating. Also ensure joints

Outline Hard Landscape Specification

are off equal width. The block pavement shall have a surface regularity/ flatness tolerance of less than 10 mm under a 3 m straight edge.

Sample: Before placing orders submit representative samples for approval.

Ensure that delivered materials match sample.

Precast Concrete Flags

Pre-cast Concrete Flags:

1. Precast concrete flags shall be laid to the requirements of BS 7533 Part 4.

Note the following selected items from BS 7533, Part 4.

- The difference in level between two adjacent flags should not exceed 3 mm.

- The top surface of the paving units should stand 3 - 6 mm above the drainage channel.

- A 30 - 50 mm (compacted thickness) of the sand laying course is given as suitable (for narrow joints)

2. Flags should be laid with narrow joints (2 - 5 mm). Joints should be filled with dried sand (conforming to table 4 of the code), or as determined by the Landscape Architect.

KERBS

Kerbing General: Kerb radii shall be in accordance with Architects and Engineers drawings. Use radius kerbs for all new kerbs.

Laying Generally:

Natural stone and precast concrete kerbs shall meet the requirements of BS 435 and

BS 7263-1.

1. Precast concrete kerbs shall be laid to the requirements of BS 7533, Part 6.

2. Units shall be laid on fresh concrete or mortar bed and

adjusted to line and level.

3. Concrete for foundations and haunching shall be to BS 5328.

4. Bedding mortar shall be freshly mixed, moist 3:1 sand-cement between 12 and 40

mm thick.

5. Kerbs shall be backed with concrete as per drawing.

6. Radius kerbs shall be used on radii of 12 m or less.

7. Kerbs should not deviate from the required level by more than 6mm.

8. Kerbs should not deviate by more than 3 mm under a 3 m straight edge.

9. Open-jointed kerbs should have joints of 2 - 4 mm wide.

Mortar jointed kerbs should have joints of 7 - 10 mm wide filled completely with 3:1

sand-cement mortar, and finished to give a smooth flush joint or as specified by the

Landscape Architect.

Programme for Implementation, Maintenance + Defects Period

5.0	Maintenance:	year 2, 4 no. year 3. Prior notification to the landscape architect and a record of attendance will be requested for each visit. Spot checks will be made to ensure full compliance with this condition.	trees including those of hedgerow form when dormant to promote open frame works in the crown. Remove all suckers and dead branches, and branches that are encroaching on to footpaths should be cut back to point of branching.	requested by the school for any part of the schools grounds will be paid for at a pro rata basis to the rates for the programmed maintenance schedule.
5.1	Period:	The Contractor shall be responsible for aftercare of the completed works for an agreed amount of time from the date of completion of planting. The period is to be negotiated between Hones (The Developer) and City Council.		
5.2	Organisation:	The aftercare programme will be organised as follows:- (1) Scheduled operations, in whose timing the contractor will be permitted some flexibility and which will be the basis of payment to the Contractor. (2) Performance standards, which the Contractor is required to meet at all times, and on which his performance will be assessed. (3) Critical dates, by which time scheduled operations, shall have been completed, and at which performance will be assessed.	5.5 Programme Year One (After Planting): 5.5.1 By end of May (Year One): Application of herbicide agreed with Landscape Architect to all planting areas. Protect all plants. Hand weed all large weeds too close to nursery stock for safe treatment. Strim long grass prior to spray application. Provision for 1 no. visit for spot weed control application to areas where perennial weeds are apparent in the grass sward. Tip prune, firm plants. Grass cutting. All necessary cultural/husbandry methods to be completed in order to leave the sites in a clean, orderly and tidy manner. Water select standard trees. Critical date: 30 May (Year One)	5.5.5 By end December: Application of herbicide agreed with Landscape Architect to all planting areas. Grass cutting. All necessary cultural/husbandry methods to be completed in order to leave the sites in a clean, orderly and tidy manner. Water extra heavy standard trees, standard trees. Critical Date: 30 December (Year One).
5.3	Performance standards:	Shrub, woodland and hedgerow planting to be maintained in accordance with specifications e.g. spraying, firming, tree tie adjustment. Weeds shall not cover more than 20% of the ground surface within planting areas and the maintained 1m diameter weed free circles at any time, and neither shall they exceed 100mm in height. Weeds shall be treated before they establish. Within grass areas noxious and competitive weeds shall not be allowed to establish and all perennial weeds shall be spot treated at each maintenance visit, 3 times per year.	5.5.2 By end August (Year One): Application of herbicide agreed with Landscape Architect to all planting areas. Protect all plants. Hand weed all large weeds too close to nursery stock for safe treatment. Provision for 1 no. visit for spot weed control application to areas where perennial weeds are apparent in the grass sward. All necessary cultural/ husbandry methods to be completed in order to leave the sites in a clean, orderly and tidy manner. Grass cutting. All necessary cultural/ husbandry methods to be completed in order to leave the sites in a clean, orderly and tidy manner. Water select standard trees. Critical Date: 30 August (Year One)	5.5.9 Other Maintenance Works All grassed areas are to be edged 3 times a year using a machine and are not to be sprayed. Carry out any other maintenance to ensure the works are kept in a satisfactory state during the defects liability period.
5.4	Watering:	The contractor is responsible for the survival of all plants during the maintenance period. Apply water to moisten full depth of root run using proprietary irrigation system. Avoid washing or compaction of the soil surface. The Landscape Contractor is responsible for informing the Landscape Architect if the plants require watering. A minimum of 16 no. waterings year1, 8 no.	5.5.6 Year 2 As year 1. 5.5.7 Year 3 As year 1. Hedgerow to be fully pruned at end of season. 5.5.8 Sweeping and Cleaning Sweeping shall mean sweeping of the footpaths, playing courts, car parks and the schools road network and removal of all grit rubbish moss and leaves, keeping the hard landscaped areas of the site in a neat and tidy manner. Number of sweepings per annum -12no. Cleaning shall mean the removal of paper, plastic bags and all other rubbish from grassed areas, roads, car parks, playing courts, shrubbery's, hedging etc. or any part of the school grounds. This operation shall be carried out twice a month. All dirt and rubbish to be removed off site to a tip to be provided by the Landscape contractor. Autumn leaves shall be swept on a weekly basis from end of October to mid-November (three weeks). Any additional cleaning and sweeping deemed necessary, during the year, and	5.6 Grass Cutting Grass cutting shall be deemed to include for: [a] Removal of lodged grass. [b] Removal and disposal of grass cuttings from adjoining roads and paving. [c] Removal and disposal of stones and other obstructions from area of grass to be cut. The pitches and other high profile grassed areas, eg. the schools entrance are to be Fine cut. Fine cutting shall mean mowing to 25mm high. This operation is to be carried out in each location shown on the landscape drawings and in locations as directed on site by a representative of The Department Of Education and Science. A rough schedule is as follows- March: 1 cut April: 3 cuts May: 4 cuts June: 4 cuts July: 4 cuts August: 4 cuts

Programme for Implementation, Maintenance + Defects Period

September: 4 cuts

October: 4 cuts

November - February: 1 cut

Total 29 cuts

Fine cutting shall be deemed to include for grass cut to 25mm high evenly over the whole area, with cuttings left evenly spread over the surfaces. Grass not to exceed 50mm between cuts.

Other grass areas of which are less high profile are to be cut 16 times a year. These will include the grassed areas around the woodland areas, in between the pitches and any grassed area hidden from the main road by the school.

Areas indicated as wildflower mix shall be cut three times per annum. Cuts shall be carried out at specified times as agreed with landscape architect and recommended by the wildflower seed producer. Remove cuttings after each cut and remove offsite to tip.

Leave cuttings evenly spread. This operation is to be carried out in each location shown on the landscape drawings and in locations as directed on site by a representative of the Board Of Management.

At every second grass cut, grass shall be trimmed from around the base of walls and fences, back of footpaths and kerbs, litter bins, sluice valves and hydrant markers, trees, shrubberies poles and public lighting columns etc., and kept in a neat and tidy condition.

Maintenance Schedule

This program is guideline only and times of operations may vary on approval by landscape architecture.

ONGOING REQUIREMENTS:	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
Lawn grass cutting (min 24 cuts)		*	**	**	***	***	***	***	***	**	**	
Edging to lawn grass areas				*								
Rough Grass							*					
Fertilizer application to lawn grass area					*					*		
Native Hedgerow pruning/cutting (once every three years,)		*										
Deciduous Hedge pruning/cutting									*			
Evergreen Hedge pruning/cutting		*							*			
Shrubs pruning and feeding				*		*			*			
Weed control of hedge and shrub planting area		*	*	*	*	*	*	*	*	*	*	
Tree pruning											*	*
Removal of tree stakes (3-5 years)				*								
Mulch top-up tree circles/squares						*				*		
Watering of new trees (or after 3 weeks of no rain)				*	*	*	*	*				
Trimming of scrub areas												*
Weed control of scrub areas				*					*			
Application of residual weed killer to footpaths, cycle paths				*								
Litter clearance/pick up	***	***	***	***	***	***	***	***	***	***	***	***