


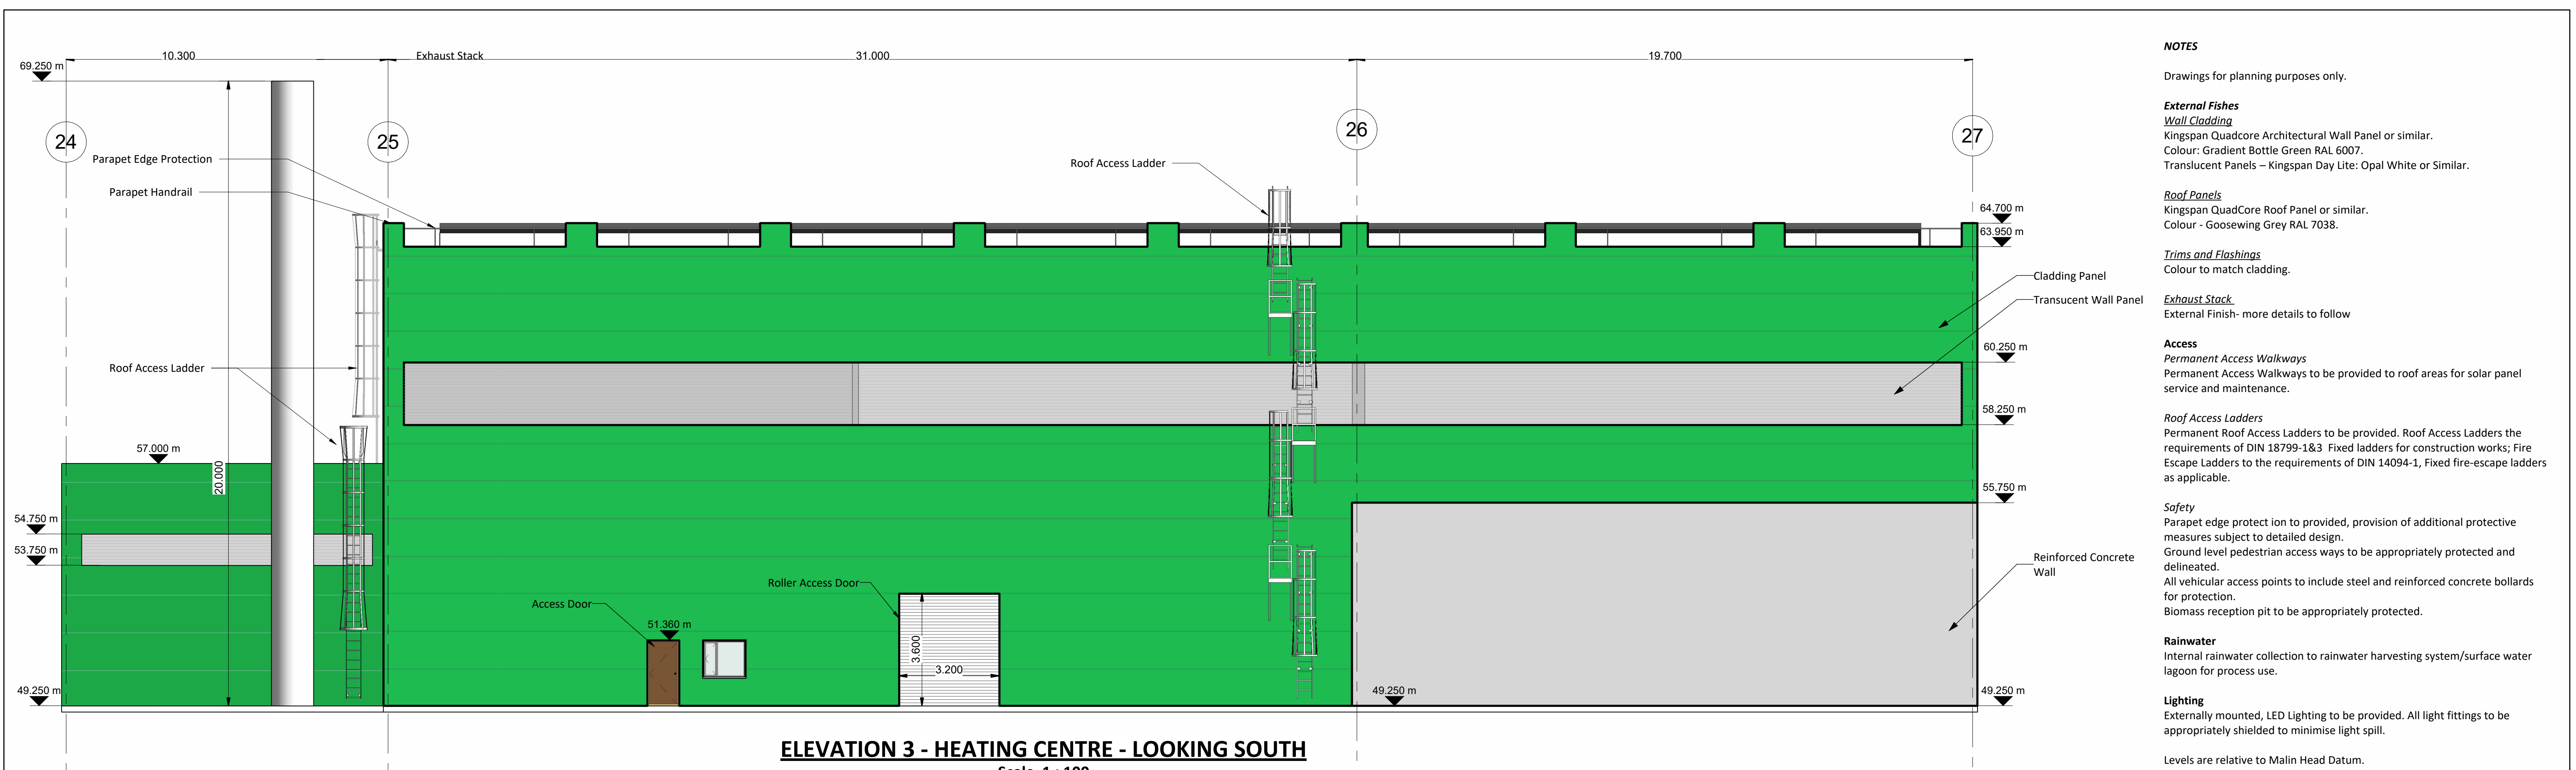

NOTES

Drawings for planning purposes only.

External Fishes
Wall Cladding
Kingspan Quadcore Architectural Wall Panel or similar.
Colour: Gradient Bottle Green RAL 6007.
Translucent Panels – Kingspan Day Lite: Opal White or Similar.

Roof Panels
Kingspan QuadCore Roof Panel or similar.
Colour - Goosewing Grey RAL 7038.

Trims and Flashings
Colour to match cladding.

Exhaust Stack
External Finish- more details to follow

Access
Permanent Access Walkways
Permanent Access Walkways to be provided to roof areas for solar panel service and maintenance.



Roof Access Ladders
Permanent Roof Access Ladders to be provided. Roof Access Ladders the requirements of DIN 18799-1&3 Fixed ladders for construction works; Fire Escape Ladders to the requirements of DIN 14094-1, Fixed fire-escape ladders as applicable.

Safety
Parapet edge protect ion to provided, provision of additional protective measures subject to detailed design.
Ground level pedestrian access ways to be appropriately protected and delineated.
All vehicular access points to include steel and reinforced concrete bollards for protection.
Biomass reception pit to be appropriately protected.

Rainwater
Internal rainwater collection to rainwater harvesting system/surface water lagoon for process use.

Lighting
Externally mounted, LED Lighting to be provided. All light fittings to be appropriately shielded to minimise light spill.

Levels are relative to Malin Head Datum.

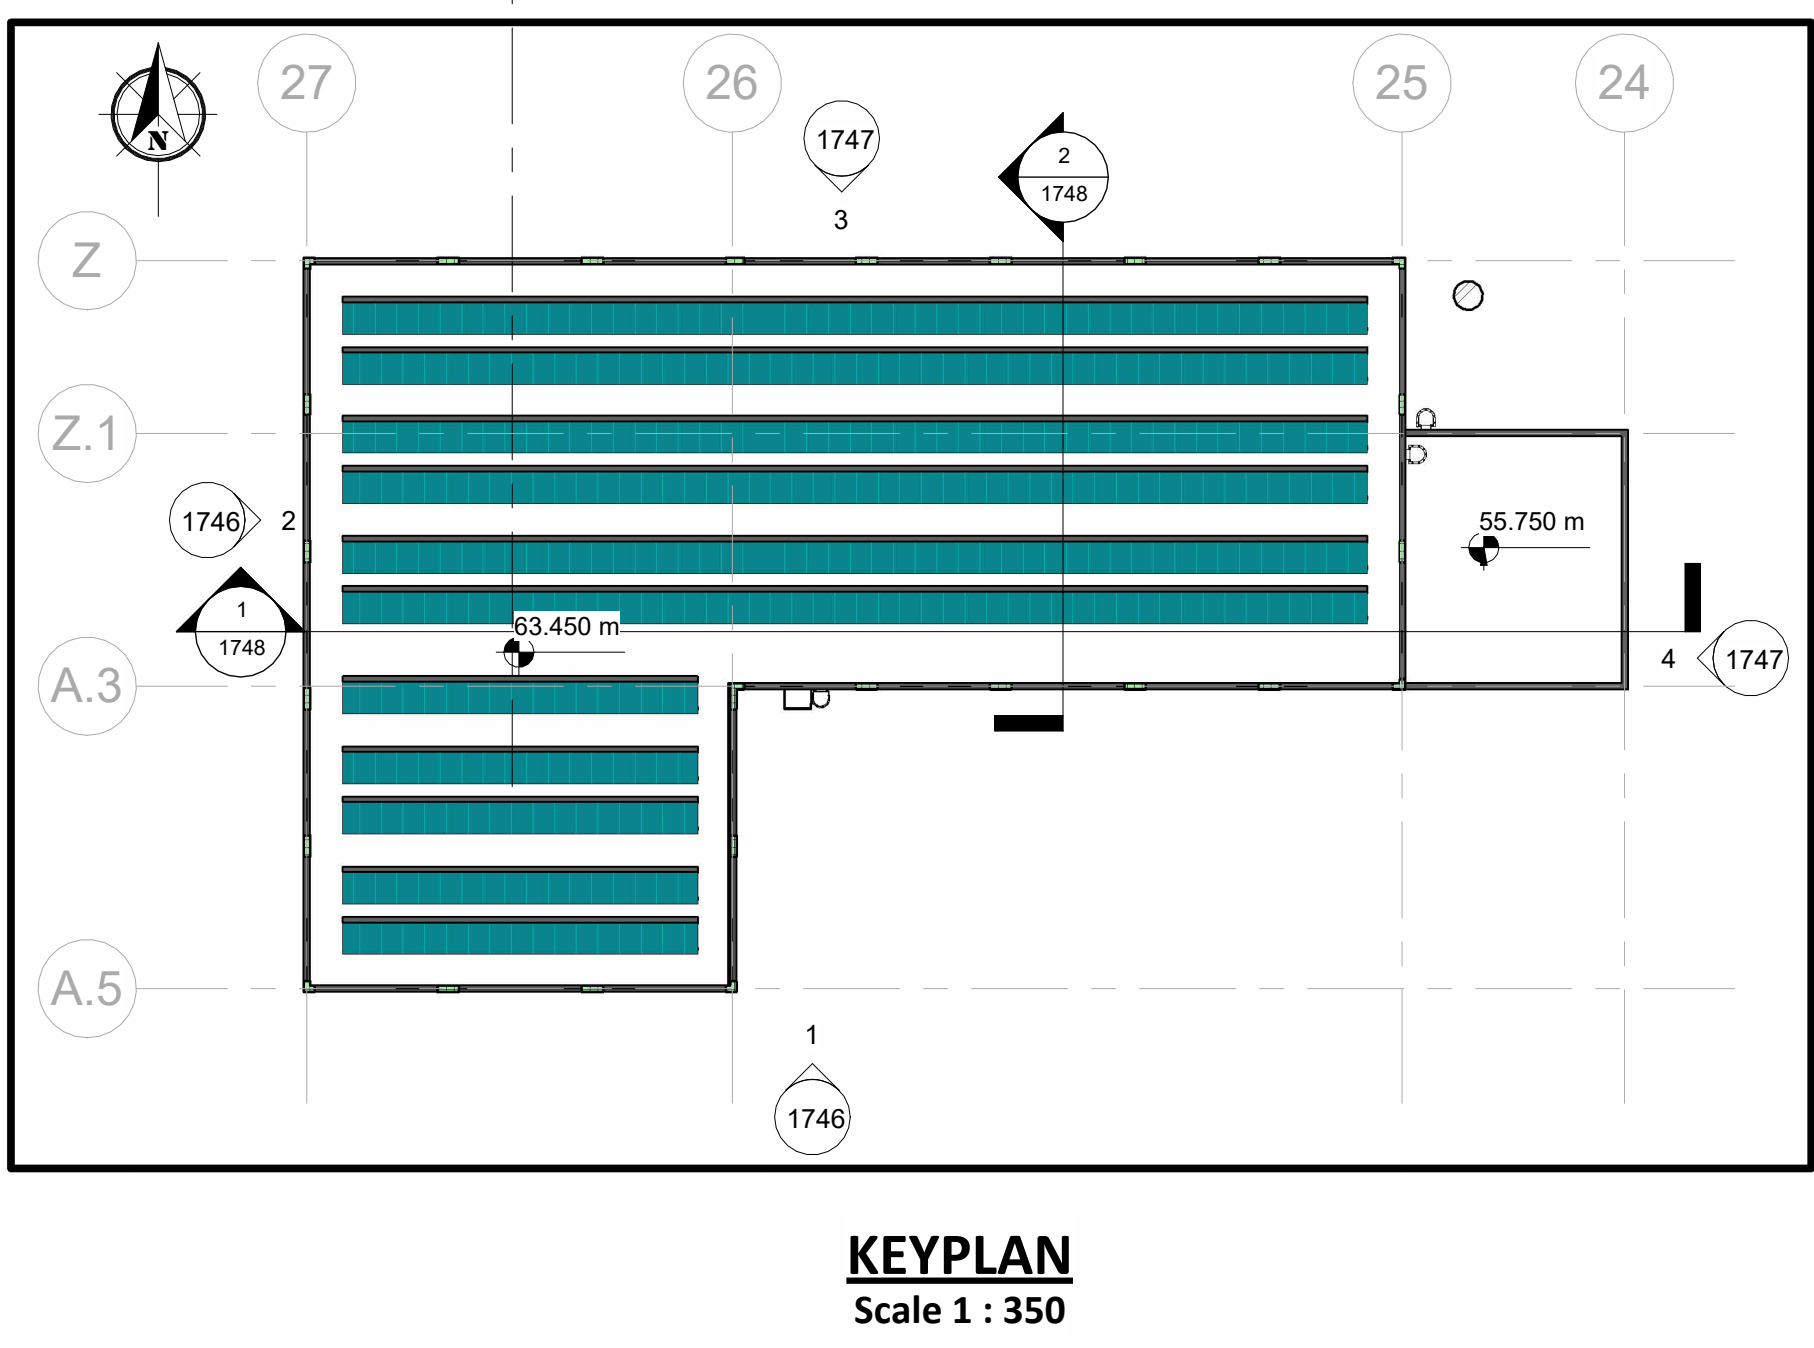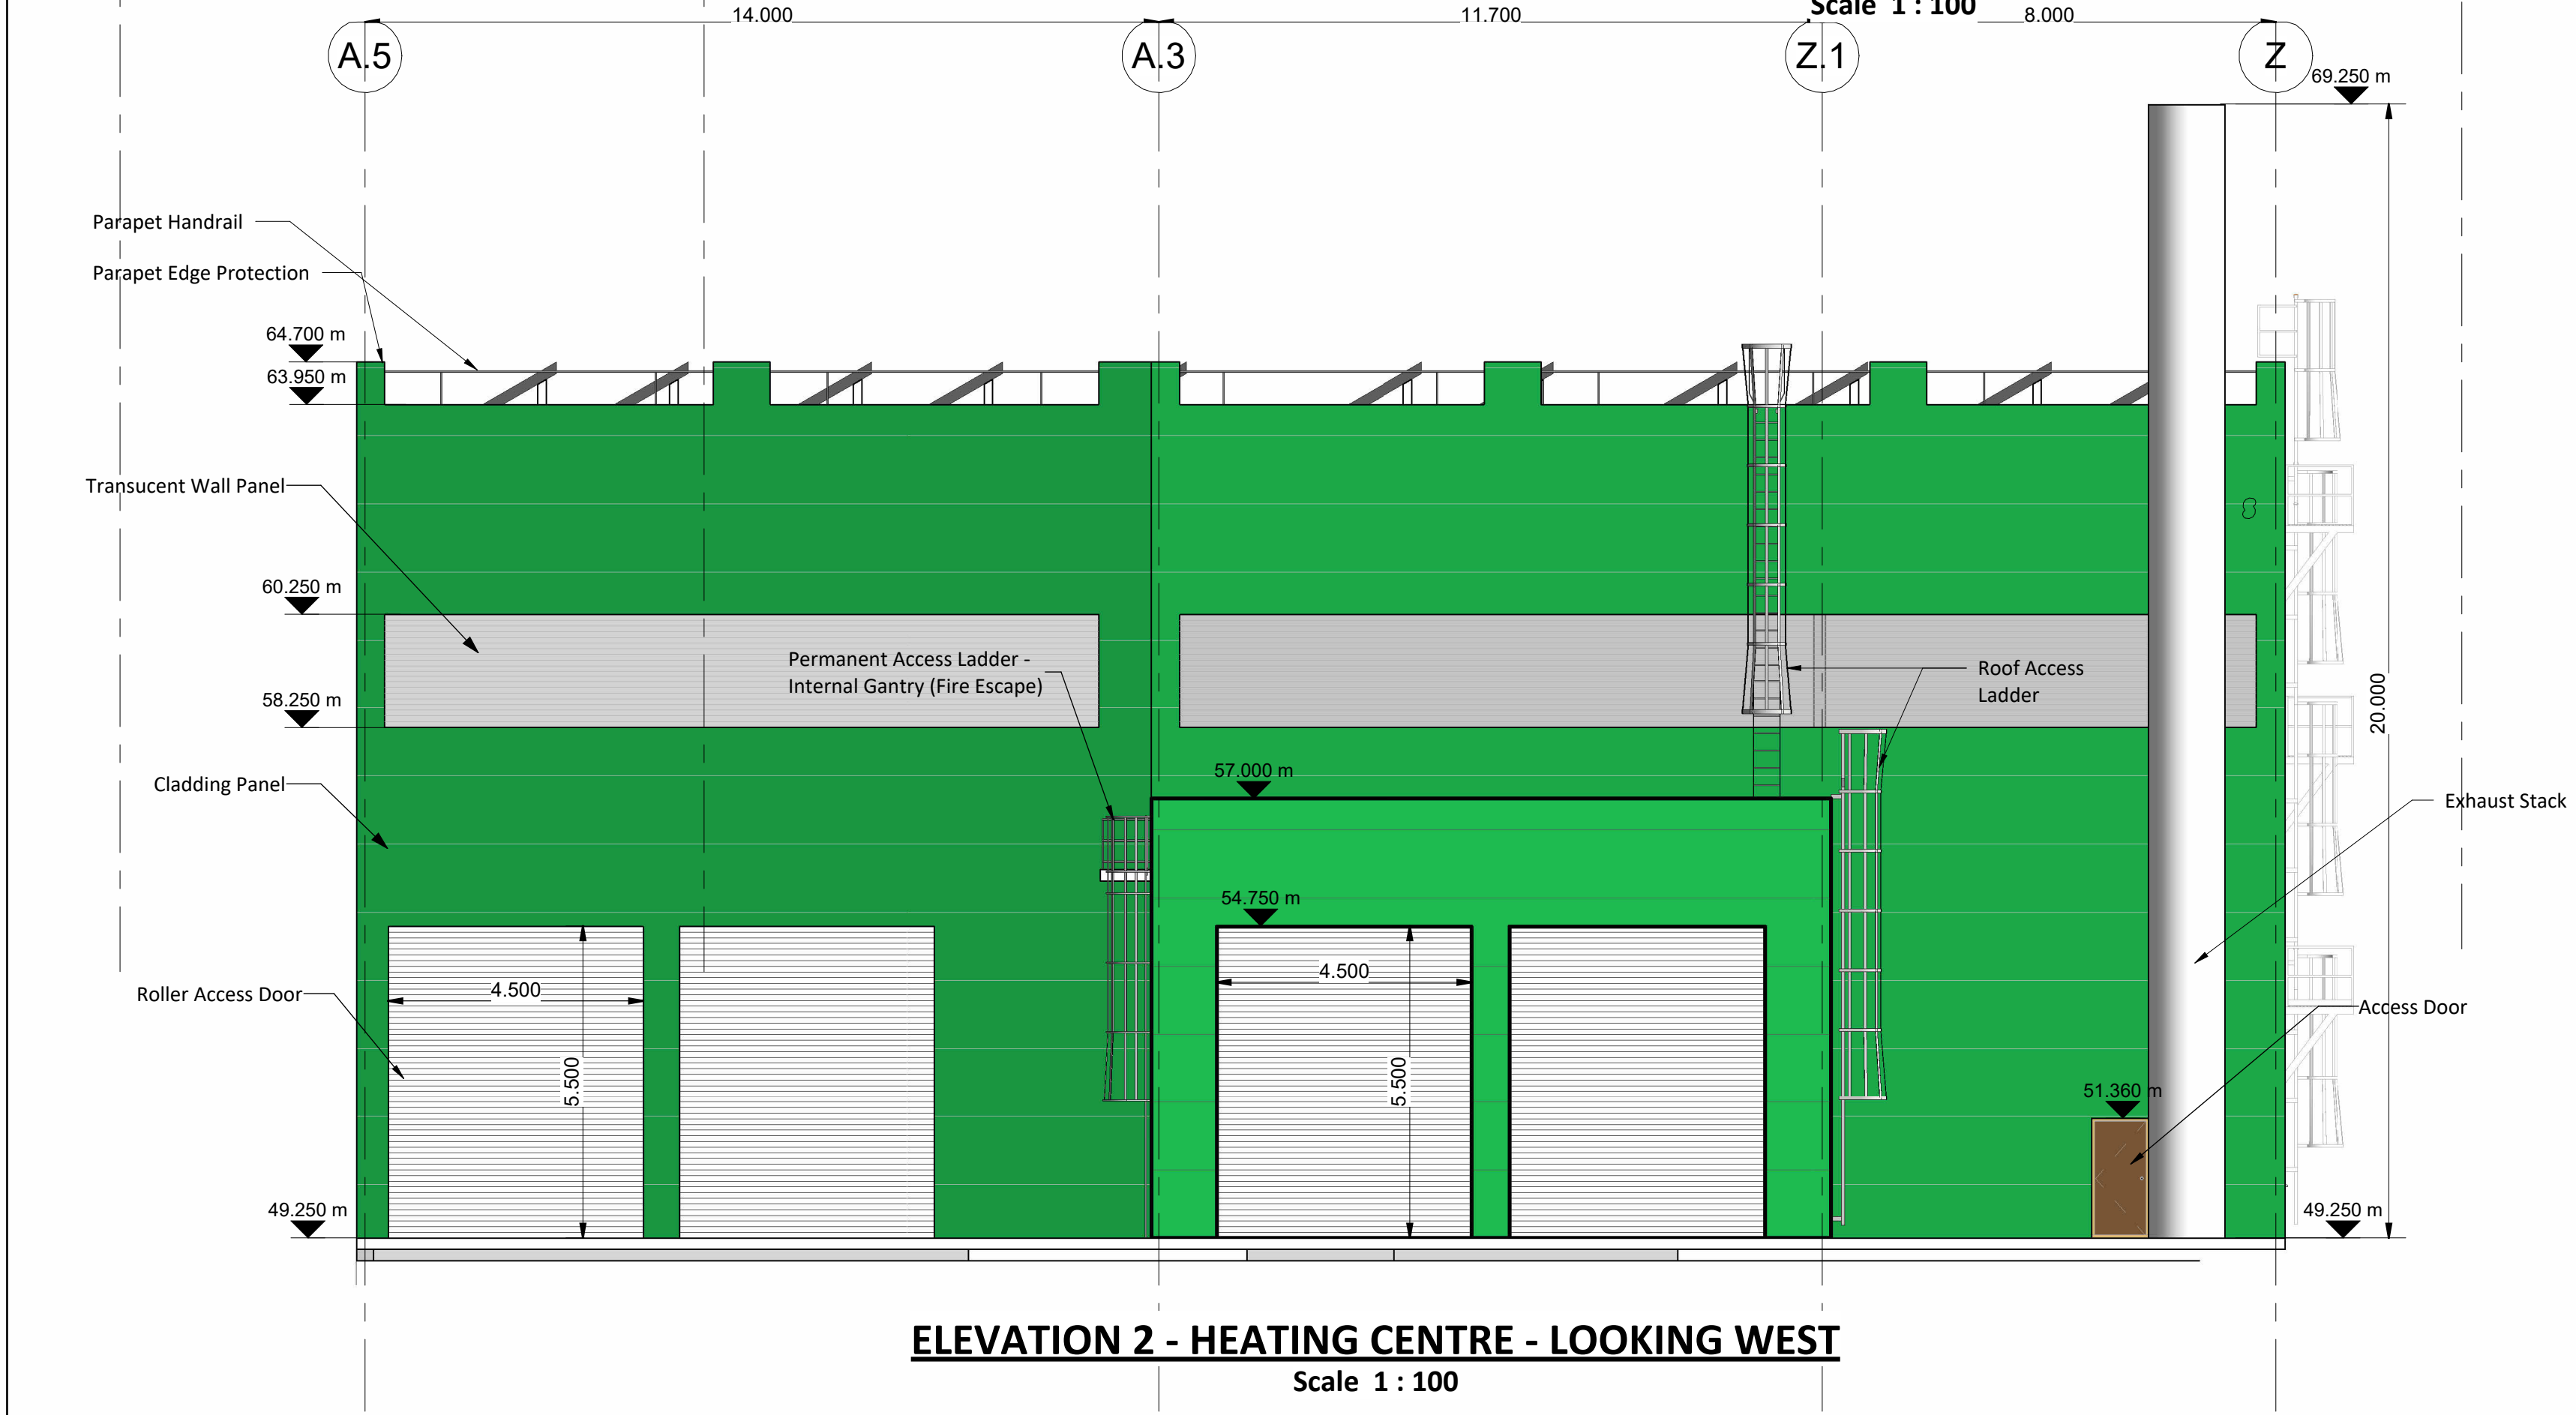

Rev.	Description	App By	Date
P01	ISSUE FOR PLANNING	JON	18.06.26

PROJECT		CLIENT			
POWERSTOWN BIOENERGY					
SHEET		Date	Project Number	Scale (at A1)	
HEATING CENTRE ELEVATIONS SHEET 2 OF 2		18.08.25	P24188	As indicated	
		Drawn by	Drawing Number		Rev
		NW	P24188-FT-XX-XX-DR-CE-1747		P01
		Checked by	Checker		