NOTE:

Areas of vegetation disturbed/damaged by works along this section of greenway to be made good by contractor:

Damaged/affected areas to be made good as per method below:

1. Remove all stones and debris.
2. Cut existing vegetation to ground level
3. Remove grass sward and cultivate soil 3 times in dry weather to a depth of 150-200mm with rotavator to kill and remove all weeds.
4. Create a firm 'seed bed' and rake to achieve a 2-3mm layer of crumbly worked soil across the surface.
5. Sow combined grass and wildflower planting mixture as per suppliers' recommendations (see Soft Landscape Legend for details)
6. Roll after sowing
7. Allow pioneering vegetation to establish naturally

Proposed Tree Protection Fencing

Proposed Solid Oak Benches (Confey):

Large solid oak bench; 5400 x 810mm; bespoke design; timber to be FSC; root fixed but not to interfere with Root Protection Areas

Tree Protection Fencing

Proposed Signal Controlled Crossing

Collins Bridge

2nr. Sheffield Cycle Stands

Existing Pedestrian Circulation

Existing Wall

Dublin-Maynooth Rail Line

Proposed Fenceline

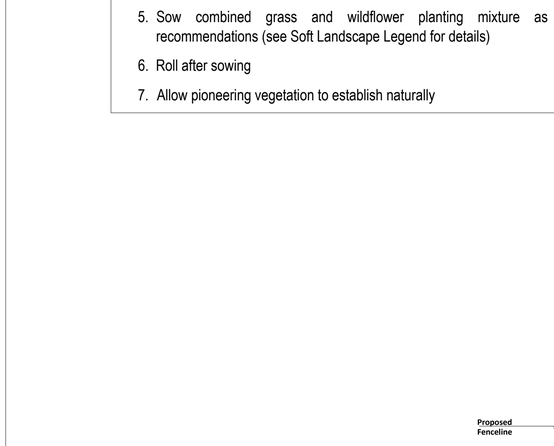

PROTECTION
Site layout 23.06.2026

LEGEND

Soft Landscape

Extra Heavy Standard

Alnus glutinosa
Quercus robur (Irish Provenance)
Betula pendula
Betula pubescens
Prunus padus
18-20cmg; 4.0-5.0m height; root balled/wrapped.

Heavy Standard

Betula pendula
Betula pubescens
Prunus padus
12-14cmg; 3.5-4.5m height; root balled/wrapped.

Multi-Stems

Corylus avlellana
Malus sylvestris
Salix caprea
multi-stem; 2.5-3.0m height/spread; root balled/wrapped; minimum of 8 breaks.

Groundcover Planting:

Sun:
Knautia macedonica
Lavandula angustifolia
Echinacea purpurea
Rubeckia fulgida 'Goldstrum'
Salvia nemerosa
Schizostylus cocinnea
Verbena bonariensis

Shade:
Ajuga reptans
Astilbe chinensis
Brunnera macrophylla 'Betty Bowring'
Luzula nivea
Luzula sylvatica
Athyrium filix-femina
Dryopteris filix-mas
Polystichum setiferum

Night Scented:
Oenothera biennis
Silene noctiflora
Matthiola bicornis
Silene nutans
Saponoria officinalis
Hesperis matronalis
Nicotiana alata

plants to be 2 litre container grown; planted at 7/m²

Native/Naturalised Hedgerow:

Crataegus monogyna **60%**
Prunus spinosa
Sambucus nigra
Hedera helix
Sorbus aucuparia
Ilex aquifolium
Prunus padus
Malus sylvestris
Crataegus monogyna (Irish Provenance)

planted at 5/m²; all bare-root; 600-900mm high, 1+1;

Climbers (to provide additional privacy/screening to back garden boundaries):

Lonicera periclymenum
Jasminum officinale
Hedera helix
plants to be P9 container grown; planted at 3 per linear metre at the base of anti-climb security fence at back garden boundaries

Combined Grass and Wildflower Planting:

Note:
Ratio of Grass seed to Wildflower seed: 70:30

Grasses:
Agrotis stolonifera (Creeping Bent)
Festuca pratensis (Meadow Fescue)
Festuca rubra (Festuca)
Phleum pratense (Timothy)

Wildflowers:
Galium verum (Lady's Bedstraw)
Ajuga reptans (Bugle)
Ranunculus acris (Meadow Buttercup)
Chamaemelum nobile (Wild Chamomile)
Trifolium pratense (Red Clover)
Primula veris (Cowslip)
Leucanthmeum vulgare (Oxeye Daisy)
Leontodon saxatilis (Smooth Hawksbit)
Plantago lanceolata (Ribwort Plantain)
Briza media (Quaking Grass)
Prunella vulgaris (Selfheal)
Rumex acetosa (Sorrel)
Lotus corniculatus (Birdsfoot Trefoil)
Achillea millefolium (Yarrow)
Anthyllis vulneraria (Kidney Vetch)

Woodland Planting:

Sub-Tree Layer*:
Corylus avellana (20%)
Crataegus monogyna (Irish Provenance) (40%)
Ilex aquifolium (20%)
Prunus avium (20%)
bare-root; 600-900 height; 1+1 transplants

***sub-tree layer planted in as 1 plant per square metre; ensure no plant is located next to a plant of same species**

SHRUB LAYER:**
Euonymus europaeus (20%)
Prunus spinosa (50%)
Viburnum opulus (20%)
Rosa canina (10%)
bare-root; 600-900 height; 1+1 transplants

****shrub layer planted in as 2 plants per square metre; ensure no plant is located next to a plant of same species**

Wildflower Meadow:

Alexanders
Bladder Campion
Burdock
Common Vetch
Corn Marigold
Corn Poppy
Corncockle
Cornflower
Field Scabious
Foxglove
Greater Trefoil
Hedge Garlic Mustard
Hemp Agrimony
Cow-Parsley
Lesser Knapweed
Opium Poppy
Ox-eye Daisy
Meadowsweet
Scented Mayweed
Mullein
Purple Loosestrife
Red Campion
St Johnswort
Sorrel, Teasel
Upright Hedge Parsley
Weld -Yellow weed
Wild Angelica
Wild Carrot
Yarrow
Yellow Flag Iris
Mugwort,
Pokeweed,
White Bedstraw.
Yellow Agrimony

Sowing rates:
Pure wildflowers: 1 to 1.5 grams per metre.
If grass seed added: 1 to 5 grams per metre.
Cutting: Once a year is advised but there is no minimum requirement.

Hard Landscape

Proposed Path
Refer to Consulting Engineers drawings for details

Proposed Cycle Lane
Refer to Consulting Engineers drawings for details

Proposed Shared Surfacing
Refer to Consulting Engineers drawings for details

Proposed Boardwalk
Refer to Consulting Engineers drawings for details

Proposed Solid Oak Benches:
large solid oak benches; 5400 x 810mm; bespoke design; timber to be FSC; root fixed but not to interfere with Root Protection Areas

Proposed Cycle Stands
Sheffield Cycle Stand

Proposed Bridge
Refer to Consulting Engineers drawings for details

Existing Pedestrian Circulation

Proposed Tree Protection Fencing
Refer to arborists drawings for details

Proposed Fencing
Refer to Consulting Engineers drawings for details

Proposed Bridge
Delivered as part of the DART+West Scheme

NOTES:

This drawing is the copyright of ait urbanism + landscape. Unless otherwise stated all dimensions are in millimetres. Where dimensions are not given, drawings must not be scaled and the matter must be referred to the Landscape Architect. If the drawing includes conflicting details/dimensions the matter must be referred to the Landscape Architect. All dimensions must be checked on site. The Landscape Architect must be informed, by the Contractor, of any discrepencies before work proceeds.

Copyright : All creative artwork, landscape symbology, text, legends, specifications, descriptions and illustrations used in our drawings and reports are the intellectual property of ait urbanism + landscape ltd. and are not to be reproduced by others.

DATE	REV.	DESCRIPTION	DRAWN BY	CHECKED BY
-	-	-	-	-

ait urbanism + landscape

ISSUE STATUS: PLANNING

CLIENT:	Fingal County Council	DRAWING NO: 18FG01-DR-0204	REVISION: -
PROJECT:	Royal Canal Urban Greenway	DRAWN BY: ME	1st ISSUE: 23/09/2026
DRAWING:	General Arrangement Layout 4 of 27	PROJECT NO: 18FG01 / SCALE: 1:500 / SHEET SIZE: A1 / CHECKED BY: GF	NORTH