

NOTE:
WATERMAIN MATERIAL TO BE PE 100 (SDR 11 OR 17) IN COMPLIANCE WITH SECTION 3.9 OF IRISH WATER, "WATER SUPPLY INFRASTRUCTURE CODE OF PRACTICE"

NOTE:
AIR VALVE AND HYDRANTS COVERS, WHERE LOCATED IN GRASS AREAS, SHALL BE SURROUNDED BY A CONCRETE PLINTH IN COMPLIANCE WITH SECTION 3.18 OF IRISH WATER, "WATER SUPPLY INFRASTRUCTURE CODE OF PRACTICE"

NOTE:
THRUST BLOCKS TO BE PROVIDED AT EACH BEND ALONG THE COURSE OF THE WATERMAIN IN COMPLIANCE WITH SECTION 4.6 OF IRISH WATER, "WATER SUPPLY INFRASTRUCTURE CODE OF PRACTICE"



NOTE:
ENSURE DEPTH OF COVER TO WATERMAIN CROWN IS ACHIEVED IN COMPLIANCE WITH SECTION 3.11 OF IRISH WATER, "WATER SUPPLY INFRASTRUCTURE CODE OF PRACTICE"

NOTE:
METERS FOR APARTMENTS OR SIMILAR PROPERTIES WILL BE INSTALLED INTERNALLY WITHIN THE PREMISES IN ACCORDANCE WITH THE BUILDING CONTROLS AUTHORITY REQUIREMENTS AND SUBJECT TO REVIEW BY IRISH WATER* SEE SECTION 3.15.2 OF THE IRISH WATER CODE OF PRACTICE.

- NOTES:**
- DO NOT SCALE. USE FIGURED DIMENSIONS ONLY.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS.

LEGEND WATER SUPPLY

	PROPOSED 150mm P.E. WATERMAIN
	PROPOSED 100mm P.E. WATERMAIN
	PROPOSED SLUCE VALVE
	PROPOSED HYDRANT
	PROPOSED HOUSE CONNECTION AND BOUNDARY BOX
	PROPOSED AIR VALVE
	PROPOSED SCOUR VALVE
	EXISTING WATERMAIN WITH PIPE SIZE
	EXISTING SLUCE VALVE
	EXISTING HYDRANT

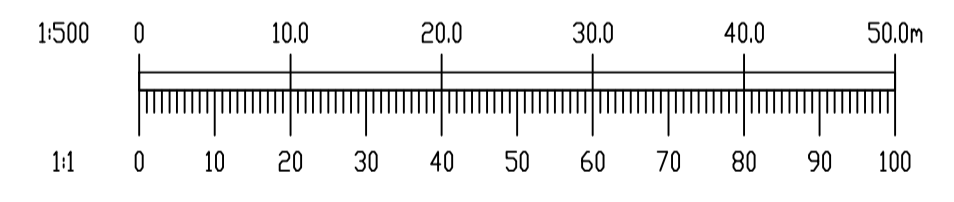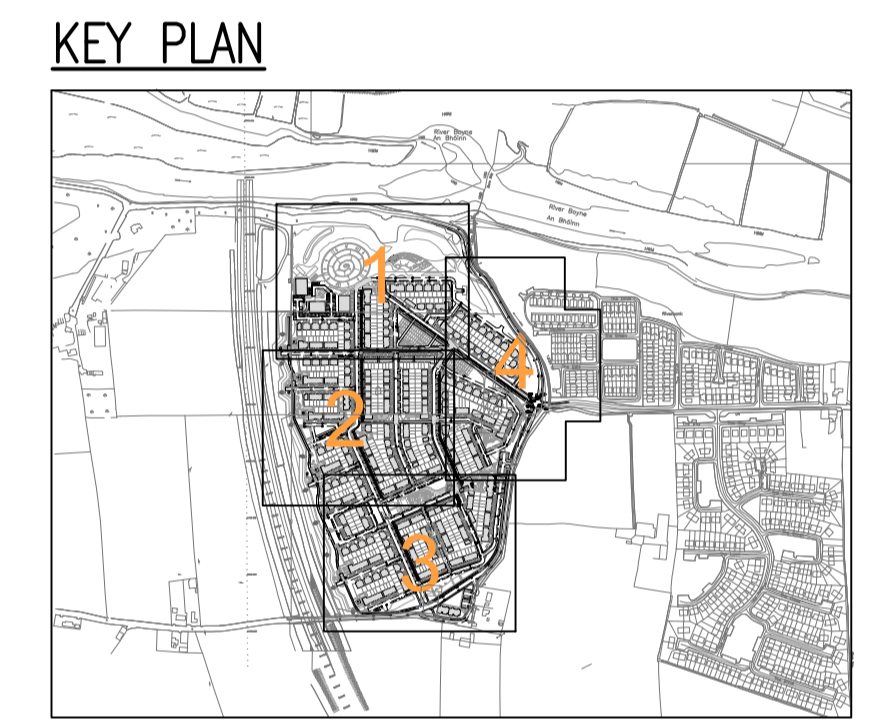

B	14/06/19	AMENDMENTS ON FOOT OF COMMENTS FROM IRISH WATER	GB	BW
A	14/05/19	IRISH WATER SUBMISSION	GB	BW
REV.	DATE	AMENDMENT	DRN	APPD

STATUS FOR PLANNING ONLY NOT FOR CONSTRUCTION

Waterman Moylan
Engineering Consultants

BLOCK 5, EASTPOINT BUSINESS PARK, ALFIE BYRNE ROAD, DUBLIN D03 H3F4 IRELAND. Tel: (01) 684 8900 Email: info@waterman-moylan.ie www.waterman-moylan.ie

CLIENT	TRAILFORD LTD		
ARCHITECT	NDBA ARCHITECTS		
PROJECT	PROPOSED RESIDENTIAL DEVELOPMENT, RATHMULLAN, DROGHEDA		
TITLE	PROPOSED WATER SUPPLY LAYOUT SHEET 1 OF 4		
DRAWN	DESIGNED	APPROVED	DATE
G.Byrne	BW	JG	AUG. '19
SCALE	JOB NO.	DRG. NO.	REVISION
1:500 @A1	18-014	P041	B

© 2017. This drawing is copyright. No part of this document may be reproduced or transmitted in any form or stored in any retrieval system of any nature without the written permission of the consulting engineer or copyright holder except as agreed for use on the project for which the document was originally issued.