







DISCLAIMER
 1. This drawing is the property of Cameo & Partners Ltd.
 2. It must not be copied or reproduced without written consent.
 3. Do not scale from this drawing.
 4. Check all dimensions on site before setting out.

PROPOSED HARD LANDSCAPE


-  **Paving Type 1:** Buff Coloured Granite Slabs
 Size: 100x200, 200x400, 400x600, depth 80mm.
 Colour: 3 shades of light buff.
 Supplier: Stonepave or Similar Approved
-  **Paving Type 3:** Buff Coloured Granite Setts
 Size: 100x200, depth 80mm.
 Colour: 3 shades of light buff.
 Supplier: Stonepave or Similar Approved
-  **Paving Type 5:** Wet Pour Safety Surface
 Colour: 4 shades of yellow and orange.
 Supplier: Soft Surfaces or Similar Approved
-  **Paving Type 15:** Slate chipping
 Size: 20-30mm
 Supplier: Kilsaran or Similar Approved/TBC
-  **Paving Type 16:** Concrete Stepping Stones
 Size: 700x300x20mm
 Supplier: Kilsaran or Similar Approved
-  **Edge Type 2:** High Performance Concrete Edges and Walls
 Height: various. Colour: White with etched surface.
 Supplier: Cassidy Brothers or Similar Approved

PROPOSED SOFT LANDSCAPE


-  **Proposed Mature Tree**
 Size/Colour: 35-40cm girth, RB, 2m clear stem.
 Product: Refer to Planting Schedule
 Supplier: Van den Berk/Tully Nurseries or Similar Approved
-  **Proposed Semi-Mature Multi-stem Tree**
 Product: Refer to Planting Schedule
 Supplier: Van den Berk/Tully Nurseries or Similar Approved
-  **Proposed Shrub Planting**
 Product: Refer to Planting Schedule
 Supplier: Tully Nurseries or Similar Approved
-  **Proposed Herbaceous Planting**
 Product: Refer to Planting Schedule
 Supplier: Tully Nurseries or Similar Approved
-  **Proposed Green Wall**
 Supplier: ANS Global or Similar Approved



Location Plan

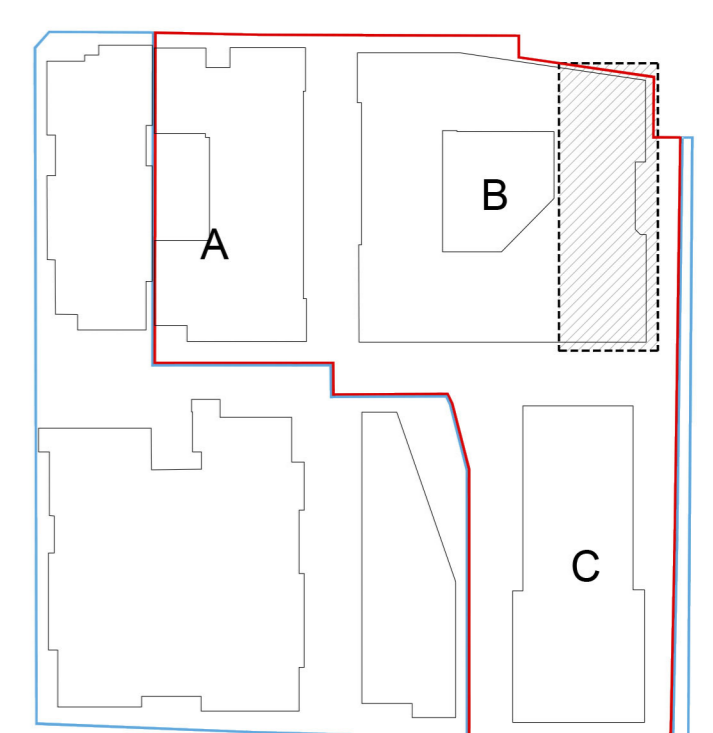

rev	details	by	date
01	Issued for planning	MM	05.11.20

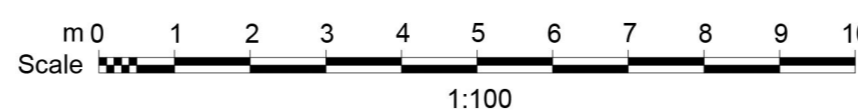

Project
Project Waterfront South, Dublin

Drawing
**Landscape Illustrative Plan Level 14
 Block B - Running Track Terrace**

Scale	Date	Checked By	Drawn By
1:100@A1	17.04.20		MM
Drawing No.			Revision
C0096 L1114 SHD BB			01
Purpose of Issue:			
P = design information / P = planning / T = tender / C = construction / B = as built			
Drawing sheet size - A1			