


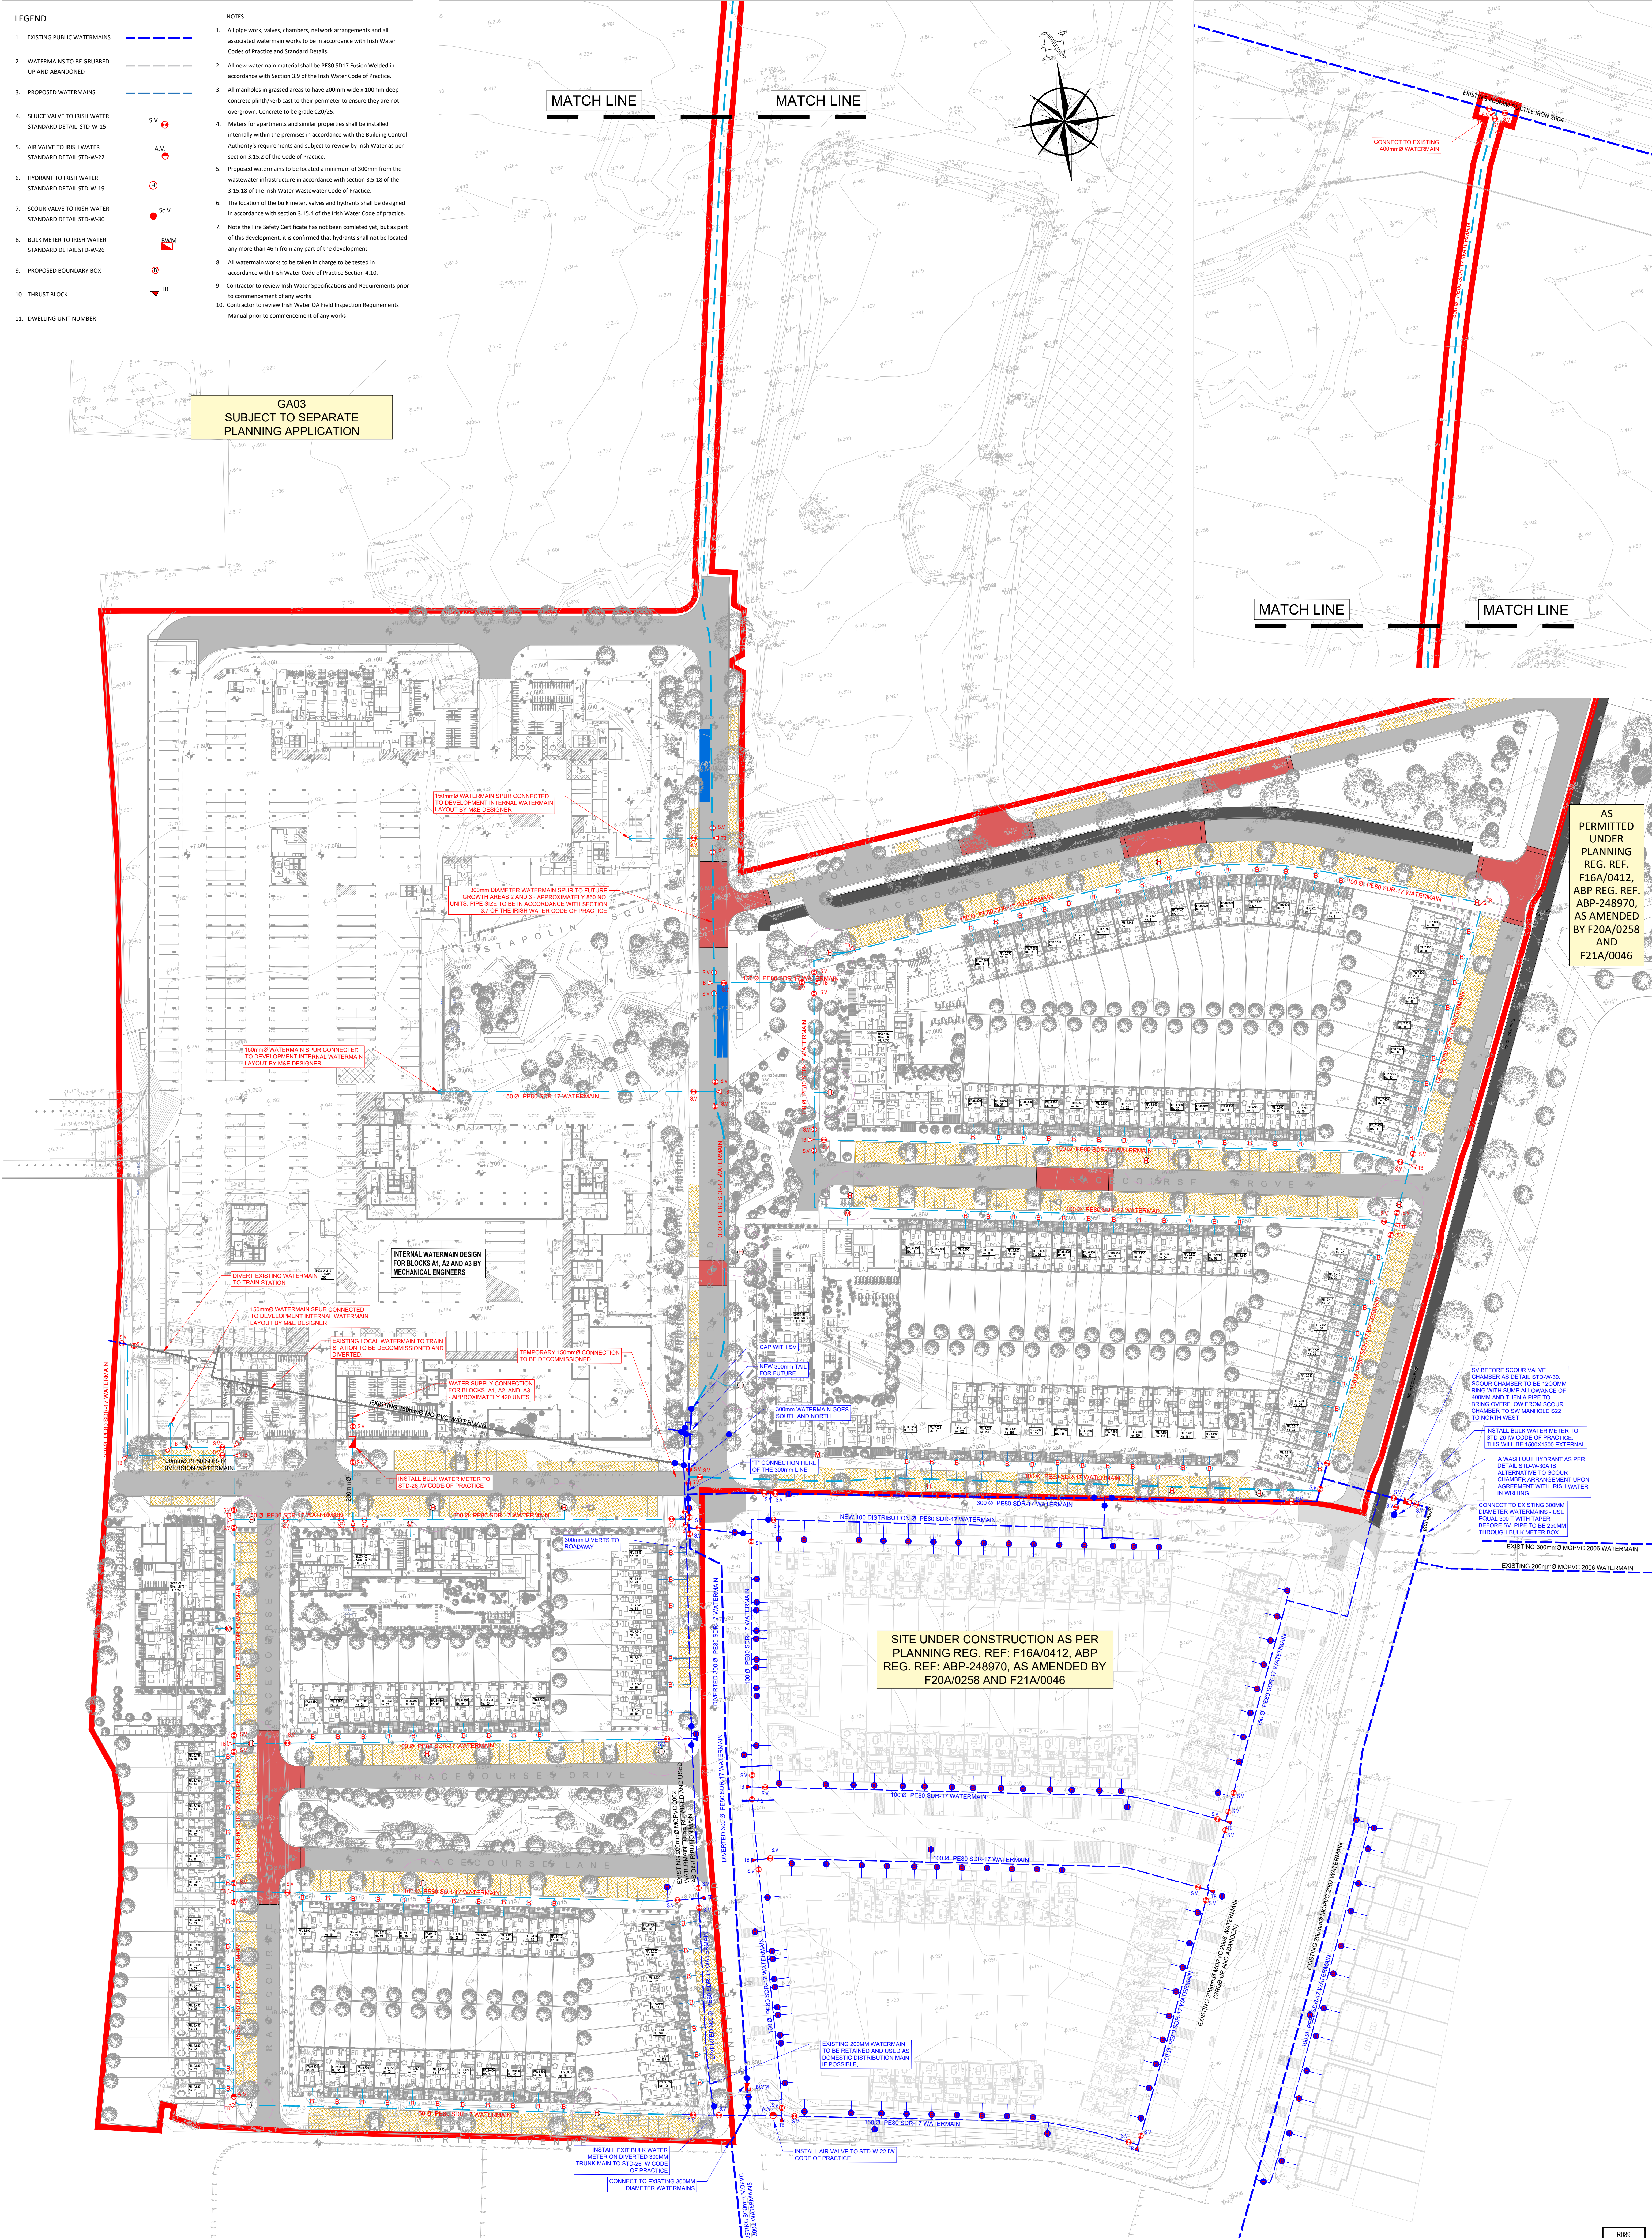

LEGEND	
1. EXISTING PUBLIC WATERMANS	---
2. WATERMANS TO BE GRUBBED UP AND ABANDONED	---
3. PROPOSED WATERMANS	---
4. SLICCE VALVE TO IRISH WATER STANDARD DETAIL STD-W-15	S.V.
5. AIR VALVE TO IRISH WATER STANDARD DETAIL STD-W-22	A.V.
6. HYDRANT TO IRISH WATER STANDARD DETAIL STD-W-19	HT
7. SCOUR VALVE TO IRISH WATER STANDARD DETAIL STD-W-30	Sc.V
8. BULK METER TO IRISH WATER STANDARD DETAIL STD-W-26	B.M.
9. PROPOSED BOUNDARY BOX	---
10. THRUST BLOCK	T.B.
11. DWELLING UNIT NUMBER	

NOTES	
1. All pipe work, valves, chambers, network arrangements and all associated watermain works to be in accordance with Irish Water Codes of Practice and Standard Details.	
2. All new watermain material shall be PE80 SDR17 Fusion Welded in accordance with Section 3.9 of the Irish Water Code of Practice.	
3. All manholes in grassed areas to have 200mm wide x 100mm deep concrete plinth/kerb cast to their perimeter to ensure they are not overgrown. Concrete to be grade C20/25.	
4. Meters for apartments and similar properties shall be installed internally within the premises in accordance with the Building Control Authority's requirements and subject to review by Irish Water as per section 3.15.2 of the Code of Practice.	
5. Proposed watermains to be located a minimum of 300mm from the wastewater infrastructure in accordance with section 3.5.18 of the 3.15.18 of the Irish Water Wastewater Code of Practice.	
6. The location of the bulk meter, valves and hydrants shall be designed in accordance with section 3.15.4 of the Irish Water Code of practice.	
7. Note the Fire Safety Certificate has not been completed yet, but as part of this development, it is confirmed that hydrants shall not be located any more than 50m from any part of the development.	
8. All watermain works to be taken in charge to be tested in accordance with Irish Water Code of Practice Section 4.30.	
9. Contractor to review Irish Water Specifications and Requirements prior to commencement of any works	
10. Contractor to review Irish Water QA Field Inspection Requirements Manual prior to commencement of any works	

PLANNING DRAWING.
NOT FOR CONSTRUCTION.
ALL LEVELS GIVEN ARE
RELATIVE TO ORDNANCE DATUM.
THIS DRAWING HAS BEEN ISSUED FOR INFORMATION
PURPOSES ONLY AND MUST NOT BE USED
FOR CONSTRUCTION UNDER ANY CIRCUMSTANCES

NOTES

- For setting out refer to Architect's drawings
- This drawing to be read in conjunction with all other Architectural and Engineering drawings and all other relevant drawings and Specifications
- DO NOT SCALE THIS DRAWING. Use figured dimensions only.
- No part of this document may be reproduced or transmitted in any form or stored in any retrieval system of any nature without the written permission as copyright holder except as agreed
- For use on the project for which the document was originally issued.
- Ordnance Survey Ireland Licence Number EN 0074021

Rev. No.	Date	REVISION NOTE
P1	09.10.2020	PLANNING SUBMISSION STAGE 3
P2	03.03.2021	SITE LAYOUT REVISED

Dr. By	Che. By	Client
DO	OS	Project
DO	OS	Project

The Shoreline Partnership
Alterations to Shoreline GA01
Lands at Baldyle

PROPOSED WATERMAIN LAYOUT

BD-CSC-ZZ-XX-DR-C-0005

Date: 06.04.2020
Dr. by: PC
Che. by: NB
Appr. by: OS
Scale: 1:500 (A4)

Revision **P2**

CS Consulting Group
DUBLIN | LONDON | LIMERICK

Head Office:
19-22 Dame Street, Dublin 2
T: +353 (0)1 5486963
E: info@csconsulting.ie
W: www.csconsulting.ie

Quality
NSAI
Certified

Environment
ISO 14001:2015

Health & Safety
ISO 45001:2018