





1 PROPOSED Main entrance detail. - Detail 8
1 : 250

LEGEND	
	INDICATES EXISTING TREES IN GRASSED VERGE
	INDICATES TREE PLANTING WITH SEMI MATURE, MEDIUM GROWING TREES - SET INTO PREPARED PLANTING PITS WITH 5 CUM OF SOIL AND ROOT PROTECTION BARRIER
	TREE PLANTING WITH LOW GROWING MULTI STEM SPECIES SET INTO PLANTER WITH DEAD MAN ANCHOR TREE SUPPORT
	TALL SHRUB WITH BAMBOO SUPPORT
	MATURE BAMBOO PLANT 5.0 M HIGH IN COURTEN STEEL POT
	SHRUB PLANTING WITH MATURE PLANT SET INTO POT
	INDICATES HEDGE PLANTING WITH SEMI MATURE PLANTS
	PERMEABLE TARMAAC all cycle lanes
	SELECTED BRICK / COMPOSITE STONE PAVING Circular areas/internal shared surface areas courtyards
	SMOOTH CONCRETE WITH BRUSH FINISH (anti slip finish) Normal footpaths
	COLORED TARMAAC all parking spaces
	PAVING BLOCKS WITH POROUS SURFACE
	BENCH SEAT WITH STAINLESS STEEL FRAME AND TIMBER SEAT
	INDICATES LED UP LIGHTERS IN PAVING
	BOLLARDS WITH STAINLESS STEEL UNITS SET INTO LOCKABLE SOCKETS
	VISITOR BICYCLE PARKING AT POOLUM LEVEL
	PAVING WITH 400 WIDE GRANITE SLABS
	PAVING WITH NON SLIP GLAZING SLABS WITH LED LIGHTS UNDER

PLANT LEGEND	symbol	plant description	size in cm	comment
EE		EUAEGNUS EBINGEI	2.5 LT	CG 2.0 PER m2
LS		LAVANDULA STOECHAS	2.0 LT	CG 2.5 PER m2
PM		PHYLLISTACHYS MITIS	3.0 LT	1.0 PER m2 PLANTED IN BOTTOMLESS POTS

BULBS PLANTED IN MIXED GROUPS AT 100 PER m2
ANEMONE NEMEROSA
CROCUS TOMMASINIANUS
NARCISSUS FEBRUARY SILVER
NARCISSUS FEBRUARY GOLD
NARCISSUS MT HOOD

NOTES:
ALL PLANTING TO BE UNDERTAKEN IN FIRST SEASON FOLLOWING COMPLETION OF SITE AND DEVELOPMENT WORKS TO EACH PHASE OF THE WORKS
NOTES ON SPECIFICATION:
ALL PLANTS TO SET INTO PREPARED PITS WITH MIXED WITH MOIST MOSS PEAT AND SLOW RELEASING FERTILIZED PLANTING PITS TO BE 350 WIDER THAN ROOTBALL WITH BOTTOM 350 OF PIT DUG OVER TO ASSIST DRAINAGE
TREES TO HAVE 2 No. 70 DIA. TREATED TIMBER STAKES WITH CROSS RAIL AND THE SHRUB PLANTED AREAS IN GARDENS TO HAVE MIN 450 DEEP TOP SOIL ON SUB SOIL DUG OVER SHRUB PLANTED AREAS IN OPEN SPACE TO HAVE MIN 450 DEEP TOP SOIL ON SUBSOIL DUG OVER GRASSING GRADE 2 SEED SPREAD ON CULTIVATED TOP SOIL 200 DEEP TO EVEN FLOWING LEVELS WHERE NOTED OPEN SPACE AREAS TO HAVE MIX OF 2 CLOVER SPECIES AND NATIVE WILDFLOWERS AND EARLY FLOWERING BULBS MAINTENANCE PERIOD TO BE 18 MONTHS TO INCLUDE WATERING, WEEDING AND REPLACEMENT AF FAILED PLANTS

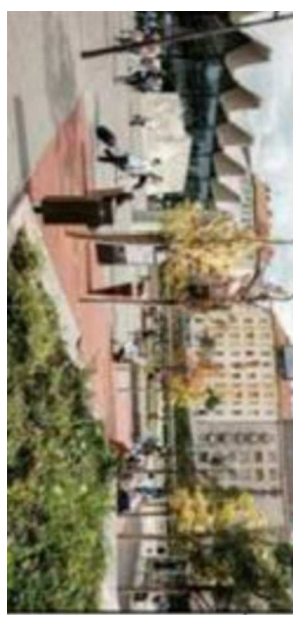

PROJECT Proposed Residential Development at Ballykeefe, Rahleen, Co Limerick.
CLIENT DW Rahleen Developments Ltd.
TITLE PROPOSED Main entrance detail.
SCALE: 1:250 @A3 DATE: NOV. 2021 DRWG. No. PCR -01-09-09 DRN. BY Cass Roche
rev.