

Primary Care Centre & Nursing Home at Moygaddy, Maynooth, Co. Meath

LANDSCAPE RATIONALE

Ronan Mac Diarmada & Associates

Landscape Architects & Consultants

August 2022





Contents

SITE CONTEXT	
LOCATION	4
SPATIAL CONTEXT	5
MASTERPLAN PHASING	6
DEVELOPMENT CONNECTIVITY CONTEXT	7
DESIGN PROPOSAL	
LANDSCAPE MASTERPLAN	9
LANDSCAPE MOODBOARD	11
CIRCULATION	12
BOUNDARY TREATMENT	13
LANDSCAPE SECTIONS	14
ARBORICULTURAL IMPACT	
ARBORICULTURAL IMPACT	
LANDSCAPE FEATURES	
HARD LANDSCAPE PALETTE	
PROPOSED PLANTING	21
DETAILED DESIGN	
SOFT LANDSCAPE	20









Location

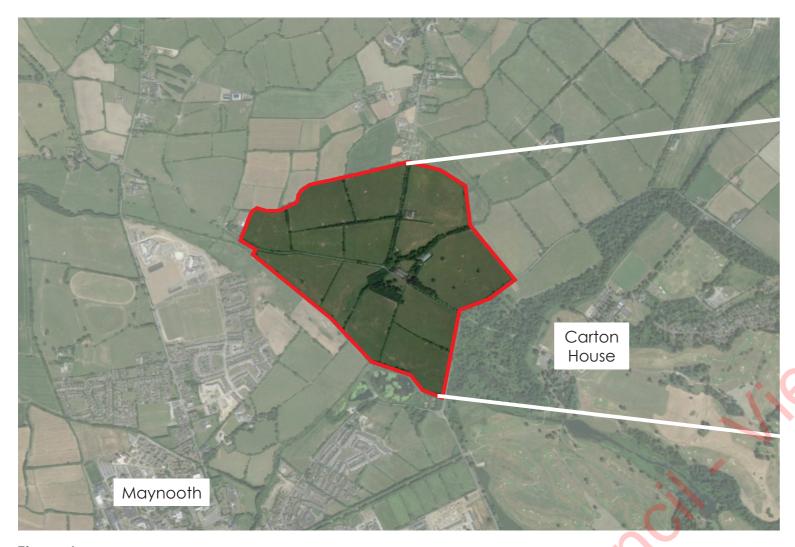


Figure 1



Moygaddy Future Development

The proposed development lands are situated in Moygaddy (Maigh Gadaí), County Meath, just north of Maynooth. The Applicant controls a land bank of circa 240 Acres, as shown in Figure 1, which is earmarked for major infrastructure upgrades and future mixed use development.

The largely greenfield site is bordered by mature trees and hedgerows, with many scenic vantage points which offer elevated views south to Maynooth and the surrounding hinterland. The location of proposed Primary Care Centre & Nursing Home Development, which is the subject of this application is shown in Figure 2.



Figure 2



Proposed Site Location

Planning Permission is sought by Sky Castle Limited for the development of a site which extends to 7.94 hectares, on land to the west of the R157 Dunboyne Road, County Meath, north of the town of Maynooth, in the townland of Moygaddy. This site is located in the Maynooth Environ Lands.





Spatial Context Meath County Development Plan








Masterplan Phasing







Development Connectivity Context

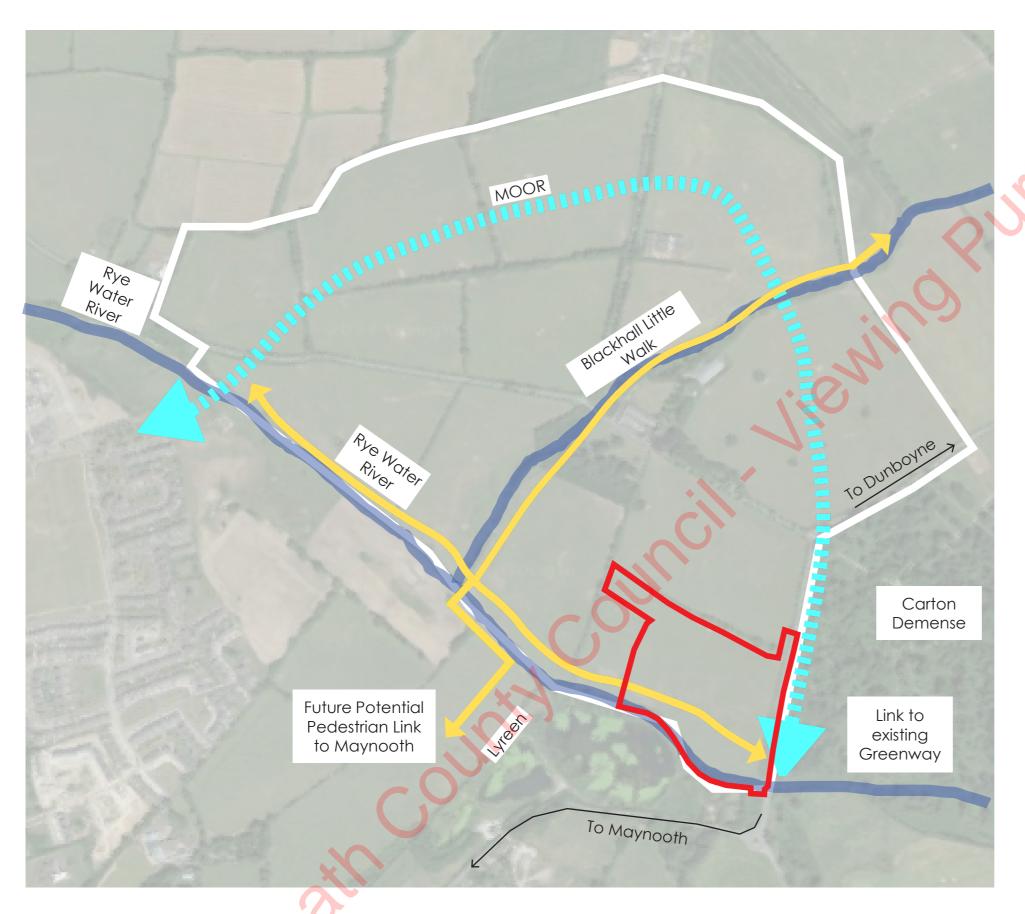

Riverside Walk

New Road Access / MOOR

Connectivity

A key objective of the design brief is to reduce car dependency by providing high quality pedestrian and cycle networks. The provision of green infrastructure and walking and cycle trails will integrate the new development into the existing landscape.

The design brief is to promote permeability throughout the entire masterplan area to facilitate the phased delivery of direct pedestrian and cycle linkages with the town of Maynooth and surrounding amenities.

As part of the wider masterplan, this Primary Care Centre & Nursing Home Development proposal will deliver a section of the Rye Water River Walk which will ultimately be linked to the future residential phases of the masterplan, located to the west. The Rye Water River Walk will be delivered in an intergrated and phased manner.





DESIGN PROPOSAL





Landscape Masterplan

Overview



This Landscape proposal for the Primary Care Centre and Nursing Home is an integral subset of the landscape strategy for the wider masterplan for the entire Moygaddy landbank.

The proposal strives to create a unique landscape identity, which will provide a positive quality of life for resident, visitors, and staff at the proposed Primary Care Centre and Nursing Home.

The landscape proposals primary aim is to make a positive contribution to the physical and psychological needs of the patients and staff at the new community healthcare facilities. An abundance of foliage, textures, blooms, and trees are proposed to help stimulate the senses and to promote therapeutic benefits, creating an engaging setting to live, work within, and visit.

The Nursing Home will have two courtyards for use by the residents. The design of these courtyards seeks support privacy, security, and safety, while creating a comfortable environment with a range of uses. The landscape spaces are designed to cater for both communal and personal use at a more intimate scale for individuals.

Easily identifiable circulation routes and boundaries help define site legibility and encourage residents to explore the various gardens. Path and boundary materials have been considered for their durability, aesthetic quality, accessibility, and to account for the needs of residents.

The external landscape surrounding the Primary Care Centre and Nursing Home has been designed to create a Riverside Walkway/ Greenway along the Rye Water River which will integrate into the landscape strategy for the wider masterplan area.





Landscape Masterplan



Landscape Moodboard



Upright trees to frame buildings



Communal Seating Areas



Pollinator Friendly Planting



Place for Reflection




Tree lined paths





Circulation

Pedestrian & Cycle Access & Connectivity

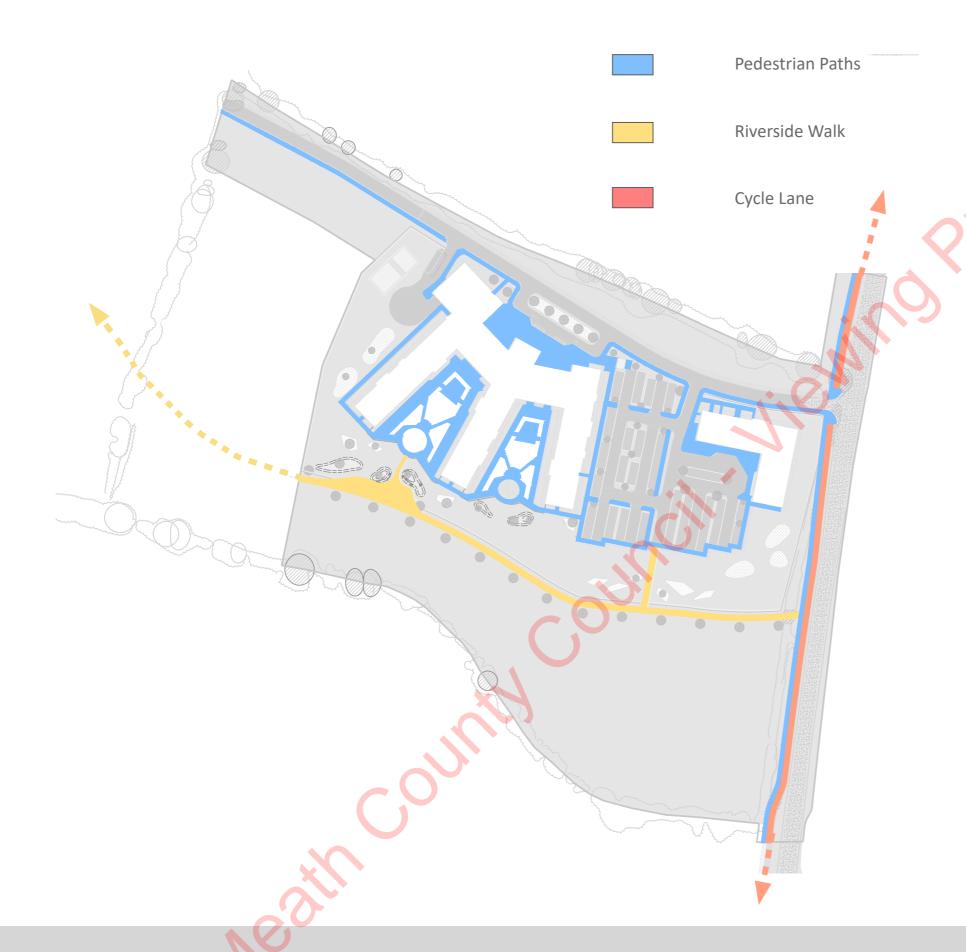

Connectivity

A key objective of the scheme is to create a setting where pedestrian experience is a priority. A palette of high quality landscape materials has been suggested to facilitate legible and comfortable movement within the site and to street linkages with surrounding opportunities.


The riverside walk will connect to the wider parkland that is envisaged as a part of the wider masterplan proposals which are the subject of separate planning applications. The design brief is to create an exemplar of sustainable development, providing opportunities for habitat management and conservation, recreation, tourism and education.





Boundary Treatment

Proposed Plan

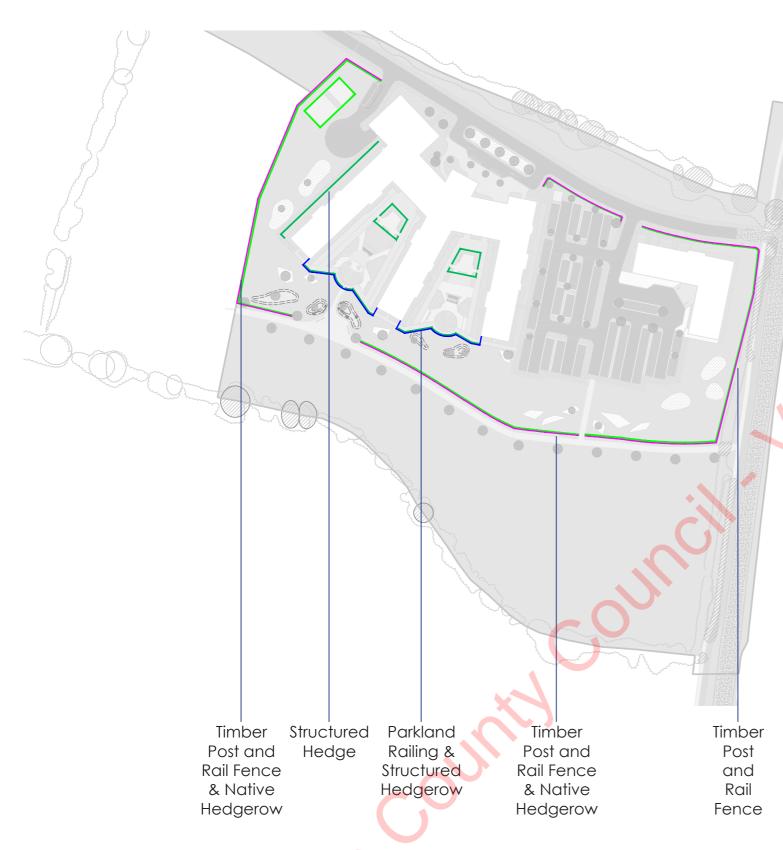



Structural Hedge Planting 1m high



Native Hedgerow .6m high



Parkland Railing 1.2m high



Timber Post and Rail Fence

1.4m high



Parkland Railing / Gate Access (1.2m high)
(3 Bar Powder Coated Black) or similar approved.

Loniceria periclymenum 'Graham Thomas'



Timber Post & Rail Fence / Gate Access (1.4m high) or similar approved.



Structural Hedgerow (450mm topsoil depth / 100cm single row)				
Species Name	Specification	Centres.		
Prunus lusitanica	c/g 3L 100cm ht.	500mm		




ative Hedgerow (450mm topsoil depth / 100cm Double Staggered Row)			
pecies Name	Specification	Centre	
raetagus monogyna	c/g 2L 40-60cm ht.	500mn	
runus spinosa	c/g 2L 40-60cm ht.	500mn	
lex aquifolium	c/a 2L 40-60cm ht.	500mn	


c/g 2L 40-60cm ht.

c/g 2L 40-60cm ht.



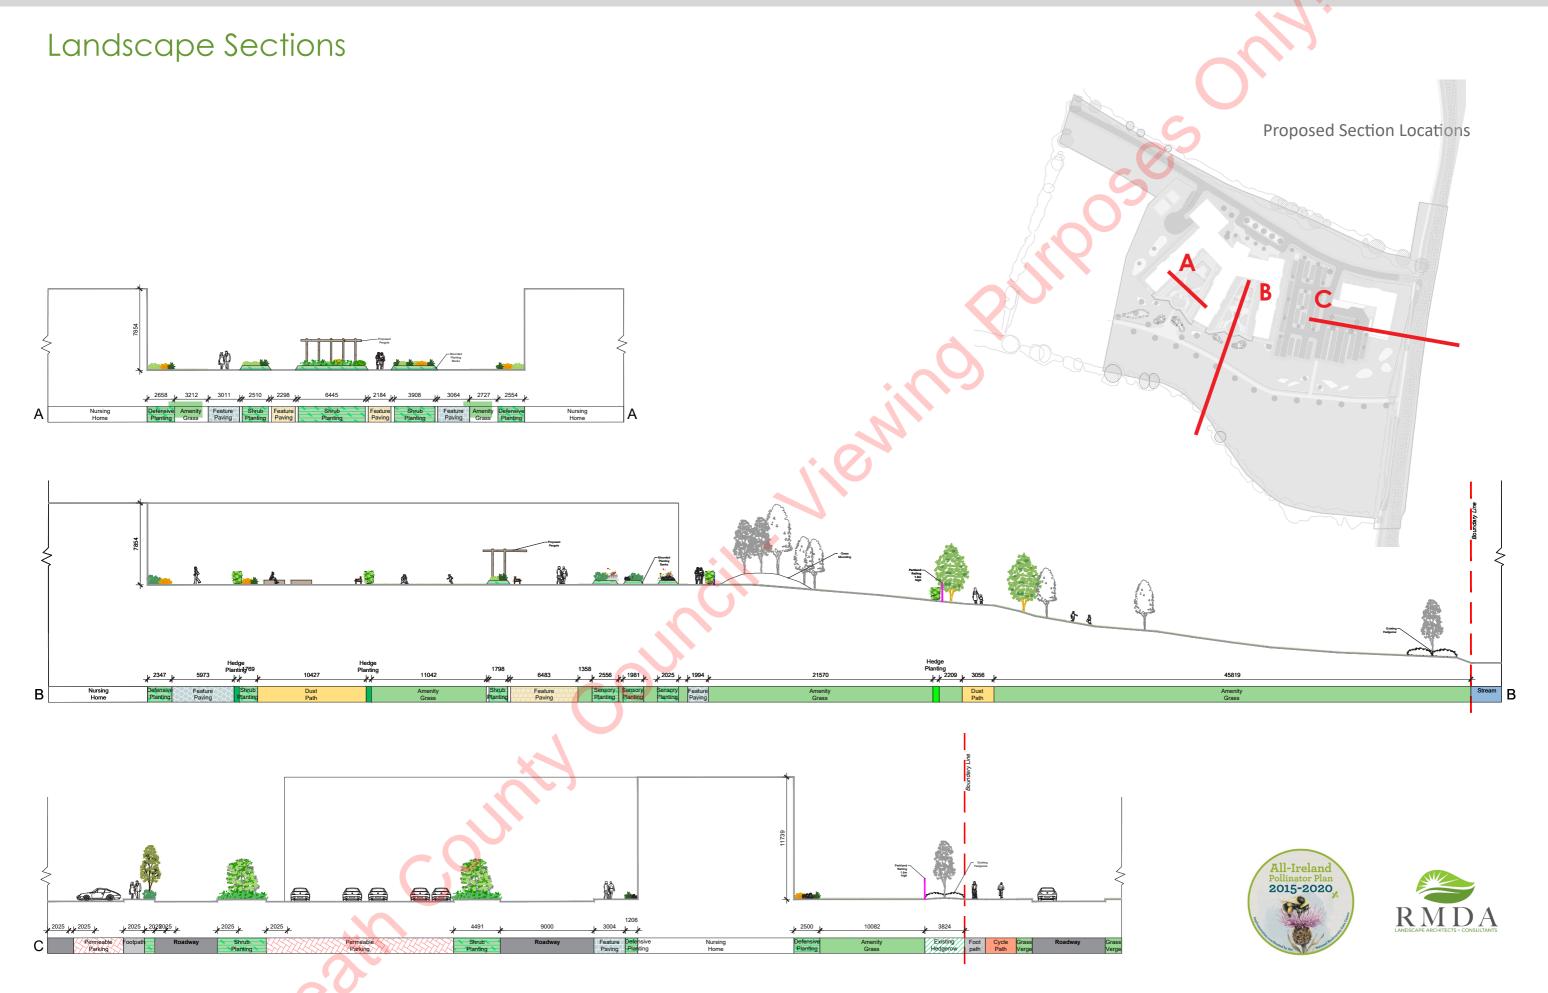

Arboricultural Impact

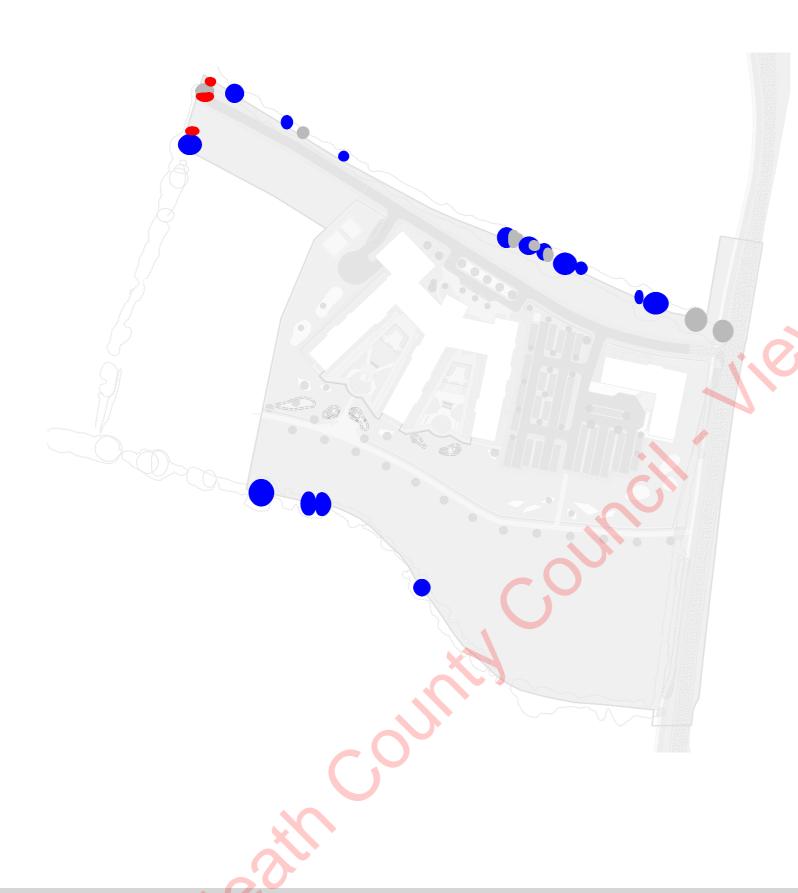


EXISTING TREES

27no.

The design brief is to minimise the input upon the existing landscape to the maximum extent possible and to retain and augment existing trees and hedgerows. A total of 27trees were identified and assessed.

The condition of trees are moderate to low quality, distributed across the north and south boundaries.

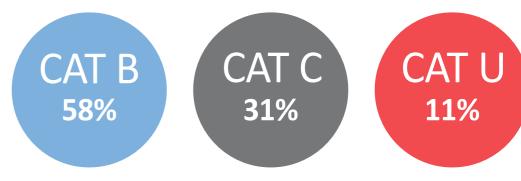

% of the total number of the existing trees

Design Proposal

Arboricultural Impact




RETAINED TREES

23no.



CAT C 87.5%

% of the total in category

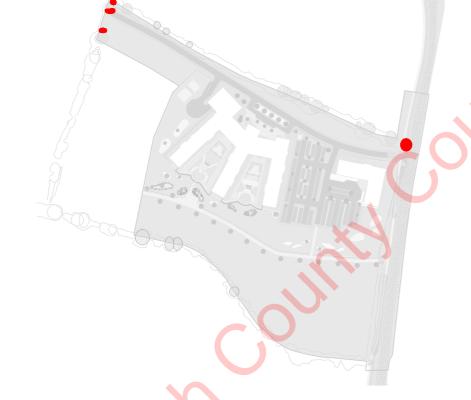

REMOVED TREES

4no.



CAT C 12.5%

% of the total in category

1no. tree is due for removal as a result of the proposed road upgrades.





Retained Trees & Hedgerows





Existing Hedgerow - Aerial View

The landscape design proposal aims to preserve the former agricultural vernacular by retaining the existing landscape structure of field boundaries, and where possible, by maintaining existing hedges and boundary trees.

This includes the hedgerow along the northern boundary and most of the hedgerow that runs parallel to the R157 (although a small section will be lost to facilitate the creation of a new roadway entrance). Retention and protection of mature vegetation and established hedgerows will ensure there is minimal impacts on biodiversity and it will allow the existing hedgerows their continued function as a wildlife corridor for the area.





LANDSCAPE FEATURES





Hard Landscape Palette Plan









2_ TIMBER SEATING





3_ LANDSCAPE STRUCTURES



4_ BICYCLE PARKING







Hard Landscape Palette

Finishes

ELEMENTS PALETTE

Wooden seating element



Omos Seating s96w Seat Or similar Approved



Flush Slipform Concrete Kerb




Sheffield Cycle Stands - 1000mm x 1000mm

PAVING PALETTE

Light coloured flags to maximum light within courtyards w/contrasting paving blocks





Tobermore City Pavers
- Graphite 300x150x100mm



Tobermore City Pavers
- Silver 300x150x100mm

SURFACE PALETTE

Resin-bound surfacing for high impact areas across the development



Ballylusk Dust Path (pedestrian path)



Coloured tarmac (cycle path)

TRAFFIC AREA & PARKING



Grasscrete Parking Bay



Country Kerb & Edge

IN-SITU SURFACES



Brushed Concrete with trowel edge finish (streets)



Tarmac



Permeable Asphalt

Landscape Treatments Cycle Storage






Sheffield Cycle Stand Root Fixedor similar Approved



Covered Cycle Storage Area

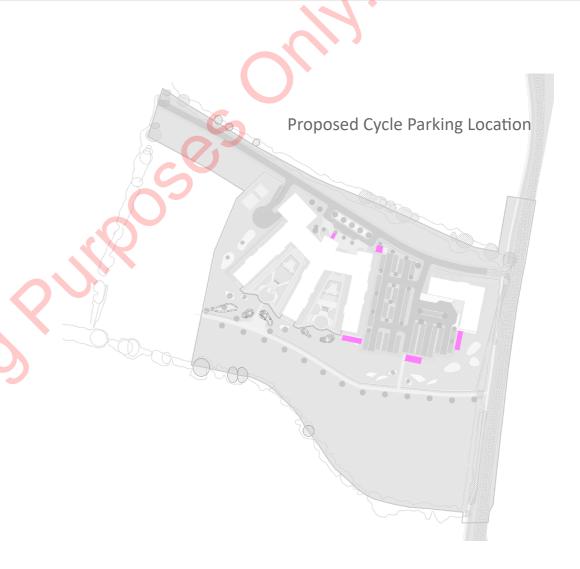









Proposed Planting Retail

Retained & Enhanced Biodiversity



Proposed Shrub Planting

Proposed Wildflower Planting

Proposed Hedgerow

Existing Hedgerows (Retained & Augmented)

Retention and enhancement of biodiversity ensures that the natural, cultural, and health requirements of communities are integrated into the new development.

This green infrastructure proposal follows an overarching strategy of protecting, creating, enhancing, and connecting the natural heritage and biodiversity value of the lands.

Existing trees and hedgerows are to be retained where possible, along the site boundary around which passive and active open space areas are arranged.

The provision of 100no. new trees, along with shrub and wildflower planting seeks to maximise the environmental benefits and habitat creation.

Additional native hedgerow planting is also proposed throughout the site and will provide commuting and nesting habitat for a variety of species. New native hedgerows are linked with existing hedgerows where possible to enhance and create ecological corridors.





Proposed Planting

Street and Open Space Trees

100no.



Entrance Plaza 12-14cmAmelanchier lamarckii



Mulitstemmed Trees 12-14cm
Prunus avium 'Plena'
Malus 'John Downie'^
Betula utilis var. jaquemontii



Street Trees 14-16cm
Tilia Tomentosa 'Brabant'
Carpinus betulus 'Fastigiata'
Tilia cordata 'Greenspire'^
calleryana 'Chanticleer'
Sorbus acuparia^



Pyrus



Open Space 14-16cm / 20-25cm

Betula pendula Pinus sylvestris Alnus glutinosa Quercus robur Quercus robur 'Koster'
Aesculus hippocastanum^
Fagus sylvatica
Prunus avium^







Proposed Planting

Shrubs - To Private Spaces













Proposed Planting

Hedgerows

H1 - Hedgerow Planting Detail

Hedge mix 60-90mm

100% Prunus lusitanica

50 x 50 stake tied with a single rubber gut tie.
2 rows @ 500mm centres -400mm apart,



Hedge Type 1 Mix Prunus lusitanica Hedge

H2 - Hedgerow Planting Detail

Hedge mix 60-90mm

Crataegus monogyna Prunus spinosa Ilex aquifolium

50 x 50 stake tied with a single rubber gut tie.
2 rows @ 500mm centres -400mm apart,



Hedge Type 2 Mix Crataegus monogyna



Hedge Type 2 Mix Prunus spinosa



Hedge Type 2 Mix Ilex aquifolium



Native hedgerows will be maintained and managed for wildlife, this includes allowing hedgerows to grow wide and dense at the base, with a wide, uncultivated grassy margin. Hedgerows should be allowed to mature before the first cut and future cutting should happen on a 3/5-year rotation. Hedgerows should be kept as dark spaces to allow commuting and foraging habitat for local wildlife.





Proposed Planting

Wildflower Mix



Marsh Thistle Cirsium palustre



Common Knapweed Centaurea nigra



Sneezewort Achillea ptarmica



Meadowsweet Filipendula ulmaria



Common Bent Agrostis capillaris



Meadow Foxtail Alopecurus pratensis



Oval Sedge Carex ovalis



Tufted Hair Grass Deschampsia caespitosa



Red Fescue Festuca rubra




Reed Canary Grass Phalaris arundinacea



Smooth-stalked Meadow Grass - Poa pratensis



Devils-bit Scabious Succisa pratensis

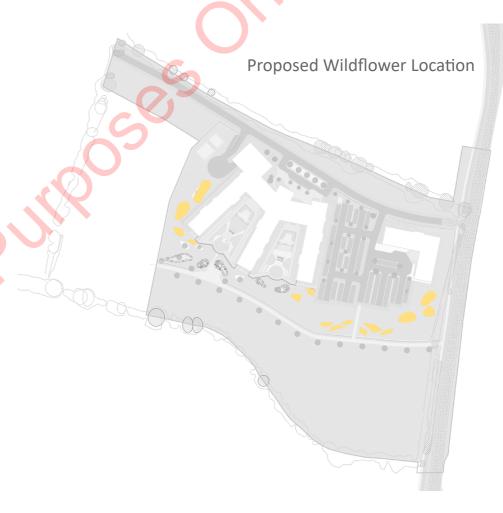

Native wildflower meadows are proposed and will provide a food source for local pollinators. The wildflower meadows will be managed in-line with the All-Ireland Pollinator Plan.

Note: The Wildflower Meadow will need to be cut once in Autumn (Late August/Early September) with a tractor and mower. Leave the mowings for a few days to allow seed to drop to the ground. Then it should be baled and bales removed.
















Soft Landscape Planting Details

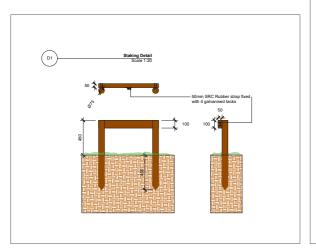


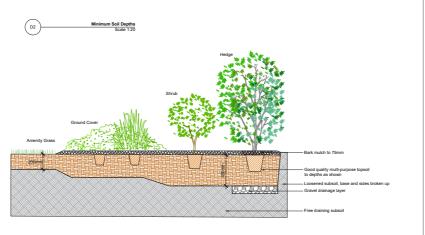


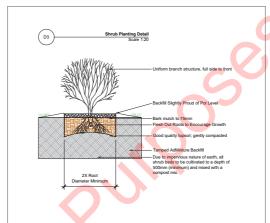

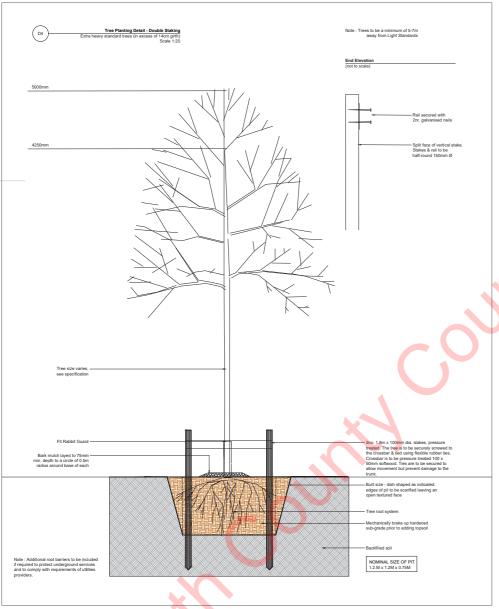

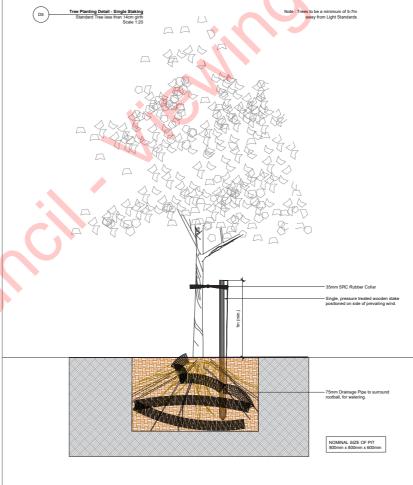

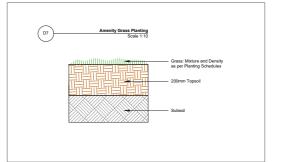

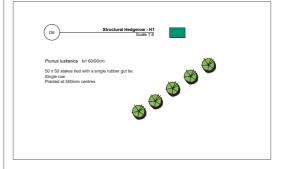










Soft Landscape Tree Protection & Detail

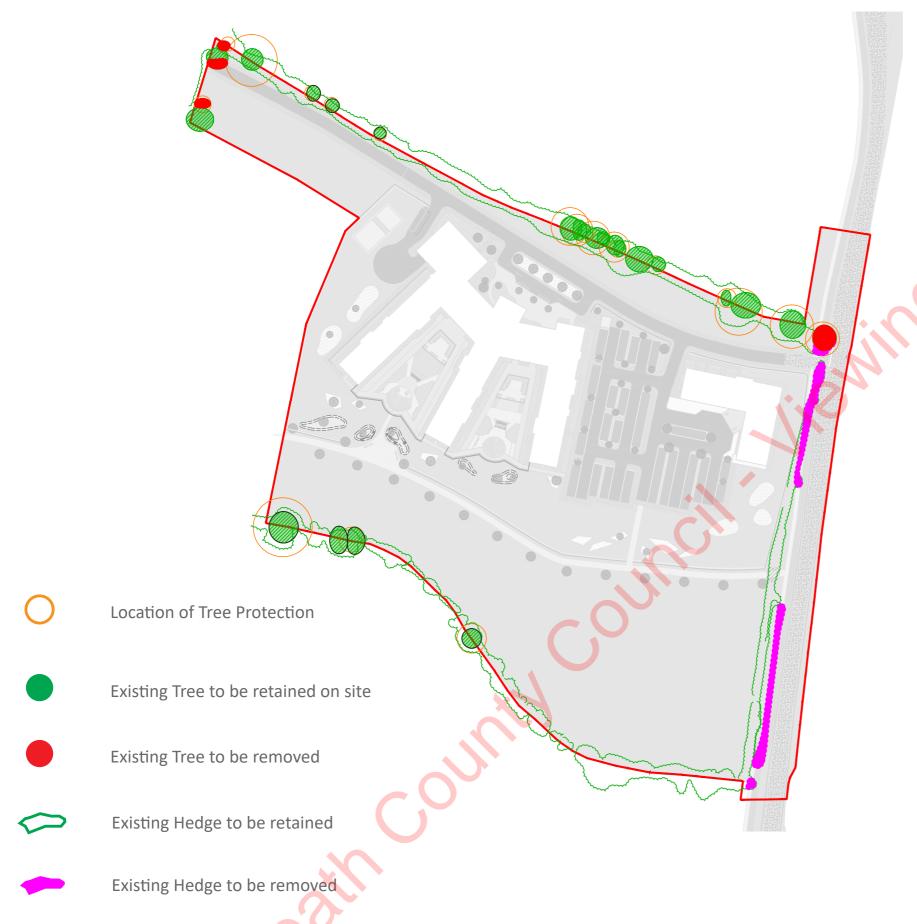

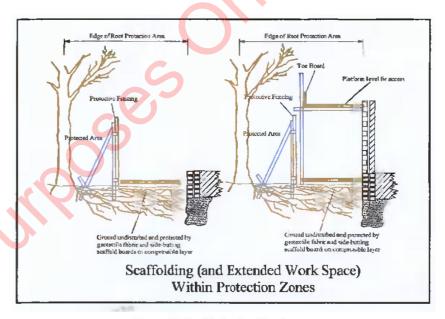

Appendix 1. - Protective Barrier

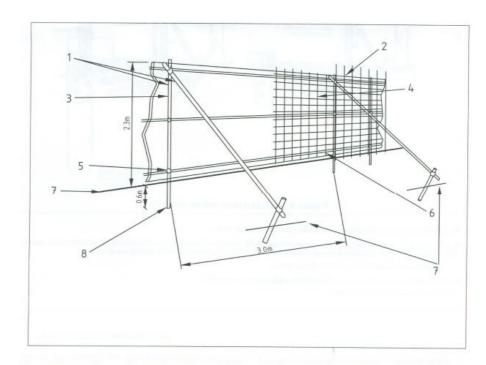

The above displays an example of a suitable protective barrier as recommended by BS. 5837 2012 Trees in Relation to Construction

- 1. Standard scaffold poles
- 2. Uprights to be driven into the ground
- 3. Panels secured to uprights with wire ties and where necessary standard scaffold poles
- 4. Weld mesh wired to the uprights and horizontals
- 5. Standard clamps
- 6. Wire twisted and secured on the inside of fencing to avoid easy dismantling
- 7. Ground level
- 8. Approx. 0.6m driven into the ground

Soft Landscape Tree Protection & Works



The tree protection fencing is to be erected enclosing the root protection areas around the trees being retained as shown on this drawing and appendix 1. In some areas, the site hoarding may be sufficient to act as the protective fencing if the tree and its root zone are positioned outside and no works are envisaged within the area outside the site hoarding. This will need to be discussed and agreed at the initial site meeting.

Where tree protection fencing is needed, this will need to be 2.3m high and constructed in accordance with figure 2 of BS 5837 2012 (see detail on drawing & appendix 1) using vertical and horizontal scaffold bars or similar well braced together with the verticals spæed out at a maximum of 3m centres. Onto this, weld mesh panels (harris fecne panels) are to be securely fixed with wire or scaffold clamps.

Signs are to be attached to these fences warning people that this is a protective area and that the fencing must be maintained in good condition in accordance with the approved plans and drawings for this development.

Once the protective fence line is erected, then the main construction works can commence on site.

The following is a list of activities that are not allowed within the RPA or within the vicinity of the trees being retained.

- Protect tree root systems from damage caused by runoff or spillage of noxious materials while mixing, placing, or storing construction materials.
- Protect root systems from ponding, eroding, or excessive weiting caused during construction operations.
- Do not store construction materials, debris, or excavated material inside tree protection zones. When excavating, place excavated soil on opposite side of trench away from the tree.
- Do not permit vehicles or foot traffic within tree protection zones; prevent soil compaction over root systems.
- o Do not allow fires under or adjacent to remaining trees or other plants.
- Do not attach notice boards, cables or other services to any part of the tree.
- Do not use neighbouring trees as anchor points.
- Do not use high machinery such asTele-porters, cranes or other equipment close to trees to avoid damage to the crown or any other parts.

During the construction works the following is required:

- The main contractor or site manager is to brief all people working on site on the tree protection measures and the procedure if works need to be carried out within these areas.
- Storage of Material, Work Yards and staff car parking

 are to be identified on the work drawings prior to the construction works starting. These need to be positioned outside the root protection areas around the trees being retained.
- 3. The main contractor or site manager is to check the tree protective fencing daily and carry out any repairs required to ensure its staysupright and
- 4. The main contractor or site manager is to liase with the projectArboriculturist if and when works are to be carried out close to or within the root protection areas around the trees.
- Any works to occur within the protection areas such as landscaping is to be carried out manually with no machinery allowed. All soft and hard landscaping within the Root Protection Area (RPA) of the trees to be retained are to be carried out manually and the soil levels are not to be lowered or raised resulting in root damage to the trees. Recommendations of sections 8 of BS5837 2012 are to be adhered to during the landscaping within the RPA'S of the trees being retained.
- The protective fencing around the trees is to stay in position until all the construction works are complete and are only to be removed following discussions and agreement with the project arborist.

Drainage

Tree Pits

GREEN STREETS: STORMWATER TREE TRENCH Street View Subgrade View Evapotranspiration Rainfall NEW TREES NEW STORMWATER INLET-TYPICAL SECTION THROUGH FORMPAVE AQUAFLOW INFILTRATION SYSTEM INCORPORATING LANDSCAPED AREA Stormwater Flow NEW TREES NEW STORMWATER INLET DISTRIBUTION PIPE STONE STORAGE Distributed through Tree Trench, then slow released into existing Infiltration storm sewer, if necessary TYPICAL SECTION THROUGH FORMPAVE AQUAFLOW ATTENUATION SYSTEM INCORPORATING LANDSCAPED AREA AND CONNECTING PIP





RMDA