

1. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS NOTED OTHERWISE
2. THE MINIMUM DEPTH OF COVER FROM THE FINISHED SURFACE TO THE CROWN OF GRAVITY PIPES WITHOUT PROTECTION SHOULD BE AS FOLLOWS :
   A) GARDENS AND PATHWAYS WITHOUT ANY POSSIBILITY OF VEHICULAR ACCESS - DEPTH NOT LESS THAN 0.5 M . (THIS WOULD NORMALLY RELATE TO DRAINS IN PRIVATE PROPERTY SHALLOW PIPES OF THIS NATURE ARE UNDESIRABLE AND SHOULD BE INSTALLED IN ACCORDANCE WITH THE CURRENT BUILDING REGULATIONS)
   B) DRIVEWAYS, PARKING AREAS AND YARDS WITH HEIGHT RESTRICTIONS TO PREVENT ENTRY BY VEHICLES WITH A GROSS VEHICLE WEIGHT IN EXCESS OF 7.5 TONNES - DEPTH NOT LESS THAN 0.75 M
   C) DRIVEWAYS, PARKING AREAS AND NARROW STREETS WITHOUT FOOTWAYS (E.G MEWS DEVELOPMENTS) WITH LIMITED ACCESS FOR VEHICLES WITH A GROSS VEHICLE WEIGHT IN EXCESS OF 7.5 TONNES - DEPTH NOT LESS THAN 0.9 M .
   D) DEPTHS OF SEWERS IN GA"ED ESTATES SHALL BE SIMILAR TO THAT OUTLINED ABOVE
   E) AGRICULTURAL LAND AND PUBLIC OPEN SPACE - DEPTH NOT LESS THAN 0.9 M .
   F) OTHER HIGHWAYS AND PARKING AREAS WITH UNRESTRICTED ACCESS TO VEHICLES WITH A GROSS VEHICLE WEIGHT IN EXCESS OF 7.5 TONNES - DEPTH NOT LESS THAN 1.2 m. IF THE MINIMUM COVERS LISTED ABOVE ARE NOT ACHIEVED THE PIPES ARE TO BE FULLY ENCASED IN CONCRETE AS PER DETAIL B2
3. CLAUSE 808 MATERIAL IN ACCORDANCE WITH THE TII SPECI?CATION FOR ROAD WORKS IS TO BE USED AS BACKFILL MATERIAL WHERE THE SEWER MAIN IS LOCATEC IN ROADS, FOOTPATHS OR WHEN THE NEAREST PART OF THE TRENCH IS WITHIN 1 m OF THE PAVED EDGE OF THE ROADWAY. CLAUSE 808 IS TO BE COMPACTED AS PER CLAUSE 802 OF THE TII SPECIFICATION FOR ROAD WORKS
4. SELECTED EXCAVATED MATERIAL (eg. CLASS 2C MATERIAL "D TABLE 6.1 OF TII SPECIFICATION FOR ROADWORKS) MAY BE USED IN GREEN FIELD AREAS ABOVE GRANULAR PIPE SURROUND MATERIAL SUBJECT TO THE APPROVAL OF THE EMPLOYERS REPRESENTATIVE
5. PIPE BEDDING SHALL COMPLY WITH WIS 4-08-02 AND IGN 4-08-01 GRANULAR MATERIAL SHALL BE 14 mm TO 5 mm GRADED AGGREGATE OR 10 mm SINGLE SIZED AGGREGATE IS EN 13242 CONCRETE BED , HAUNCH & SURROUND WHERE REQUIRED (NOTE: CONCRETE BED AND HAUNCH REQUIRED IN AREAS TO BE TAKEN IN CHARGE BY DUBLIN CITY COUNCIL) . SHALL BE TO DETAIL B1.
6. IN SOFT GROUND CONDITIONS (CBR < 5) THE MATERIAL SHOULD BE EXCAVATED AND DISPOSED OF IN ACCORDANCE WITH THE WASTE MANAGEMENT ACT AND CLAUSE 808 MATERIAL IN ACCORDANCE WITH THE TII SPECIFICATION FOR ROAD WORKS SHALL REPLACE THE EXCAVATED MATERIAL WRAPPED IN GEO - TEXTILE WRAPPING . ALTERNATIVELY , SPECIAL PIPE SUPORT ARRANGEMENTS , INCLUDING PILING ETC . MAY BE REQUIRED WHERE THE DEPTH OF SOFT MATERIAL IS EXCESSIVE SUCH ARRANGEMENTS SHALL BE SUBJECT TO ASSESSMENT BY THE EMPLOYERS REPRESENTATIVE BEFORE ADVANCING WITH THE WORK
7. IN GREEN FIELD AREAS , TYPE B BACKFILL (SELECTED EXCAVATED MATERIAL) WILL BE ALLOWED ABOVE THE SIDE HAUNCH GRANULAR MATERIAL Is THE CASE OF RIGID PIPES . A GRANULAR SURROUND OF A MINIMUM DEPTH OF 150 mm ABOVE THE CROWN OF THE PIPE IS REQUIRED FOR FLEXIBLE PIPES , AND TYPE B MATERIAL MAY BE USED AS BACKFILL ABOVE THIS . ALL RISING MAINS IN GREINFIELD AREAS SHALL HAVE A MINIMUM COVER OF 300 mm OF GRANULAR MATERIAL ABOV(THE EXTERNAL CROWN OF THE PIPE
8. PIPES SHALL NOT BE SUPPORTED ON STONES , ROCKS , OR ANY HARD OBJECTS A" ANY POINT ALONG THE TRENCH . ROCK SHALL BE EXCAVATED TO A DEPTH OF 150 mm BELOW THE ACTUAL DEPTH OF THE TRENCH WITH THE VOID FILLED WITH CLAUSE 808 MATERIAL IN ACCORDANCE WITH THE TII SPECIFICATION FOR ROAD WORKS . THE GRANULAR MATERIAL SHALL BE LAID ABOVE THIS VOID BACKFILL MATERIAL
9. NON DEGRADABLE MARKER TAPE SHOULD BE INSTALLED AT TOP OF PIPE BEDDING LAYER
10. TRENCH WIDTHS FOR PIPE SIZES 80 mm MAY BE < 500 mm , SUBJECT TO CONSIDERATION BEING GIVEN TO THE TRENCH DEPTH , HEALTH & SAFETY & CONSTRUCTION ACCESS REQUIREMENTS .

A1 CROSS SECTION IN PAVED AREAS



A2 CROSS SECTION IN GRASSED AREAS / SOFT LANDSCAPING

PIPE DIAMETER A (mm)	TRENCH WIDTH B (mm)
80 RISING MAIN	SEE NOTE 10.
100	500
150	600
200	600
250	750
300	750
350	750
400	900
450	900

PIPE MATERIALS

UNLESS SPECIFICALLY NOTED OTHERWISE IN THE DRAINAGE LAYOUT THE PIPE MATERIAL WILL BE AS FOLLOWS:

PIPE DIAMETER < 100mm: USE uPVC PIPE WORK
PIPE DIAMETER >100 & ≤ 375mm: USE VITRIFIED CLAY PIPE WORK
PIPE DIAMETER >375mm: USE CONCRETE PIPE WORK.
PIPE MATERIAL TO BE IN ACCORDANCE WITH THE FOLLOWING:

1. CONCRETE PIPES TO HAVE SPIGOT & SOCKET JOINTS AND RUBBER RING FITTINGS TO IS EN 1916 (2002); BS5911, PART 1 , (2002- 2010) AND IS 6 (2004), STRENGTH CLASS 120
2. VITRIFIED CLAY PIPES & FITTINGS TO COMPLY WITH IS EN 295- 1/ 2/ 3 - CLASS 160 OR CLASS 200
3. uPVC PIPES, JOINTS AND FITTINGS TO COMPLY WITH THE PROVISION OF IS EN 1401-PART 1 AND BS 4660; (NOTE: uPVC PIPES NOT PERMITTED IN AREAS TO BE TAKEN IN CHARGE BY DUBLIN CITY COUNCIL)

A TRENCH BACKFILL & BEDDING

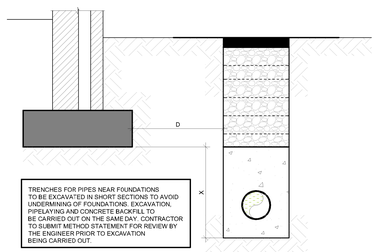

WHERE 'D' IS LESS THAN 2X
(CONCRETE FILL TO LEVEL OF FOUNDATION BOTTOM)

C DRAIN LAID NEAR FOUNDATIONS



B1 CONCRETE BED & HAUNCH



B2 FULL CONCRETE ENCASEMENT



SPIGOT AND SOCKET JOINT

B CONCRETE HAUNCH, BED & SURROUND

1. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS NOTED OTHERWISE.
2. CONCRETE PIPE BEDS AND HAUNCHES MAY BE REQUIRED TO ADDRESS MINIMUM COVER SITUATIONS. AND SHALL BE SUBJECT TO SUBMISSICN AND ASSESSMENT BY THE EMPLOYERS REPRESENTATIVE BEFORE ADVANCING WITH THE WORKS.
3. CONCRETE PIPE BEDS AND HAUNCHES SHALL HAVE MINIMUMTHICKNESS OF 150 mm WITH AN ABSOLUTE MINIMUM DEPTH OF COVER ABOVE THE EXTERNAL CROWN OF THE PIPE OF 150 mm .
4. CONCRETE TO BE IN ACCOHDANCE WITH IS EN 206 AND TO BE CLASS C 16 / 20.
5. THE HAUNCHES AND SURROUNDS TO BE FORMED USING FORMWORK TO PROVIDE A ROUGH CAST FINISH .
6. EXPANSIOR JOINTS IN THE CONCRETE SHALL BE PROVIDEC AT ALL PIPE JOINTS TO ALLOW FOR PIPE FLEXIBILITY . COMPRESSIBLE FILLER BOARD TO BE IN ACCORDANCE WITH BS EN 622-1 AND BS EN 622-4. AND TO BE 18mm THICK .
7. POLYETHYLENE PIPES SHALL BE WRAPPED IN PLASTIC SHEETING HAVING A COMPOSITION IN ACCORDANCE WITH BS 6076 BEFORE BEING CAST INTO CONCRETE .
8. BITUMINOUS MATERIAL SHALL NOT BE PUT IN CONTACT WITH PE OR PVC PIPES .

NOTE:

1. FORM A SAW CUT 100mm DEEP AT A MIN. OF 100mm FROM SIDES OF EXCAVATION PRIOR TO PERMANENT REINSTATEMENT. WHERE ANY TRIM LINES ARE WITHIN 400mm OF ROAD EDGE, JOINT OR OTHER REINSTATEMENT, THE TRIM LNE SHOULD BE EXTENDED TO THE INTERFACE OF SUCH SITUATIONS.
2. LEAN-MIX SURFACE TO BE SPRAYED AS PER CLAUSE 920 (TII SPEC.) PRIOR TO APPLICATION OF BINDER COURSE MACADAM.
3. 100°C HOT BITUMEN BINDER 50 PEN OR COLD THIXOTROPIC BITUMEN 50 - 70 PEN TO BE APPLIED TO ALL VERTICC CUTS IN ACCORDANCE WITH IS EN 13108-4 PRIOR TO APPLICATION OF BITUMINOUS MATERIAL
4. JOINTS SEALED WITH HOT BITUMEN AND TOPPED WITH FINE SAND / GRIT TO GET A MINIMUM 55 SKID RESISTANCE VALUE AS DETERMINED BY THE PORTABLE SKID RESISTANCE PENDULUM USED IN ACCORDANCE WITH ROAD NOTE 27 AND SHALL NOT EXCEED 3mm THICKNESS AND 25mm WIDTH.
5. SURFACE REINSTATEMENT
   - ASPHALT CONCRETE ROAD -
   40mm MIN THICK OF 'SMA 10 surf 70/100 dev' SURFACE COURSE TO IS EN 13108 and NSA's S26; ON 60mm MIN THICK OF AC 20 dense bin 70/100 dev' BINDER COURSE TO IS EN 13108 AND NSA's S28. ON BITUMEN SPRAY TO CI.920 OF TI SPECIFICATION FOR ROAD WORKS ON 225mm THICK LEAN MIX CONCRETE. SAW CUT AND REINSTATE TO 100mm FROM EDGE OF TRENCH EXCAVATION. JOINTS SEALED WITH HOT BITUMEN AS NOTE 4

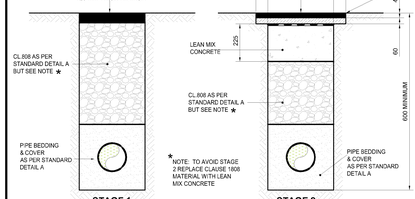

D REINSTATEMENT OF PIPE TRENCH IN EXISTING ROAD

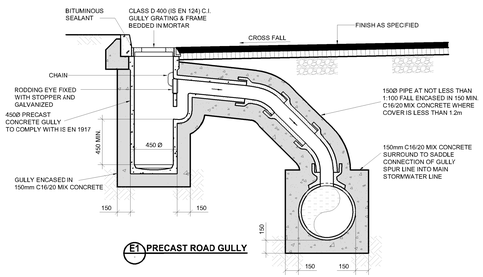

E1 PRECAST ROAD GULLY

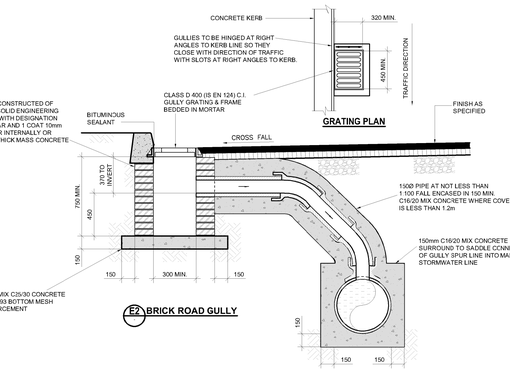

E2 BRICK ROAD GULLY

E TYPICAL SECTION THROUGH ROAD GULLY

NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ENGINEERS & ARCHITECT'S DRAWINGS.FIGURED DIMENSIONS ONLY (NOT SCALING) TO BE USED. WHERE A CONFLICT OF INFORMATION EXISTS OR IF IN ANY DOUBT - ASK.
2. CONSULTANTS TO BE INFORMED IMMEDIATELY OF ANY DISCREPANCIES BEFORE WORK PROCEEDS.
3. WASTE DRAINAGE DETAILS TO BE IN ACCORDANCE WITH IRISH WATER REQUIREMENTS UNLESS NOTED OTHERWISE. REFER TO IRISH WATER DETAILS FOR ADDITIONAL INFORMATION.
4. REFER TO THE STRUCTURAL WATERMAIN DETAILS DRAWING FOR A TYPICAL SERVICE LAYOUT UNDER A FOOTPATH
5. CONNECTION OF BRANCHES TO THE MAIN LINE ARE TO BE BY MEANS OF 45° BRANCH CONNECTIONS, SADDLE CONNECTIONS NOT ALLOWED.
6. INTERNAL GROUND FLOOR FOUL CONNECTIONS TO DRAIN SEPARATELY FROM THE UPPER STOREYS.
7. ALL BURIED PIPES UNDER GROUND FLOOR SLABS TO BE ENCASED IN CONCRETE.
8. ALL GULLY GRATINGS AND LIDS TO BE MIN. D400 RATING.

DEVELOPMENT NOT TO BE TAKEN-INCHARGE.
PRIVATE MANAGEMENT COMPANY TO BE PROVIDED

1. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS NOTED OTHERWISE.
2. SOLID BLOCKWORK TO BE OF HIGH STRENGTH (20 N/mm) TO IS EN 771 .
3. MAXIMUM DEPTH OF BLOCK WORK MANHOLE IS 2.0 m (THE USE OF BLOCK WORK IN DEEPER MANHOLES WILL BE EXCENSIDERED BUT SUCH USE WILL REQUIRE DETAILED STRUCTURAL DESIGN AND WRITTEN APPROVAL FROM THE EMPLOYERS REPRESENTATIVE).
4. WALLS TO BE FLUSH POINTED INTERNALLY. FOR FOUL MANHOLES PROVIDE INTERNAL LINING OF ENGINEERING BRICK TO IS EN 771-1 TO A HEIGHT OF 1 m ABOV(BENCHING. ENGINEERING BRICK TO BE BONDED TO BLOCK WORK USING ENGLISH GARDEN WALL BOND
5. STRUCTURAL DESIGN AND REINFORCEMENT DETAILS FOR ROOF AND BASE SLABS TO BE PROVIDED BY THE CONTRACTOR AND SUBMITTED TO THE EMPLOYERS REPRESENTATIVE FOR REVIEW
6. COVERS AND FRAMES SHALL BE SUITABLE FOR ROAD AND TRAFFIC CONDITIONS SUBJECT TO APPROVAL FROM THE EMPLOYERS REPRESENTAT
7. 200mm ALL AROUND, 100mm DEEP CONCRETE PLINTH WITH PROTECTIVE STAINLESS STEEL METAL BAND AROUND COVERS IN GREEN AREAS.
8. ALL CHAMBERS TO BE CHECKED FOR UPLIFT BY THE CONTRACTOR BASED ON GROUND CONDITIONS WITHIN THE SITE. SHOULD ANTI FLOATATION MEASURES BE REQUIRED THEY SHALL BE SUBJECT TO APPROVAL FROM THE EMPLOYERS REPRESENTATIVE
9. ALL CONCRETE TO BE ACCORDANCE WITH IS EN 206: 2013 .
10. BRANCH PIPES INTO MANHOLES: BENCHING TO BE SHAPED SO AS TO GUIDE THE FLOW IN THE FLOW DIRECTION. THE MINIMUM LENGTH OF THE MANHOLE BASED ON THE SIDE WITH THE GREATEST NUMBER OF BRANCHES EQUAL TO 300mm PLUS THE SUM OF THE BRANCH DIAMETERS PLUS 200mm PER BRANCH FOR BRANCHES UP TO 150mm (OR 300mm FOR BRANCHES GREATER THAN 150mm DIAMETER).
11. WHERE PIPE DIAMETER CHANGES AT A MANHOLE THE PIPE CROWNS ARE TO LINE UP
12. ALL MANHOLES TO BE WATERTIGHT TO THE SATISFACTION OF THE EMPLOYERS REPRESENTATIVE

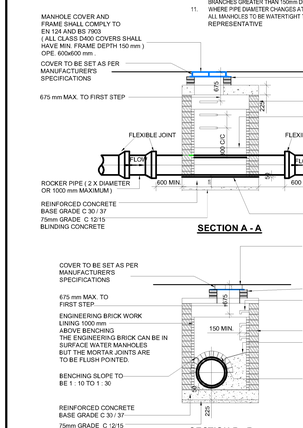

F BLOCKWORK MANHOLE < (450mm DIAMETER & DEPTH TO INVERT ≤ 2m)

1. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS NOTED OTHERWISE.
2. PRE-CAST MANHOLES UNITS : COMPLYING WITH REQUIREMENTS OF IS EN 1917 AND BS 5911-PART 3 .
3. THICKER MANHOLE WALLS REQUIRED FOR SEWERS IN EXCESS OF 3m DEEP WHERE THE SIZE IS GREATER THAN THE STANDARD MINIMUM SIZE .
4. APPROVED PRE-CAST CONCRETE BASES MAY BE USED INCORPORATING CHANNELS , BENCHING ETC. SUBJECT TO THE EMPLOYERS REPRESENTATIVE APPROVAL AND COMPLYING WITH BS 5911-PART 4 2002
5. STRUCTURAL DESIGN AND REINFORCEMENT DETAILS "O BE PROVIDED BY THE DEVELOPER AND SUBMITTED TO THE EMPLOYERS REPRESENTATIVE FOR REVIEW
6. MANHOLES GREATER THAN 3m IN DEPTH WILL REQUIRE A DETAILED STRUCTURAL DESIGN AND BE SUBJECT TO THE EMPLOYERS REPRESENTATIVES APPROVAL.
7. MANHOLE ROOFS SHOULD CONSIST OF RE-INFORCED CONCRETE SLAB OF IN-SITU CONCRETE 150 mm MIN. THICKNESS OF 225mm. DESIGNED TO CARRY ALL LIVE AND DEAD LOADS. ALTERNATIVELY, APPROVED PRE-CAST CONCRETE ROOF SLABS MAY BE USED SUBJECT TO THE EMPLOYERS REPRESENTATIVES APPROVAL AND COMPLIANCE WITH BS 5911 PART 4 : 2002.
8. COVERS AND FRAMES SHALL BE SUITABLE FOR ROAD AND TRAFFIC CONDITIONS SUBJECT TO APPROVAL FROM THE EMPLOYERS REPRESENTATIVES
9. 200 mm ALL AROUND, 100 mm DEEP CONCRETE PLINTH WITH PROTECTIVE STAINLESS METAL BAND AROUND COVERS IN GREEN AREAS.
10. ALL CHAMBERS TO BE ?HECKED FOR UPLIFT BY THE CONTRACTOR, BASEID ON GROUND CONDITIONS WITHIN THE SITE . SHOULD ANTI FLOTATION MEASURES BE REQUIRED THEY SHALL BE SUBJECT TO APPROVAL FROM THE EMPLOYERS REPRESENTATIVE
11. ALL CONCRETE TO BE IN ACCORDANCE WITH IS EN 206 : 2013 .
12. BRANCH PIPES INTO MANHOLES: BENCHING TO BE SHAPED SO AS TO GUIDE THE FLOW IN THE FLOW DIRECTION. THE MINIMUM LENGTH OF THE MANHOLE BASED ON THE SIDE WITH THE GREATEST NUMBER OF BRANCHES EQUAL TO 300mm PLUS THE SUM OF THE BRANCH DIAMETERS PLUS 200mm PER BRANCH FOR BRANCHES UP TO 150mm (OR 300mm FOR BRANCHES GREATER THAN 150mm DIAMETER).
13. WHERE PIPE DIAMETER CHANGES AT A MANHOLE THE PIPE CROWNS ARE TO LINE UP
14. MANHOLE SHAFTS ARE RECOMMENDED IN DEEP MANHOLES . THE DISTANCE BETWEEN THE TOP OF THE BENCHING AND THE SOFFIT OF THE MAIN ROOF SLAB SUPPORTING THE SOFFIT SHOULD BE NOT LESS THAN 2.1m . THE MINIMUM SHAFT SIZE SHOULD BE 900mm.
15. ALL MANHOLES TO BE WATERTIGHT TO THE SATISFACTION OF THE EMPLOYERS REPRESENTATIVE.



MINIMUM MANHOLE DIAMETERS

DIAMETER OF LARGEST PIPE IN MANHOLE (mm)	INTERNAL DIAMETER OF MANHOLE (mm)
LESS THAN 375	1200
375 TO 450	1350
500 TO 750	1500

G PRE- CAST CONCRETE MANHOLE

1. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS NOTED OTHERWISE.
2. IN-SITU MANHOLES TO HAVE A MINIMUM WALL AND FLOOR THICKNESS OF 225mm FOR MANHOLE DEPTHS UP TO 3.0 m AND 300 mm OR MORE WHEN THE MANHOLE DEPTH EXCEEDS 3.0 m .
3. STRUCTURAL DESIGN & REINFORCEMENT DETAILS TO BE PROVIDED BY THE DEVELOPER AND SUBMITTED TO THE EMPLOYERS REPRESENTATIVE FOR REVIEW
4. MANHOLES GREATER THAN 3m IN DEPTH WILL REQUIRE A DETAILED STRUCTURAL DESIGN AND BE SUBJECT TO THE EMPLOYERS REPRESENTATIVE APPROVAL.
5. COVERS AND FRAMES SHALL BE SUITABLE FOR ROAD AND TRAFFIC CONDITIONS SUBJECT TO APPROVAL FROM THE EMPLOYERS REPRESENTATIVE
6. 200 mm ALL AROUND, 100 mm DEEP CONCRETE PLINTH WITH PROTECTIVE STAINLESS METAL BAND AROUND COVERS IN GREEN AREAS.
7. ALL CHAMBERS TO BE CHECKED FOR UPLIFT BY THE DEVELOPER BASED ON GROUND CONDITIONS WITHIN THE SITE . SHOULD ANTI FLOATATION MEASURES BE REQUIRED THEY SHALL BE SUBJECT TO APPROVAL FROM THE EMPLOYERS REPRESENTATIVE.
8. ALL CONCRETE TO BE IN ACCORDANCE WITH IS EN 206.
9. MANHOLE DETAILS TO BE IN ACCORDANCE WITH DETAILS F,G & H

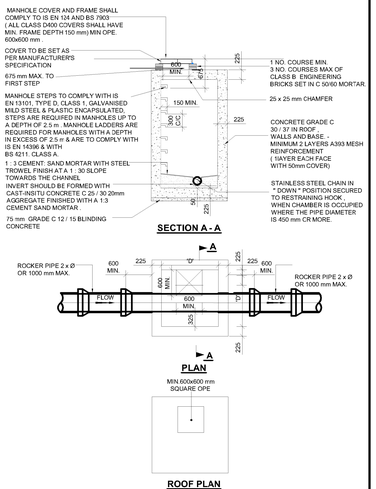

MINIMUM MANHOLE DIMENSIONS " D "

DIAMETER OF LARGEST PIPE IN MANHOLE (mm)	INTERNAL DIMENSION OF MANHOLE (mm)
LESS THAN 375	1200
375 TO 450	1350
500 TO 750	1500