




Gym equipment along northern boundary recently complete and opened by Ardstone at White Pines North to be continued into this scheme  
Woodland Boundary along northern boundary recently complete and opened by Ardstone at White Pines North to be continued into this scheme  
Wildflower meadow in the central spine recently complete and opened by Ardstone at White Pines North to be continued into this scheme



Playground Recently Complete and Opened By Ardstone at White Pines North

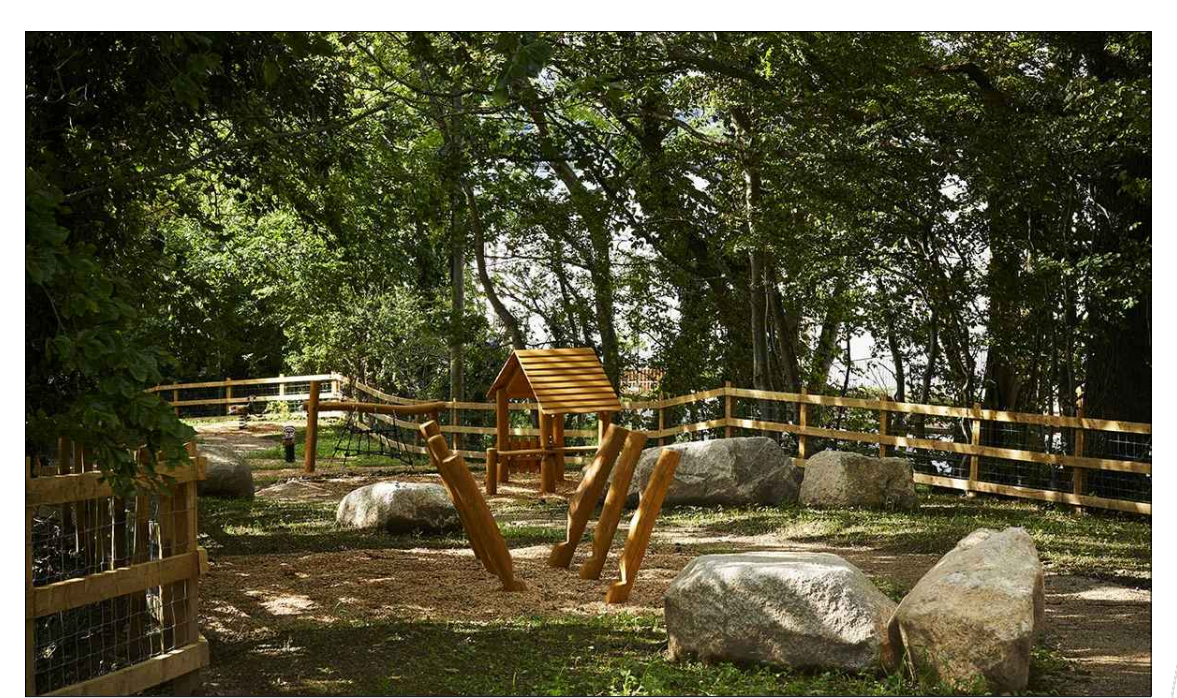

Playground Recently Complete and Opened By Ardstone at White Pines South



Proposed Circulation Space Between Block A and B Including Steps, Ramps and Green Walls

- Existing Trees for Retention**  
Refer to arboricultural drawings and survey
- Proposed Standard Tree Planting**  
Refer to planting schedule  
Refer to planting details
- Proposed Woodland Tree Planting**  
Refer to planting schedule  
Refer to planting details
- Proposed Multi-Stem Tree Planting**  
2.5-3m high with min. 3No. stems emerging from base with strong even canopy.  
Refer to planting schedule  
Refer to planting details
- Grass**  
Amenity Grass seeding on min. 150mm approved topsoil  
Refer to planting schedule  
Refer to planting details
- Ornamental shrub / herbaceous plant mix**  
Refer to planting schedule. All planting to be planted into 450mm approved topsoil.  
Refer to planting schedule  
Refer to planting details
- Woodland Edge Mix**  
Refer to planting schedule for details  
Refer to planting details
- Hedge Planting**  
Min. 1.2m high structured hedge planted into a min. 500mm topsoil.  
Refer to planting schedule  
Refer to planting details
- Wildflower Meadow Mix**  
Refer to planting schedule  
Refer to planting details
- Bulb Mix**  
Refer to planting schedule
- Play Bark Mulch**  
To play areas and woodland paths.  
See Landscape Specification  
Refer to hardworks details
- PC Flag Paving**  
Buff coloured flags  
Refer to hardworks details
- Public Footpaths**  
Buff concrete paving in street settings and Compacted Gravel Surfacing in public open space settings  
Refer to hardworks details
- Stone Setts**  
100x100x100 Natural stone setts to entrance, plaza and cycle bays  
Refer to hardworks details
- Cycle Racks**  
316 grade stainless steel with a brushed polish finish.  
Refer to hardworks details
- Seating**  
Seating with back & armrests  
Refer to hardworks details
- Feature Sculptural Seating**
- Play Elements**  
Refer to play Landscape report
- Guard Rail**  
1100mm high railing for falls protection  
Refer to hardworks details
- Proposed Adult Gym Equipment**  
Trim trail from White Pines North continued into this scheme.  
Refer to play Landscape report

P02	Client Review	WB	09.02.2021
P01	Planner Review	WB	22.01.2021
REV	DESCRIPTION	ISSUED BY DATE	

**MITCHELL + ASSOCIATES**  
LANDSCAPE ARCHITECTURE URBAN DESIGN  
Unit 5, Woodpark, The Rise, Clonsilla, Dublin 15, Ireland t + 353 1 454 5066 e info@mitcheassoc.net

**PROJECT**  
White Pines East

**CLIENT**  
Ardstone Homes

**JOB NO.**  
LST0005

**DRAWING**  
Landscape Masterplan

**DRAWING NO.**  
WPE-MAL-XX-XX-DR-L-0100

<b>DRAWN BY</b> William Burke	<b>CHECKED</b>	<b>DATE</b> 09.02.2021
<b>STATUS:</b> Planning	<b>SCALE</b> 1:500 @ A1	<b>REVISION</b> P2

NOTES:  
All dimensions are in millimeters unless otherwise stated and shall be checked and confirmed by the contractor on site. Any discrepancies shall be immediately reported to the landscape architect. Work to figured dimensions only - Do not scale from drawing. Do Not Scale. Use Figured Dimensions Only. Not for Construction Purposes unless Specifically Marked.  
© THIS DRAWING IS COPYRIGHT OF MITCHELL + ASSOCIATES