


- DISCREPANCY WITH GIVEN SURVEY LEVELS ARE TO BE BROUGHT TO THE ATTENUATION OF THE ENGINEER.
- 4. IN AREAS WHERE EXISTING SERVICES ARE PRESENT, THE EXISTING SERVICES ARE TO BE CHECKED BY THE CONTRACTOR TO ENSURE THAT ALL RELEVANT EXISTING SERVICES ARE IDENTIFIED AND SHOWN ON DRAWINGS.
- 5. ANY UNSUITABLE MATERIAL EXPOSED DURING EXCAVATION IS TO BE BROUGHT TO THE ATTENUATION OF THE ENGINEER. 6. SURFACE WATER DRAINAGE WORKS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH SDCC REQUIREMENTS FOR TAKING IN CHARGE AND THE GENERAL DUBLIN CODE OF PRACTICE FOR
- DRAINAGE WORKS. 7. ALL TRENCHES WHERE THERE IS EXPOSED ROCK ARE TO BE LINED WITH LIQUID BITUMEN SPRAY IMMEDIATELY AFTER EXPOSURE.
- 8. SEWERS ARE TO BE CONSTRUCTED WITH CONCRETE SURROUND IN ACCORDANCE WITH IRISH WATER STD-WW-08 WHERE THE VERTICAL CLEARANCE FORM THE SURFACE WATER IS LESS THAN 300mm AND WHERE DRAINAGE LINES HAVE A DEPTH OF COVER LESS THAN 1.2m WITHIN ROADWAYS.
- 9. ALL GRAVITY SEWER PIPE MATERIALS SHALL COMPLY WITH SECTION 3.13 OF THE IRISH WATER CODE OF PRACTICE FOR WASTEWATER INFRASTRUCTURE.



| 1:500 | 0 | | 10m | | 20n | n | 30n | m 40 |)m | 50m |
|-------|---|----|-----|----|-----|----|-----|------|------|-----|
| | | | | | | | | | | |
| 1:1 | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 8 | 0 90 | 100 |

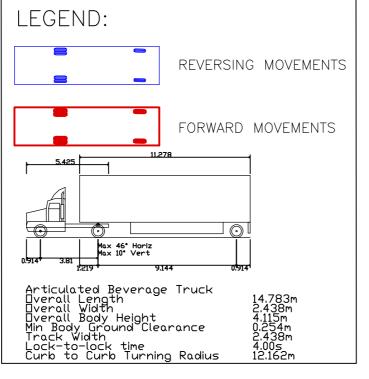

BLOCK S, EASTPOINT BUSINESS PARK, ALFIE BYRNE ROAD, DUBLIN D03 H3F4 IRELAND. Tel: (01) 664 8900 Email: info@waterman-moylan.ie www.waterman-moylan.ie

| Status | | | | | | | |
|---|----|----------|-----|--------------|-------|--|--|
| | | | | | | | |
| Designed By | PI | Approved | IW | Waterman Ref | 2-010 | | |
| Drawn By | IG | JAN. | 500 | | | | |
| Project - Originator - Volume - Level - Type - Role - Number Revision | | | | | | | |
| COP - WMC-PH2-00 - DR - P - 0119 01 | | | | | | | |