


LOCATION PLAN
1:500

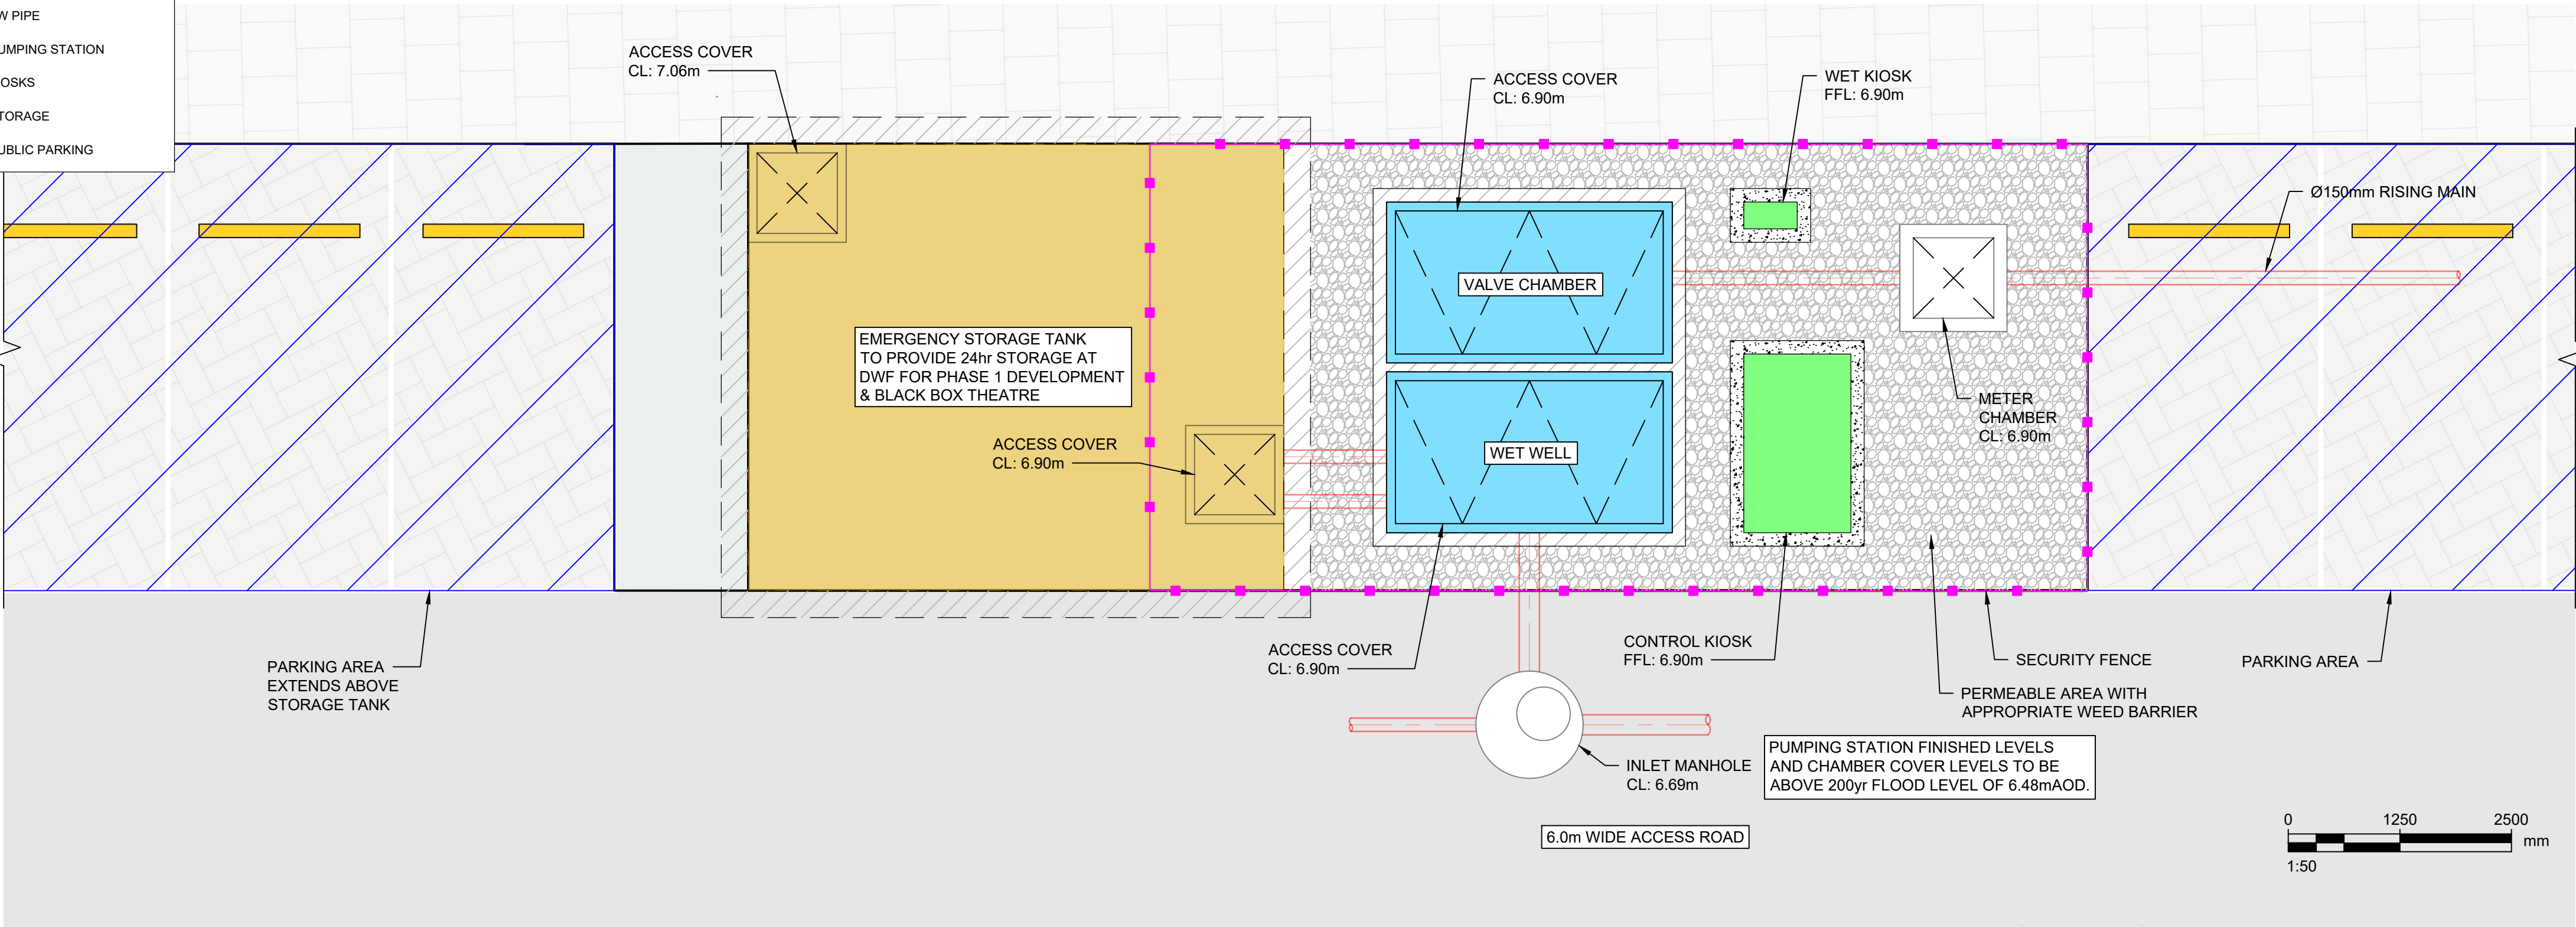

WWPS DETAILS
1:50

AECOM

PROJECT

Phase 1
Corrib Causeway
Dyke Road, Galway

Galway City Council

CONSULTANT

AECOM
BLOCK 6, GALWAY TECHNOLOGY PARK
PARKMORE
GALWAY, H91 W30F, IRELAND
www.aecom.com

NOTES

- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS, ANY DISCREPANCIES, ERRORS OR OMISSIONS TO BE BROUGHT TO THE ATTENTION OF THE DESIGNER.
- ALL DIMENSIONS TO BE CHECKED BY THE CONTRACTOR ON SITE PRIOR TO COMMENCEMENT OF WORKS.
- AECOM LIMITED TO BE INFORMED BY THE CONTRACTOR OF ANY DISCREPANCIES PRIOR TO THE COMMENCEMENT OF WORKS ON SITE.
- DIMENSIONS OF ALL BOUNDARIES AND ADJOINING ROADS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORKS.
- DO NOT SCALE. ALL MEASUREMENTS AND COORDINATES TO BE CHECKED ON SITE.
- RIGID INCLUSION GROUND IMPROVEMENT TECHNIQUES TO BE EMPLOYED PRIOR TO THE CONSTRUCTION OF ANY ROADS OR BELOW GROUND SERVICES. REFER TO STRUCTURAL ENGINEERS DRAWINGS FOR DETAILS.
- THE LOCATION & DEPTH OF SERVICES TO BE CHECKED ON SITE PRIOR TO COMMENCING ANY WORKS.
- MANHOLE COVERS AND FRAMES IN PUBLICLY ACCESSIBLE AREAS SHALL BE HEAVY DUTY CAST IRON, CLASS D400, DOUBLE SEALED AND LOCKABLE TYPE COMPLYING WITH BS EN 124-2:2015.
- GULLY GRATINGS & FRAMES SHALL COMPLY WITH BS EN 124-2:2015.
- EXISTING INVERT LEVELS TO BE VERIFIED ON SITE BEFORE COMMENCING CONSTRUCTION.
- SURFACE WATER & FOUL SEWER PIPES LESS THAN 1.2m BELOW THE ROAD SURFACE OR LESS THAN 0.9m IN NON-TRAFFICKED FOOTPATHS AND LANDSCAPE AREAS (WITH AN ABSOLUTE MINIMUM DEPTH OF COVER ABOVE THE EXTERNAL CROWN OF THE PIPE Ø750mm) SHALL BE PROTECTED FROM DAMAGE BY PROVIDING MINIMUM 150mm THICK CONCRETE C18/20 HAUNCH IN ACCORDANCE WITH IS EN 12620.
- CCTV SURVEY TO BE CONDUCTED PRIOR TO COMMENCEMENT OF ANY WORKS TO DETERMINE THE CONDITION AND VERIFY LEVELS OF THE EXISTING FOUL AND SURFACE WATER PIPES/ MANHOLES. ANY SUB-STANDARD OR DEFECTIVE ELEMENTS OF THE EXISTING PIPES/MANHOLES TO BE REPORTED AND CORRECTED.
- ALL SURFACE WATER DRAINAGE DETAILS TO BE IN ACCORDANCE WITH TII SPECIFICATIONS FOR ROAD WORKS.
- ALL FOUL DRAINAGE TO BE IN ACCORDANCE WITH THE IRISH WATER STANDARD DETAILS AND CODES OF PRACTICE.
- CONNECTIONS TO THE EXISTING DRAINAGE NETWORK REQUIRE APPROVAL FROM IRISH WATER & GALWAY CITY COUNCIL.
- REFER TO ARCHITECT DRAWINGS FOR ARCHITECTURAL DETAILS.
- REFER TO LANDSCAPE ARCHITECT DRAWINGS FOR LANDSCAPING DETAILS.

AECOM
PLANNING

PURPOSE

P3 PLANNING

ISSUE/REVISION

NO	DATE	DESCRIPTION
01	26.02.2025	FOR PLANNING
I/R	DATE	DESCRIPTION

PROJECT NUMBER

60710277

SHEET TITLE

PROPOSED PHASE 1
WASTE WATER PUMPING STATION
(WWPS)

SHEET NUMBER

60710277-ACM-XX-XX-DR-CE-10-0503