



TREE Existing + RPA



PINE TREE
Height 4m - Rootball 1m




STREET TREES
between car parking space
Height 5m - Girth 20-25




TREE small & Multistem
in courtyards and front houses
Height 5m - Girth 18-20

(ACE) Acer campestre 'Elsrijk'
(APE) Acer platanoides 'Emerald Queen'
(ARR) Acer rubrum 'Red Sunset'
(TCG) Tilia cordata 'Greenspire'
(TPP) Tilia platyphyllos 'Prince's Street'
(QR) Quercus robur

(PSC) Prunus serrulata 'Tai Haku'
(PSD) Prunus calleryana 'Chanticleer'
(PAP) Prunus avium 'Plena'
(CR) Crataegus monogyna
(KP) Koeleria paniculata
(MA) Malus
(SI) Sorbus intermedia

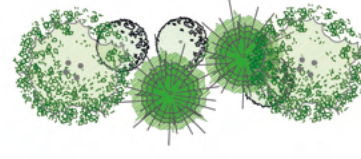


NATIVE TREES IN SUDS
Birch, Bird Cherry, Rowan, Whitethorn, Willow, etc.
Height 1.5m - Girth n/a - Large feathered tree

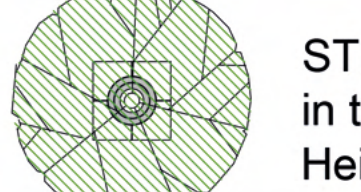


STREET TREE GRILL
in the little plaza
Height 6m - Girth 25-30

(GTI) Gleditsia triacanthos Inermis
(QP) Quercus palustris




TREE GROUP
in large planting area
Height 2.0m


(BP) Betula pendula
(BU) Betula utilis



HEDGEROW AND WALL
proposed double staggered native hedgerow
Height 1m 0/1/1 Transplant, branched, 4 brks
20% Blackthorn + 30% Hawthorn + 10 Silver birch + 10 Wild Cherry + 5% Crab Apple + 5% Spindle + 10% Guelder Rose + 5% Holly + 5% Azel



EVERGREEN HEDGES - GREEN BUFFER ALONG TERRACES
Height 1m / 10L pot
Cotoneaster lacteus / Euonymus fortunei 'Emerald Gaiety' / Ligustrum japonicum / Viburnum tinus 'Eve Price'



ACCENTUATION PLANTING - SHRUBS & GROUND COVERS
IN COURTYARDS AND NODES OF INTEREST

BUSHES / SHRUBS
Blackcurrant / Corylus avellana / Euvonymus europaeus / Ilex
Ribes aureum & sanguineum / Kolkwitzia amabilis / Euonymus alatus
Deutzia gracilis / Forsythia intermedia 'Spectabilis' / Spirea arguta
Physocarpus 'Dart's Gold' / Viburnum opulus 'Roseum'

ORNAMENTAL GRASSES & FLOWERS
Thalictrum 'Black Stockings' / Salvia involucrata / Crocosmia aurea
Nepeta faassenii / Agapanthus / Gaura / Hesperantha coccinea
Panicum virgatum / Perowskia / Salvia involucrata / Campanula
Cerastium / Crocosmia aurea / Echinacea / Fennel / Iris 'Tol Long'
Lavandula stoechas / Arabis caucasica 'Bakkely'

GROUND COVERS
Fragaria vesca / Fern / Genanium maccorrhizum / Hedera helix
Geranium psilostemon 'Patricia' / Helexine / Galium odoratum



MEADOW GRASS - WET CONDITION
WILDFLOWER MEADOW TYPE2 / for pictorial meadow, wet soil:
2000g of wetlands Native Wildflower Seed Mix by Connecting to Nature

PLUG PLANT MIX, 1plug / 2m²:
Digitalis purpurea alba / Succisa pratensis / Eupatorium cannabinum
Valeriana officinalis / Sanguisorba canadensis / Thalictrum white
Iris sibirica + Iris ToLong / Filipendula rubra venusta


BULB MIX: (5 bulbs/m2)
Nectaroscordum siculum / Narcissus pseudonarcissus
Leucojum aestivum / Camassia leichtlinii blue and white
Fritillaria meleagris



MEADOW GRASS - DRY CONDITION
WILDFLOWER MEADOW TYPE1 / for pictorial meadow normal soil:
500g of Year after Year Colour Impact seed mix by Connecting to Nature

PLUG PLANT MIX, 1plug / 2m²:
Salvia sylvestris . May Night . / Echinacea purpurea . White Swan,
Echinacea purpurea / Helenium autumnale salsa / Sanguisorba tanna
Verbascum phoeniceum / Achillea millefolium / Achillea terracota

BULB MIX: (5bulbs/m2)
Galtonia candicans / Gladiolus italicus / Camassia leichtlinii blue
Camassia leichtlinii white / Muscari latifolium / Tulip darwin hybrid Apricot
Impression / Leucojum aestivum



MOWED GRASS



PRIVATE BACK GARDEN