
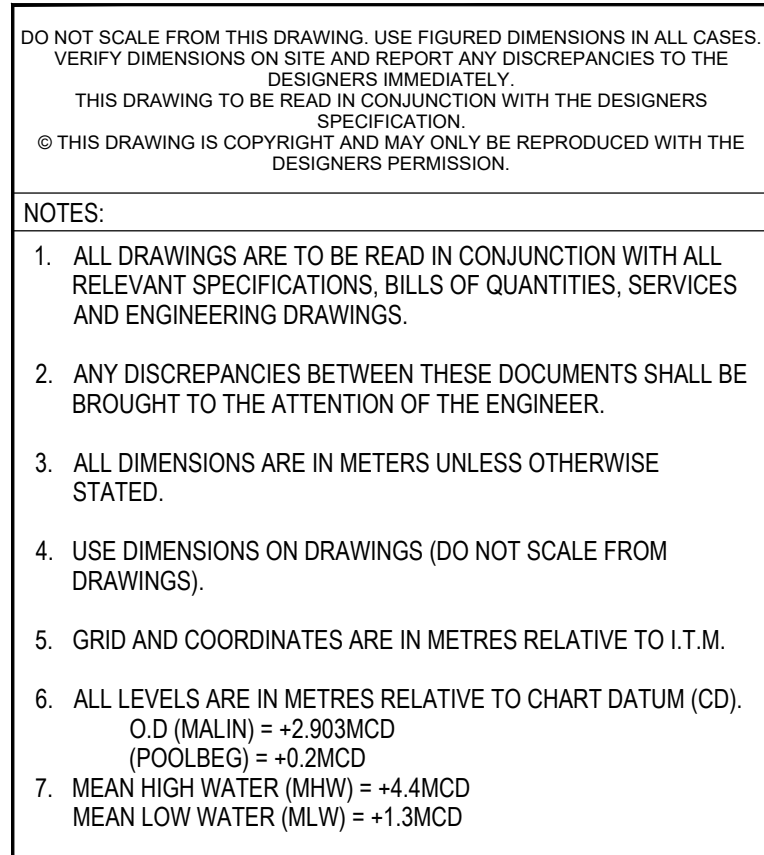


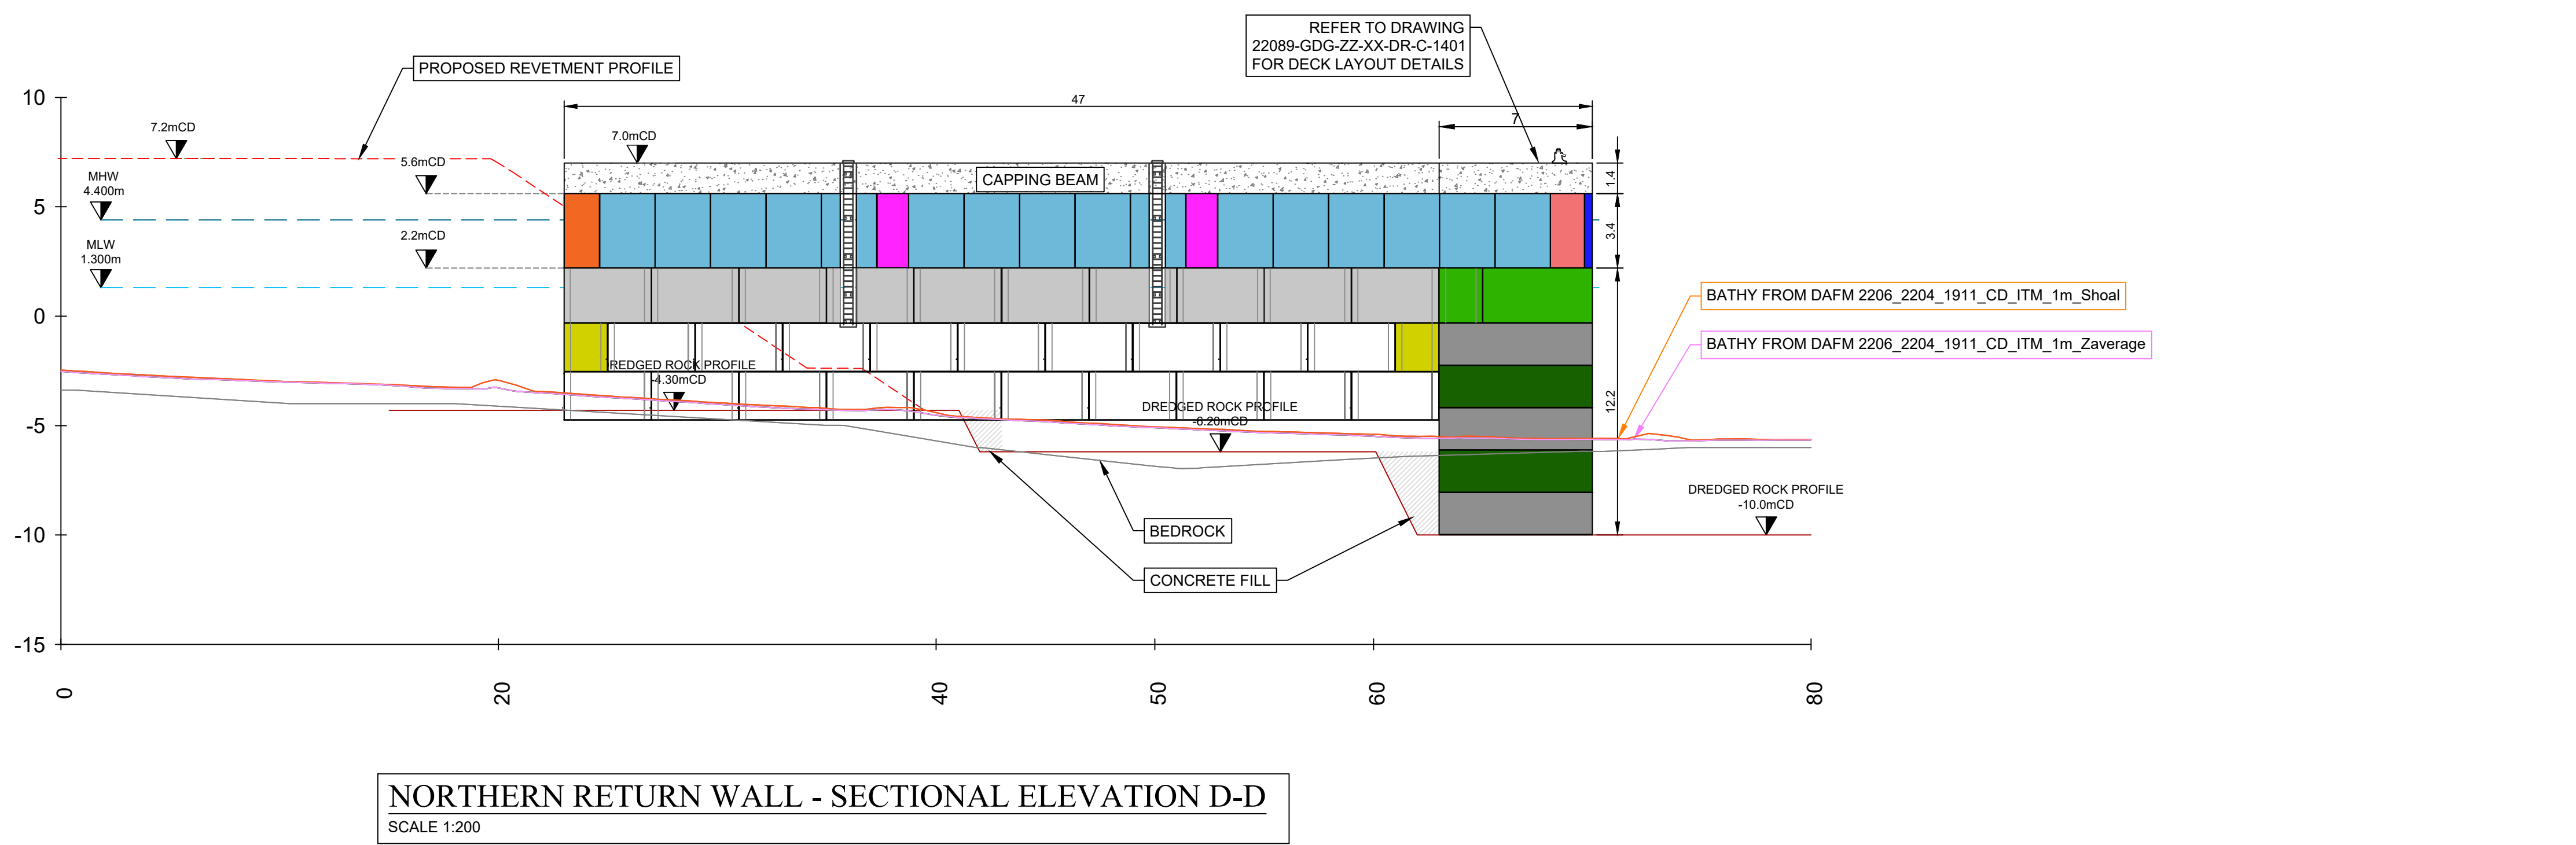

- ## CONCRETE NOTES:
1. STRUCTURAL CONCRETE SHOULD BE C40/50 WITH A MINIMUM CEMENT CONTENT OF 400kg/m³ (>4% GBBS). MASS CONCRETE SHOULD BE C20/25.
 2. THE COVER FOR ALL STEEL REINFORCEMENT SHALL NOT BE LESS THAN 75MM UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
 3. CONCRETE FINISH SHOULD BE U4.
 4. REINFORCEMENT TO BE CLASS B500B AS DETAILED IN THE SPECIFICATION.
 5. PRECAST CONCRETE SURFACES THAT ARE TO RECEIVE IN SITU CONCRETE SHALL HAVE AN EXPOSED AGGREGATE SURFACE.
 6. EXPOSED FACES OF PRECAST UNITS SHALL HAVE A PLAIN SMOOTH FINISH.
 7. LIFTING POINTS FOR PRECAST UNITS SHALL BE CONTRACTOR DESIGNED. LIFTING POINTS SHALL NOT BE LOCATED ON EXPOSED SURFACES. THE CONTRACTOR SHALL ISSUE DESIGN CALCULATION AND DRAWINGS FOR PROPOSED LIFTING POINTS TO THE EMPLOYERS REPRESENTATIVE FOR REVIEW AND APPROVAL PRIOR TO INSTALLATION.

GRANULAR FILL NOTE:

- FOR SECTION LOCATIONS REFER TO
24984-XX-XXX-DR-MWP-CE-5111 TO
24984-XX-XXX-DR-MWP-CE-5114

0	21.11.25	ISSUED FOR PLANNING		JK	CF
REV	DATE	DESCRIPTION		BY	APP
PROJECT:					
ROB AN MHIL DEEP WATER QUAY					
TITLE:					
QUAY WALL RETURN ENDS ELEVATION					
CLIENT:					
DEPARTMENT OF AGRICULTURE, FOOD & THE MARINE					
 ENGINEERING AND ENVIRONMENTAL CONSULTANTS CORK TRALEE LONDON LIMERICK mwp.ie					
DRAWN: JK		CHECKED: CF		APPROVED: CF	
PROJECT NUMBER: 24984		DATE: NOVEMBER 2025		SCALE @ A1: AS SHOWN	
ACCEPTANCE CODE: S		PURPOSE OF ISSUE: ISSUED FOR PLANNING PERMISSION		PURPOSE CODE: P3	
DRAWING NUMBER: 24984-XX-XXX-DR-MWP-CE-5404					REV: 0