


Tree Protection Detail



Protective fence line to protect work exclusion zone around trees being retained.

Protective fence detail as per

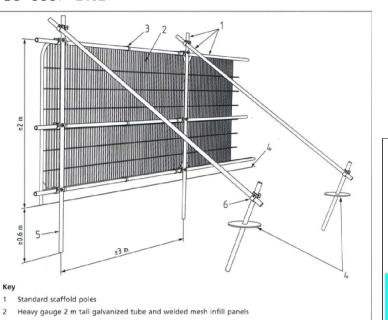

Detail of singage

Panels secured to uprights and cross-members with wire ties Uprights driven into the ground until secure (minimum depth 0.6 m) Standard scaffold clamps

> The tree protection fencing is to be erected enclosing the root protection areas around the trees being retained as shown on this drawing and appendix 1_In some areas, the site hoarding may be sufficient to act as the protective fencing if the tree and its root zone are positioned outside and no works are envisaged within the area outside the site hoarding. This will need to be discussed and agreed at the initial site meeting.

Where tree protection fencing is needed, this will need to be 2.3m high and constructed in accordance with figure 2 of BS 5837 2012 (see detail on drawing & appendix 1) using vertical and horizontal scaffold bars or similar well braced together with the verticals spaced out at a maximum of 3m centres. Onto this, weld mesh panels (harris fecne panels) are to be securely fixed with wire or


Signs are to be attached to these fences warning people that this is a protective area and that the fencing must be maintained in good condition in accordance with the approved plans and drawings for this development.

Once the protective fence line is erected, then the main construction works can

The following is a list of activities that are not allowed within the RPA or within the vicinity of the trees being retained.

- o Protect tree root systems from damage caused by runoff or spillage of noxious materials while mixing, placing, or storing construction materials.

 Protect root systems from ponding, eroding, or excessive weiting caused
- during construction operations_ Do not store construction materials, debris, or excavated material inside tree protection zones. When excavating, place excavated soil on opposite side of
- trench away from the tree. Do not permit vehicles or foot traffic within tree protection zones; prevent soil
- compaction over root systems.
- Do not allow fires under or adjacent to remaining trees or other plants. Do not attach notice boards, cables or other services to any part of the tree.
- Do not use high machinery such asTele-porters, cranes or other equipment close to trees to avoid damage to the crown or any other parts.

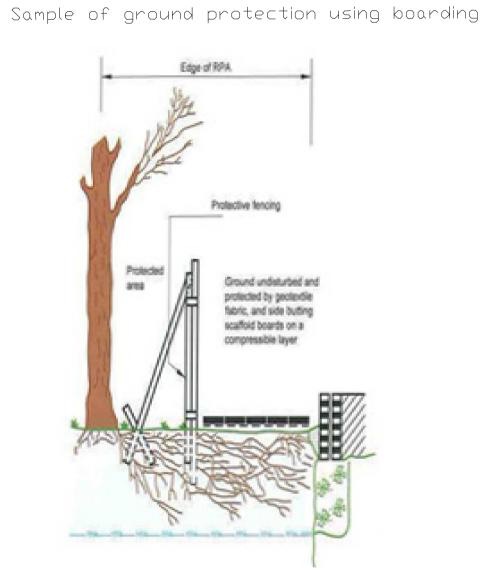

Sample of ground protection for heavier loading using Cellweb or similar.



Tree Constraints —_Tag Number -Category grade _Actual Crown Spread

BS5837: 2012 - Category Retention Rating



Trees in such a condition that any existing value would be lost within 10 years or being recommended for removal sound arboricultural practice.

Category A Trees

Trees of high quality/value with a min. of 40 years life expectancy.

Category B Trees

Trees of moderate quality/value with a min. of 20 years life expectancy.


Category C Trees

Trees of low quality/value with a min. of 10 years
life expectancy life expectancy.

Sub Categories

1- Mainly Arboricultural values

2 - Mainly Landscape valus3 - Mainly cultural and conservation values.



Tree & hedge vegetation being retained



Trees & Hedge Vegetation being removed.

Schedule of events

Works	Schedule
Site Meeting	Prior to any works commencing.
Tree Works - Felling & Pruning	Prior to any construction works commencing.
Tree Protection	After tree removal and pruning is complete and prior to any construction works commencing. The erection and removal of the protective fencing is to be scheduled in accordance with the phasing of the construction works.
Site Monitoring	Ongoing throughout the construction works.
Removal of Tree P rotection	Once all the main construction works are completed and in order to incorporate the area into the finished development.
Tree Review and Certification	Once all works are complete.

ARBORIST ASSOCIATES LTD.

94 BALLYBAWN COTTAGES, ENNISKERRY, CO. WICKLOW TEL: 01-2742011 / 087-2629589

TITLE: Tree Protection Plan

Site: Shanganagh Castle Grounds.

Dwg No.SGC002 Overall Site Plan

Scale 1:1250@ A1