

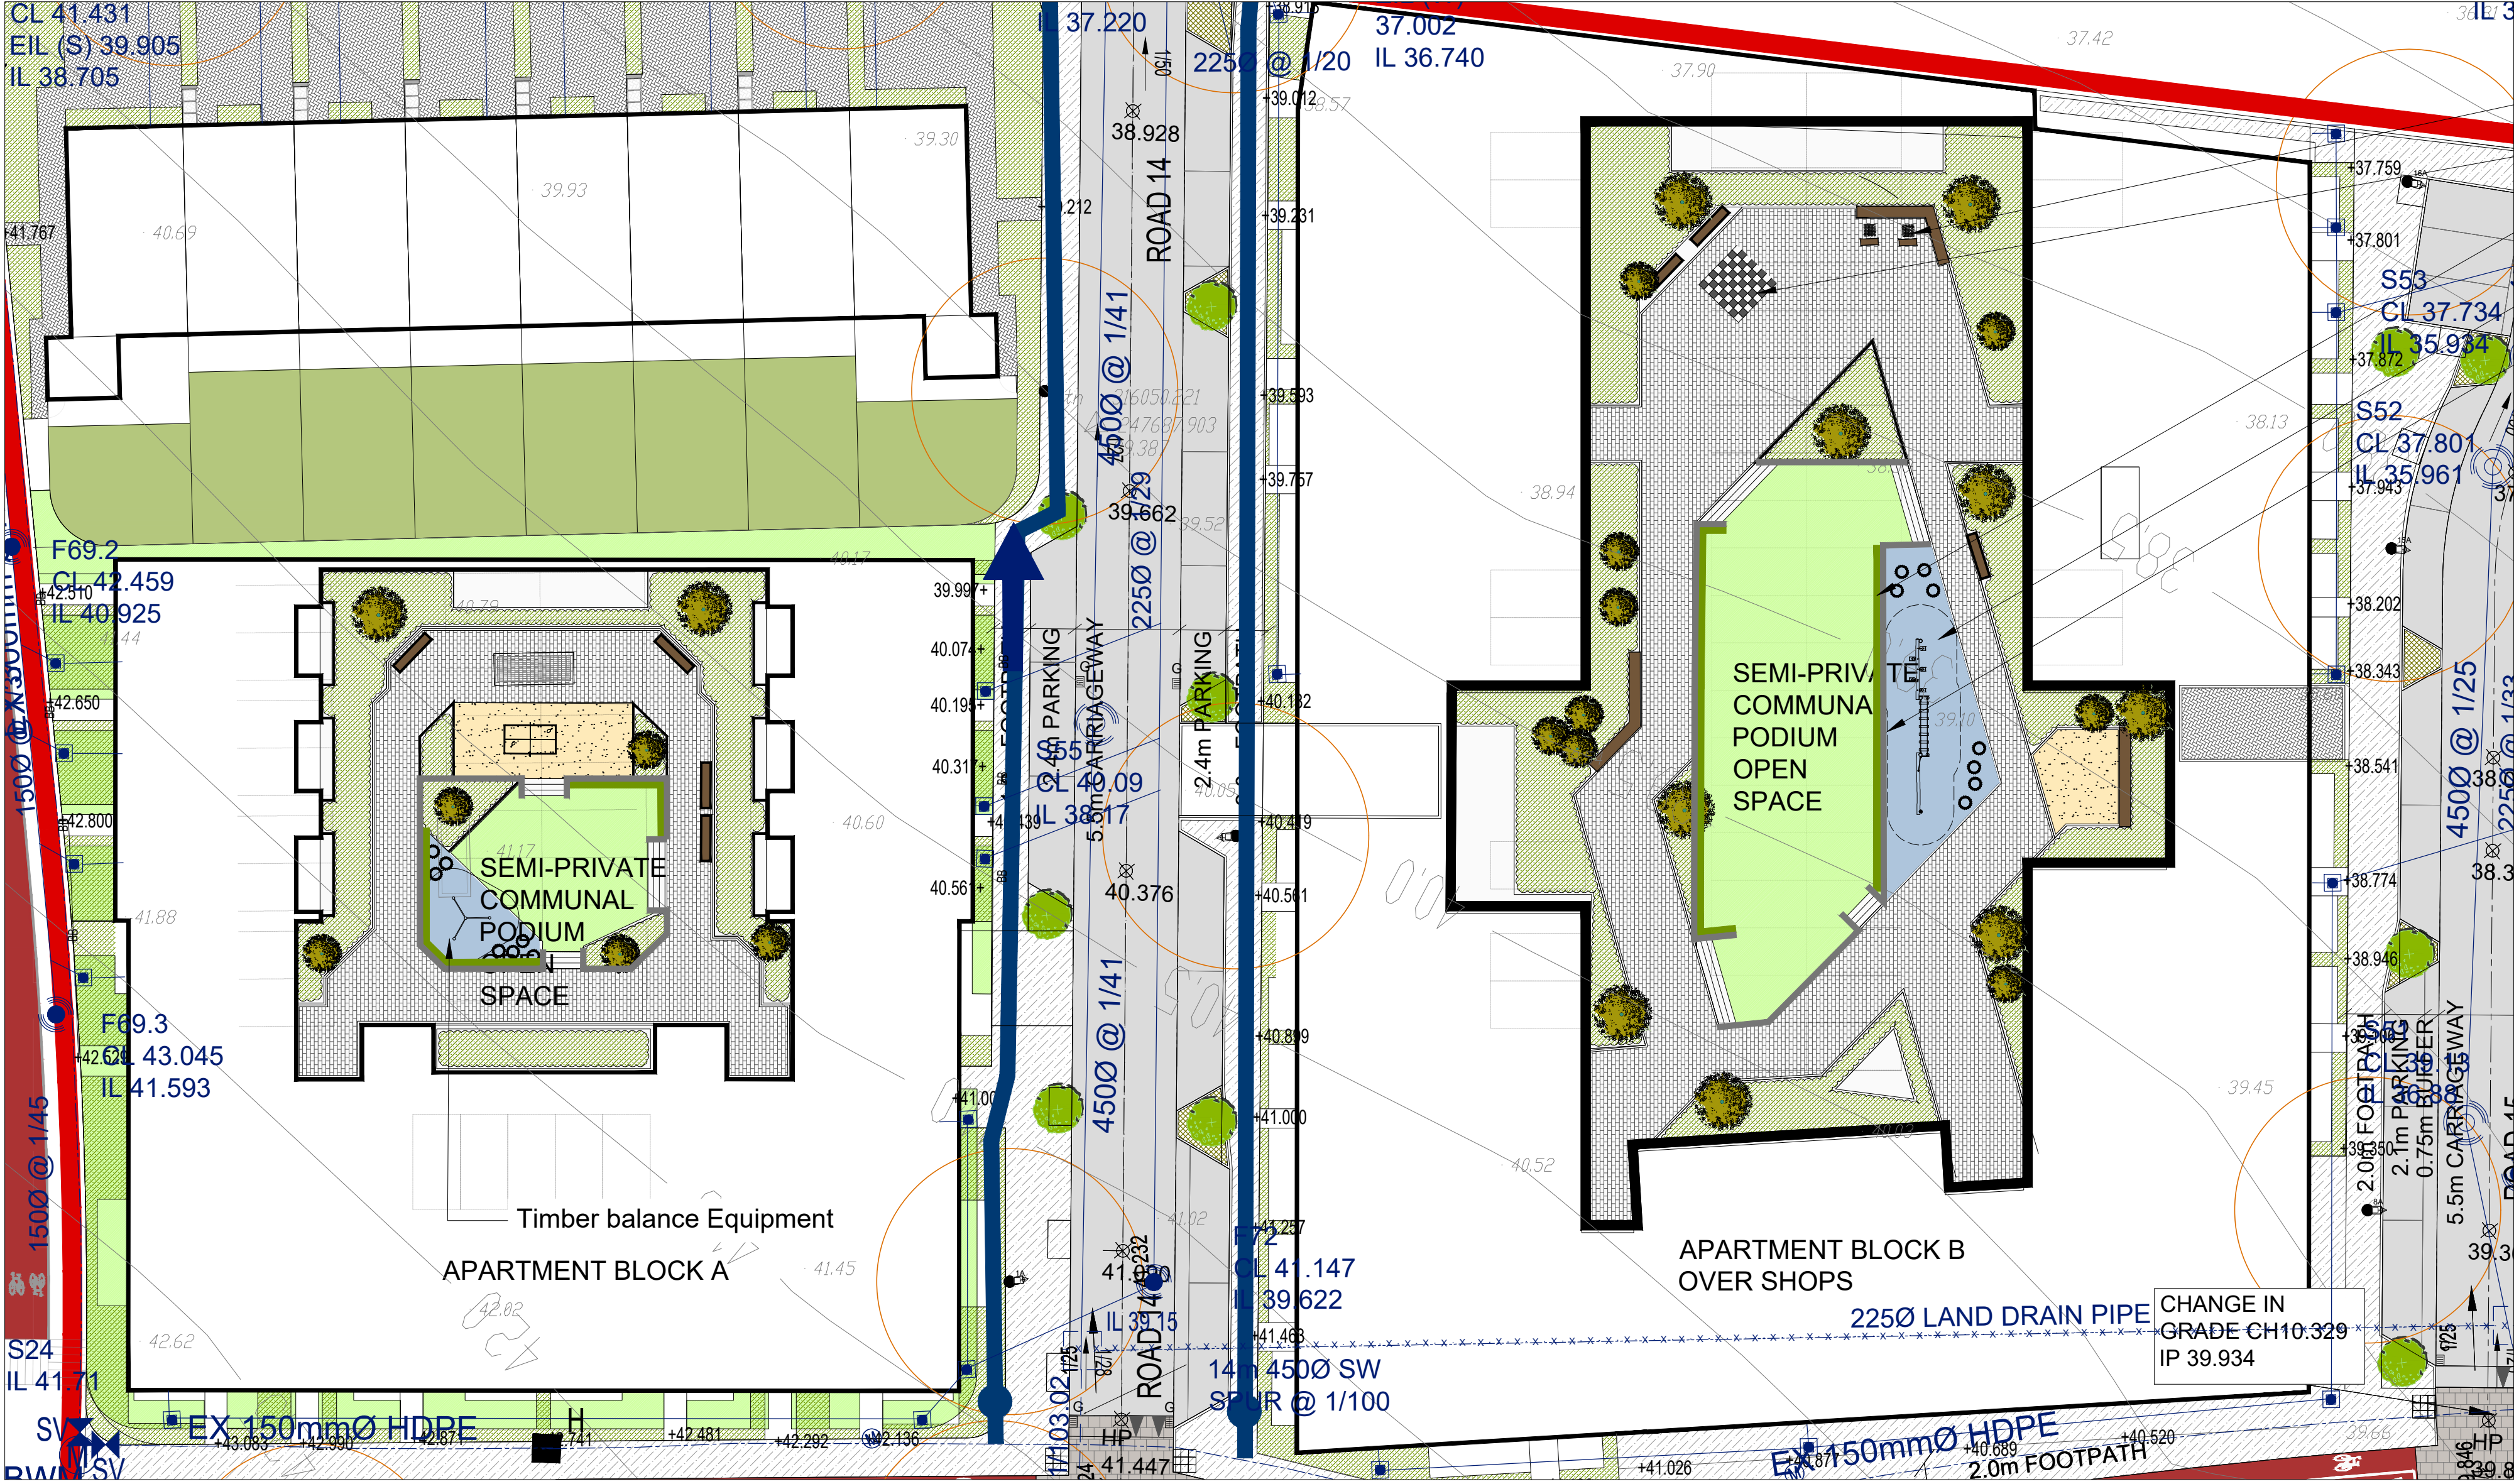



Podium Courtyards

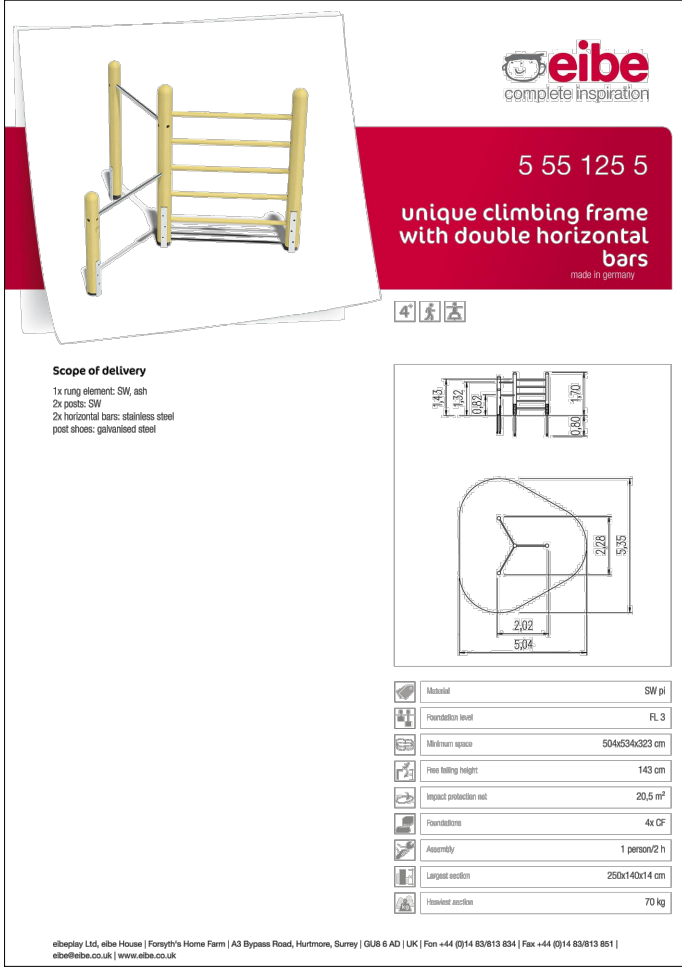

- Chess tables
- In ground chess board
- Proposed Hedge and supporting fence
- Timber balance Equipment
- Retaining walls +1000mm high

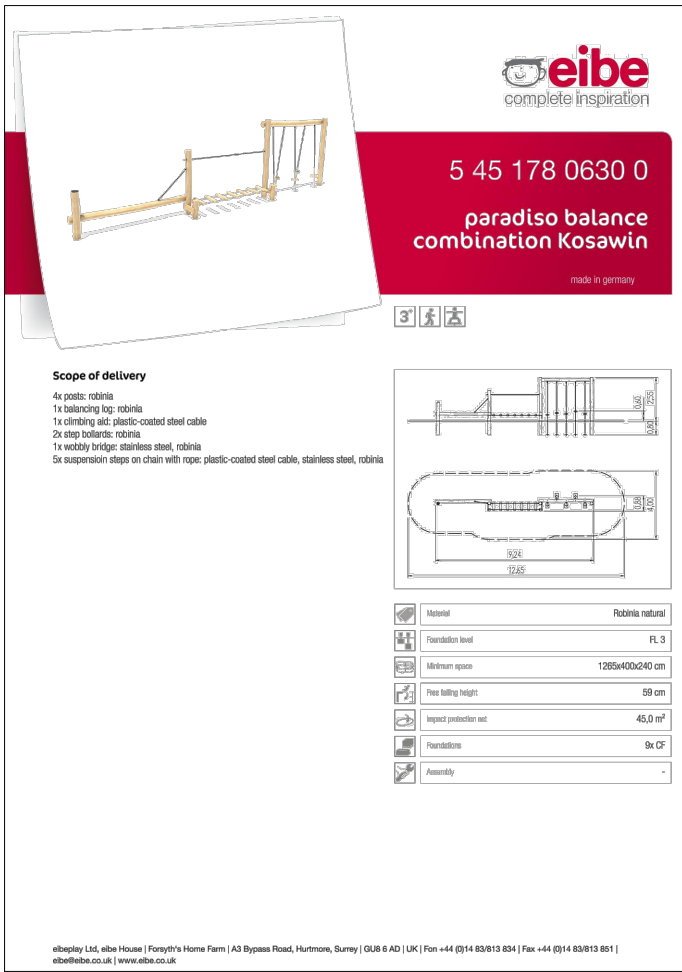


Civic Square

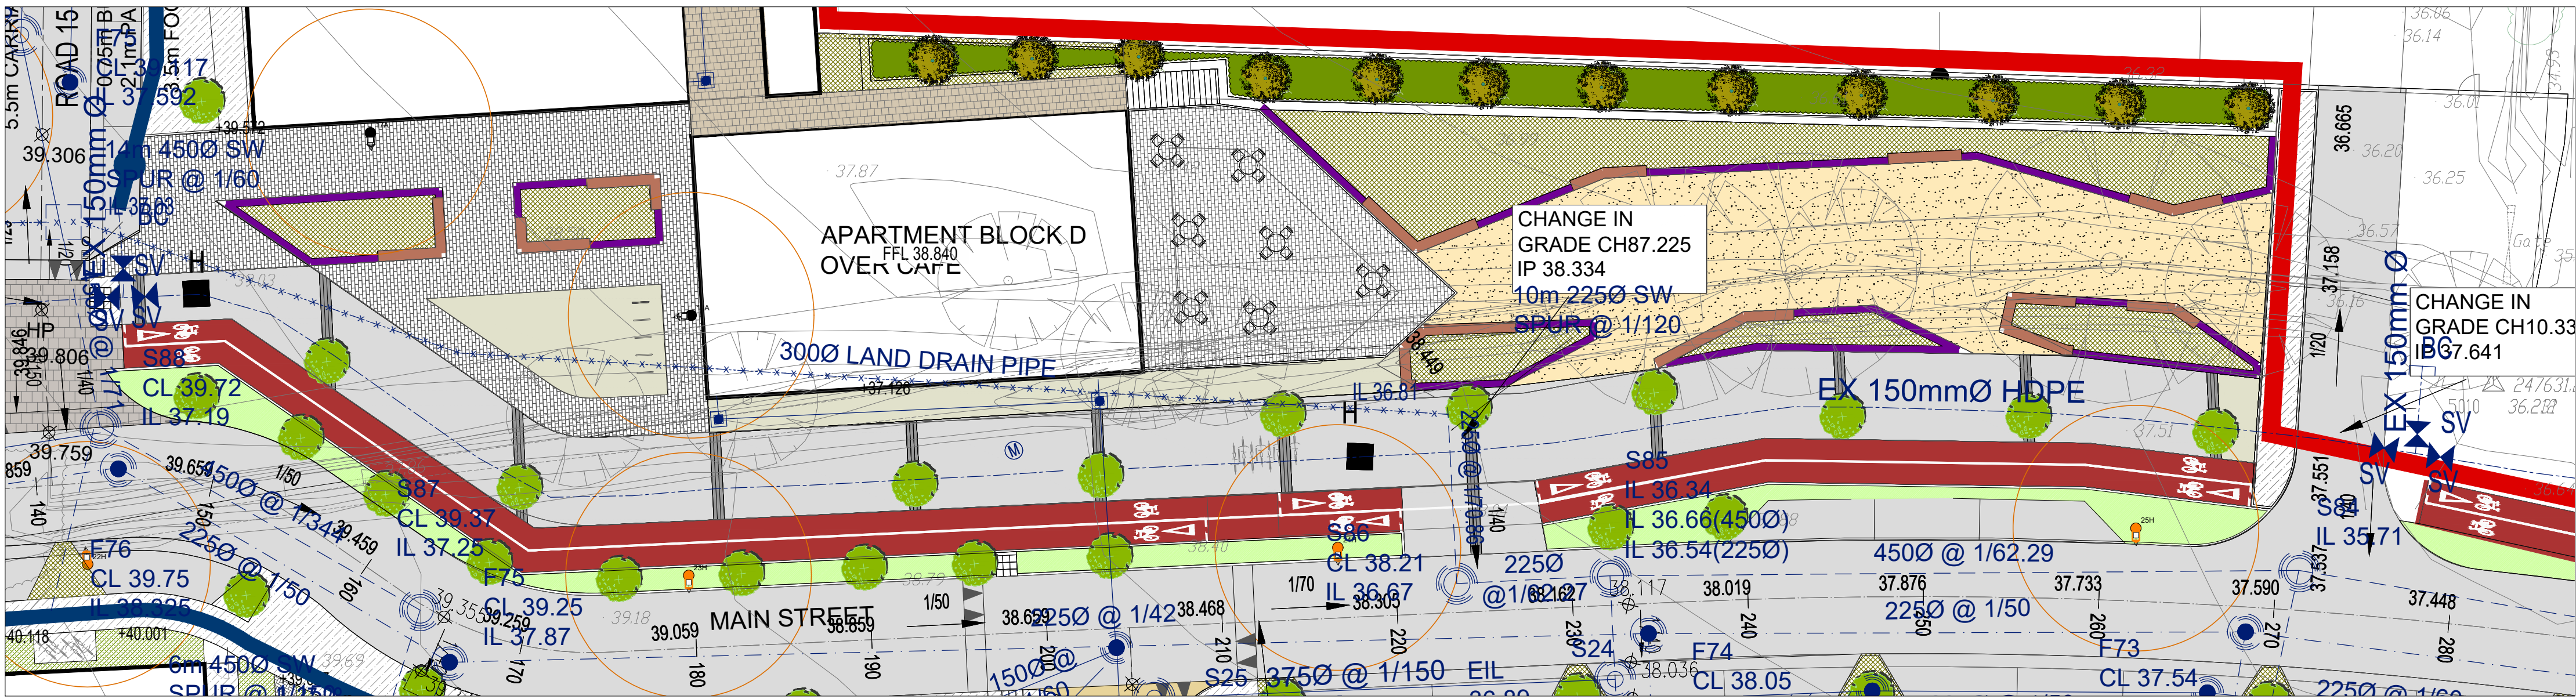

- Site Boundary
- Proposed Amenity grass areas with public ownership and to public open space: grass seed sown on 150mm clean topsoil (imported if necessary), over 250mm subsoil, all subsoil to be punctured and consolidated to aid natural drainage: (to receive the following amenity seed mix 2):
 - 50% Dwarf ryegrass
 - 45% Strong creeping red fescue
 - 5% Chewings fescue
- Grass areas within private ownership.
- Proposed shrub planting within private ownership: positioned within 450mm clean topsoil (imported if necessary) to areas shown.
- Proposed shrub planting areas within public open space, positioned within 450mm clean topsoil (imported if necessary) to areas shown. See drawing PP-01-PP for Planting Strategy & LD-01-PP for details.
- Existing Hedgerow to be retained or infilled as necessary with similar species where possible; see drawing PP-01-PP for Planting Strategy & LD-01-PP for details.
- Proposed native hedgerow to areas shown; Part Native Hedgerow mix: below should be planted at 5/linear metre (double staggered row with temporary post and wire fencing) see drawing PP-01-PP for Planting Strategy & LD-01-PP for details.
- Proposed herb layer, Hedgerow Wild Flower Mixture (Code ECD4)
- Proposed Meadow Zone
- Proposed naturalised bulb planting: (Planted as shown or included in shrub areas). See drawing PP-01-PP for Planting Strategy and LD-01-PP for details.
- Proposed open space tree planting: see drawing PP-01-PP for Planting Strategy and LD-01-PP for details.
- Proposed Street tree planting: see drawing PP-01-PP for Planting Strategy and LD-01-PP for details. All Street tree planting or tree planting within constrained hardscape zones shall receive constructed tree pits to ensure 16M3 of growing medium is provided quality establishment.
- Existing Tree planting to be retained.
- Proposed bitmac footpath surface with concrete pencil kerb edging.
- Proposed brushed concrete surface.
- Proposed concrete block paving.
- Proposed feature paving to plaza area, Bush hammered granite paving (rectangular form); to Engineers details.
- Proposed feature paving to plaza area, Tegula Tobermore paving or similar and approved in grey with banding in charcoal (80mm depth); to Engineers details.
- Proposed feature paving to plaza area, Manhattan paving by Tobermore or similar and approved (rectangular form) with a random mix of 30% Charcoal and 70% Silver (80mm depth); to Engineers details.
- Proposed Tree planting to plaza zone to be set in a tree grate; The Castle Paving stone Tree Grate; Supplied by Green Blue Urban or similar and approved; see Detail 06 drawing LD-02-PP for information.
- Proposed concrete feature paving to raised tables and pedestrian areas shown, to Engineers details.
- Proposed bitmac road surface to Engineers details.
- Proposed Duracolor Beige SMA 10 surf Mex C; suited to vehicular traffic situations, in Homezone areas as shown, to Engineers details.
- Proposed Resin bound gravel surface within Plaza Zone.
- Proposed Tiger mulch surface to play areas.
- Proposed wetpour safety surfacing.
- Proposed MUGA(Multi-Use Games Area) with cross play (size 800m2) and associated fencing (Refer to detail 04 drawing reference LD-02-PP)
- Proposed rubberised grass to play zones.
- Proposed position of light pole showing 7m dia. no tree planting zone.
- Table tennis, see drawing PG-04-PP for details.
- Proposed bench, see Detail 02, LD-02-PP for details.
- Proposed Litter Bin, see Detail 01, LD-02-PP for details.
- Proposed freestanding Medilith Interpretive display signage, see Detail 05 on drawing LD-02-PP for details.
- Omox S21 raised planters (aluminium and powder coated) with timber seating in accordance with details on drawing no. LD-04-PP.

Rev.	Date	Note

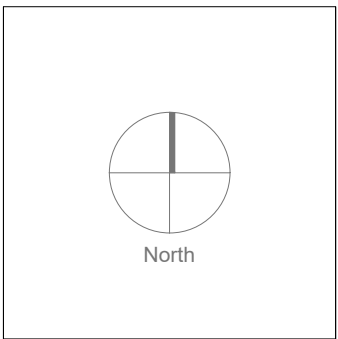

General Notes

Doyle & O'Troiligh
Landscape
Architecture

Project Name	Mooretown Phase 3 (SHD)	Drawing Name	Landscape Plan – Open Spaces Civic Square & Podium Courtyards (3of 4)
Status	Planning	Drawing No	LP-08-PP
Project No	21-003	Revision No	00
Scale	1:250	Drawn By	AD
Date	06/04/2022	Checked By	LD
Linda Doyle Director +353 (0)87 267 4196 linda@doyle-o'troiligh.com	Dalith O'Troiligh Director +353 (0)86 300 3469 dalith@doyle-o'troiligh.com	Office Address 28-29 Upper Pembroke St Dublin 2	Contact mail@doyle-o'troiligh.com +353 (0)1 608 7782