

---

---

# **DREENACREENIG WEST WIND FARM LIMITED**

---

---

## **DERREENACRINNIG WEST WIND FARM CO. CORK**


### **MANAGEMENT PLAN 4 DECOMMISSIONING PLAN**

**JULY 2025**

**Dreenacreenig West  
Wind Farm Limited**  
Derreenacrinnig West,  
Drimoleague,  
Co. Cork



**Jennings O'Donovan & Partners Limited,**  
Consulting Engineers,  
Finisklin Business Park,  
Sligo.  
Tel.: 071 9161416  
Fax: 071 9161080  
email: [info@jodireland.com](mailto:info@jodireland.com)



**JENNINGS O'DONOVAN & PARTNERS LIMITED**

Project, Civil and Structural Consulting Engineers,  
FINISKLIN BUSINESS PARK,  
SLIGO,  
IRELAND.



Telephone (071) 91 61416  
Fax (071) 91 61080

Email [info@jodireland.com](mailto:info@jodireland.com)  
Web Site [www.jodireland.com](http://www.jodireland.com)

**DOCUMENT APPROVAL**

<b>PROJECT</b>	Derreenacrinnig West Wind Farm	
<b>CLIENT / JOB NO</b>	Dreenacreenig West Wind Farm Limited	4636
<b>DOCUMENT TITLE</b>	Construction Environmental Management Plan (CEMP) Decommissioning Plan (DP)	

	<b>Prepared by</b>	<b>Reviewed / Approved by</b>
Issue / Revision	Name	Name
Final	Angelika Thiel	Breana Coyle David Kiely
Date	Signature	Signature
July 2025		

This document, and information or advice which it contains, is provided by JENNINGS O'DONOVAN & PARTNERS LIMITED solely for internal use and reliance by its Client in performance of JENNINGS O'DONOVAN & PARTNERS LIMITED's duties and liabilities under its contract with the Client. Any advice, opinions, or recommendations within this document should be read and relied upon only in the context of the document as a whole. The advice and opinions in this document are based upon the information made available to JENNINGS O'DONOVAN & PARTNERS LIMITED at the date of this document and on current standards, codes, technology and construction practices as at the date of this document. Following final delivery of this document to the Client, JENNINGS O'DONOVAN & PARTNERS LIMITED will have no further obligations or duty to advise the Client on any matters, including development affecting the information or advice provided in this document. This document has been prepared by JENNINGS O'DONOVAN & PARTNERS LIMITED in their professional capacity as Consulting Engineers. The contents of the document does not, in any way, purport to include any manner of legal advice or opinion. This document is prepared in accordance with the terms and conditions of JENNINGS O'DONOVAN & PARTNERS LIMITED contract with the Client. Regard should be had to those terms and conditions when considering and/or placing any reliance on this document. Should the Client wish to release this document to a Third Party for that party's reliance, JENNINGS O'DONOVAN & PARTNERS LIMITED may, at its discretion, agree to such release provided that:

- (a) JENNINGS O'DONOVAN & PARTNERS LIMITED written agreement is obtained prior to such release, and
- (b) By release of the document to the Third Party, that Third Party does not acquire any rights, contractual or otherwise, whatsoever against JENNINGS O'DONOVAN & PARTNERS LIMITED and JENNINGS O'DONOVAN & PARTNERS LIMITED, accordingly, assume no duties, liabilities or obligations to that Third Party, and
- (c) JENNINGS O'DONOVAN & PARTNERS LIMITED accepts no responsibility for any loss or damage incurred by the Client or for any conflict of JENNINGS O'DONOVAN & PARTNERS LIMITED's interests arising out of the Client's release of this document to the Third Party.

**Directors**  
Nigel Board, Abigail Draper,  
David Kiely, Seamus Lee,  
David O'Hagan, Alan Ryder

**Chief Finance Officer**  
Rose Davis

**Technical Directors**  
Joe Healy, Sean Molloy

**Regional Director**  
Audrey Phelan

**Senior Associates**  
Seán Gilmartin, John McElvaney, Tomás McGloin

**Associates**  
Breana Coyle, Dermot Guilfoyle, Lindsey McCormack,  
Sarah Moore, Cáit O'Reilly



**DERREENACRINNIG WEST WIND FARM, CO. CORK****DECOMMISSIONING PLAN****CONTENTS**

<b>1</b>	<b>INTRODUCTION .....</b>	<b>1</b>
1.1	Scope of the Decommissioning Plan .....	1
<b>2</b>	<b>SITE AND PROJECT DETAILS .....</b>	<b>3</b>
2.1	Site Location and Description .....	3
2.2	Description of the Decommissioning .....	3
2.3	Targets and Objectives .....	4
2.4	Decommissioning Methodologies Overview .....	5
2.4.1	Introduction .....	5
2.4.2	Decommissioning Methodology .....	5
<b>3</b>	<b>ENVIRONMENTAL CONTROLS .....</b>	<b>7</b>
3.1	Site Drainage .....	7
3.2	Refuelling; Fuel and Hazardous Materials Storage .....	8
3.3	Dust Control .....	8
3.4	Noise Control .....	9
3.5	Invasive Species Management .....	10
3.6	Traffic Management .....	10
3.7	Waste Management Plan .....	10
3.7.1	Legislation .....	10
3.7.2	Waste Management Hierarchy .....	11
3.7.3	Waste Arising from Decommissioning .....	11
3.8	Environmental Management Implementation .....	13
3.8.1	Roles and Responsibilities .....	13
<b>4</b>	<b>EMERGENCY RESPONSE PLAN .....</b>	<b>14</b>
4.1	Emergency Response Procedure .....	14
4.1.1	Roles and Responsibilities .....	14
4.1.2	Initial Steps .....	15
4.1.3	Site evacuation/Fire Drill .....	16
4.1.4	Excessive Peat Movement .....	17
4.1.5	Onset of Peat Slide .....	17
4.1.6	Spill Control Measures .....	18
4.1.7	Environmental Investigation .....	18
4.2	Contact the Emergency Services .....	19
<b>5</b>	<b>PROGRAMME OF WORKS .....</b>	<b>20</b>
5.1	Decommissioning Schedule .....	20
<b>6</b>	<b>MITIGATION PROPOSALS .....</b>	<b>20</b>
<b>7</b>	<b>COMPLIANCE AND REVIEW .....</b>	<b>24</b>
7.1	Site Inspections and Environmental Audits .....	24
7.2	Auditing .....	24
7.3	Environmental Compliance .....	24
7.4	Corrective Action Procedure .....	25
7.5	Decommissioning Plan Review .....	25

## **1 INTRODUCTION**

This Decommissioning Plan has been prepared by Jennings O'Donovan & Partners Limited on behalf of Dreenacreenig West Wind Limited for the Decommissioning of the Proposed Derreenacrinig West Wind Farm Development and relevant infrastructure which is hereafter referred to as the Proposed Development. This document is being prepared, alongside an Environmental Impact Assessment Report (EIAR), as part of an application for planning permission for the Proposed Development to Cork County Council.

Decommissioning of the Proposed Development will be scheduled to take place after the proposed 40-year lifespan of the Project.

This report provides the environmental management framework to be adhered to during the Decommissioning phase of the Proposed Development, and it incorporates the mitigating principles to ensure that the work is carried out in a way that minimises the potential for any environmental impacts to occur.

As noted in the Scottish Natural Heritage report Research and Guidance on Restoration and Decommissioning of Onshore Wind Farms (SNH, 2013) Reinstatement proposals for a wind farm are made approximately 30 years in advance, so within the lifespan of the wind farm. Due to the efficiency of modern-day turbines, it is estimated that their lifespan will be 40 years. The technological advances and preferred approaches to Reinstatement are likely to change in the intervening decades.

In this regard, this Decommissioning Plan will be reviewed and updated for the written agreement of the Planning Authority prior to commencement of a Decommissioning works. It will take account of the relevant conditions of the planning permission and current health and safety standards in accordance with the approach set out and the principles established in this document.

### **1.1 SCOPE OF THE DECOMMISSIONING PLAN**

This plan for the Decommissioning of the Proposed Development includes its connection to the national grid. Where the term 'Site' is used in the Decommissioning Plan it refers to the Site of the Proposed Development and all works associated with the Proposed Development including enabling works. The Decommissioning Plan clearly outlines the mitigation measures and monitoring proposals that are required to be adhered to in order to complete the works in an appropriate manner.

The report is divided into eight sections, as outlined below:

**Section 1** provides a brief introduction as to the scope of the report.

**Section 2** outlines the Site and Project details, detailing the targets and objectives of this plan along with providing an overview of works methodologies that will be adopted throughout Decommissioning.

**Section 3** sets out details of the environmental controls to be implemented on site including the mechanisms for implementation. A waste management plan is also included in this section.

**Section 4** outlines the Emergency Response Procedure to be adopted in the event of an emergency in terms of site health and safety and environmental protection.

**Section 5** sets out a programme for the timing of the works.

**Section 6** consists of a summary table of all mitigation measures to be adhered to during the Decommissioning-phase.

**Section 7** outlines the proposals for reviewing compliance with the provisions of this report.

## **2 SITE AND PROJECT DETAILS**

### **2.1 SITE LOCATION AND DESCRIPTION**

The Site, as shown in **Figure 2.2** of the EIAR, is located within an agricultural and forested landscape, between Goulanes and Castledonovan, in Co. Cork. The nearest settlement is the village of Drimoleague which is situated 5.1km to the southeast of the Site. The Site is located 10.5km north-east of Bantry, Co. Cork and 10.9km west of Dunmanway. The Site is 14.2km south-east the county boundary between Cork and Kerry and is 59km west of Cork City.

The red line wind farm Site extends to approximately 104 ha.

There are 63 houses within 2km of the proposed turbines. The closest house to a turbine that is to be assessed as part of this **EIAR**, is H1. This is located 983m from T3.

### **2.2 DESCRIPTION OF THE DECOMMISSIONING**

- Removal of 3 no. wind turbines and concrete plinths.
- Removal of all associated underground electrical and communications cabling connecting the wind turbines to the wind farm substation. Ducting is to remain *in-situ*.

All other elements of the Proposed Development will remain in-situ. The Site access tracks and associated drainage systems will serve ongoing forestry and agriculture activity in the area. All other hard surfaced areas will be allowed to revegetate naturally. Based on the experience of the Project team monitoring operational wind farm sites throughout the country, the approach of allowing these areas to revegetate naturally has proven to be very successful.

Cranes of similar size to those used for construction will disassemble each turbine using the same crane hardstands. The towers, blades and all above ground components will be removed from site and reused, recycled, or disposed of in a suitably licenced facility. (The financial costs of Decommissioning, at current material values, will be more than met by the recycling value of the turbine components.)

Turbines will be cut on site so as to fit on articulated trucks, therefore allowing the use of the civil construction delivery route for removal.

The following elements are included in the Decommissioning phase:

- Decommissioning works will be limited to action necessary to remove the wind farm structures, i.e., removal of turbines, cabling and the monitoring mast.
- Existing Hardstands will be utilised to act as a temporary compound for the appointed Contractor.
- Access tracks and associated drainage systems will remain in place to serve ongoing forestry and agriculture activity<sup>1</sup>. Hardstanding areas will be allowed to revegetate naturally.
- Turbine plinths will be removed, and the hardcore covering Turbine Foundations will be allowed to revegetate naturally<sup>2</sup>.
- Soil disturbance will be avoided.

### 2.3 **TARGETS AND OBJECTIVES**

This Decommissioning plan has considered environmental issues as listed in **Section 3**.

The key targets are as follows:

- Ensure Decommissioning works and activities are completed in accordance with mitigation and best practice approach presented in the accompanying Environmental Impact Assessment Report (EIAR) and associated planning documentation. A Schedule of Mitigation Measures has been included in **Appendix 17.1** of the EIAR.
- Ensure Decommissioning works and activities have minimal impact/disturbance to local landowners and the local community. This will relate to transport, particularly of material off site with noise and dust also impacting on receptors at time of Decommissioning to a lesser extent.
- Ensure Decommissioning works and activities have minimal impact on the natural environment. Disturbance to habitats will be avoided and the use of existing infrastructure and drainage will ensure silt does not enter waterways.
- Adopt a sustainable approach to Decommissioning. This means comparing alternative methods for turbine disassembly and taking the approach with the least impact on the natural environment; and,
- Provide toolbox talks, environmental training and awareness of sensitive receptors and waste management within the Site for all project personnel.

The key site objectives are as follows:

---

<sup>1</sup> For a wind farm where the roads are not to be retained, natural revegetation is preferred to reprofiling, or the importation of soil.

<sup>2</sup> The covering of Turbine Foundations with soil material was discussed, and discounted. Instead, the possibility was discussed of roughening the surface of the concrete foundation, to assist in the initiation and subsequent growth and coalescence of flora. However, the foundations will in fact be covered with hardcore, so this step is unnecessary.

- Avoidance of any pollution incident or near miss as a result of working around or close to existing watercourses and have emergency measures in place, in accordance with the Water Quality Management Plan. Similar mitigation measures to the construction phase will be implemented. Please **Section 3** for more details.
- Avoidance of vandalism.
- Keeping all watercourses free from obstruction and debris.
- Sustainable drainage system /drainage design principles will be maintained and monitored to ensure efficiency.
- Keep impact of Decommissioning works to a minimum on the local environment, namely watercourses, and wildlife through the use of defences such as buffers and silt fences.
- Correct fuel storage and refuelling procedures to be followed.
- Good waste management and housekeeping to be implemented.
- Air and noise pollution prevention to be implemented.
- Monitoring of the works and any adverse effects that it may have on the environment.

**Section 3** discusses the above in more detail.

## **2.4 DECOMMISSIONING METHODOLOGIES OVERVIEW**

### **2.4.1 Introduction**

An experienced main contractor will be appointed to undertake the Decommissioning of the Proposed Development. The main contractors will comply with the mitigation measures of the Construction and Environmental Management Plan (CEMP) prepared for the construction phase. An overview of the Decommissioning methodologies is provided below.

### **2.4.2 Decommissioning Methodology**

The proposed Decommissioning methodology is summarised under the following main headings:

- Wind turbines;
- Turbine Foundations, and
- Underground Cabling.

#### **2.4.2.1 *Wind Turbines***

Prior to any works being undertaken on wind turbines, they will be disconnected from the grid by the Site operator in conjunction with ESB Networks and EirGrid. The dismantling and removal of wind turbines of this scale is a specialist operation which will be undertaken by the turbine supplier or competent subcontractor. Turbine dismantling will be undertaken in reverse order to methodology employed during their construction. Cranes will be brought

back to site utilising the hard stand areas. The dismantling of turbines will be bound by the same safety considerations as will be the case during construction in terms of weather conditions. Works will not be undertaken during adverse weather conditions and in particular not during high winds.

The turbine blades will be cut on site and removed in articulated trucks, the details of which are assessed in **Chapter 11: Traffic & Transportation** of the EIA which accompany this application.

The transport of disassembled turbines from the Site will be undertaken in accordance with a Traffic Management Plan (**Appendix 11.1** of the EIA). The Traffic Management Plan will provide for all necessary safety measures, including a convoy and Garda escort as required, off-peak turning/reversing movements and any necessary safety controls.

The Met Mast will also be removed as its purpose will cease once the turbines have been dismantled and removed. In addition, the Met Mast is solely a requirement of the operational phase to satisfy EirGrid's requirements.

#### **2.4.2.2 Turbine Foundations**

On the dismantling of turbines, it is not intended to remove the concrete foundations from the ground. It is considered that their removal will be the least preferred options in terms of potential effects on the environment. Turbine plinths will be removed and hardcore from the hardstands will be used to cover the plinth area. The hardcore covering Turbine Foundations will be allowed to revegetate naturally.

#### **2.4.2.3 Underground Cabling**

The cabling on site will be pulled from the cable duct using a mechanical winch which will extract the cable and re-roll it on to a cable drum. This will be undertaken at each of the joint bays/pull pits along the cable. The ground above original pulling pits/joint bays will be excavated to access the cable ducts using a mechanical excavator and will be fully reinstated once the cables are removed. Excavated material will be temporarily stored adjacent to the Site of excavation at a height of less than 1 m and at 25 m distance from any watercourse.

The cable ducting will be left in-situ as it is considered the most environmentally prudent option, avoiding unnecessary excavation and soil disturbance for an underground element that is not visible with no environmental impact.

The onsite substation and associated Grid Connection will remain in place as it will be under the ownership of the ESB and will form a permanent part of the national electricity grid.

#### **2.4.2.4 Transport Route Accommodation Works**

Turbines will be cut at the hardstand locations on site so as to fit on articulated trucks, therefore allowing the use of the civil construction delivery route for removal. There will be no need for additional temporary works on access roads for the removal of turbines.

### **3 ENVIRONMENTAL CONTROLS**

The following sections give an overview of the drainage design, dust and noise control measures, a waste management plan for the Site and the implementation of the environmental management procedures for the Site. Based on the nature and extent of the Decommissioning works these are the key on-site controls that are applicable at Decommissioning. (Associated mitigation measures are described in **Section 6**).

#### **3.1 SITE DRAINAGE**

The Site drainage features for this site during its construction and operation are outlined in the **EIAR** and **Surface Water Management Plan** (Management Plan 5 of the CEMP) which accompany this application. This document has been prepared on a preliminary (outline) basis and will be further developed and expanded following the appointment of the Contractors for the main construction/Decommissioning works. Some items of this CEMP can only be finalised with appropriate input from the Contractors who will actually carry out the main construction/Decommissioning works. This CEMP identifies, for the incoming Contractors, the key planning, environmental and contract document constraints that must be adhered to in order to deliver optimum environmental reassurance for the Site. As stated in **Section 2.2**, the drainage system will serve ongoing activity on the area.

When the final Decommissioning Plan is prepared prior to Decommissioning and presented as a standalone document, all drainage management measures, which will include maintenance of the operational drainage measures, will be included in that document. However, it should be noted that by the time Decommissioning is undertaken after the planned 40-year lifespan of the Proposed Development, the areas within the Site will have revegetated substantially resulting in a drainage pattern that is similar to what existed prior to any construction. It is not anticipated that the Decommissioning phase will interrupt this drainage regime in any way with the works proposed. As an additional measure, areas where

freshly placed soil material as part of excavation works will be surrounded by silt fencing if deemed necessary until the area has naturally revegetated e.g., near joint bays.

### **3.2 REFUELLING; FUEL AND HAZARDOUS MATERIALS STORAGE**

The plant and equipment used during Decommissioning will require refuelling during the works. Appropriate management of fuels will be required to ensure that incidents relating to refuelling are avoided. The following mitigation measures, which are the same as those proposed for the construction phase, are proposed to avoid release of hydrocarbons at the Site:

- Road-going vehicles will be refuelled off site wherever possible.
- On-site refuelling will be carried out at designated refuelling area at the temporary Decommissioning compound at the Site. Existing Hardstands will be utilised to act as a temporary compound for the appointed Contractor. Machinery such as cranes will be refuelled directly by a mobile fuel truck that will come to site as required. Drip trays will be used in such circumstances.
- Only designated trained and competent operatives will be authorised to refuel plant on site. Mobile measures such as drip trays and fuel absorbent mats will be used during all refuelling operations.
- Fuel volumes stored on site will be minimised. The fuel storage areas will be bunded to 110% of the storage volume.
- The plant used will be regularly inspected for leaks and fitness for purpose.
- An emergency plan for the Decommissioning phase to deal with accidental spillages will be developed. Spill kits will be available to deal with an accidental spillage in and outside the refuelling area.
- A programme for the regular inspection of plant and equipment for leaks and fitness for purpose will be developed at the outset of the Decommissioning phase.

### **3.3 DUST CONTROL**

Dust is unlikely to be generated in significant amounts from on-site activities during Decommissioning. The extent of dust generation will depend on the type of activity undertaken, the proximity of activities to receptors and the nature of the dust, i.e., soil, and the weather. In addition, dust dispersion is influenced by external factors such as wind speed and direction and/or, periods of dry weather. Site traffic movements also have the potential to generate dust as they travel along the haul route.

Proposed measures, which are the same as those proposed for the construction phase, to control dust include:

- Any site roads with the potential to give rise to dust will be regularly watered, as appropriate, during dry and/or windy conditions.
- The designated public roads outside the Site and along the main transport routes to the Site will be inspected daily by the Site Manager for cleanliness and cleaned if deposits are found.
- Material handling systems and material storage areas influenced by convenience and ease of handling, and peat slippage safety.
- Water misting or sprays will be used in dry and windy if particularly dusty activities are necessary during dry or windy periods.
- The transport of soils or other material, which has significant potential to generate dust, will be undertaken in tarpaulin-covered vehicles.
- Daily inspection of the Site to examine dust measures and their effectiveness.
- When in dry and/or windy weather and dirt is visible on the roads, sections of the haul route will be swept using a truck mounted vacuum sweeper.

### 3.4 **NOISE CONTROL**

The operation of plant and machinery, including site vehicles, is a source of potential impact that will require mitigation at all locations within the Site. Proposed measures, which are the same as those proposed for the construction phase, to control noise include:

- Diesel generators will be enclosed in sound proofed containers to minimise the potential for noise impacts.
- Plant and machinery with low inherent potential for generation of noise and/or vibration will be selected. All plant and equipment to be used on-site will be modern equipment and will comply with the S.I. No. 359/1996 - European Communities (Construction Plant and Equipment) (Permissible Noise Levels) (Amendment) Regulations.
- Regular maintenance of plant will be carried out in order to minimise noise emissions. Particular attention will be paid to the lubrication of bearings and the integrity of silencers.
- All vehicles and mechanical plant will be fitted with effective exhaust silencers and maintained in good working order for the duration of the works.
- Compressors will be of the "sound reduced" models fitted with properly lined and sealed acoustic covers which will be kept closed whenever the machines are in use and all ancillary pneumatic tools shall be fitted with suitable silencers.
- Machines, which are used intermittently, will be shut down during those periods when they are not in use.
- Training will be provided by the Site Manager to drivers to ensure smooth machinery operation/driving, and to minimise unnecessary noise generation.
- Local areas of the haul route will be condition monitored and maintained, if necessary.

### **3.5 INVASIVE SPECIES MANAGEMENT**

Prior to Decommissioning, a suitably qualified ecologist will complete an invasive species survey of the Site to identify invasive species where any excavation will be required. An Invasive Species Management Plan will be implemented if invasive species are identified.

### **3.6 TRAFFIC MANAGEMENT**

A Traffic Management Plan will be prepared in advance of any Decommissioning works. The traffic management arrangements for the removal of turbines although similar to those that will be implemented for construction materials delivery (to a lesser extent) as outlined in the EIAR, will be agreed in advance of Decommissioning with the competent authority.

The Traffic Management Plan for the Decommissioning phase will also include provision for the removal of underground cables from the underground ducts within the Site. Cables in public roads will be left in-situ as they will be the responsibility of the ESB.

### **3.7 WASTE MANAGEMENT PLAN**

The Waste Management Plan will outline the methods of waste prevention and minimisation by recycling, recovery and reuse at each stage of Decommissioning. Disposal of waste will be a last resort.

#### **3.7.1 Legislation**

The Waste Management Act 1996 as amended requires that any waste related activity has to have all necessary licenses and authorisations. It will be the duty of the Waste Manager on the Site of the Proposed Derreenacrinnig West Wind Farm Development to ensure that all contractors hired to remove waste from the Site have valid Waste Collection Permits. It will then be necessary to ensure that the waste is delivered to a licensed or permitted waste facility. The hired waste contractors and subsequent receiving facilities must adhere to the conditions set out in their respective permits and authorisations. Waste removal-related traffic volumes during the Decommissioning phase, will be similar or less than those anticipated and assessed for the construction phase.

The Department of the Environment provides a document entitled, 'Best Practice Guidelines on the Preparation of Waste Management Plans for Construction and Demolition Projects' (2006). No demolition will take place at this site.

### 3.7.2 Waste Management Hierarchy

The waste management hierarchy sets out the most efficient way of managing waste in the following order:

#### 1. Prevention and Minimisation:

The primary aim of the Waste Management Plan will be to prevent and thereby reduce the amount of waste generated.

#### 2. Reuse of Waste:

No material is likely to be reused on site during the Decommissioning phase. Materials such as cabling will be reused off-site.

#### 3. Recycling of Waste:

There are several established markets available for the beneficial use of Construction and Demolition waste such as using waste concrete as fill for new roads.

#### 4. Disposal of Waste to Landfill

At all times during the implementation of the Waste Management Plan, disposal of waste to landfill will be considered only as a last resort.

### 3.7.3 Waste Arising from Decommissioning

The relevant components will be removed from site for re-use, recycling or waste disposal. Any structural elements that are not suitable for recycling will be disposed of in an appropriate manner. All lubrication fluids will be drained down and put aside for appropriate collection, storage, transport and disposal. Any materials which cannot be re-used or recycled will be disposed of by an appropriately licenced contractor.

The waste types arising from the Decommissioning of the Proposed Development are outlined in **Table 3.1** below.

**Table 3.1 Waste Types Arising during the Decommissioning Phase**

Material Type	Example	EWC Code
Cables	Electrical wiring	17 04 11
Metals	Copper, aluminium, lead and iron	17 04 07
Fibreglass	Turbine blade component	10 11 03
Hydrocarbons	Oils and lubricants drained from the turbines	13 01 01,13 02 04

### **3.7.3.1 Reuse**

Many construction materials can be reused several times before they have to be disposed of:

- Electrical wiring can be reused on similar wind energy projects
- Elements of the turbine components can be reused but this will be determined by the condition that they are in.

### **3.7.3.2 Recycling**

If a certain type of material cannot be reused, then recycling is the most suitable option. The opportunity for recycling during Decommissioning will be limited and restricted to components of the wind turbines and met mast.

All wastes will be sorted and segregated on-site during the time of Decommissioning. The anticipated volume of all waste material to be generated at the Proposed Derreenacrinnig West Wind Farm Development is low which provides the justification for adopting small containers as a method of waste storage.

### **3.7.3.3 Implementation**

#### **3.7.3.3.1 Roles and Responsibilities**

The Ecological Clerk of Works will have responsibility for overseeing and the implementation of the objectives of the Decommissioning Plan, ensuring that all hired waste contractors have the necessary authorisations and that the waste management hierarchy is adhered to. The person nominated will have sufficient authority so that they can ensure everyone working on the Decommissioning adheres to the management plan.

#### **3.7.3.3.2 Training**

It is important for the Decommissioning Waste Manager to communicate effectively with colleagues in relation to the aims and objectives of the waste management plan. All employees working on site during the Decommissioning phase of the Project will be trained in materials management and thereby, will be able to:

- Distinguish reusable materials from those suitable for recycling.
- Ensure maximum segregation at source.
- Co-operate with site manager on the best locations for stockpiling reusable materials.
- Separate materials for recovery.
- Identify and liaise with waste contractors and waste facility operators.

### 3.7.3.3.3 Record Keeping

The Waste Management Plan will provide systems that will enable all arisings and movements of construction waste to be recorded. This system will enable the contractor to measure and record the quantity of waste being generated. The Waste Management Plan can then be adapted with changes that are seen through record keeping.

### 3.7.3.4 *Waste Management Plan Conclusion*

The Waste Management Plan will be properly adhered to by all staff involved in the Project and will be outlined within the induction process for all site personnel. Reuse of certain types of Decommissioning wastes will cut down on the cost and requirement of raw materials at other sites therefore further minimising waste levels going to landfill. This Waste Management Plan outlines the main objectives that are to be adhered to.

## 3.8 **ENVIRONMENTAL MANAGEMENT IMPLEMENTATION**

### 3.8.1 **Roles and Responsibilities**

The Site Manager and/or Environmental Clerk of Works will be key members of the Contractors team.

In general, the Ecological Clerk of Works will maintain responsibility for monitoring the Decommissioning works and Contractors/Sub-contractors from an environmental perspective. The Ecological Clerk of Works will act as the regulatory interface on environmental matters. The Site Manager will be responsible for reporting to and liaising with Cork Country Council and other statutory bodies as required.

A suitably qualified and experienced ecologist and any other suitably qualified and experienced professionals such as engineers and geotechnical experts will further advise the Ecological Clerk of Works and Site Manager. This will ensure there is no negative impact on the environment as a result of the Decommissioning of the Proposed Development.

## **4 EMERGENCY RESPONSE PLAN**


An Emergency Response Plan (**Management Plan 1**) provides details of procedures to be adopted in the event of an emergency in terms of site health and safety and environmental protection.

### **4.1 EMERGENCY RESPONSE PROCEDURE**

The Site Emergency Response Plan includes details the response required and the responsibilities of all personnel in the event of an emergency. The Emergency Response Plan will require updating and submissions from the Contractor/Project Supervisor Decommissioning Stage (appointed to manage and co-ordinate health and safety matters during the construction stage) and sub-contractors as Decommissioning progresses. Where sub-contractors are governed by their own emergency response procedure a bridging arrangement will be adopted to allow for inclusion of the sub-contractor's Emergency Response Plan within this document.

#### **4.1.1 Roles and Responsibilities**

The chain of command during an emergency response sets out who is responsible for coordinating the response. The Site Supervisor/Construction Manager will lead the emergency response which makes him responsible for activating and coordinating the emergency response procedure. The other site personnel who can be identified at this time who will be delegated responsibilities during the emergency response are presented in **Figure 4.1**. In a situation where the Site Supervisor/ Construction Manager is to coordinate the emergency response, the responsibility will be transferred to the next person in the chain of command outlined in **Figure 4.1**. This will be updated throughout the various stages of the Project.

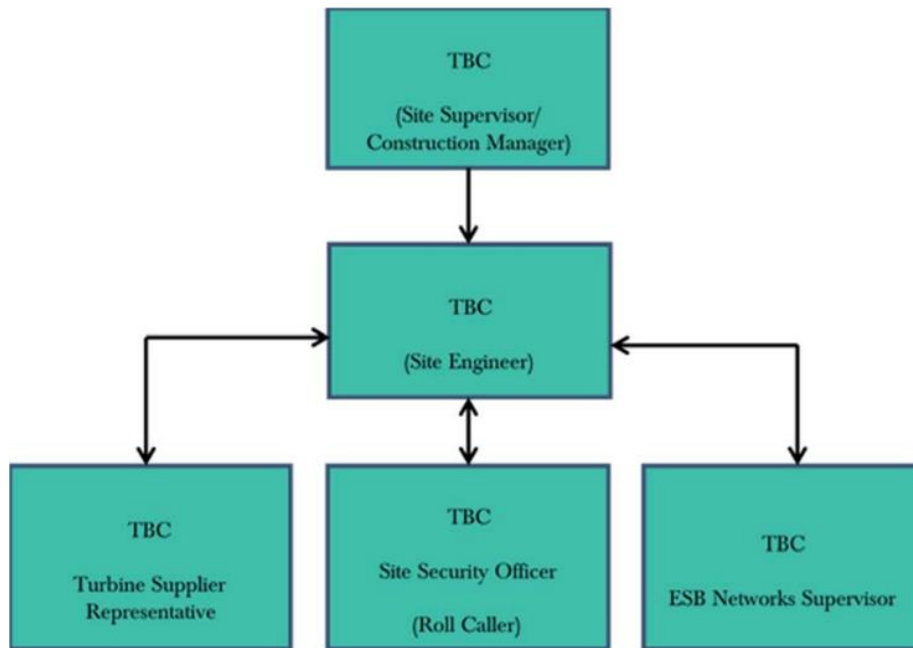

**Figure 4.1: Emergency Response Procedure Chain of Command**

**4.1.2 Initial Steps**

The following hazards have been identified as being potential situations that may require an emergency response in the event of an occurrence.

**Table 4.1 Hazards associated with potential emergency situations**

Hazard	Emergency Situation
Construction Vehicles: Dump trucks, tractors, excavators, cranes etc.	Collision or overturn which has resulted in operator or third-party injury.
Peat Instability	Excessive movement of peat on site; onset of peat slide.
Abrasive wheels/Portable Tools	Entanglement, amputation or electrical shock associated with portable tools
Contact with services	Electrical shock or gas leak associated with an accidental breach of underground services
Fire	Injury to operative through exposure to fire
Falls from heights including falls from scaffold towers, scissor lifts, ladders, roofs and turbines	Injury to operative after a fall from a height
Sickness	Illness unrelated to site activities of an operative e.g., heart attack, loss of consciousness, seizure
Turbine Specific Incident	This will be included the turbine manufacturers' emergency response plan.

In the event of an emergency situation such as the hazards outlined in **Table 4.2** the Site Supervisor/Construction Manager will carry out the following:

- Establish the scale of the emergency situation and identify the number of personnel, if any, who have been injured or are at risk of injury.
- Where necessary, sound the emergency siren/foghorn that activates an emergency evacuation on the Site. The Site Supervisor/Construction Manager must proceed to the assembly point if the emergency poses any significant threat to their welfare and if there are no injured personnel at the scene that require assistance. The Site Supervisor/Construction Manager will be required to use their own discretion at that point. In the case of fire, the emergency evacuation of the turbines and substation should proceed, without exception. The Site evacuation procedure is outlined in **Section 4.1.3**.
- Make safe the area if possible and ensure that no identifiable risk exists with regard to dealing with the situation e.g., if a machine has turned over, ensure that it is in a safe position so as not to endanger others before assisting the injured.
- Contact the required emergency services or delegate the task to someone. If delegating the task, ensure that the procedures for contacting the emergency services as set out in **Section 4.2** is followed.
- Take any further steps that are deemed necessary to make safe or contain the emergency incident e.g., cordon off an area where an incident associated with electrical issues has occurred.
- Contact any regulatory body or service provider as required e.g., ESB Networks the numbers for which are provided in **Section 4.3**.
- Contact the next of kin of any injured personnel where appropriate.

#### **4.1.3 Site evacuation/Fire Drill**

A site evacuation/fire drill procedure will provide basis for carrying out the immediate evacuation of all site personnel in the event of an emergency. The following steps will be taken:

- Notification of the emergency situation. Provision of a siren or foghorn to notify all personnel of an emergency situation.
- An assembly point will be designated in the construction compound area and will be marked with a sign. All site personnel will assemble at this point.
- A roll call will be carried out by the Site Security Officer to account for all personnel on site.
- The Site Security Officer will inform the Site Supervisor/Construction Manager when all personnel have been accounted for. The Site Supervisor/Construction Manager will

decide the next course of action, which be determined by the situation that exists at that time and will advise all personnel accordingly.

All personnel will be made aware of the evacuation procedure during site induction. The Fire Services Acts of 1981 and 2003 require the holding of fire safety evacuation drills at specified intervals and the keeping of records of such drills.

#### **4.1.4 Excessive Peat Movement**

No excessive excavation works are proposed for the Decommissioning phase. In the unlikely event of excessive peat movement or continuing peat movement recorded at a monitoring location, or identified at any location within the Site, but no apparent signs of distress to the peat (e.g., cracking, surface rippling) (not as a result of the Decommissioning of the Wind Farm) then the following shall be carried out:

1. All Decommissioning activities shall cease within the affected area.
2. Increased monitoring at the location shall be carried out. The area will be monitored, as appropriate, until such time as movements have ceased.
3. Re-commencement of limited construction activity will only start following a cessation of movement and the completion of a geotechnical risk assessment by a geotechnical engineer.
4. Such detailed monitoring and awareness will further ensure that the potential for a peat slide is absolutely minimised as actions arising from monitoring will reduce the significance of the possible negative effects.

#### **4.1.5 Onset of Peat Slide**

Neither the Site activities nor the Site characteristics are conducive to a peat slide arising as a result of Decommissioning. In the highly unlikely event of an onset or actual detachment of peat then the following shall be carried out:

1. On alert of a peat slide incident, all activities will cease and all available resources will be diverted to assist in the required mitigation procedures.
2. For localised peat slides that do not represent a risk to a watercourse and have essentially come to rest the area will be stabilised initially by rock infill, if required. The failed area and surrounding area will then be assessed by the geotechnical engineer and stabilisation procedures implemented. The area will be monitored, as appropriate, until such time as movements have ceased.

#### 4.1.6 Spill Control Measures

Every effort will be made to prevent an environmental incident during the Decommissioning phase of the Project. Oil/fuel spillages if arising, are likely to be small and localised. The importance of a swift and effective response in the event of a spill is important. The following steps provide the procedure to be followed in the event of such an incident:

- Stop the source of the spill and raise the alarm to alert people working in the vicinity of any potential dangers.
- If applicable, eliminate any sources of ignition in the immediate vicinity of the incident.
- Contain the spill using the spill control materials, track mats or other material as required. Do not spread or flush away the spill.
- If necessary, cover or bund off any vulnerable areas where appropriate such as drains, watercourses or sensitive habitats.
- Clean up as much as possible using the spill control materials.
- Contain any used spill control material. Dispose of used materials appropriately using a fully licensed waste contractor with the appropriate permits so that further contamination is limited.
- Notify the Ecological Clerk of Works immediately giving information on the location, type and extent of the spill so that they can take appropriate action.
- The Ecological Clerk of Works will inspect the Site and ensure the necessary measures are in place to contain and clean up the spill and prevent further spillage from occurring.
- The Ecological Clerk of Works will notify the appropriate regulatory body such as Cork County Council, and the Environmental Protection Agency, if deemed necessary.

#### 4.1.7 Environmental Investigation

Any environmental incident must be investigated in accordance with the following steps:

- The Ecological Clerk of Works will be immediately notified.
- If necessary, the Ecological Clerk of Works will inform the appropriate regulatory authority. The regulatory authority will depend on the nature of the incident.
- The details of the incident will be recorded on an Environmental Incident Form which will provide information such as the cause, extent, actions and remedial measures used following the incident. The form will also include any recommendations made to avoid reoccurrence of the incident.
- If the incident has impacted on a sensitive receptor such as an archaeological feature the Ecological Clerk of Works will halt work and will liaise with the Project Archaeologist.
- A record of all environmental incidents will be kept on file by the Ecological Clerk of Works and the Main Contractor. These records will be made available to the relevant

authorities such as Cork County Council and/or Environmental Protection Agency if required.

The Ecological Clerk of Works will be responsible for any corrective actions required as a result of the incident e.g., an investigative report, formulation of alternative works methodologies or environmental sampling, and will advise the Main Contractor as appropriate.

#### 4.2 **CONTACT THE EMERGENCY SERVICES**

In the event of requiring the assistance of the emergency services the following steps will be taken:

Ring 999 or 112.

Clearly state the situation and the location.

Await further instructions from Emergency Services.

**Table 4.2 Emergency Contacts**

Contact	Telephone no.
Doctor – Dunmanway Primary Care Centre	023 88 555 00
Emergency Services – Ambulance, Fire, Gardaí	999/112
ESB Emergency Services	1850 372 999
Hospital – Cork University Hospital	021 49 22 000
Gas Networks Ireland Emergency	1850 20 50 50
Gardaí – Drimoleague Garda Station	028 31 111
Health and Safety Co-ordinator - Health & Safety Services	TBC
Health and Safety Authority	1890 289 389
Inland Fisheries Ireland (IFI)	1890 347 424
Project Supervisor Construction Stage (PSCS): TBC	TBC
Project Supervisor Design Stage (PSDS)*: Jennings O'Donovan & Partners Limited	071 916 1416

\* oversees the coordination of the design with the design team, architects engineers etc.

## 5 PROGRAMME OF WORKS

### 5.1 DECOMMISSIONING SCHEDULE

The Decommissioning phase will take approximately 3 – 6 months to complete from commencing the removal of turbines to the final Reinstatement of the Site.

The Decommissioning of the Proposed Development will take place after the 40-year operational period of the planning permission period has elapsed.

The phasing and scheduling of the main Decommissioning task items are outlined in **Figure 5.1** below, where the 1<sup>st</sup> January has been shown as an indicative start date for Decommissioning to commence.

ID	Task Name	Task Description	Q1			Q2			Q3			
			Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
1	Site Health and Safety		[Blue bar spanning Jan to Jun]									
2	Turbine Decommissioning	Disconnect Power Output	[Blue bar in Jan]									
3	Turbine and Met Mast Dismantling	Disassemble turbine components and met mast		[Blue bar spanning Feb to Apr]								
4	Turbine Removal	Transport of all turbine components off site		[Blue bar spanning Feb to Apr]								
5	Cable Removal	Remove underground cables form ducting			[Blue bar in Mar]							
6	Turbine Foundations Backfill	Reinstate foundation areas by covering with soil material						[Blue bar in Jun]				

**Figure 5.1 Indicative Decommissioning Schedule**

## 6 MITIGATION PROPOSALS

The Decommissioning Mitigation Measures are presented in **Table 6.1**.

By presenting the mitigation proposals in the below format, it is intended to provide an easy to audit list that can be reviewed and reported on during the Decommissioning phase of the Project.

**Table 6.1 Mitigation Measures**

Ref. No.	Reference Heading	EIAR Chapter	Section	Mitigation Measure	Audit Result	Action Required
MM91	Decommissioning	<b>Chapter 7: Land and Soils</b>	7.5.3 Decommissioning	<p>Mitigation measures employed during Decommissioning activities will be similar to those used during construction. On Decommissioning of the wind farm, cranes will be used to disassemble and remove the turbines. The foundations will be covered over with soil and peat and allowed to re-vegetate naturally. Leaving the foundation in place (rather than breaking out the concrete) is considered the most environmental benign approach. The Wind Energy Ireland (WEI) states that when Decommissioning a wind farm 'the concrete bases could be removed, but it may be better to leave them under the ground, as this causes less disturbance'.</p> <p>The roads will be left in place and used to access the farmland and forestry of the Site. The on-site substation is also likely to be left in place and become part of the National grid. Otherwise, it would be removed, and the Site restored to peatlands.</p>		
MM92	Decommissioning	<b>Chapter 9: Air and Climate</b>	9.2.9.3 Decommissioning Phase Mitigation	Mitigation measures during the Decommissioning phase will be similar to those employed during the construction phase as outlined above.		
	Decommissioning	<b>Chapter 10: Noise and Vibration</b>	10.13.1 Construction Noise Mitigation	During Decommissioning noise levels are likely to be no more than predicted in Table 10.10 as similar plant will be utilised. Any legislation, guidance or best practice relevant at the time of Decommissioning will be complied with. All construction is a temporary day time activity.		
MM93	Decommissioning	<b>Chapter 11: Traffic and Transport</b>	11.6.3 Decommissioning Phase	As the turbine blades can be cut into manageable lengths on Decommissioning, there are no requirements to adjust street furniture on the turbine supply haul route for Decommissioning.		

Ref. No.	Reference Heading	EIAR Chapter	Section	Mitigation Measure	Audit Result	Action Required
				<p>The wind turbines proposed as part of the Proposed Development are expected to have a lifespan of up to 40 years. Following the end of their useful life, the wind turbines may be replaced with a new set of machines, subject to planning permission being obtained, or the Site may be decommissioned fully, with the exception of the electricity substation.</p> <p>Upon Decommissioning (4 - 6 months) of the proposed wind farm, the wind turbines will be disassembled in reverse order to how they were erected. All above ground turbine components will be separated, cut and removed off-site for recycling. Turbine Foundations will remain in place underground and allowed to revegetate or reseeded as appropriate. Leaving the Turbine Foundations in-situ is considered a more environmentally prudent option, as to remove that volume of reinforced concrete from the ground could result in potentially significant environment nuisances such as noise, dust and/or vibration. The Site roadways will be in use for additional purposes to the operation of the wind farm (e.g. recreational use) by the time the Decommissioning of the Project arises and therefore the Site roads will remain in situ for future use. .</p> <p>The 20kV substation and Grid Connection, when completed, will be handed over to ESB Networks as the Distribution System Operator and thus it will not be removed.</p> <p>The traffic management of the Decommissioning phase will be informed by the road conditions at the time of Decommissioning. It is not possible to predict the changes to the public road infrastructure and policies in the next 30-40</p>		

Ref. No.	Reference Heading	EIAR Chapter	Section	Mitigation Measure	Audit Result	Action Required
				<p>years. It is envisaged that a Traffic Management Plan will be developed for the Decommissioning phase.</p> <p>Nevertheless, the following traffic management measures are likely to be required:</p> <ul style="list-style-type: none"> <li>• Signage will be erected at the Site entrance</li> <li>• Construction traffic associated with Decommissioning will be scheduled so as to avoid school drop off and collection times.</li> <li>• All vehicles using or while in operation at the wind farm site shall either have roof mounted flashing beacons or will use their hazard lights.</li> <li>• A speed limit of 25 km/h shall apply to all vehicles within the wind farm site.</li> </ul>		
MM94	Land Use	<b>Chapter 12: Landscape and Visual Amenity</b>	12.4 Mitigation Measures	Upon Decommissioning, the turbines, and all underground electrical and communications cabling will be removed. Other elements will be retained in situ to serve ongoing forestry and agriculture activity.		
<b>Monitoring</b>						
MX18		<b>Chapter 7: Land and Soils</b>	7.5.4 Monitoring	Monitoring of the works will be carried out by the ECoW, project engineer and geotechnical engineer. This will involve visual inspection of the works for soil storage, restoration of parts of the Site, etc. Inspections and testing of roads and crane areas will be carried out prior to mobilising the cranes to site for turbine installation. This is to ensure that they can accommodate the design loadings. Formation levels for the Turbine Foundation will also be inspected, tested and certified prior to constructing the Turbine Foundations. Rock cuts will be inspected to ensure no slope stability issues arise. Remedial measures, if required, will be implemented as appropriate.	As required	ECoW, project engineer and geotechnical engineer

## **7 COMPLIANCE AND REVIEW**

### **7.1 SITE INSPECTIONS AND ENVIRONMENTAL AUDITS**

Routine inspections of Decommissioning activities will be carried out on a daily and weekly basis by the Ecological Clerk of Works and the Site Supervisor/Construction Manager to ensure all controls are in place to prevent environmental impacts, relevant to the Decommissioning activities taking place at the time.

Environmental inspections will ensure that the works are undertaken in compliance with this Decommissioning Plan and all other planning application documents. Only suitably trained staff will undertake environmental site inspections. These staff will have undergone third level educational training and will have experience in a similar role.

### **7.2 AUDITING**

An Environmental audit will first be carried out prior to the Decommissioning Phase of the Proposed Development to ensure the implementation of mitigation measures. Further environmental audits will be carried on a monthly basis during the construction phase of the Project and again after the Decommissioning of the wind turbines.

Environmental audits will be carried out by the Ecological Clerk of Works. An impartial and objective approach will be taken. Environmental audits will be conducted at monthly to determine to determine whether the Decommissioning Plan is being properly implemented and maintained. The results of environmental audits will be provided to the contractor.

An audit of compliance with the Decommissioning mitigation measures will be completed by the Ecological Clerk of Works during the Decommissioning phase of the Proposed Development. The findings of each audit will be documented by the Ecological Clerk of Works in an audit report within the Decommissioning Plan for the Site. The audit report will be made available to Cork County Council on request.

### **7.3 ENVIRONMENTAL COMPLIANCE**

The following definitions will apply in relation to the classification of Environmental Occurrences during Decommissioning of the Proposed Development:

- **Environmental Near Miss:** An occurrence which if not controlled or due to its nature could lead to an Environmental Incident.
- **Environmental Incident:** Any occurrence which has potential, due to its scale and nature, to migrate from source and have an environmental impact beyond the immediate area of the incident.

- **Environmental Exceedance Event:** An environmental exceedance event occurs when monitoring results indicate that limits for a particular environmental parameter (as indicated in the Environmental Monitoring Programme) has been exceeded.

Any of these events will immediately trigger an investigation into the reason for the incident and the application of suitable mitigation where necessary.

Exceedance events can be closed out on achieving a monitoring result below the assigned limit for a particular environmental parameter e.g., 25 mg/L total suspended solids in waters (Inland Fisheries Ireland, 2016).

#### **7.4 CORRECTIVE ACTION PROCEDURE**

A corrective action is implemented to rectify an environmental problem on-site. Corrective actions will be implemented by the Site Supervisor/Construction Manager, as advised by the Site Environmental Clerk of Works. Corrective actions may be required as a result of the following:

- Environmental Audits
- Environmental Inspections and Reviews
- Environmental Monitoring
- Environmental Incidents
- Environmental Complaints

A Corrective Action Notice will be used to communicate the details of the action required to the main contractor. A Corrective Action Notice is a form that describes the cause and effect of an environmental problem on site and the recommended corrective action that is required. The Corrective Action Notice, when completed, will include details of close out and follow up actions.

If an environmental problem occurs on site that requires immediate attention direct communications between the Site supervisor/Construction Manager and the Ecological Clerk of Works will be conducted. This in turn will be passed down to the Site staff involved. A Corrective Action Notice will be completed at a later date.

#### **7.5 DECOMMISSIONING PLAN REVIEW**

This Decommissioning Plan will be reviewed and confirmed prior to commencement of Decommissioning works. Further details will be added to the plan during Decommissioning

works to adapt to specific situations or site conditions that are encountered that need to be considered by the Plan.